

## SUBMITTAL - 24KUAS1B

Job Name: \_\_\_\_\_

Date: \_\_\_\_\_

Location: \_\_\_\_\_

**R32**

Indoor Unit: **ABUH24KUAS**

Outdoor Unit: **AOUH24KUAS1**



### FEATURES

#### INDOOR UNIT:

- Ceiling-suspended indoor unit delivering superior comfort and energy-efficient performance
- Indoor unit with ProCore™ (High Corrosion Resistant Copper) coils for long-lasting protection against corrosion
- Whisper-quiet operation with sound levels as low as 29dB
- Multiple fan speed options; Auto, High, Med, Low, and Quiet
- Special Operation modes available:
  - Economy Mode/ Energy Saving Mode / Powerful Mode / Minimum Heat Mode / Automatic defrosting operation / Auto-restart function
- Enhanced controls platform for seamless, intuitive operation:
  - Seamless control using the optional IR Receiver and Wireless Remote Controller kit
  - Optional Wi-Fi connectivity enables remote monitoring through the Airstage Mobile App
  - Extended connectivity with support for third-party interface options
  - Compatible with BACnet and Modbus protocols for seamless integration with Building Management and Home Automation Systems
- Advanced scheduling and timer options offer greater control over unit operation:
  - Weekly Timer / 24-hr Timer / Sleep Function
- Optional drain pump unit for efficient water removal and flexible installation
- Offers group control, allowing seamless management of multiple units simultaneously
- Additional premium features include, but are not limited to:
  - Built-in external input and output for interlocking systems with 3rd party devices (Ex: Fire Alarm, Door Switch, Humidifier, Aux. Heat & more)
  - Multiple Auxiliary Heat logic options for optimized heating performance
  - Service monitoring functionality via compatible accessories (UTY-RVRU & UTY-RNRUZ-series)

#### OUTDOOR UNIT:

- Low GWP R-32 systems for reduced environmental impact
- INVERTER-driven compressor that offers superior performance, comfort, and energy savings
- Compact outdoor unit with extended line set lengths up to 164ft (50m)
- Blue Fin-coated heat exchanger for improved corrosion resistance and coil durability



7 Year Compressor, 5 Year Parts out-of-the-box Warranty.



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence.



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation in a residence and installed by a Fujitsu Elite contractor.



Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://connect.fujitsugeneral.com>

Version: 20250106A

-1 of 6-

## SUBMITTAL - 24KUAS1B

### SPECIFICATIONS:

Indoor Unit					ABUH24KUAS			
Outdoor Unit					AOUH24KUAS1			
System Name					24KUAS1B			
AHRI Number					215434549			
SEER2		Cooling			Btu/hW	21.7		
EER2						12.8		
HSPF2		Heating			kW/kW	10.8		
COP2						4		
Outdoor Operation Range		Cooling			°F (°C)	-5 to 122*8 (-21 to 50*8)		
		Heating				-5 to 75 (-21 to 24)		
Indoor Capacity		Cooling		Rated	Btu/h	24000		
				Min.—Max.		5,400—28,000		
		Heating	47°FDB (Outdoor temp.)	Rated		27000		
				Min.—Max.		5,400—32,000		
			17°FDB (Outdoor temp.) <sup>1</sup>	Rated		17800		
				Max.		26000		
			5°FDB (Outdoor temp.) <sup>2</sup>	Rated		23600		
				Max.				
Outdoor Connection pipe		Size		Liquid		Ø1/4 (Ø6.35)		
				Gas		Ø1/2 (Ø12.70)		
		Method				FLARE		
		Pre-charge length				66 (20)		
		Min. length				16 (5)		
		Max. length				164 (50)		
		Max. height difference				98 (30)		
Indoor Dimensions (H × W × D)		Net			in (mm)	9-1/4 × 54-3/4 × 27-3/4 (235 × 1,390 × 705)		
		Gross				13 × 58-1/16 × 32-1/2 (330 × 1,475 × 825)		
Indoor Weight		Net			lb (kg)	68 (31)		
		Gross				90 (41)		
Outdoor Dimensions (H × W × D)		Net			in (mm)	31 × 37 × 12-5/8 (788 × 940 × 320)		
		Gross				38-1/16 × 40-7/16 × 17-1/2 (966 × 1,027 × 445)		
Outdoor Weight		Net			lb (kg)	115 (52)		
		Gross				132 (60)		
Indoor Fan		Cooling		High	CFM (m³/h)	724 (1,230)		
				Med		583 (990)		
				Low		506 (860)		
				Quiet		412 (700)		
		Heating		High		724 (1,230)		
				Med		583 (990)		
				Low		506 (860)		
				Quiet		412 (700)		
		Type × Qty				SIROCCO FAN × 3		
		Motor output				W		
Outdoor Fan		Airflow rate		Cooling		CFM (m³/h)	2,187 (3,715)	
				Heating				
		Type × Qty				PROPELLER FAN × 1		
Indoor Sound Pressure Level <sup>4</sup>		Motor output			W	100		
		Cooling		High	dB (A)	41		
				Med		36		
				Low		32		
				Quiet		29		
		Heating		High		41		
				Med		36		
				Low		32		
Quiet	29							
Outdoor Sound Pressure Level <sup>4</sup>		Cooling				52		
		Heating				54		

## SUBMITTAL - 24KUAS1B

### SPECIFICATIONS:

Outdoor Refrigerant		Type		R32	
		Charge	lb oz	3 lb 5 oz	
			g	1500	
Additional Charge Calculation			oz/ft	0.22	
			g/m	20	
Outdoor Refrigerant Oil		Type		RMM68AF	
		Amount	in <sup>3</sup> (cm <sup>3</sup> )	48.8 (800)	
Indoor Moisture removal			pints/h (L/h)	6.1 (2.9)	
Indoor Drain hose		Material		POLYVINYL CHLORIDE	
		Tip Diameter		in (mm)	Ø13/16 (Ø20.7) (I.D.), Ø1-1/16 (Ø26.6) (O.D.)
Indoor Operation range		Cooling		°F (°C)	64 to 90 (18 to 32)
				%RH	80 or less
		Heating		°F (°C)	60 to 86 (16 to 30)
Power Supply				208/230 V ~ 60 Hz	
Available Voltage Range				187—253	
System power supply		Voltage		V	208/230
		Frequency		Hz	60
		Available voltage range		V	187—253
Indoor Current	Cooling		Rated	A	8.3
	Heating				8.7
Maximum Operating Current <sup>*3</sup>			Cooling		15.9
			Heating		
Outdoor Starting Current					8.7
MCA <sup>*5</sup>					15.9
Wiring spec. <sup>*6</sup>		MAX. CKT. BKR <sup>*7</sup>			20
Indoor Input Power	Cooling		Rated		kW
			Min.—Max.	0.42—2.82	
	Heating	47°FDB (Outdoor temp.)	Rated	1.97	
			Min.—Max.	0.47—3.00	
		17°FDB (Outdoor temp.) <sup>*1</sup>	Rated	1.6	
			Max.	3.24	
		5°FDB (Outdoor temp.) <sup>*2</sup>	Rated	3.33	
	Max.				
Indoor Power Factor	Cooling		%	98	
	Heating			98.5	
Energy Star <sup>*9</sup>				ES, ESCC, ESME	

#### NOTES

- Cooling: Indoor temperature of 80°F (26.67°CDB)/67°FWB (19.44°CWB), and outdoor temperature of 95°FDB (35°CDB)/75°FWB (23.9°CWB).
- Heating: Indoor temperature of 70°FDB (21.11°CDB)/60°FWB (15.56°CWB), and outdoor temperature of 47°FDB (8.33°CDB)/43°FWB (6.11°CWB).
- 17°FDB (Outdoor temp.) — \*1: Heating (17°F): Indoor temperature of 70°FDB (21.11°CDB)/60°FWB (15.56°CWB), and outdoor temperature of 17°FDB (-8.33°CDB)/15°FWB (-9.44°CWB).
- 5°FDB (Outdoor temp.) — \*2: Heating (5°F): Indoor temperature of 70°FDB (21.11°CDB)/60°FWB (15.56°CWB), and outdoor temperature of 5°FDB (-15.0°CDB)/4°FWB (-15.56°CWB).
- Test conditions are based on AHRI 210/240 2023.

- \*4: Indoor Sound Pressure Level — Measured values in manufacturer's anechoic chamber.
- Outdoor Sound Pressure Level — Because of the surrounding sound environment, the sound levels measured in actual installation conditions might be higher than the specified values here.

- \*3: Maximum Operating Current — Maximum current is maximum value when operated within the operation range.
- The total current of indoor unit and outdoor unit.
- MCA — \*5: Minimum Circuit Ampacity (Calculation based on UL60335-2-40)

- \*6: Selected sample based on Japan Electrotechnical Standards and Codes Committee E0005.
- Wiring spec. — As the regulations of wire size and circuit breaker differ in each country or region, select appropriate devices complied to the regional standard.

- MAX. CKT. BKR — \*7: Maximum Circuit Breaker
- Operation Range — \*8: Suction temperature of the outdoor unit.
- Energy Star — \*9: ES = Energy Star, ESCC = Energy Star Cold Climate, ESME = Energy Star Most Efficient.

System continues to operate below rated outdoor operation temperature range, subject to varying conditions. System has no low temperature cut out. Capacity is not tested outside of the rated temperature range.

## SUBMITTAL - 24KUAS1B

### ACCESSORIES:

Model Number	Description
UTY-RVRU	KAGAMI - Touch Panel Wired Controller
UTY-RNRUZ5	Touch Panel Wired Remote Controller
UTY-RHRY	Simple Wired Remote (Without Mode Function) - Hospitality
UTY-RSRY	Simple Wired Remote (With Mode Function)
UTY-LBTUH	IR Receiver Kit w/ Wireless Remote Controller (Ceiling Susp.)
UTY-TFSXJ4	Wi-Fi adapter (WiFi Interface Module UART Type)
FJ-AC-WIFI-1	Intesis Wi-Fi Device: Wired Module
FJ-IR-WIFI-1NA <sup>*1</sup>	Intesis IR Wireless AC Cloud Control Interface (Intesis Home app)
BM101WA <sup>*1</sup>	Cielo - Breez Max IR Controller w/ WiFi (Black)
BM102WA <sup>*1</sup>	Cielo - Breez Max IR Controller w/ WiFi (White)
UTY-VMSX	Modbus Converter
UTY-VTGX	Network Converter - Convert H-Series Comm. Protocol to V/J-Series Comm.
FJ-AC-485-1	Intesis - BACnet MSTP & Modbus RTU Gateway
UTY-TERX	External Switch Controller
UTY-TTRXZ1 <sup>*2</sup>	24V Thermostat Interface
TTRXZ1-KIT <sup>*2</sup>	24V Thermostat Interface Kit (UTY-TTRXZ1, UTY-WIFI Plug & 24V Transformer)
UTY-XCSX	External input and output PCB
UTY-XWZXZG	External Connect Kit
UTZ-GXEA	External input and output PCB box
UTY-DSGYZ2 <sup>*3</sup>	Airstage Edge Controller

NOTES:

\*1 -Requires IR receiver kit UTY-LBTUH to connect this device to IDU.


\*2 -This device may not be used with any other type of controls (central controller, wire/wireless RC, WiFi adapter, BMS interface).

\*3 -Connection to AIRSTAGE Cloud requires a compatible AIRSTAGE Mobile adapter connected to the IDU.

# SUBMITTAL - 24KUAS1B

## INDOOR UNIT DIMENSIONS:

Unit: in (mm)

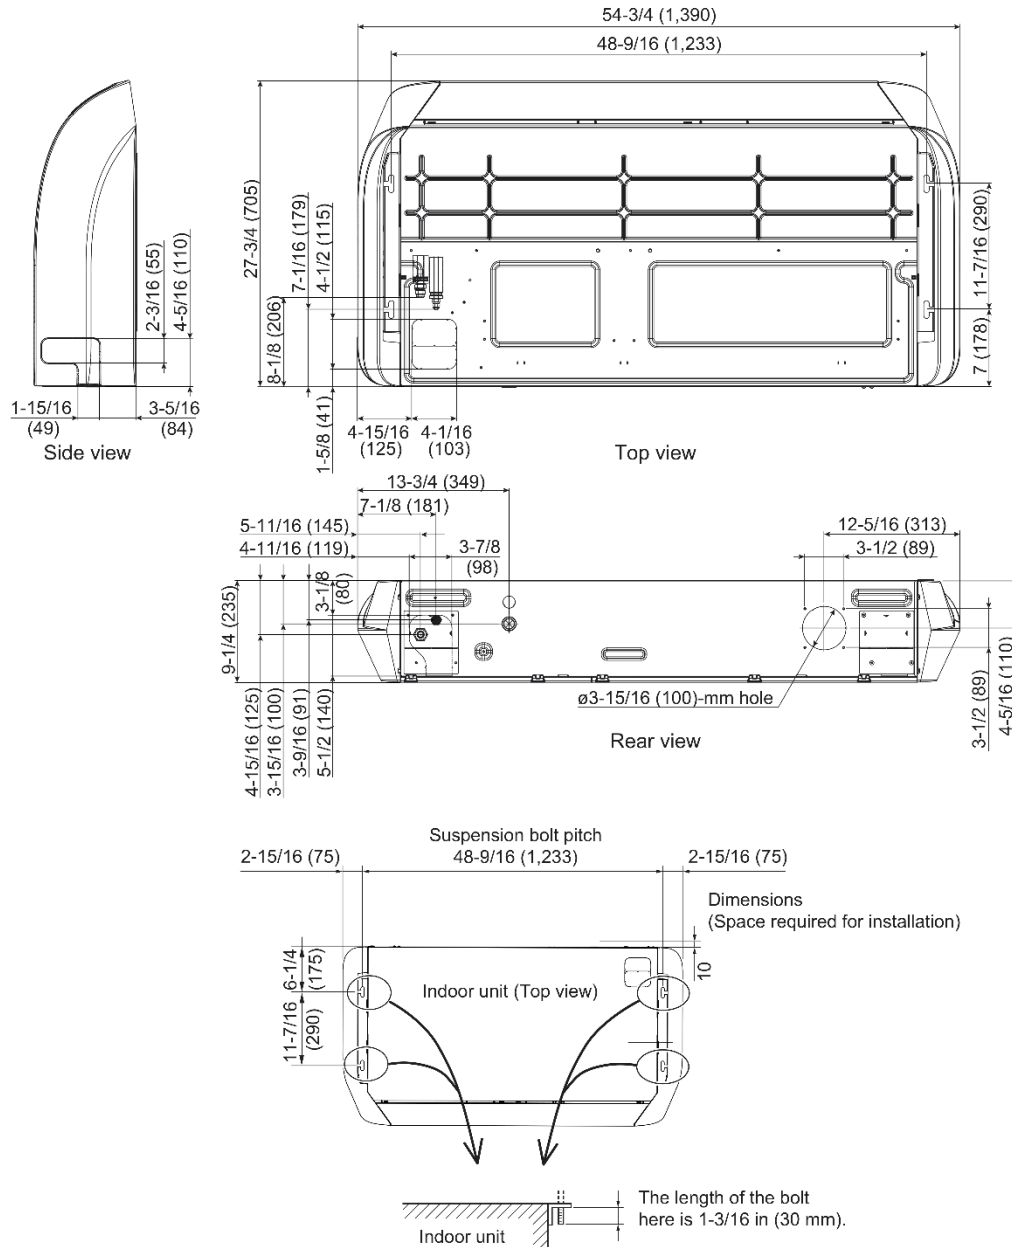

# SUBMITTAL - 24KUAS1B

## OUTDOOR UNIT DIMENSIONS:

Unit: in (mm)

