

## Medium Static Pressure Duct (36,000 BTU) Indoor Unit For Heat-recovery/Heat-pump Airstage VRF System

Job Name \_\_\_\_\_  
 Location \_\_\_\_\_  
 Engineer \_\_\_\_\_  
 Submitted To \_\_\_\_\_  
 Submitted By \_\_\_\_\_  
 Reference \_\_\_\_\_

Date \_\_\_\_\_  
 Approval \_\_\_\_\_  
 Construction \_\_\_\_\_  
 Unit No \_\_\_\_\_  
 Drawing No \_\_\_\_\_

### FEATURES

- Quiet 3-speed fan
- Slim design require Small height clearance 10-1/4"
- Adjustable Static pressure from 0.12 to 0.6 in.WG
- Flexible air intake connection (Back or bottom)
- Very low power usage
- Dual direction drain piping
- Auxiliary heat operation capability
- 10 year Extended Warranty on parts and compressor. See Warranty Statement.



### STATIC PRESSURE

Static Pressure Range - in.WG [Pa]	0 to 0.60 [0 to 150]
Standard Static Pressure - in.WG [Pa]	0.16 [40]

### PIPING ACCESSORIES

UTP-AX090A	Separation Tube - 2-Pipe - 90 MBH or Less
UTP-AX180A	Separation Tube - 2-Pipe - 91 to 180 MBH
UTP-AX567A	Separation Tube - 2-Pipe - 180 MBH or More

### CONTROLLER

UTY-RNRUZZ	Individual Touch Panel Controller (Wired Remote)
UTY-RSRY	Simple Remote (WITH Master Control) 2-Wire
UTY-RHRY	Simple Remote (WITHOUT Master Control) 2-Wire
UTY-LNHU	Wireless Remote Controller (requires IR Receiver)

UTY-DCGY	Central Remote Controller (100 units)
UTY-DTGYZ1	Touch Panel Controller with Internet (400 units)

### ACCESSORIES

UTD-LF25NA	Long Life Filter
UTD-SF045T	Flange (Square) for Duct IU
UTD-RF204	Flange (Round) for Duct IU
UTZ-PU1NBA	Drain Pump Kit - For Medium Static Ducted Units
UTY-TEKX	External Switch Controller. Use with 3-Wire remotes only.

UTY-XSZX	Remote Sensor for ducted units
----------	--------------------------------

### WEIGHT AND DIMENSIONS

Enclosure - Net Weight - lbs [kg]	86 [39]
Enclosure - Gross Weight - lbs [kg]	104 [47]
Dimensions - Net (H x W x D) - in [mm]	10-5/16 x 44-11/16 x 27-9/16 [270 x 1,135 x 700]
Dimensions - Gross (H x W x D) - in [mm]	11-13/16 x 51-15/16 x 31-1/8 [300 x 1,320 x 790]

### CAPACITY

Capacity - Cooling - Btu/h [kW]	36,000 [10.6]
Capacity - Heating - Btu/h [kW]	40,000 [11.7]

### ELECTRICAL

Power Source	208 / 230V, 1-Phase, 60Hz
Available Voltage Range - VAC	187 to 253
Input Power - W	222
Full Load Amps - FLA - A	1.39
Max Circuit Breaker - A	15
Minimum Circuit Ampacity - MCA - A	1.74
Fuse - A (V)	5 (250)

### FAN

Fan Type	2X (Sirocco)
Airflow Rate - High   Medium High - CFM [m³/h]	1,113 [1,890]   1,031 [1,750]
Airflow Rate - Medium   Medium Low - CFM [m³/h]	954 [1,620]   854 [1,450]
Airflow Rate - Low   Quiet - CFM [m³/h]	766 [1,300]   677 [1,150]

### SOUND PRESSURE

Sound Pressure Level - dB(A)	41/39/37/34/31/29
------------------------------	-------------------

### WIRING

Communication Cable	LonWorks (Fujitsu Pink Cable. See AE Bulletin 009)
---------------------	--

### PIPING

Connection Pipe Diameter - Liquid (Brazing) - in [mm]	ø 3/8 [9.52]
Connection Pipe Diameter - Gas (Brazing) - in [mm]	ø 5/8 [15.88]
Connection Pipe Diameter - Drain (ID; OD) - in [mm]	ø 3/4 [19]
Drain-Pump	Optional

### ETL

E.T.L.	91987
--------	-------

### TEMPERATURE RANGES

Operating Temp. Cooling (DB) - °F [°C]	64 to 88 [18 to 31]
Operating Temp. Heating (DB) - °F [°C]	50 to 88 [10 to 31]


Note: Specifications are based on the following conditions:  
 Cooling: Indoor temperature of 80°F (26.7°C) DB/67°F (19.4°C) WB, and outdoor temperature of 95°F (35°C) DB/75°F (23.9°C) WB. Heating: Indoor temperature of 70°F (21.1°C) DB/60°F (15.6°C) WB, and outdoor temperature of 47°F (8.3°C) DB/43°F (6.1°C) WB. Pipe length: 25ft. (7.5m), Height difference: 0ft. (0m) (Outdoor unit - indoor unit).

SUBMITTAL ARUM36TLAV2

Medium Static Pressure Duct (36,000 BTU) Indoor Unit  
For Heat-recovery/Heat-pump Airstage VRF System

DIMENSIONS

Unit: In. (mm)

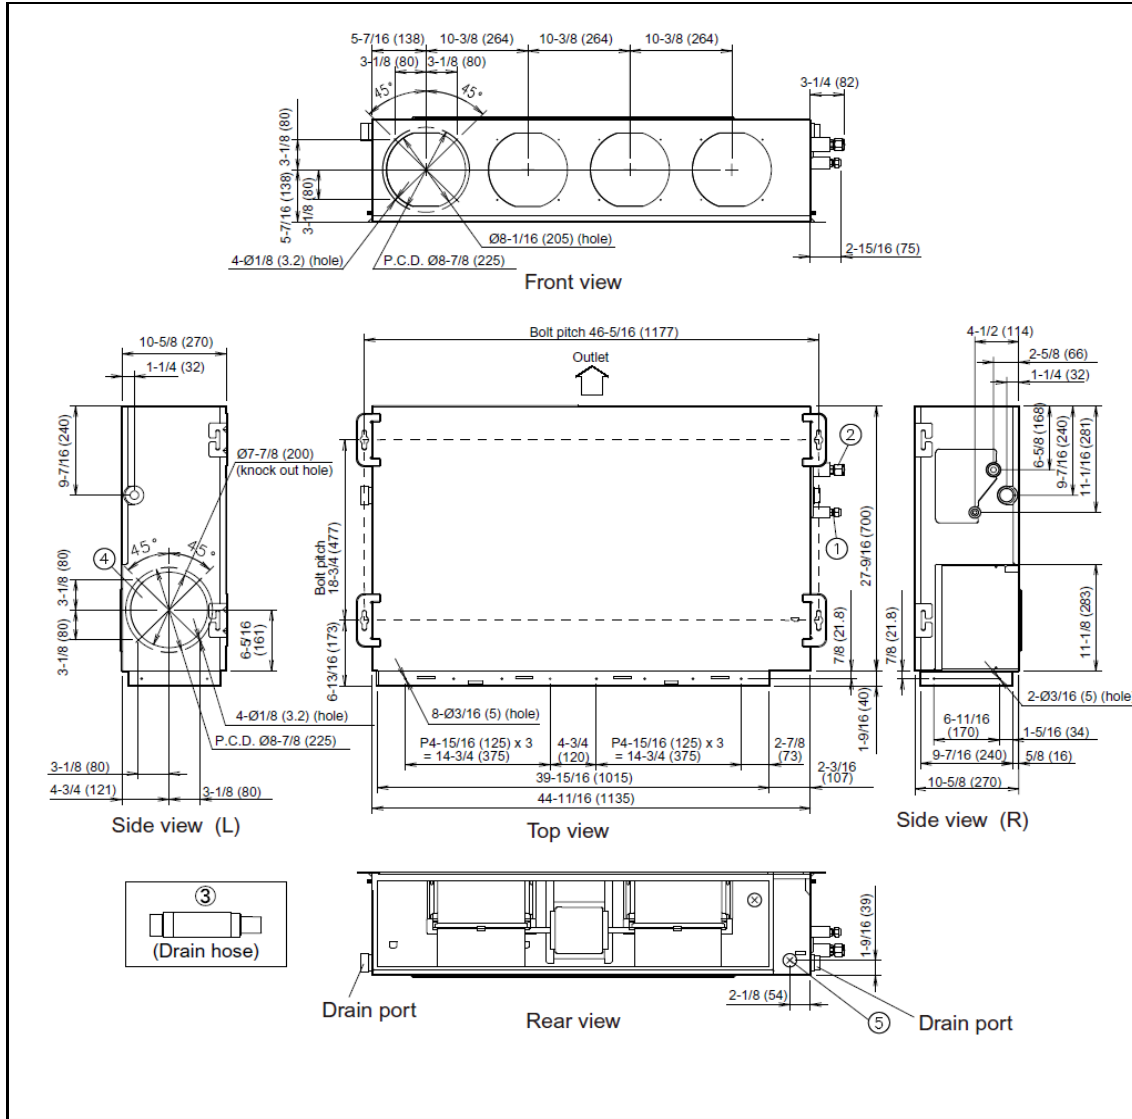

Fujitsu General America, Inc.  
353 Route 46 West  
Fairfield, NJ 07004  
Toll Free: (888) 888-3424  
Fax: (973) 836-0453  
www.airstagevrf.com