

HOSE SERIES HOSE TEST GAUGE



Utility water test gauge with or without maximum indicating pointer
For pressure tests of residential and commercial water lines

SPECIFICATIONS


Dial	2 1/2" (63 mm)
Case	Black plastic, dry non-fillable
Wetted Parts	Copper alloy
Ranges	0/300 psi
Bezel	Black steel, fixed
Lens	Plastic
Pointer	Black aluminum
Connection	Top mount 3/4" female Copper alloy swivel connection
Scale	Standard: single scale psi
Accuracy	3-2-3% of span, ASME B40.1 Grade B
Ambient Temp	Dry = -40° F to 160° F

Design meets or exceeds ASME B40.100 pressure gauge standard.



HOSE

HOSE-MAX

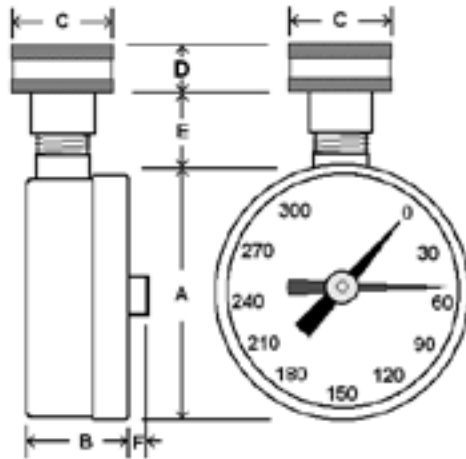

P/N	Unit	A	B	C	D	E	F
HOSE	In.	2.52"	1.11"	1.18"	0.58"	0.81"	N/A
	mm	64	28	30	15	21	
HOSE-MAX	In.	2.52"	1.11"	1.18"	0.58"	0.81"	0.20"
	mm	64	28	30	15	21	5

IN STOCK IN CDC

SH ITEM# B136-7 Hose-Max with pointer 0-300 PSI

SH ITEM# B136-8 Hose-Max with pointer 0-100 PSI

AVAILABLE OPTIONS*

- Custom Dial
- Special Connection Size/Location
- Other Ranges

*Lead times/minimums may apply

APPROXIMATE SHIPPING WEIGHTS/ BOX QUANTITIES

Dial Size	Est. Unit Wt.	Box Qty
2 1/2"	0.35 lbs (0.16 kg)	50

5