

Super-Pan® Plastic Secondary Drain Pan

- Manufactured from impact resistant high density polyethylene
- Rolled edges for durability & strength
- Ribbed bottoms for rigidity
- Structurally engineered corners for strength
- 3/4" PVC fittings supplied with each pan
- No rust - No breakage - No leakage
- Available in over 10 convenient sizes
- Drain pans are black in color & 2.5" deep


Drain locations:
LS = long side
SS = short side



ITEM NO.	DESCRIPTION	STD QTY	PLT QTY	U M
17572	24" X 24" Bottom, Drain: S	5	100	EA
17578	27" X 29" Bottom, Drain: LS	5	100	EA
17585	27" X 29" Bottom, Drain: SS	5	100	EA
17586	27" X 39" Bottom, Drain: LS	5	100	EA
17589	27" X 39" Bottom, Drain: SS	5	100	EA
17590	27" X 48" Bottom, Drain: LS	5	100	EA
17592	27" X 48" Bottom, Drain: SS	5	100	EA
17593	27" X 63" Bottom, Drain: LS	5	100	EA
17598	27" X 63" Bottom, Drain: SS	5	100	EA
17599	30" X 30" Bottom, Drain: S	5	100	EA
17600	30" X 50" Bottom, Drain: LS	5	100	EA
17605	30" X 50" Bottom, Drain: SS	5	100	EA
17617	30" X 60" Bottom, Drain: LS	5	100	EA
17618	30" X 60" Bottom, Drain: SS	5	100	EA
17619	32" X 63" Bottom, Drain: LS	5	100	EA
17624	32" X 63" Bottom, Drain: SS	5	100	EA
17625	36" X 36" Bottom, Drain: S	5	100	EA
17626	36" X 60" Bottom, Drain: LS	5	100	EA
17627	36" X 60" Bottom, Drain: SS	5	100	EA
17631	24" Round Bottom, Drain: S	5	100	EA

Seamless Metal Drain Pans

- One-piece construction with seamless formed corners
- Nestable design saves space & protects edges
- 26 gauge galvanized steel construction
- PVC fitting included
- 2" deep
- Long side drain hole
- Patented design

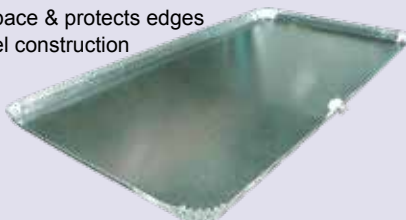

ITEM NO.	DESCRIPTION	STD QTY	PLT QTY	U M
16215	27" X 48" Metal Pan	5	50	EA
16216	27" X 63" Metal Pan	5	50	EA
16217	30" X 30" Metal Pan	5	50	EA
16218	30" X 50" Metal Pan	5	50	EA
16219	30" X 60" Metal Pan	5	50	EA
16220	32" X 63" Metal Pan	5	50	EA

Condensate Drain Pan Fittings

- Connects to PVC, vinyl tubing, polyethylene, etc.
- One rubber gasket included for each fitting
- Can be hand tightened
- Eliminates soldering & bimetallic corrosion
- Items 16657 & 17651 have a metal lock nut



0655



0656



0658



17651
16657

ITEM NO.	DESCRIPTION	STD QTY	U M
0655	3/4" FPT With Nylon Nut	25	EA
0656	3/4" MPT With Nylon Nut	25	EA
0658	3/4" PVC Slip With Nylon Nut	25	EA
17651	3/4" PVC Slip With Metal Lock Nut	25	EA
16657	1" PVC Slip With Metal Lock Nut	25	EA
95535	3/4" Rubber Washer	1000	EA
17536	1" Rubber Washer	1000	EA
97252	3/4" Metal Lock Nut	1000	EA
97255	1" Metal Lock Nut	1000	EA

3/4" Rubber Elbow


- Allows quick connect & disconnect of drain lines
- Gear clamps recommended for installation



ITEM NO.	DESCRIPTION	STD QTY	U M
19810	3/4" Rubber Elbow	50	EA

Condensate Traps

- Full-flow condensate traps
- Each trap is carefully sized, minimizing bothersome clogged trap service calls
- Manufactured to demanding standards



ITEM NO.	DESCRIPTION	STD QTY	PLT QTY	U M
0356	3/4" Schedule 40 PVC P-Trap	50	3000	EA
0357	3/4" Schedule 40 PVC R-Trap	50	3000	EA
13655	3/4" Schedule 40 PVC J-Trap	50	3000	EA
16082	1" Schedule 40 PVC P-Trap	10		EA
16349	1" Schedule 40 PVC R-Trap	10		EA

PVC Pipe

- Manufactured in 10' lengths
- Chemical resistance to acid & alkalies
- White in color
- SDR pipe conforms to ASTM D 2241
- Sch 40 pipe conforms to ASTM D 1785



ITEM NO.	DESCRIPTION	STD QTY	PLT QTY	U M
6085	1/2" 315 PSI PVC Pipe	500	4000	FT
6106	3/4" 200 PSI PVC Pipe	500	4000	FT
6070	3/4" Schedule 40 400 PSI PVC Pipe	500	4000	FT
6107	1" 200 PSI PVC Pipe	500	3600	FT
16062	1" Schedule 40 PVC Pipe	100	3600	FT
6076	2-1/2" Sch 40 300 PSI PVC Pipe	100	1120	FT

DWV Pipe

- Manufactured in 10' lengths
- DWV pipe conforms to ASTM D 2665



ITEM NO.	DESCRIPTION	STD QTY	PLT QTY	U M
6079	2" Sch 40 DWV PVC Pipe	100	1750	FT
6080	3" Sch 40 DWV PVC Pipe	100	1000	FT

Foam Core Pipe

- Manufactured in 10' lengths
- Plain ends



ITEM NO.	DESCRIPTION	STD QTY	PLT QTY	U M
7179	2" DWV/Foam Core Pipe	200	1670	FT
7180	3" DWV/Foam Core Pipe	100	750	FT

CPVC Pipe

- Manufactured in 10' lengths
- Pipe rated 100# psi @ 180F ASTM D 2846
- NSF Standard 61 certified for drinking water
- ASTM E 84 Tested water-filled pipe & fittings for return air plenums – Meets 25/50 flame & smoke limits



ITEM NO.	DESCRIPTION	STD QTY	PLT QTY	U M
6065	1/2" CPVC pipe	100	1050	FT
16324	3/4" CPVC pipe	100	600	FT

Motor Run Capacitors



Temperature rating -13F to 158F (-25C to 70C)

Aluminium cans with steel covers

Biodegradable, non-polluting oil (non-P.C.B.)

Standard: IEC 252 (1975), UL 810

50/60 Hz

Oval or Round

Single or Dual Capacitance

370 VAC or 440 VAC



See Pages 66 - 69 For More Information

Schedule 40 PVC Fittings - 90° Elbows S x S

- NSF approved



ITEM NO.	DESCRIPTION	STD QTY	U M
0314	[406-005] 90° Elbow, 1/2" S x S	50	EA
0344	[406-007] 90° Elbow, 3/4" S x S	50	EA
0364	[406-010] 90° Elbow, 1" S x S	50	EA
0402	[406-025] 90° Elbow, 2-1/2" S X S	10	EA

Schedule 40 PVC Fittings - 90° Street Elbows S x S

- NSF approved



ITEM NO.	DESCRIPTION	STD QTY	U M
0324	[409-005] 90° Street Elbow, 1/2" S x S	50	EA
0350	[409-007] 90° Street Elbow, 3/4" S x S	50	EA
0370	[409-010] 90° Street Elbow, 1" S x S	50	EA

Schedule 40 PVC Fittings - 90° Street Elbows S x FPT

- NSF approved



ITEM NO.	DESCRIPTION	STD QTY	U M
0317	[407-074] 90° Elbow, 1/2" S x 3/4" FPT	50	EA
0347	[407-007] 90° Elbow, 3/4" S x 3/4" FPT	50	EA
0367	[407-010] 90° Elbow, 1" S x 1" FPT	50	EA

Schedule 40 PVC Fittings - 90° Street Elbows S x MPT

- NSF approved



ITEM NO.	DESCRIPTION	STD QTY	U M
0351	[410-007] 90° St El 3/4" S x 3/4" MPT	50	EA
0371	[410-010] 90° St El, 1" S x 1" MPT	50	EA

Schedule 40 PVC Fittings - 45° Elbows S x S


- NSF approved



ITEM NO.	DESCRIPTION	STD QTY	U M
0316	[417-005] 45° Elbow, 1/2" S x S	50	EA
0346	[417-007] 45° Elbow, 3/4" S x S	50	EA
0366	[417-010] 45° Elbow, 1" S x S	50	EA
0401	[417-025] 45° Elbow, 2-1/2" S x S	10	EA

Schedule 40 PVC Fittings - Couplings S x S


- NSF approved



ITEM NO.	DESCRIPTION	STD QTY	U M
0310	[429-005] Coupling, 1/2" S x S	50	EA
0340	[429-007] Coupling, 3/4" S x S	50	EA
0360	[429-010] Coupling, 1" S x S	50	EA
0372	[429-020] Coupling, 2" S x S	25	EA
0400	[429-025] Coupling, 2-1/2" S x S	12	EA
0374	[429-030] Coupling, 3" S x S	10	EA

Schedule 40 PVC Fittings - Male Adapters S x MPT


- NSF approved



ITEM NO.	DESCRIPTION	STD QTY	U M
16267	[436-005] Adapter, 1/2" S x 1/2" MPT	50	EA
0312	[436-101] Adapter, 1/2" S x 3/4" MPT	50	EA
0342	[436-007] Adapter, 3/4" S x 3/4" MPT	50	EA
19101	[436-131] Adapter, 3/4" S x 1" MPT	50	EA
19102	[436-102] Adapter, 1" S x 3/4" MPT	50	EA
0362	[436-010] Adapter, 1" S x 1" MPT	50	EA
0355	Adapter, 3/4" S x 3/4" MGHT	25	EA

Schedule 40 PVC Fittings - Female Adapters S x FPT

- NSF approved



ITEM NO.	DESCRIPTION	STD QTY	U M
16266	[435-005] Adapter, 1/2" S x 1/2" FPT	50	EA
0311	[435-074] Adapter, 1/2" S x 3/4" FPT	50	EA
0318	[435-101] Adapter, 3/4" S x 1/2" FPT	50	EA
0341	[435-007] Adapter, 3/4" S x 3/4" FPT	50	EA
0361	[435-010] Adapter, 1" S x 1" FPT	50	EA

Schedule 40 PVC Fittings - Unions S x S

- NSF approved



ITEM NO.	DESCRIPTION	STD QTY	U M
16270	[497-005] 1/2" Slip Union	10	EA
16271	[497-007] 3/4" Slip Union	10	EA
16272	[497-001] 1" Slip Union	10	EA

Schedule 80 PVC Fittings - Unions S x S

- NSF approved



ITEM NO.	DESCRIPTION	STD QTY	U M
17722	[897-005] 1/2" Slip Union	10	EA
17723	[897-007] 3/4" Slip Union	10	EA

Schedule 40 PVC Fittings - Tees S x S x S


- NSF approved



ITEM NO.	DESCRIPTION	STD QTY	U M
0319	[401-005] Tee, 1/2" S x S x S	50	EA
0349	[401-007] Tee, 3/4" S x S x S	50	EA
0369	[401-010] Tee, 1" S x S x S	50	EA
0403	[401-025] Tee, 2-1/2" S x S x S	10	EA

Schedule 40 PVC Fittings - Clean Out Tees

- NSF approved



ITEM NO.	DESCRIPTION	STD QTY	U M
0348	Clean Out Tee, 3/4" S x S x Clean Out	25	EA

Schedule 40 PVC Fittings - Slip Caps

- NSF approved



ITEM NO.	DESCRIPTION	STD QTY	U M
0315	[447-005] Cap, 1/2" Slip	50	EA
0345	[447-007] Cap, 3/4" Slip	50	EA
0365	[447-010] Cap, 1" Slip	50	EA
0382	[447-015] Cap, 1-1/2" Slip	25	EA
0391	[447-020] Cap, 2"	10	EA
0404	[447-025] Cap, 2-1/2"	10	EA
0421	[447-030] Cap, 3"	10	EA

Schedule 40 PVC Fittings - Threaded Caps

- NSF approved



ITEM NO.	DESCRIPTION	STD QTY	U M
17720	[448-005] 1/2" Threaded Cap (FPT)	50	EA
17721	[448-007] 3/4" Threaded Cap (FPT)	50	EA

Schedule 40 PVC Fittings - Threaded Plugs

- NSF approved



ITEM NO.	DESCRIPTION	STD QTY	U M
0354	[450-007] 3/4" Threaded Plug	100	EA

Schedule 40 PVC Fittings - Bushings

- NSF approved




ITEM NO.	DESCRIPTION	STD QTY	U M
0352	[437-101] Bushing, 1/2" S x 3/4" S	100	EA
0313	[438-101] Bushing, 3/4" S X 1/2" FPT	50	EA
16268	[437-131] Bushing, 3/4" S x 1" S	50	EA
0425	[437-251] Bushing 1-1/2" S x 2" S	25	EA
0426	[437-292] Bushing 2" S x 2-1/2" S	10	EA
0427	[437-339] Bushing 2-1/2" S x 3" S	10	EA
0428	[437-338] Bushing 2" S x 3" S	10	EA

Schedule 40 PVC Fittings - Threaded Caps

- Pressure rating @ 73°F, water: 150 PSI
- Maximum service temperature 140°F
- EPDM O-ring seal



ITEM NO.	DESCRIPTION	STD QTY	U M
0405	[2622-005] 1/2" PVC Ball Valve SxS	5	EA
0406	[2622-007] 3/4" PVC Ball Valve SxS	5	EA
0407	[2622-010] 1" PVC Ball Valve SxS	5	EA

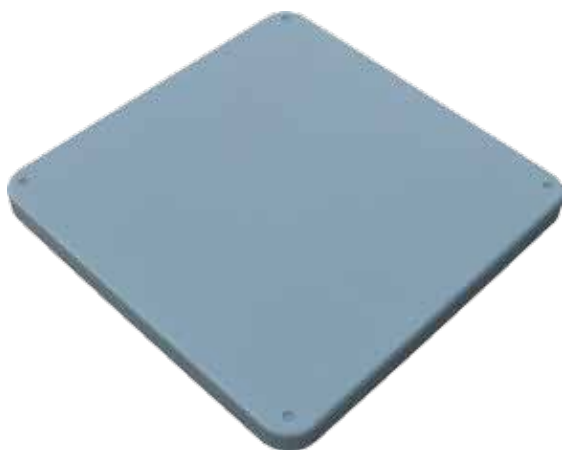**Equipment Pads**

Lightweight, 30 x 30 x 3 pad weighs only 9 lbs

Strong high density polyethylene construction

Textured top to prevent slipping

Corner tabs help keep pads stacked

See Page 3 For Sizes Available!

DWV Fittings - 90° Elbows

- NSF
- ASTM D2665



ITEM NO.	DESCRIPTION	STD QTY	U M
0379	1-1/2" 90° Elbow	100	EA
0388	2" 90° Elbow	50	EA
0395	2" 90° Street Elbow	25	EA
0418	3" 90° Elbow	25	EA
0396	3" 90° Street Elbow	20	EA

DWV Fittings - 90° Long Turn Elbows

- NSF
- ASTM D2665



ITEM NO.	DESCRIPTION	STD QTY	U M
0380	1-1/2" 90° Long Turn Elbow	50	EA
0389	2" 90° Long Turn Elbow	25	EA
0398	2" 90° Street Long Turn Elbow	25	EA
0419	3" 90° Long Turn Elbow	10	EA
0397	3" 90° Long Turn Street Elbow	20	EA

DWV Fittings - 45° Elbows

- NSF
- ASTM D2665



ITEM NO.	DESCRIPTION	STD QTY	U M
0378	1-1/2" 45° Elbow	100	EA
0387	2" 45° Elbow	50	EA
0393	2" 45° Street Elbow	50	EA
0417	3" 45° Elbow	25	EA
0394	3" 45° Street Elbow	50	EA

DWV Fittings - Couplings

- NSF
- ASTM D2665



ITEM NO.	DESCRIPTION	STD QTY	U M
0376	1-1/2" Coupling	100	EA
0377	1-1/2" Repair Coupling	25	EA
0385	2" Coupling	100	EA
0386	2" Repair Coupling	25	EA
0415	3" Coupling	60	EA
0416	3" Repair Coupling	12	EA

DWV Fittings - Reducing Couplings

- NSF
- ASTM D2665



ITEM NO.	DESCRIPTION	STD QTY	U M
0384	2" x 1-1/2" Reducing Coupling	50	EA
0414	3" x 2" Reducing Coupling	20	EA

DWV Fittings - Tees

- NSF
- ASTM D2665



ITEM NO.	DESCRIPTION	STD QTY	U M
0381	1-1/2" Tee DWV PVC	100	EA
0390	2" Tee DWV PVC	35	EA
0420	3" Tee DWV PVC	30	EA

CPVC Pipe

- Manufactured in 10' lengths
- Pipe rated 100# psi @ 180F ASTM D 2846
- NSF Standard 61 certified for drinking water
- ASTM E 84 Tested water-filled pipe for return air plenums – Meets 25/50 flame & smoke limits



ITEM NO.	DESCRIPTION	STD QTY	PLT QTY	U M
6065	1/2" CPVC pipe	100	1050	FT
16324	3/4" CPVC pipe	100	600	FT

CPVC Fittings - 90° Elbows S x S

- Hot & cold water pressure lines
- NSF Standard 61 certified for drinking water
- ASTM E 84 Tested water-filled pipe & fittings for return air plenums – Meets 25/50 flame & smoke limits



ITEM NO.	DESCRIPTION	STD QTY	U M
0444	1/2" CPVC 90° Elbow S x S	100	EA
16328	3/4" CPVC 90° Elbow S x S	50	EA

CPVC Fittings - 90° Street Elbows S x S

- Hot & cold water pressure lines
- NSF Standard 61 certified for drinking water
- ASTM E 84 Tested water-filled pipe & fittings for return air plenums – Meets 25/50 flame & smoke limits



ITEM NO.	DESCRIPTION	STD QTY	U M
0450	1/2" CPVC Street Elbow S x S	100	EA
16331	3/4" CPVC Street Elbow S x S	50	EA

CPVC Fittings - 45° Elbows S x S

- Hot & cold water pressure lines
- NSF Standard 61 certified for drinking water
- ASTM E 84 Tested water-filled pipe & fittings for return air plenums – Meets 25/50 flame & smoke limits



ITEM NO.	DESCRIPTION	STD QTY	U M
0446	1/2" CPVC 45° Elbow S x S	100	EA
16329	3/4" CPVC 45° Elbow S x S	50	EA

CPVC Fittings - Couplings S x S

- Hot & cold water pressure lines
- NSF Standard 61 certified for drinking water
- ASTM E 84 Tested water-filled pipe & fittings for return air plenums – Meets 25/50 flame & smoke limits



ITEM NO.	DESCRIPTION	STD QTY	U M
0440	1/2" CPVC Coupling S x S	100	EA
16325	3/4" CPVC Coupling S x S	50	EA

CPVC Fittings - Male Adapters S x MPT

- Hot & cold water pressure lines
- NSF Standard 61 certified for drinking water
- ASTM E 84 Tested water-filled pipe & fittings for return air plenums – Meets 25/50 flame & smoke limits



ITEM NO.	DESCRIPTION	STD QTY	U M
0442	1/2" CPVC Male Adapter S x MPT	100	EA
16327	3/4" CPVC Male Adapter S x MPT	50	EA

CPVC Fittings - Female Adapters S x FPT

- Hot & cold water pressure lines
- NSF Standard 61 certified for drinking water
- ASTM E 84 Tested water-filled pipe & fittings for return air plenums – Meets 25/50 flame & smoke limits



ITEM NO.	DESCRIPTION	STD QTY	U M
13886	1/2" CPVC Female Adapter S x FPT	100	EA
16326	3/4" CPVC Female Adapter S x FPT	50	EA

CPVC Fittings - Tee S x S x S

- Hot & cold water pressure lines
- NSF Standard 61 certified for drinking water
- ASTM E 84 Tested water-filled pipe & fittings for return air plenums – Meets 25/50 flame & smoke limits



ITEM NO.	DESCRIPTION	STD QTY	U M
0449	1/2" CPVC Tee S x S x S	100	EA
16330	3/4" CPVC Tee S x S x S	50	EA

CPVC Fittings - Tee S x S x S

- Hot & cold water pressure lines
- NSF Standard 61 certified for drinking water
- ASTM E 84 Tested water-filled pipe & fittings for return air plenums – Meets 25/50 flame & smoke limits



ITEM NO.	DESCRIPTION	STD QTY	U M
16332	3/4" x 1/2" CPVC Bushing	25	EA

CPVC Fittings - Cap

ITEM NO.	DESCRIPTION	STD QTY	U M
16333	3/4" CPVC Cap	50	EA

Oatey® Regular Pipe Cement

- Free flowing regular-bodied clear cement
- Recommended use: PVC pipe up to 3" dia.
- Apply at temperatures 40°F to 90°F
- Exceeds ASTM D-2564, NSF & UPC approved
- For use on Sch. 40 & 80 gas, conduit, DWV pipe & potable water pressure pipe
- Gold label



ITEM NO.	DESCRIPTION	STD QTY	U M
0321	[31012] 4 oz. Regular Pipe Cement	24	EA
0329	[31013] 8 oz. Regular Pipe Cement	24	EA
0322	[31014] 16 oz. Regular Pipe Cement	24	EA
13069	[31015] 32 oz. Regular Pipe Cement	12	EA

Arrow Regular Pipe Cement

- Clear regular bodied, fast setting, high strength cement
- For PVC pipe & fittings thru 4" diameter
- ASTM D 2564 to insure a quality product
- NSF & UPC listed
- Gold label



ITEM NO.	DESCRIPTION	STD QTY	U M
20500	[1104RB-4] 4 oz. Pipe Cement	24	EA
20501	[1104RB-2] 8 oz. Pipe Cement	24	EA
20502	[1104RB-P] 16 oz. Pipe Cement	12	EA

Oatey® Heavy Duty Pipe Cement

- Free flowing heavy-bodied clear cement
- Fills gaps in loose joints
- Apply at temperatures 40°F to 90°F
- Exceeds ASTM D-2564 & is NSF & UPC approved
- For Sch. 40 & 80 gas, conduit drain waste, potable water pressure & vent pipe
- Green label



ITEM NO.	DESCRIPTION	STD QTY	U M
13064	[30850] 4 oz. Heavy Duty Pipe Cement	24	EA
0330	[30863] 8 oz. Heavy Duty Pipe Cement	24	EA
13065	[30876] 16 oz. Heavy Duty Pipe Cement	24	EA
13066	[31008] 32 oz. Heavy Duty Pipe Cement	12	EA

Arrow Heavy Duty Pipe Cement

- Clear heavy bodied, fast setting, high strength cement
- For PVC pipe & fittings up to 12" diameter
- ASTM D 2564 to insure a quality product
- NSF & UPC listed
- Green label



ITEM NO.	DESCRIPTION	STD QTY	U M
20508	[1104HB-4] 4 oz. Pipe Cement	24	EA
20509	[1104HB-2] 8 oz. Pipe Cement	24	EA
20510	[1104HB-P] 16 oz. Pipe Cement	12	EA

Oatey® All Purpose Pipe Cement

- Free flowing heavy-bodied clear cement
- Apply at temperatures 40°F to 90°F
- Exceeds ASTM D-2564, D-2846, D-2235, F-493
- For all pipe schedules, gas, conduit drain waste, potable water pressure & vent pipe
- Red label



ITEM NO.	DESCRIPTION	STD QTY	U M
13060	[30818] 4 oz. All Purpose Pipe Cement	24	EA
13061	[30821] 8 oz. All Purpose Pipe Cement	24	EA
13062	[30834] 16 oz. All Purpose Pipe Cement	24	EA
13063	[30847] 32 oz. All Purpose Pipe Cement	12	EA

Arrow Universal Pipe Cement

- Clear medium bodied, fast setting, high strength cement
- Joins PVC, CPVC or ABS pipe & fittings thru 6" diameter
- ASTM D 2564 to insure a quality product
- Red label



ITEM NO.	DESCRIPTION	STD QTY	U M
20516	[1108-4] 4 oz. Pipe Cement	24	EA
20517	[1108-2] 8 oz. Pipe Cement	24	EA
20518	[1108-P] 16 oz. Pipe Cement	12	EA

Oatey® All Weather Pipe Cement

- A medium-bodied clear cement
- Formulated for fast set-up at temperatures to 10°F
- Apply at temperatures 10°F to 100°F
- For PVC pipe & fittings up to 6" in diameter
- Dark green label



ITEM NO.	DESCRIPTION	STD QTY	U M
14069	[31132] 16 oz. All Weather Pipe Cement	24	EA
17680	[31133] 32 oz. All Weather Pipe Cement	12	EA

Arrow Weather-All Pipe Cement

- Clear medium bodied, fast setting, high strength cement
- Remains fluid & usable to -10°F
- For joining plastic pipe & fittings thru 6" diameter
- ASTM D 2564 to insure a quality product
- NSF & UPC listed
- Blue label



ITEM NO.	DESCRIPTION	STD QTY	U M
20520	[1128-4] 4 oz. Pipe Cement	24	EA
20521	[1128-2] 8 oz. Pipe Cement	24	EA
20522	[1128-P] 16 oz. Pipe Cement	12	EA

Oatey® Rain-R-Shine Pipe Cement

- A medium-bodied blue colored cement
- Very fast setting, formulated for wet conditions
- Apply at temperatures 40° F to 100° F
- Flows freely
- For PVC pipe & fittings up to 6" in diameter
- Light blue label



ITEM NO.	DESCRIPTION	STD QTY	U M
14067	[30890] 4 oz. Rain-R-Shine Pipe Cement	24	EA
14068	[30891] 8 oz. Rain-R-Shine Pipe Cement	24	EA
17630	[30893] 16 oz. Rain-R-Shine Pipe Cement	24	EA

Arrow Pool & Turf Pipe Cement

- Blue medium bodied, fast setting, high strength cement
- For wet conditions or when quick pressurization is needed
- For joining plastic pipe & fittings thru 6" diameter
- ASTM D 2564 to insure a quality product
- NSF & UPC listed
- Light blue label



ITEM NO.	DESCRIPTION	STD QTY	U M
20524	[1132-4] 4 oz. Pipe Cement	24	EA
20525	[1132-2] 8 oz. Pipe Cement	24	EA
20526	[1132-P] 16 oz. Pipe Cement	12	EA

Oatey® All Purpose Cleaner

- A free flowing clear cleaner
- Apply at temperatures 40° F to 90° F
- Recommended for use on PVC, ABS & CPVC
- Cleaner removes surface dirt, grease & grime
- Yellow label



ITEM NO.	DESCRIPTION	STD QTY	U M
13067	[30782] 8 oz. All Purpose Pipe Cleaner	24	EA
0323	[30795] 16 oz. All Purpose Pipe Cleaner	24	EA
13068	[30805] 32 oz. All Purpose Pipe Cleaner	12	EA

Arrow Pipe Cleaner

- Clear
- For use on PVC, CPVC & ABS pipe and fittings
- Yellow label



ITEM NO.	DESCRIPTION	STD QTY	U M
20504	[901-4] 4 oz. Pipe Cleaner	24	EA
20505	[901-2] 8 oz. Pipe Cleaner	24	EA
20506	[901-P] 16 oz. Pipe Cleaner	12	EA

Oatey® Purple Primer

- Free flowing purple tinted all purpose primer
- Purple tint shows that a primer was used
- Removes surface dirt, grease & grime
- Apply at temperatures 40° F to 100° F
- Purple label



ITEM NO.	DESCRIPTION	STD QTY	U M
0332	[30780] 4 oz. Purple Pipe Primer	24	EA
0333	[30783] 8 oz. Purple Pipe Primer	24	EA
0334	[30796] 16 oz. Purple Pipe Primer	24	EA

Arrow Purple Primer-Cleaner

- Purple
- For priming PVC & CPVC pipe and fittings
- Purple label



ITEM NO.	DESCRIPTION	STD QTY	U M
20512	[921-4] 4 oz. Purple Primer-Cleaner	24	EA
20513	[921-2] 8 oz. Purple Primer-Cleaner	24	EA
20514	[921-P] 16 oz. Purple Primer-Cleaner	12	EA