


# CA SERIES

## UNCASED COPPER UPFLOW/DOWNFLOW EVAPORATOR COIL

### FEATURES, BENEFITS, DIMENSIONS, & SPECIFICATIONS

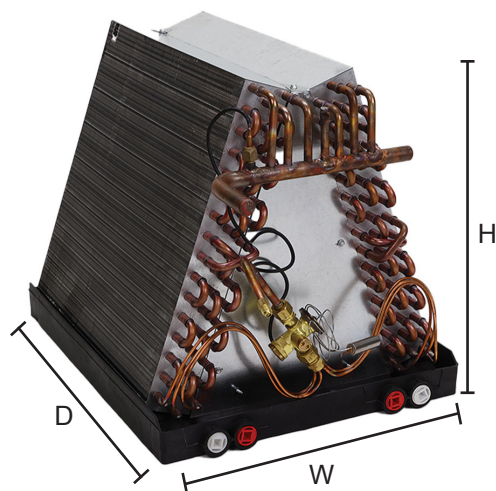

Representative drawing only. Some models may vary in appearance. Due to continuous product improvement, specifications are subject to change without notice.

### FEATURES AND BENEFITS:

- Rifled copper tubing, enhanced aluminum fins.
- Left or right-hand refrigerant and plumbing connections.
- Standard refrigerant connections:
  - Liquid line - 3/8" ODS
  - Suction line
    - 3/4" ODS on 1-1/2-ton to 3-ton
    - 7/8" on 3-1/2-ton to 5-ton
- Externally mounted flowrater body with Schrader valve for hiss-testing.
- Heavy gauge plastic drain pans on most models.
- Immersion-tested at 500 psi, then Nitrogen-pressurized and sealed.
- Upflow without field modification. Downflow applications require plate kit, sold separately.
- AHRI certifiable with all brands of A/C and heat pump systems.
- ETL listed for use with R-410A, R-454B, and R-32 when proper metering device is used.
- Ten-year limited warranty.

### CUSTOMIZATION

- Factory or field-installed TXV available.
- Powder-painted metal pans.
- Schrader mounted on suction manifold, external to cabinet.

### DOWNFLOW KIT PART NUMBERS

#### METAL DRAIN PANS:

- 16" DWNFLWM-16
- 18" DWNFLWM-18

#### PLASTIC DRAIN PANS:

- DWNFLWP



### WANT MORE INFORMATION ON ASPEN'S CA SERIES EVAPORATOR COILS?

SCAN QR CODE TO VISIT THIS PRODUCT ON OUR WEBSITE



*For complete warranty details, please visit our Warranty Information tab when you visit Aspen's website.  
To view this coil's product information online for the most up-to-date information scan the QR Code.*

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. CA-Spec-2025-03



## SPECIFICATIONS & PERFORMANCE:

COIL MODEL	NOM. CAPACITY (BTU)	PAN SIZE						SHIPPING INFO.			
		WIDTH (W)				DEPTH (D)	BARE SLAB HEIGHT (H)	WEIGHT (LBS)			SKID QTY
		13	16	19-1/2	23			2 ROW	3 ROW	4 ROW	
CA24A*	24,000	13	16	19-1/2	N/A	19-3/8	13-1/2	17	27	35	30
CA24B*		13	16	19-1/2	N/A	19-3/8	15-1/2	20	31	41	25
CA24C*		13	16	19-1/2	N/A	19-3/8	17-1/2	23	36	47	25
CA24D*		13	16	19-1/2	N/A	19-3/8	19-1/2	25	40	53	20
CA30A*	30,000	13	16	19-1/2	N/A	19-3/8	15-1/2	20	31	41	25
CA30B*		13	16	19-1/2	N/A	19-3/8	17-1/2	23	36	47	25
CA30C*		13	16	19-1/2	N/A	19-3/8	19-1/2	25	40	53	20
CA30D*		13	16	19-1/2	N/A	19-3/8	21-1/2	28	45	58	16
CA30E*		13	16	19-1/2	N/A	19-3/8	21-1/2	30	47	60	16
CA36A*	36,000	13 for 2, 3R; 16 for 4R	16	19-1/2	N/A	19-3/8	17-1/2	23	36	47	25
CA36B*			16	19-1/2	N/A	19-3/8	19-1/2	25	40	53	20
CA36C*			16	19-1/2	N/A	19-3/8	21-1/2	28	45	58	16
CA36D*			16	19-1/2	N/A	19-3/8	23-1/2	31	49	64	12
CA42A*	42,000	N/A	16	19-1/2	23	19-3/8	25-1/2	25	40	53	20
CA42B*		N/A	16	19-1/2	23	19-3/8	21-1/2	28	45	58	16
CA42C*		N/A	16	19-1/2	23	19-3/8	23-1/2	31	49	64	12
CA42D*		N/A	16	19-1/2	23	19-3/8	25-1/2	34	54	70	12
CA48A*	48,000	N/A	16	19-1/2	23	19-3/8	21-1/2	28	45	58	16
CA48B*		N/A	16	19-1/2	23	19-3/8	23-1/2	31	49	64	12
CA48C*		N/A	16	19-1/2	23	19-3/8	25-1/2	34	54	70	12
CA48D*		N/A	16	19-1/2	23	19-3/8	27-1/2	37	58	76	12
CA48F*		N/A	16	19-1/2	23	19-3/8	25-1/2	36	56	72	12
CA48G*		N/A	16	19-1/2	23	19-3/8	27-1/2	39	60	78	12
CA60A*	60,000	N/A	N/A	19-1/2	23	19-3/8	25-1/2	34	54	70	12
CA60B*		N/A	N/A	19-1/2	23	19-3/8	27-1/2	37	58	76	12
CA60C*		N/A	N/A	19-1/2 (2)	23 (2)	21-3/4	24-1/2	38	60	79	12
CA60D*		N/A	N/A	19-1/2 (2)	23 (2)	21-3/4	26-1/2	41	65	86	12
CA60E*		N/A	N/A	N/A	24 (3)	21	26-1/2	46	73	95	12
CA60F*		N/A	N/A	19-1/2	23	19-3/8	25-1/2	41	62	80	12
CA60G*		N/A	N/A	N/A	24 (3)	21	26-1/2	48	75	97	12

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. CA-Spec-2025-03