



BASO Gas Products LLC


K15DA Series Thermocouples

Description

K15DA Series thermocouples are designed to be used in many thermoelectric applications where standing pilots are needed. This style of thermocouple can also be used with other manufacturers' standing pilots.

Agency Listing

- CSA (AGA/CGA) Certificate number 229521-1656071

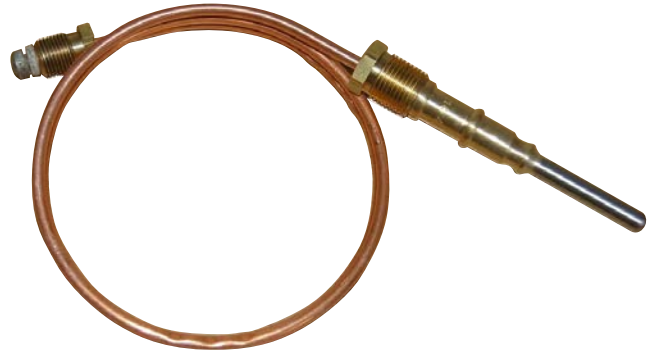

Selection Chart

	Part Number	Length	Replaces Johnson Controls	Open Circuit mV Range
▲	K15DA-12H	12 in. (305 mm)	N/A	20 – 28 mV
▲	K15DA-18H	18 in. (457 mm)	K15DS-18H, K15DS-1818H	20 – 28 mV
▲	K15DA-24H	24 in. (610 mm)	K15DS-24H, K15DS-1824H	20 – 28 mV
▲	K15DA-30H	30 in. (762 mm)	K15DS-30H, K15DS-1830H	20 – 28 mV
▲	K15DA-36H	36 in. (914 mm)	K15DS-36H, K15DS-1836H	20 – 28 mV
▲	K15DA-48H	48 in. (1219 mm)	N/A	20 – 28 mV

▲ means bulk pack is available upon request.

Notes: Connects to valves with 11/32-32 male nut connector
 Open Circuit: 15 mV minimum
 Closed Circuit: 8 mV minimum
 Maximum Hot Junction Temperature: 1500°F (816°C)

Thermocouples