


Controls Group 507 E. Michigan Street P.O. Box 423, Milwaukee, WI 53202 Code No. Lit-1925080

K16 Series

"Husky™" High Performance Thermocouple

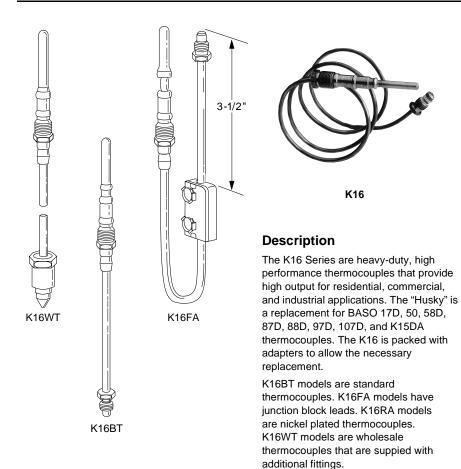

Specifications

Millivoltage Range:

• 25-35 mV

To Order

Specify the code number from the following selection chart.

Selection Chart

| Code Number | Length (in.) | Thermocouples in Carton |
|----------------|-----------------|----------------------------|
| ▲ K16BT-18 | 18 | 10 |
| ▲ K16BT-24 | 24 | 10 |
| ▲ K16BT-30 | 30 | 10 |
| ▲ K16BT-36 | 36 | 10 |
| K16FA-18 | 18 | 10 |
| K16FA-24 | 24 | 10 |
| K16FA-36 | 36 | 10 |
| K16RA-24 | 24 | 10 |
| K16RA-36 | 36 | 10 |
| K16RA-48 | 48 | 5 |
| K16RA-60 | 60 | 5 |
| K16RA-72 | 72 | 5 |
| ▲ K16WT-48 | 48 | 5 |
| ▲ K16WT-60 | 60 | 5 |
| ▲ K16WT-72 | 72 | 5 |

▲ Universal Replacement, Multi-Mount. ★ Non-Stock Item. Built to Order.

The performance specifications are nominal and conform to acceptable industry standards. For applications at conditions beyond these specifications, consult the local Johnson Controls office. Johnson Controls, Inc. shall not be liable for damages resulting from misapplication or misuse of its products. © 03/99 Johnson Controls, Inc.