




Available with fusible link option, limited sizes (not UL-listed or fire-rated)

## 661 Register

- All-steel construction
- Used for ceiling or sidewall installations
- For heating or cooling
- Ideal for shallow duct installations
- Two-way deflection
- 1/3" spaced fins set at 20 degrees
- Galvanized multi-shutter valve
- 1-5/8" depth when fully opened
- Interlocking valve louvers for positive shut-off
- Bright White finish

		661 Standard Sizes (in.)									
		WIDTH									
HT		6	8	10	12	14	16	18	20	24	30
4	X	X	X	X	X	X	X			X	
5		X	X	X	X	X					
6	X	X	X	X	X	X	X	X	X	X	X
8		X	X	X	X	X	X	X	X	X	X
10				X	X						
12					X						

**Note:** When ordering sidewall products, specify horizontal (width) dimension first.

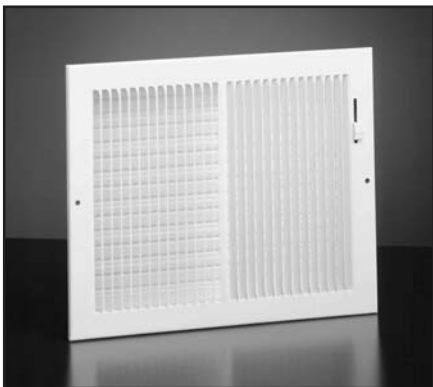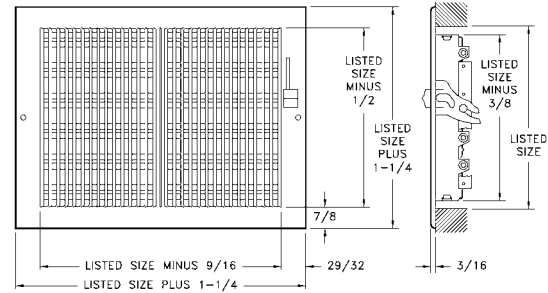

## A661 Register

- Stamped aluminum construction
- Used for ceiling or sidewall installations
- For heating or cooling
- Ideal for shallow duct installations
- Two-way deflection
- 1/3" spaced fins set at 20 degrees
- Galvanized multi-shutter valve
- 1-5/8" depth when fully opened
- Interlocking valve louvers for positive shut-off
- Bright White finish

		A661 Available Sizes (in.)			
		WIDTH			
HT		8	10	12	14
4	X	X	X	X	
6			X	X	X

Contact factory for sizes not listed.

