



# HVH8

## Quiet Comfort® Deluxe 18 with SmartSense™ Technology Product Specifications

### HIGH EFFICIENCY UP TO 19 SEER VARIABLE-SPEED HEAT PUMP WITH OBSERVER® COMMUNICATING CONTROL SYSTEM 2 THRU 5 TONS SPLIT SYSTEM

208–230 Volt, 1-phase, 60 Hz  
REFRIGERATION CIRCUIT

- Variable speed compressor operates at 5 stages with capacity range as wide as 25 – 100%
- Electronic expansion valve (EXV) for precise heating control
- High pressure switch
- Suction pressure transducer
- Pressure equalizer valve for easy starting
- Compressor discharge temperature sensor
- Coil temperature sensor
- Copper tube/aluminum fin coil
- Internal crankcase heater standard
- Suction line accumulator factory installed

#### PERFORMANCE

- Up to 13.0 EER and 11 HSPF
- Integrated inverter control enables 5-stage operation with complete Observer communicating system including Observer control
  - Observer Wall Control with version 5.0 or newer software required
  - Also capable of 2-stage operation with 2-stage thermostat
- Self-configuring installation with Observer Communicating Wall Control
- Compact ECM fan motor driven by integrated inverter control
- Outdoor temperature sensor factory installed
- High-performance compressor sound shield standard
- Isolation compressor grommets
- Enhanced dehumidification

#### EASY TO INSTALL AND SERVICE

- Text based diagnostics with Observer Communicating Wall Control
- Only 2 control wires required from communicating indoor unit to condenser
- External high and low refrigerant service ports
- Factory charged with R-410A refrigerant
- Adjustments for min and max staging with Observer Wall Control

#### BUILT TO LAST

- High gloss, baked-on powder coat finish over galvanized steel
- Post-painted (black) coil fins
- Coated inlet grille with 3/8" (10mm) spacing for extra protection (hail guard)
- Corner posts for extra strength and style

#### WARRANTY\*

- 10 year No Hassle Replacement™ limited warranty
- 5 year parts limited warranty (including compressor and coil)
  - With timely registration, an additional 5 year parts limited warranty (including compressor and coil)

\* For residential applications only. See Warranty certificate for complete details and restrictions, including warranty coverage for other applications.



TSTAT0201CW  
(Sold Separately)



**smartsense**  
TECHNOLOGY



Qualifying models only

This product has been designed and manufactured to meet ENERGY STAR criteria for energy efficiency when matched with appropriate coil components. However, proper refrigerant charge and proper air flow are critical to achieve rated capacity and efficiency. Installation of this product should follow the manufacturer's refrigerant charging and air flow instructions. Failure to confirm proper charge and airflow may reduce energy efficiency and shorten equipment life.



Use of the AHRI Certified TM Mark indicates a manufacturer's participation in the program. For verification of certification for individual products, go to [www.ahridirectory.org](http://www.ahridirectory.org).

Model Number	Size (tons)	Nominal Btu/hr	Min. Circuit Ampacity	Max. Fuse or Breaker	Operating Dimensions height x length/width(sq.) in. (mm)	Operating/Ship Weight lbs. (kg)
HVH824GKA	2	24,000	13.5	20	31–13/16 x 23–1/8 (807 x 587)	132/154(60/70)
HVH825GKA ‡	2	24,000	23.6	40	38–1/2 x 23–1/8 (980 x 587)	156/181 (71/82)
HVH836GKA	3	36,000	24.4	40		156/181 (71/82)
HVH837GKA ‡	3	36,000	26.0	40	38–15/16 x 31–3/16 (989 x 792)	207/244 (94/111)
HVH848GKA	4	48,000	31.4	50		207/244 (94/111)
HVH860GKA	5	60,000	40.8	60	42–5/16 x 31–3/16 (1075 x 792)	233/272 (106/123)

‡ = Meets Energy Star criteria when matched with appropriate coil

<b>OUTDOOR UNIT MODEL NUMBER IDENTIFICATION GUIDE (single phase)</b>											
Digit Position:	1	2	3	4	5, 6	7	8	9	10	11	12
Example Part Number:	<b>H</b>	<b>V</b>	<b>H</b>	<b>8</b>	<b>24</b>	<b>G</b>	<b>K</b>	<b>A</b>	<b>1</b>	<b>0</b>	<b>0</b>
H = Mainline <b>BRANDING</b> V = Variable Speed <b>KEY CHARACTERISTIC</b> A = Air Conditioner H = Heat Pump <b>TYPE</b> 6 = 16 SEER 7 = 17 SEER 8 = 18 SEER 9 = 19 SEER <b>NOMINAL EFFICIENCY</b> 24 = 24,000 BTUH = 2 tons 25 = 24,000 BTUH = 2 tons 36 = 36,000 BTUH = 3 tons 37 = 36,000 BTUH = 3 tons 48 = 48,000 BTUH = 4 tons 60 = 60,000 BTUH = 5 tons <b>NOMINAL CAPACITY</b> G = Coil Guard Grille <b>FEATURES</b> K = 208/230-1-60 <b>VOLTAGE</b> Sales Code Engineering Revision Extra Digit Extra Digit											

<b>ACCESSORIES PART NUMBER IDENTIFICATION GUIDE</b>									
Digit Position:	1	2	3	4	5	6, 7	8, 9	10, 11	
Example Part Number:	<b>N</b>	<b>A</b>	<b>S</b>	<b>A</b>	<b>0</b>	<b>01</b>	<b>01</b>	<b>CH</b>	
N = Non-Branded A = Accessory <b>PRODUCT GROUP</b> S = Split System (AC & HP) <b>KIT USAGE</b> A = Original B = 2nd Generation <b>MAJOR SERIES</b> 0 = Generic or Not Applicable 2 = R-22 4 = R-410A <b>REFRIGERANT</b> Product Identifier Number Package Quantity Type of Kit (Example: CH = Crankcase Heater)									

## REFRIGERANT PIPING LENGTH LIMITATIONS

### Maximum Line Lengths:

The maximum allowable total equivalent length for heat pumps can vary depending on the vertical separation. See the tables below for allowable lengths depending on whether the outdoor unit is on the same level, above or below the indoor unit.

#### Maximum Line Lengths for Heat Pump Applications

	MAXIMUM ACTUAL LENGTH ft (m)	MAXIMUM EQUIVALENT LENGTH† ft (m)	MAXIMUM VERTICAL SEPARATION ft (m)
Units on equal level	100 (30.5)	100 (30.5)	N/A
Outdoor unit ABOVE indoor unit	100 (30.5)	100 (30.5)	100 (30.5)
Outdoor unit BELOW indoor unit	See Table 'Maximum Total Equivalent Length: Outdoor Unit BELOW Indoor Unit'		

† Total equivalent length accounts for losses due to elbows or fitting. See the Long Line Guideline for details.

#### Maximum Total Equivalent Length† – Outdoor Unit BELOW Indoor Unit

Size	Liquid Line Diameter w/ TXV	HP with R-410A Refrigerant – Maximum Total Equivalent Length† Vertical Separation ft (m) Outdoor unit BELOW indoor unit;						
		0–20 (0 – 6.1)	21–30 (6.4 – 9.1)	31–40 (9.4 – 12.2)	41–50 (12.5 – 15.2)	51–60 (15.5 – 18.3)	61–70 (18.6 – 21.3)	71–80 (21.6 – 24.4)
2–Ton	3/8	100*	100*	100*	100*	100*	100*	100*
3–Ton	3/8	100*	100*	100*	100*	100*	100*	100*
4–Ton	3/8	100*	100*	100*	100*	100	100	--
5–Ton	3/8	100*	100*	100*	100*	100	100	--

\* Maximum actual length not to exceed 100 ft (30.5 m)

† Total equivalent length accounts for losses due to elbows or fitting.

-- = outside acceptable range

## LONG LINE APPLICATIONS

Unit is approved for up to 100 ft (30.5 m) equivalent length and vertical separations shown above with no additional accessories.

Longer line set applications are not permitted.

## COOLING CAPACITY LOSS TABLE

Nominal Size (Btuh)	Line OD (in.)	HVH8 Cooling Capacity Loss (%)				
		Total Equivalent Line Length (ft)				
		25	50	75	80	100
24	5/8	0.5	1.2	1.8	1.9	2.4
	<b>3/4</b>	<b>0.1</b>	<b>0.4</b>	<b>0.6</b>	<b>0.7</b>	<b>0.8</b>
25	5/8	0.5	1.2	1.8	1.9	2.4
	3/4	0.1	0.4	0.6	0.7	0.8
	<b>7/8</b>	0.0	0.1	0.3	0.3	0.4
36 37	5/8	1.1	2.4	3.7	4.0	5.0
	3/4	0.3	0.8	1.3	1.4	1.8
	<b>7/8</b>	0.0	0.3	0.5	0.6	0.8
48	3/4	0.7	1.6	2.4	2.6	3.2
	7/8	0.3	0.7	1.1	1.2	1.6
	<b>1 1/8</b>	0.0	0.1	0.2	0.3	0.4
60	3/4	1.0	2.3	3.5	3.8	4.8
	7/8	0.4	1.0	1.7	1.8	2.3
	<b>1 1/8</b>	0.0	0.1	0.3	0.4	0.5

Rating Line Size in **BOLD**

## EQUIPMENT SIZING GUIDELINES

If primary load is cooling, size the same as any other air conditioning system. If primary load is heating, use the chart below for maximum size for heating.

#### MAXIMUM RECOMMENDED EQUIPMENT SIZE – HEATING

COOLING LOAD (tons)	MAXIMUM RECOMMENDED EQUIPMENT SIZE FOR HEATING*
1	25
1.5	25
2	37
2.5	37
3	48
3.5	60
4	60
5	60

\* Make sure duct work is capable of delivering required airflow. Make sure combination rating exists for desired indoor and outdoor combination.

### MIN/MAX AIRFLOW TABLES

The indoor airflow delivered by this system varies significantly based on outdoor temperature, indoor unit combination, and system demand. The airflows on these tables are for duct design considerations.

Duct systems capable of these ranges will ensure the system will deliver full capacity at all outdoor temperatures.

Minimum and maximum compressor stage can be adjusted from these numbers in the Observer® Control Heat Pump Setup screen.

Cooling – Comfort Mode			Minimum Cooling (Dehum or Zoning)
Size	Max Stage 5 Airflow	Max Stage 1 Airflow	
2–Ton	739	300	300
3–Ton	990	300	300
4–Ton	1389	542	457
5–Ton	1600	700	600

Cooling – Efficiency Mode		
Size	Max Stage 5 Airflow	Max Stage 1 Airflow
2–Ton	825	585
3–Ton	1050	600
4–Ton	1400	875
5–Ton	1800	975

Heating – Comfort Mode		
Size	Max Stage 5 Airflow	Max Stage 1 Airflow
2–Ton	819	300
3–Ton	1014	226
4–Ton	1550	429
5–Ton	1600	500

Heating – Efficiency Mode		
Size	Max Stage 5 Airflow	Max Stage 1 Airflow
2–Ton	825	585
3–Ton	1200	700
4–Ton	1600	1000
5–Ton	1600	900

Cooling Max Mode		
Size	Max Stage 5 Airflow	Max Stage 1 Airflow
2–Ton (24)	850	585
2–Ton (25) (550 cfm/ delivered ton)*	1350	510
3–Ton	1200	600
4–Ton	1600	875
4–Ton–49	1450	875
5–Ton	2000	975

Heating Max Mode		
Size	Max Stage 5 Airflow	Max Stage 1 Airflow
2–Ton (24)	850	585
2–Ton (25) (550 cfm/ delivered ton)*	850	585
3–Ton	1200	700
4–Ton	1600	1000
5–Ton	2000	900

\* Serial number beginning with 0115E and newer

**LEGEND::**

**Max Capacity Airflow** – Stage 5 airflow varies depending on conditions. This is the highest airflow the system will attempt to deliver in this particular mode. Ductwork for non–zoned systems should be sized for this airflow to ensure the system can deliver full capacity when needed. Improper duct design may result in excessive airflow noise and/or cutback occurrences at max airflow conditions.

**Highest Min. Capacity Airflow** – Stage 1 airflow also varies depending on conditions. In zoned systems, each zone must be capable of delivering this airflow for the system to deliver full capacity into the zone. Otherwise, airflow may be diverted to other zones or cutback may occur.

**Min Cooling (Dehum or Zoning)** – Lowest airflow the system will deliver. May operate down to this airflow in dehumidification mode or in zoning applications where duct-work restrictions have caused the blower to cut–back.

**PHYSICAL DATA**

UNIT SIZE SERIES	24	25	36	37	48	60
<b>Compressor Type</b>	Variable Speed Rotary					
<b>REFRIGERANT</b>	R-410A					
Control	TXV (R-410A Hard Shutoff)					
Charge lb (kg)	5.40 (2.45)	6.38 (2.89)	6.38 (2.89)	7.5 (3.40)	8.30 (3.76)	8.60 (3.90)
Outdoor Htg Exp. Device	EXV					
<b>COND FAN</b>	Forward Swept Propeller Type, Direct Drive					
Air Discharge	Vertical					
Air Qty (CFM)	2080	2500	2500	3800	4500	4500
Motor HP	1/5	1/3	1/3	1/3	1/3	1/3
Motor RPM	825	1050	1050	750	850	900
<b>COND COIL</b>						
Face Area (Sq ft)	11.12	13.90	13.90	21.50	21.50	23.65
Fins per In.	20	20	20	20	20	20
Rows	1	1	1	1	1	1
Circuits	5	6	6	8	8	8
<b>VALVE CONNECT. (In. ID)</b>						
Vapor	5/8	3/4	3/4	7/8	7/8	7/8
Liquid	3/8					
<b>REFRIGERANT TUBES (In. OD)</b>						
Rated Vapor*	3/4	7/8	7/8	1-1/8	1-1/8	1-1/8
Max Liquid Line	3/8					

\* Units are rated with 25 ft (7.6 m) of lineset length. See Vapor Line Sizing and Cooling Capacity Loss table when using other sizes and lengths of lineset.

**Note:** See unit Installation Instruction for proper installation.

**ELECTRICAL DATA**

UNIT SIZE— VOLTAGE, SERIES	V/PH	OPER VOLTS*		COMPR		FAN	MCA	MAX FUSE ** or CKT BRK AMPS
		MAX	MIN	LRA	RLA	FLA		
24	208/230 -1-60	253	197	N/A	10.32	0.58	13.50	20
25				N/A	17.70	1.20	23.60	40
36				N/A	18.30	1.20	24.40	40
37				N/A	19.60	1.20	26.00	40
48				N/A	23.90	1.20	31.40	50
60				N/A	31.30	1.40	40.80	60

\* Permissible limits of the voltage range at which the unit will operate satisfactorily

\*\* Time—Delay fuse.

**FLA** — Full Load Amps

**LRA** — Locked Rotor Amps

**MCA** — Minimum Circuit Amps

**RLA** — Rated Load Amps

**NOTE:** Control circuit is 24-V on all units and requires external power source. Copper wire must be used from service disconnect to unit.

All motors/compressors contain internal overload protection.

Complies with 2010 requirements of ASHRAE Standards 90.1

**CHARGING SUBCOOLING (TXV-TYPE EXPANSION DEVICE)**

UNIT SIZE—VOLTAGE, SERIES	
24	Subcooling recommendation displayed in the subcooling chart shown on the charging label must be followed
25	
36	
37	
48	
60	

### SOUND POWER LEVEL (dBA)

Unit Size— Voltage, Series	Typical Octave Band Spectrum (without tone adjustment)	Min Speed Cooling	Max Speed Cooling	Max Speed Heating
24	Freq (Hz)	1500 RPM	4700 RPM	5400 RPM
	125	40.5	44.0	45.5
	250	45.5	49.5	53.5
	500	41.5	53.0	56.0
	1000	44.0	52.5	54.0
	2000	39.0	50.5	53.0
	4000	34.5	53.0	56.5
	8000	31.0	45.0	45.5
	Sound Rating (dBA)	56	67	68
25	Freq (Hz)	1200 RPM	3300 RPM	4800 RPM
	125	43.0	52.0	52.5
	250	47.0	59.5	59.0
	500	51.0	64.5	61.5
	1000	49.5	63.0	62.0
	2000	42.5	60.0	60.0
	4000	35.5	59.5	64.0
	8000	46.0	50.5	54.5
	Sound Rating (dBA)	56	69	71
36	Freq (Hz)	1200 RPM	4800 RPM	5400 RPM
	125	43.0	53.0	51.5
	250	47.0	59.5	61.5
	500	51.0	62.5	62.5
	1000	49.5	63.5	63.5
	2000	42.5	63.0	61.5
	4000	35.5	63.5	62.0
	8000	46.0	54.0	54.5
	Sound Rating (dBA)	56	72	71
37	Freq (Hz)	1200 RPM	3000 RPM	4800 RPM
	125	49.5	55.5	62.0
	250	52.5	60.0	63.0
	500	54.0	63.0	64.5
	1000	53.5	61.0	63.5
	2000	50.5	60.5	62.0
	4000	43.0	58.0	64.5
	8000	41.5	50.0	55.0
	Sound Rating (dBA)	60	69	72
48	Freq (Hz)	1500 RPM	4320 RPM	5400 RPM
	125	49.5	59.0	52.5
	250	54.5	64.0	60.0
	500	54.0	66.0	63.5
	1000	54.5	64.5	64.0
	2000	52.0	63.5	63.0
	4000	54.5	63.5	65.5
	8000	46.5	53.0	59.0
	Sound Rating (dBA)	64	72	74
60	Freq (Hz)	1200 RPM	4140 RPM	5400 RPM
	125	39	49.5	46
	250	48	59.5	59
	500	46.5	62	60
	1000	45.5	60	57
	2000	39.5	58.5	56.5
	4000	36.5	55	56.5
	8000	35.5	48	54.5
	Sound Rating (dBA)	57	72	71

NOTE: Tested in compliance with AHRI 270–2008 but not listed with AHRI.

**RPM-CAPACITY-SOUND (dBA)\***

STAGE #	COMP RPM	CAPACITY %	SOUND (dBA)
<b>HVH824</b>			
<b>COOLING</b>			
1	1500	35%	56
2	2566	56%	60
3	3150	69%	65
4	3950	87%	66
5	4700	100%	67
<b>HEATING</b>			
1	1500	29%	56
2	2800	53%	59
3	3150	59%	62
4	4700	88%	65
5	5400	100%	68
<b>HVH825</b>			
<b>COOLING</b>			
1	1200	38%	56
2	1900	58%	60
3	2400	73%	62
4	2600	79%	66
5	3300	100%	69
<b>HEATING</b>			
1	1200	25%	56
2	2400	50%	60
3	3300	69%	62
4	4200	88%	68
5	4800	100%	71
<b>HVH836</b>			
<b>COOLING</b>			
1	1200	25%	56
2	2400	50%	61
3	3300	69%	65
4	4200	88%	69
5	4800	100%	72
<b>HEATING</b>			
1	1200	22%	56
2	2600	48%	60
3	3400	63%	63
4	4800	89%	69
5	5400	100%	71
<b>HVH837</b>			
<b>COOLING</b>			
1	1200	25%	60
2	1800	60%	61
3	2200	73%	67
4	2600	87%	67
5	3000	100%	69
<b>HEATING</b>			
1	1200	25%	60
2	2400	50%	67
3	2700	56%	68
4	3000	63%	69
5	4800	100%	72
<b>HVH848</b>			
<b>COOLING</b>			
1	1500	35%	64
2	2460	57%	67
3	2800	65%	68
4	3650	84%	70
5	4320	100%	72
<b>HEATING</b>			
1	1500	28%	64
2	2800	52%	67
3	3300	61%	68
4	4320	80%	71
5	5400	100%	74
<b>HVH860</b>			
<b>COOLING</b>			
1	1200	32%	57
2	2180	55%	61
3	2850	70%	65
4	3700	90%	68
5	4140	100%	72
<b>HEATING</b>			
1	1200	25%	57
2	2600	50%	51
3	3200	61%	65
4	4140	88%	69
5	5400	100%	71

\*Estimated sound for stages 2, 3, and 4

\*For 2-stage operation: Cooling Low = Stage 2, Heating low = Stage 3; both cooling and heating High = Stage 5

8 DIMENSIONS – ENGLISH


UNIT	SERIES	ELECTRICAL CHARACTERISTICS	A	B	C	D	E	F	G	K	L	M	N	P	OPERATING WEIGHT (lbs)	SHIPPING WEIGHT (lbs)	SHIPPING DIMENSIONS (L x W x H)
*VH8246KA	1	X 0 0 0	23 1/8"	31 13/16"	3 3/4"	3/4"	4 7/16"	18 1/16"	7 13/16"	2 13/16"	1/2"	11 1/4"	11 1/4"	14 1/2"	132	154	25 1/4" X 25 1/4" X 35 5/8"
*VH8256KA	1	X 0 0 0	23 1/8"	38 1/2"	3 3/4"	3/4"	4 7/16"	18 1/16"	7 13/16"	2 13/16"	1/2"	10 3/4"	10 3/4"	18 1/4"	156	181	25 1/4" X 25 1/4" X 43 3/8"
*VH8366KA	1	X 0 0 0	23 1/8"	38 1/2"	3 3/4"	3/4"	4 7/16"	18 1/16"	7 13/16"	2 13/16"	1/2"	10 3/4"	10 3/4"	18 1/4"	156	181	25 1/4" X 25 1/4" X 43 3/8"
*VH8376KA	1	X 0 0 0	31 3/16"	38 15/16"	3 7/8"	7/8"	6 9/16"	24 11/16"	9 1/8"	2 15/16"	5/8"	14 1/2"	14 5/8"	18 3/4"	207	244	33 3/8" X 33 3/8" X 46 1/8"
*VH8486KA	1	X 0 0 0	31 3/16"	38 15/16"	3 7/8"	7/8"	6 9/16"	24 11/16"	9 1/8"	2 15/16"	5/8"	14 1/2"	14 5/8"	18 3/4"	207	244	33 3/8" X 33 3/8" X 46 1/8"
*VH8606KA	1	X 0 0 0	31 3/16"	42 5/16"	3 7/8"	7/8"	6 9/16"	24 11/16"	9 1/8"	2 15/16"	5/8"	16 1/2"	15"	20"	233	272	33 3/8" X 33 3/8" X 49 9/16"

X = YES  
O = NO

208/230-160	230-160	208/230-3-60	460-3-60
-------------	---------	--------------	----------

UNIT SIZE	"X" MIN GROUND MOUNTING PAD APPLICATION DIMENSIONS	"Y" MIN ROOF-TOP MOUNTING PAD APPLICATION DIMENSIONS
24, 25, 36	23 1/8"	17 3/4"
-	25 3/4"	20 7/16"
37, 46, 60	31 3/16"	23"
-	35"	26 3/4"

- NOTES:
- ALLOW 30" CLEARANCE TO SERVICE SIDE OF UNIT, 48" ABOVE UNIT, 6" ON ONE SIDE, 12" ON REMAINING SIDE, AND 24" BETWEEN UNITS FOR PROPER AIRFLOW.
  - MINIMUM OUTDOOR OPERATING AMBIENT IN COOLING MODE IS 55°F, MAX. 115°F.
  - SERIES DESIGNATION IS THE 10TH POSITION OF THE UNIT MODEL NUMBER.
  - CENTER OF GRAVITY.
  - ALL DIMENSIONS ARE IN "INCHES" UNLESS NOTED.

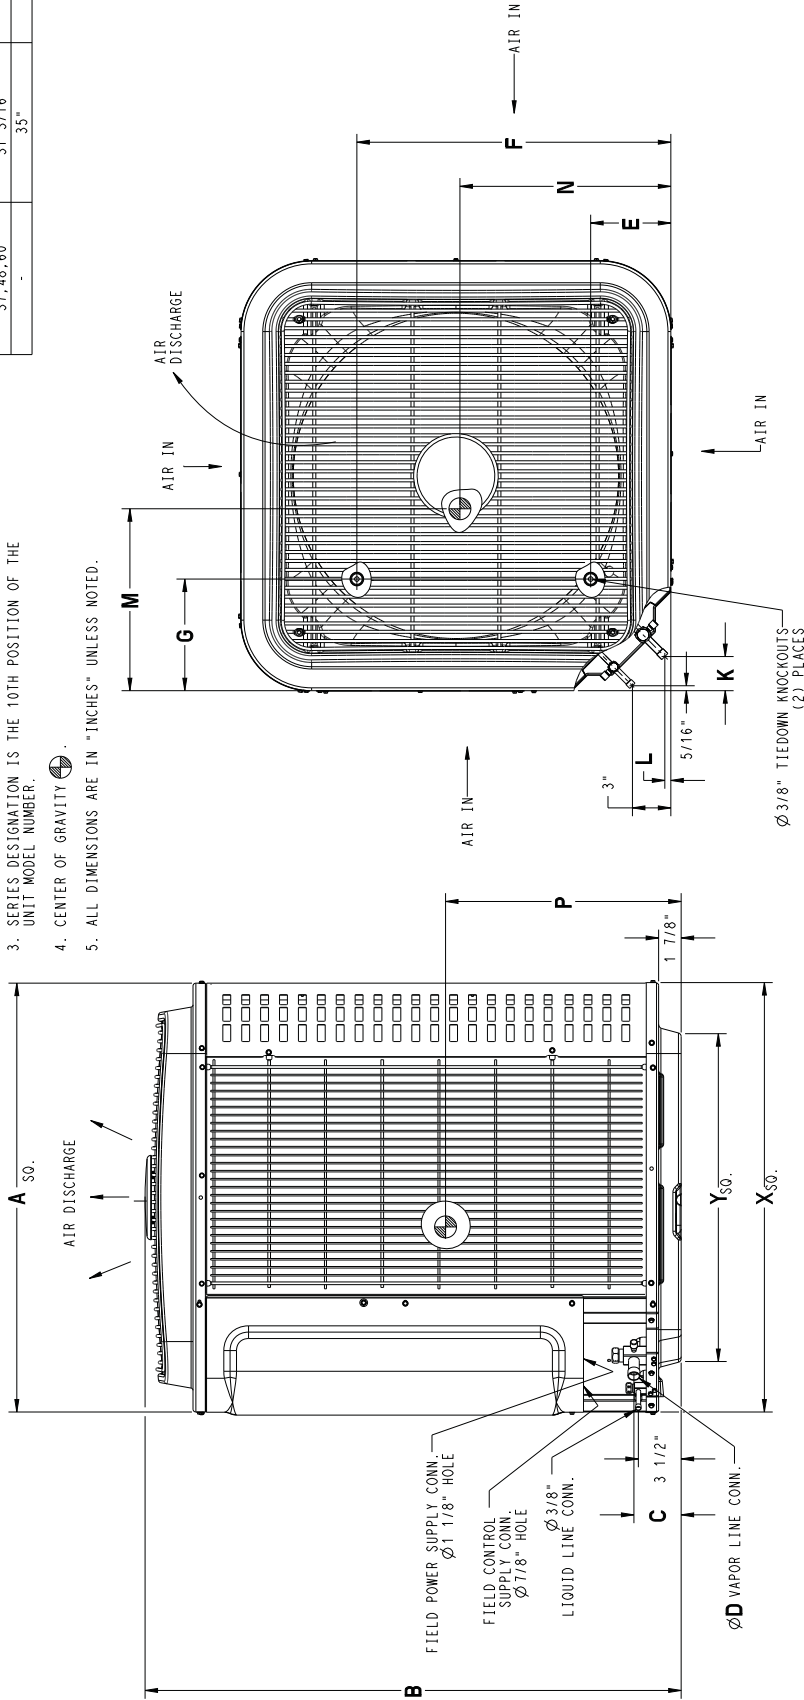

Representative drawing only, some models may vary in appearance.

SD5334-4 REV B

\* = C, H, T



DIMENSIONS – SI

UNIT	SERIES	ELECTRICAL CHARACTERISTICS	A	B	C	D	E	F	G	K	L	M	N	P	OPERATING WEIGHT (KGS)	SHIPPING WEIGHT (KGS)	SHIPPING DIMENSIONS (L x W x H)
*VH824GKA	1	X 0 0 0	587.3	807.3	96.1	19.1	112.7	458.8	198.4	71.4	12.7	285.8	285.8	388.3	60	70	641.5 X 641.5 X 905.2
*VH825GKA	1	X 0 0 0	587.3	980.1	96.1	19.1	112.7	458.8	198.4	71.4	12.7	273.1	273.1	463.6	71	82	641.5 X 641.5 X 1102.2
*VH836GKA	1	X 0 0 0	587.3	980.1	96.1	19.1	112.7	458.8	198.4	71.4	12.7	273.1	273.1	463.6	71	82	641.5 X 641.5 X 1102.2
*VH837GKA	1	X 0 0 0	792.2	988.5	98.4	22.2	166.7	627.1	231.8	74.6	15.9	368.3	371.5	476.3	94	111	846.6 X 846.6 X 1172.2
*VH848GKA	1	X 0 0 0	792.2	988.5	98.4	22.2	166.7	627.1	231.8	74.6	15.9	368.3	371.5	476.3	94	111	846.6 X 846.6 X 1172.2
*VH860GKA	1	X 0 0 0	792.2	1074.9	98.4	22.2	166.7	627.1	231.8	74.6	15.9	419.1	381.0	508.0	106	123	846.6 X 846.6 X 1258.6


X = YES  
O = NO

208/230-160	230-160	208/230-3-60	460-3-60
-------------	---------	--------------	----------

NOTES:

- ALLOW 762.0 CLEARANCE TO SERVICE SIDE OF UNIT, 1219.2 ABOVE UNIT, 152.4 ON ONE SIDE, 304.8 ON REMAINING SIDE, AND 609.6 BETWEEN UNITS FOR PROPER AIRFLOW.
- MINIMUM OUTDOOR OPERATING AMBIENT IN COOLING MODE IS 13°C, MAX. 46°C.
- SERIES DESIGNATION IS THE 10TH POSITION OF THE UNIT MODEL NUMBER.
- CENTER OF GRAVITY
- ALL DIMENSIONS ARE IN "MM" UNLESS NOTED.

UNIT SIZE	"X" MIN GROUND MOUNTING PAD APPLICATION DIMENSIONS	"Y" MIN ROOF-TOP MOUNTING PAD APPLICATION DIMENSIONS
24,25,36	587.4	451.3
37,48,60	654.0	518.5
-	792.2	583.2
-	889.0	679.7

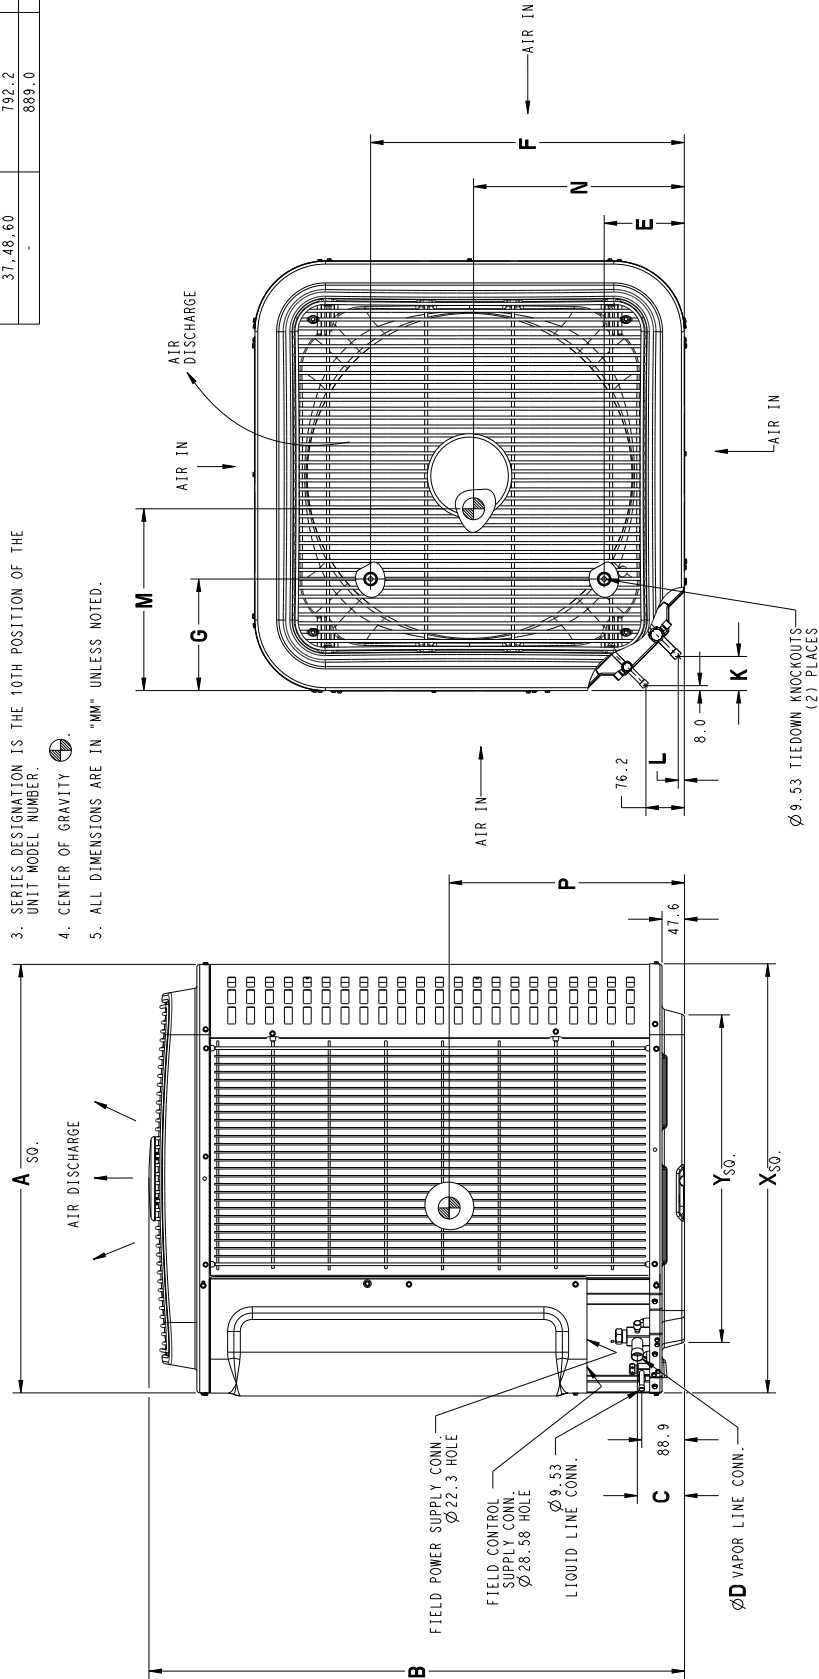


Representative drawing only, some models may vary in appearance.

SD5634-4 REV B

\* = C, H, T

HVH8 BALANCE POINT WORKSHEET

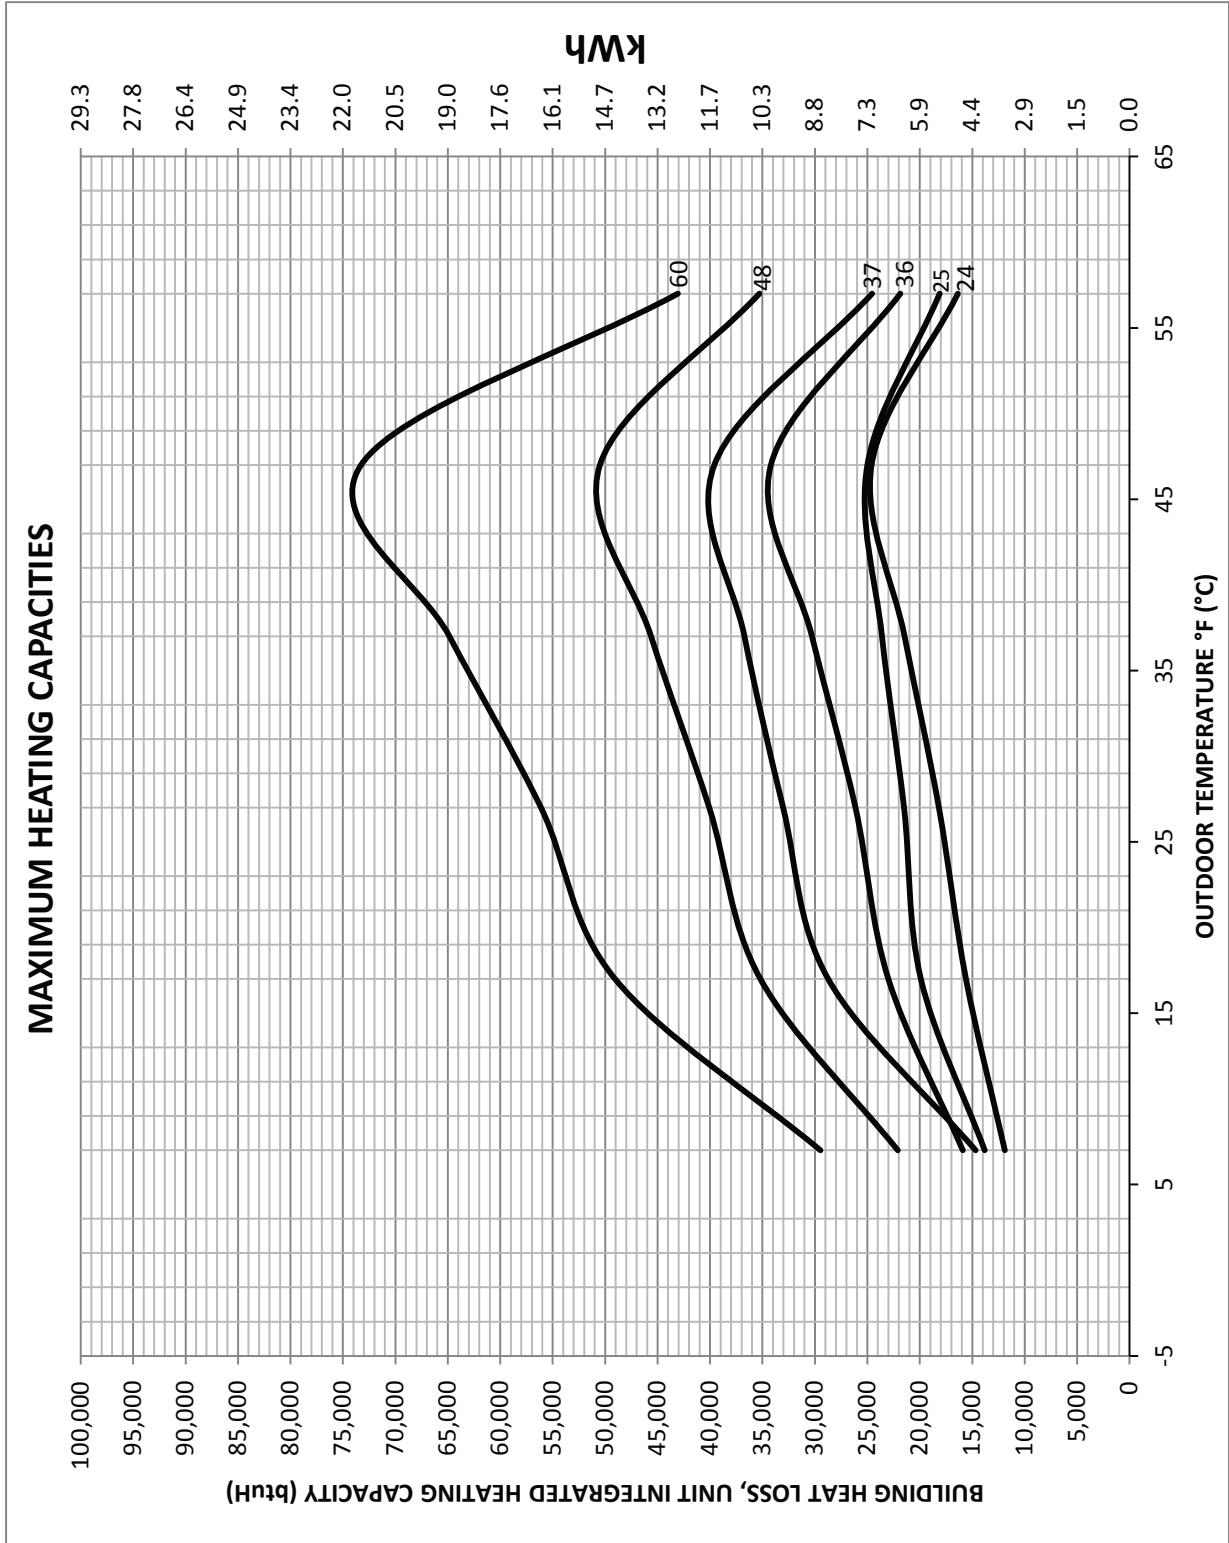

### TESTED AHRI COMBINATION RATINGS\*

NOTE: Ratings contained in this document are subject to change at any time.

For AHRI ratings certificates, please refer to the AHRI directory. [www.ahridirectory.org](http://www.ahridirectory.org)

Additional ratings and system combinations can be accessed via the Heil database at:

<http://www.icpeqp.com/AHRIratings/ratings.aspx?Brand=Heil>

Or scan this QR code:



Outdoor Model	Indoor Model	Furnace Model	Stages	Cooling				Heating				
				Cooling Cap.	SEER	EER	ID CFM	High Temp		Low Temp		
								Capacity 47°F (8°C)	COP	Capacity 17°F (-8°C)	COP	
HVH824GKA101	FCM4X24***L + WALLCON		5	24,000	17.5	11.0	825	10.5	24,400	3.61	15,800	2.60
HVH824GKA101	FVM4X24***L		2	23,200	15.0	10.5	700	9.0	23,800	3.42	15,600	2.52
HVH825GKA101	FCM4X48***L + WALLCON		5	24,000	18.0	12.5	825	10.0	26,800	3.56	19,900	2.58
HVH825GKA101	FVM4X36***L		2	23,200	16.5	12.0	700	8.2	30,200	3.04	19,900	2.38
HVH836GKA101	FCM4X48***L + WALLCON		5	34,200	17.5	10.5	1050	10.5	34,200	3.56	23,000	2.58
HVH836GKA101	FVM4X48***L		2	34,600	15.5	10.0	1050	9.0	34,000	3.58	22,400	2.58
HVH837GKA101	FCM4X60***L + WALLCON		5	33,600	19.0	13.0	1050	11.0	40,000	3.50	30,400	2.66
HVH848GKA101	FCM4X48***L + WALLCON		5	46,000	18.0	11.0	1400	11.0	50,500	3.44	35,200	2.66
HVH860GKA101	FCM4X60***L + WALLCON		5	57,000	17.0	10.0	1600	10.0	60,000	3.10	44,500	2.48
HVH860GKA101	FVM4X60***L		2	57,000	15.0	10.0	1750	9.0	60,000	3.05	44,000	2.45

Ratings with “+ WALLCON” are **communicating** systems with Observer® Wall Control and 5—stages of operation. Ratings **without** “+ WALLCON” are **non—communicating** systems with 2—stage operation.

\* Ratings are net values reflecting the effects of circulating fan heat. Supplemental electric heat is not included. Ratings are based on:

**Cooling Standard:** 80°F (27°C) db 67°F (19°C) wb indoor entering air temperature and 95°F (35°C) db air entering outdoor unit.

**High—Temp Heating Standard:** 70°F (21°C) db indoor entering air temperature and 47°F (8°C) db 43°F (6°C) wb air entering outdoor unit.

**Low—Temp Heating Standard:** 70°F (21°C) db indoor entering air temperature and 17°F (-8°C) db 15°F (-9°C) wb air entering outdoor unit.

**COP** — Coefficient of Performance

**EER** — Energy Efficiency Ratio

**HSPF** — Heating Seasonal Performance Factor

**SEER** — Seasonal Energy Efficiency Ratio

**WALLCON** — Wall Control

NOTE: Ratings contained in this document are subject to change at any time.

HVH824

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE

Table with columns for EDB °F (°C), EVAP AIR, and capacity/efficiency data for HVH824 / FCM4X24\*\*L Efficiency Mode. Includes sub-sections for STAGE 5, STAGE 3, and STAGE 1.

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE

Table with columns for EDB °F (°C), EVAP AIR, and capacity/efficiency data for HVH824 / FCM4X24\*\*L Comfort + Dehumidify Mode. Includes sub-sections for STAGE 5, STAGE 3, and STAGE 1.

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage

Stage 1 - Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 43

DETAILED COOLING CAPACITIES# – EFFICIENCY MODE & COMFORT + DEHUMIDIFY MODE CONTINUED

HVH824

		2-STAGE (HL-Stage 5, Lo-Stage 2)					
		COOLING INDOOR MODEL	HIGH SPEED CAR	POWER	LOW SPEED CAR	POWER	FURNACE MODEL
	FVMA424**L	FVMA424**L	1.00	1.00	1.00	1.00	
	FVMA424**R	FVMA424**R	0.98	0.84	0.97	0.96	
	EA*4X24L14A*	EA*4X24L14A*	0.96	0.91	0.96	1.07	*9MX*0401410A**
	EA*4X24R17A*	EA*4X24R17A*	0.95	0.85	0.97	1.06	*9MX*0401712A**
	EA*4X24L17A*	EA*4X24L17A*	0.97	0.88	1.00	1.12	OMV098J12*
	EA*4X24R17A*	EA*4X24R17A*	0.97	0.88	1.00	1.09	OLV098A12*
	EA*4X30L14A*	EA*4X30L14A*	0.97	0.84	1.00	1.04	OMV112K14A
	EA*4X30R17A*	EA*4X30R17A*	0.97	0.82	0.96	1.07	*9MX*0401410A**
	EA*4X30L17A*	EA*4X30L17A*	0.96	0.86	0.97	1.06	*9MX*0401712A**
	EA*4X30R17A*	EA*4X30R17A*	0.98	0.88	1.00	1.11	OMV098J12*
	EA*4X36L17A*	EA*4X36L17A*	0.98	0.84	1.00	1.08	OLV098A12*
	EA*4X36R17A*	EA*4X36R17A*	0.99	0.85	1.00	1.03	OMV112K14A
	EA*4X36L17A*	EA*4X36L17A*	0.97	0.92	0.97	1.07	*9MX*0401410A**
	EA*4X36R17A*	EA*4X36R17A*	0.97	0.83	0.97	1.05	*9MX*0401712A**
	EN(A,D)4X36L14A**	EN(A,D)4X36L14A**	0.97	0.82	0.96	1.07	*9MX*0401410A**
	EN(A,D)4X36R17A**	EN(A,D)4X36R17A**	0.96	0.86	0.96	1.05	*9MX*0401712A**
	EN(A,D)4X36L17A**	EN(A,D)4X36L17A**	0.98	0.88	1.00	1.11	OMV098J12*
	EN(A,D)4X36R17A**	EN(A,D)4X36R17A**	0.99	0.85	1.00	1.03	OMV112K14A
	EN(A,D)4X36L17A**	EN(A,D)4X36L17A**	0.96	0.86	0.96	1.05	*9MX*0401712A**
	EN(A,D)4X36R17A**	EN(A,D)4X36R17A**	0.97	0.83	0.97	1.05	*9MX*0401712A**
	EHD4X24AAL	EHD4X24AAL	0.97	0.92	0.97	1.06	*9MX*0401712A**
	EHD4X24AAL	EHD4X24AAL	0.95	0.85	0.97	1.06	*9MX*0401712A**
	EHD4X30AAL	EHD4X30AAL	0.97	0.92	0.97	1.07	*9MX*0401410A**
	EHD4X30AAL	EHD4X30AAL	0.96	0.86	0.97	1.05	*9MX*0401712A**
	EHD4X36AAL	EHD4X36AAL	0.99	0.84	0.97	1.06	*9MX*0401410A**
	EHD4X36AAL	EHD4X36AAL	0.97	0.88	0.97	1.04	*9MX*0401712A**
	EA*4X36L17A*	EA*4X36L17A*	0.97	0.88	0.99	1.13	*9MV*0601412A**
	EA*4X36R17A*	EA*4X36R17A*	0.96	0.84	0.99	1.05	*9MV*0601714A**
	EA*4X36L17A*	EA*4X36L17A*	0.98	0.84	0.99	1.04	*9MV*0601716A**
	EA*4X36R17A*	EA*4X36R17A*	0.97	0.83	0.97	1.05	*9MX*0401712A**
	EA*4X36L21A*	EA*4X36L21A*	0.97	0.88	0.99	1.12	*9MV*0401712A**
	EA*4X36R21A*	EA*4X36R21A*	0.96	0.84	0.99	1.05	*9MV*0601714A**
	EA*4X36L21A*	EA*4X36L21A*	0.98	0.84	1.00	1.04	*9MV*0601716A**

		FURNACE MODEL		POWER		CAPACITY		COOLING INDOOR MODEL	
	FCM4X24**L			1.00		1.00			
	FCM4X36**L			1.01		1.01			
	EA*4X36L14A*		*8MV*0701412**	1.05		1.00			
	EA*4X36L17A*		*9MA*0601714A**	1.05		1.00			
	EA*4X36L17A*		*9MA*0801714A**	1.05		1.00			
	EA*4X36L17A*		*8MV*0701412**	1.01		1.01			
	EA*4X36L17A*		*8MV*0901716**	1.01		1.01			
	EA*4X36L17A*		*9MA*0601714A**	1.05		1.00			
	EA*4X36L21A*		*9MA*0801714A**	1.05		1.00			
	EA*4X36L21A*		*9MA*0602120A**	1.05		1.00			
	EA*4X36L21A*		*8MV*0901716**	1.02		1.01			
	EA*4X42L21A*		*9MA*0602120A**	1.06		1.01			
	EA*4X42L21A*		*9MA*0801714A**	1.07		1.01			
	EA*4X42L21A*		*9MA*0601714A**	1.03		1.03			
	EA*4X48L17A*		*8MV*0701412**	1.03		1.03			
	EA*4X48L17A*		*8MV*0901716**	1.03		1.03			
	EA*4X48L21A*		*9MA*0601714A**	1.07		1.02			
	EA*4X48L21A*		*9MA*0801714A**	1.02		1.02			
	EA*4X48L21A*		*8MV*0901716**	1.03		1.03			
	EN(A,D)4X36L17A**		*9MA*0601714A**	1.00		1.00			
	EN(A,D)4X36R17A**		*9MA*0801714A**	1.05		1.00			
	EN(A,D)4X36L21A**		*9MA*0601714A**	1.05		1.00			
	EN(A,D)4X36R21A**		*9MA*0801714A**	1.06		1.01			
	EN(A,D)4X36L17A**		*9MA*0601714A**	1.06		1.02			
	EN(A,D)4X36R17A**		*8MV*0701412**	1.02		1.02			
	EN(A,D)4X36L21A**		*8MV*0901716**	1.02		1.02			
	EN(A,D)4X36R21A**		*9MA*0601714A**	1.06		1.01			
	EN(A,D)4X42L21A**		*9MA*0801714A**	1.06		1.01			
	EN(A,D)4X42L21A**		*9MA*0601714A**	1.06		1.01			
	EN(A,D)4X42L21A**		*8MV*0901716**	1.02		1.02			
	EN(A,D)4X42L21A**		*9MA*0601714A**	1.07		1.03			
	EN(A,D)4X42L21A**		*9MA*0801714A**	1.02		1.02			
	EN(A,D)4X42L21A**		*8MV*0901716**	1.03		1.03			
	EHD4X36AAL		*9MA*0601714A**	1.07		1.02			
	EHD4X36AAL		*9MA*0801714A**	1.07		1.02			
	EHD4X36AAL		*8MV*0701412**	1.07		1.02			
	EHD4X36AAL		*8MV*0901716**	1.07		1.03			
	EHD4X42AAL		*9MA*0601714A**	1.07		1.03			
	EHD4X42AAL		*9MA*0801714A**	1.07		1.03			
	EHD4X42AAL		*8MV*0701412**	1.03		1.03			
	EHD4X42AAL		*8MV*0901716**	1.03		1.03			
	EHD4X48AAL		*9MA*0601714A**	1.07		1.03			
	EHD4X48AAL		*9MA*0801714A**	1.07		1.03			

**HVH824**  
**HEAT PUMP HEATING PERFORMANCE – EFFICIENCY MODE**

INDOOR AIR	HVH824 / FCM4X24***L Heating Efficiency Mode Outdoor Coil Entering Air Temperature °F (°C)														
	7 (-13.9)					17 (-8.3)					27 (-2.8)				
	Capacity MBtuh		ID SCFM	Total Sys. KWt	Capacity MBtuh		ID SCFM	Total Sys. KWt	Capacity MBtuh		ID SCFM	Capacity MBtuh			
Total	Integ†	Total			Integ†	Total			Integ†	Total		Integ†			
65 (18.3)	12.00	11.03	1.37	825	15.76	14.37	1.69	825	18.37	16.31	1.74	18.37	16.31	1.74	
70 (21.1)	11.90	10.93	1.45	825	15.60	14.22	1.77	825	18.18	16.15	1.83	18.18	16.15	1.83	
75 (23.3)	11.70	10.75	1.50	825	15.44	14.07	1.86	825	17.99	15.98	1.92	17.99	15.98	1.92	
65 (18.3)	8.37	7.69	0.89	500	10.11	9.21	0.88	500	11.81	10.49	0.90	11.81	10.49	0.90	
70 (21.1)	8.22	7.56	0.94	500	9.93	9.05	0.93	500	11.61	10.31	0.96	11.61	10.31	0.96	
75 (23.3)	8.07	7.42	0.98	500	9.75	8.89	0.99	500	11.41	10.13	1.01	11.41	10.13	1.01	
65 (18.3)	8.37	7.69	0.89	500	10.10	9.21	0.88	500	10.55	9.37	0.81	10.55	9.37	0.81	
70 (21.1)	8.22	7.56	0.94	500	9.93	9.05	0.93	500	10.36	9.20	0.84	10.36	9.20	0.84	
75 (23.3)	8.07	7.42	0.98	500	9.75	8.89	0.99	500	10.17	9.03	0.89	10.17	9.03	0.89	

INDOOR AIR	HVH824 / FCM4X24***L Heating Efficiency Mode Outdoor Coil Entering Air Temperature °F (°C)														
	37 (2.8)					47 (8.3)					57 (13.9)				
	Capacity MBtuh		ID SCFM	Total Sys. KWt	Capacity MBtuh		ID SCFM	Total Sys. KWt	Capacity MBtuh		ID SCFM	Capacity MBtuh			
Total	Integ†	Total			Integ†	Total			Integ†	Total		Integ†			
65 (18.3)	21.73	19.77	1.82	825	24.94	24.94	1.89	825	16.71	16.71	1.01	16.71	16.71	1.01	
70 (21.1)	21.46	19.52	1.92	825	24.60	24.60	1.99	825	16.37	16.37	1.08	16.37	16.37	1.08	
75 (23.3)	21.18	19.27	2.02	825	24.26	24.26	2.10	825	16.03	16.03	1.16	16.03	16.03	1.16	
65 (18.3)	13.45	12.24	0.95	650	15.09	15.09	0.99	650	16.71	16.71	1.01	16.71	16.71	1.01	
70 (21.1)	13.21	12.02	1.01	650	14.83	14.83	1.06	650	16.38	16.38	1.09	16.38	16.38	1.09	
75 (23.3)	12.98	11.81	1.07	650	14.56	14.56	1.13	650	16.07	16.07	1.16	16.07	16.07	1.16	
65 (18.3)	11.91	10.84	0.81	585	7.42	7.42	0.37	585	7.98	7.98	0.37	7.98	7.98	0.37	
70 (21.1)	11.62	10.58	0.87	585	7.20	7.20	0.42	585	7.74	7.74	0.42	7.74	7.74	0.42	
75 (23.3)	11.38	10.35	0.93	585	6.99	6.99	0.46	585	7.52	7.52	0.47	7.52	7.52	0.47	

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage  
**Stage 5** – Compressor speed limited to stage four at 7 and stage three at 57 outdoor, **Stage 1** – Compressor speed limited to stage three at 7 and 17 and to stage two at 27 and 37 outdoor.  
 See additional notes on page 45

HVH824

HEAT PUMP HEATING PERFORMANCE – COMFORT MODE

INDOOR AIR	HVH825 / FCM4X48***L Heating Comfort Mode Outdoor Coil Entering Air Temperature °F (°C)											
	7 (-13.9)					17 (-8.3)						
	ID SCFM	Capacity MBtuh		Total Sys. KW†	ID SCFM	Capacity MBtuh		Total Sys. KW†	ID SCFM	Capacity MBtuh		
65 (18.3)	450	12.00	11.03	1.37	825	15.76	14.37	1.89	825	18.37	16.31	1.74
70 (21.1)		11.90	10.93	1.45		15.60	14.22	1.77		18.18	16.15	1.83
75 (23.3)		11.70	10.75	1.50		15.44	14.07	1.86		17.99	15.98	1.92
65 (18.3)	300	8.37	7.69	0.93	500	10.11	9.21	0.88	650	11.81	10.49	0.90
70 (21.1)		8.22	7.56	0.94	500	9.93	9.05	0.93	650	11.61	10.31	0.96
75 (23.3)		8.07	7.42	0.98	500	9.75	8.89	0.99	650	11.41	10.13	1.01
65 (18.3)	300	8.37	7.69	0.89	500	10.10	9.21	0.88	650	10.55	9.37	0.81
70 (21.1)		8.22	7.56	0.94	500	9.93	9.05	0.93	650	10.36	9.20	0.84
75 (23.3)		8.07	7.42	0.98	500	9.75	8.89	0.99	650	10.17	9.03	0.89

INDOOR AIR	HVH825 / FCM4X48***L Heating Comfort Mode Outdoor Coil Entering Air Temperature °F (°C)														
	37 (2.8)					47 (8.3)					57 (13.9)				
	ID SCFM	Capacity MBtuh		Total Sys. KW†	ID SCFM	Capacity MBtuh		Total Sys. KW†	ID SCFM	Capacity MBtuh		Total Sys. KW†	ID SCFM	Capacity MBtuh	
65 (18.3)	825	21.73	19.77	1.82	825	24.94	24.94	1.89	825	16.71	16.71	1.01	825	16.71	16.71
70 (21.1)		21.46	19.52	1.92		24.60	24.60	1.99		16.37	16.37	1.08		16.37	16.37
75 (23.3)		21.18	19.27	2.02		24.26	24.26	2.10		16.03	16.03	1.16		16.03	16.03
65 (18.3)	650	13.45	12.24	0.95	650	15.09	15.09	0.99	650	16.71	16.71	1.01	650	16.71	16.71
70 (21.1)		13.21	12.02	1.01		14.83	14.83	1.06		16.38	16.38	1.09		16.38	16.38
75 (23.3)		12.98	11.81	1.07		14.56	14.56	1.13		16.07	16.07	1.16		16.07	16.07
65 (18.3)	650	11.91	10.84	0.81	585	7.42	7.42	0.37	585	7.98	7.98	0.37	585	7.98	7.98
70 (21.1)		11.62	10.58	0.87		7.20	7.20	0.42		7.74	7.74	0.42		7.74	7.74
75 (23.3)		11.38	10.35	0.93		6.99	6.99	0.46		7.52	7.52	0.47		7.52	7.52

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage  
**Stage 5** – Compressor speed limited to stage four at 7 and stage three at 57 outdoor; **Stage 1** – Compressor speed limited to stage three at 7 and 17 and to stage two at 27 and 37 outdoor.  
 See additional notes on page 45

DETAILED HEATING CAPACITIES# - EFFICIENCY MODE & COMFORT MODE CONTINUED

HVH824

HEATING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL	2-STAGE (Hi-Stage 5, Lo-Stage 2)				FURNACE MODEL
				HEATING INDOOR MODEL	HIGH SPEED D CAP.	POW-ER	LOW SPEED D CAP.	
FCM4X24**L	1.00	1.00						
FCM4X36**L	0.99	0.99						
EA4X36L14A*	1.00	1.01	*8MV*0701412**					
EA4X36L17A*	1.00	1.01	*8MV*0701412**					
EA4X36L17A*	1.00	1.00	*8MV*0801716**					
EA4X36L17A*	1.01	1.03	*9MA*0601714A**					
EA4X36L17A*	1.00	1.01	*9MA*0801714A**					
EA4X36L21A*	1.00	1.03	*9MA*0601714A**					
EA4X36L21A*	1.01	1.01	*9MA*0602120A**					
EA4X36L21A*	1.00	1.01	*9MA*0801714A**					
EA4X36L21A*	1.00	1.00	*9MA*0802120A**					
EA4X36L21A*	1.00	1.00	*9MA*1002122A**					
EA4X42L21A*	0.99	0.98	*8MV*0901716**					
EA4X42L21A*	1.00	1.01	*9MA*0601714A**					
EA4X42L21A*	1.00	1.01	*9MA*0602120A**					
EA4X42L21A*	1.00	1.01	*9MA*0801714A**					
EA4X42L2A*	1.00	1.01	*9MA*0602120A**					
EA4X48L17A*	0.96	0.95	*8MV*0701412**					
EA4X48L17A*	0.97	0.94	*8MV*0901716**					
EA4X48L17A*	0.97	0.97	*9MA*0601714A**					
EA4X48L17A*	0.97	0.95	*8MV*0801716**					
EA4X48L21A*	0.98	0.98	*9MA*0601714A**					
EA4X48L21A*	0.98	0.98	*9MA*0801714A**					
EHD4X36AAL	0.99	0.98	*8MV*0701412**					
EHD4X36AAL	1.00	1.01	*9MA*0601714A**					
EHD4X36AAL	1.00	1.00	*9MA*0801714A**					
EHD4X42AAL	0.98	0.96	*8MV*0901716**					
EHD4X42AAL	0.99	0.99	*9MA*0601714A**					
EHD4X42AAL	0.99	0.99	*9MA*0801714A**					
EHD4X48AAL	0.98	0.97	*9MA*0601714A**					
EN(A,D)4X36L21**	0.94	0.97	*9MA*0601714A**					
EN(A,D)4X36L21**	1.01	1.03	*9MA*0801714A**					
EN(A,D)W4X36L17**	1.01	1.04	*9MA*0601714A**					
EN(A,D)W4X36L17**	1.01	1.03	*9MA*0801714A**					
EN(A,D)W4X42L21**	1.00	0.99	*8MV*0901716**					
EN(A,D)W4X42L21**	1.01	1.02	*9MA*0601714A**					
EN(A,D)W4X42L21**	1.00	1.01	*9MA*0801714A**					
EN(A,D)W4X48L21**	0.98	0.96	*8MV*0801716**					
EN(A,D)W4X48L21**	0.99	0.99	*9MA*0601714A**					
EN(A,D)W4X48L21**	0.99	0.98	*9MA*0801714A**					
END4X42L17**	0.99	0.98	*8MV*0701412**					
END4X42L17**	1.00	1.01	*9MA*0601714A**					
END4X42L17**	1.00	1.00	*9MA*0801714A**					

HEATING INDOOR MODEL	HIGH SPEED D CAP.	POW-ER	LOW SPEED D CAP.	POW-ER	FURNACE MODEL
FVMA4X24**L	1.00	1.00	1.00	1.00	
FVMA4X36**L	0.96	1.03	0.98	1.02	
EA4X24L14A*	1.02	1.09	1.01	1.11	*9MX*0401410A**
EA4X24L17A*	1.00	1.10	1.01	1.09	*9MX*0401712A**
EA4X24L17A*	1.02	1.04	1.03	1.06	OMV098J12*
EA4X24L17A*	1.02	1.03	1.02	1.04	OLV098A12*
EA4X30L14A*	1.02	1.02	1.01	1.02	OMV112K14A
EA4X30L14A*	1.00	1.07	1.00	1.09	*9MX*0401410A**
EA4X30L17A*	0.98	1.08	0.99	1.07	*9MX*0401712A**
EA4X30L17A*	1.00	1.02	1.01	1.03	OMV098J12*
EA4X30L17A*	1.00	1.02	1.01	1.02	OLV098A12*
EA4X30L17A*	1.00	1.01	1.01	1.00	OMV112K14A
EA4X36L14A*	1.00	1.07	0.99	1.08	*9MX*0401410A**
EA4X36L17A*	0.98	1.08	0.99	1.06	*9MX*0401712A**
EN(A,D)4X30L17**	1.00	1.03	0.99	1.07	*9MX*0401712A**
EN(A,D)4X30L17**	1.00	1.02	1.01	1.03	OMV098J12*
EN(A,D)4X30L17**	1.00	1.02	1.01	1.02	OLV098A12*
EN(A,D)4X30L17**	1.00	1.01	1.01	1.00	OMV112K14A
EN(A,D)W4X36L17**	0.98	1.09	0.99	1.07	*9MX*0401712A**
END4X42L17**	0.98	1.07	1.00	1.10	*9MX*0401410A**
EHD4X24AAL	1.00	1.10	1.00	1.10	*9MX*0401712A**
EHD4X30AAL	1.01	1.05	1.00	1.08	*9MX*0401410A**
EHD4X30AAL	0.99	1.08	1.00	1.08	*9MX*0401712A**
EHD4X36AAL	1.00	1.04	0.99	1.07	*9MX*0401410A**
EHD4X36AAL	0.98	1.06	0.99	1.06	*9MX*0401712A**



HVVH825

DETAILED COOLING CAPACITIES# – EFFICIENCY MODE

EDB °F (°C)	EVA.P. AIR	HVH825 / FCMA48***L Efficiency Mode Condenser Entering Air Temperature °F (°C)																										
		115 (46.1)				105 (40.5)				85 (29.4)				75 (23.9)				65 (18.3)										
		ID SCF M	Capacity MBtuh Total Sens ‡	Total Sys. KW**	ID SCF M	Capacity MBtuh Total Sens ‡	Total Sys. KW**	ID SCF M	Capacity MBtuh Total Sens ‡	Total Sys. KW**	ID SCF M	Capacity MBtuh Total Sens ‡	Total Sys. KW**	ID SCF M	Capacity MBtuh Total Sens ‡	Total Sys. KW**	ID SCF M	Capacity MBtuh Total Sens ‡	Total Sys. KW**									
75 (23.9)	72 (22.2)	825	23.61	9.88	2.53	25.24	10.47	2.23	825	26.64	10.98	1.92	28.18	11.54	1.86	29.67	12.09	1.41	825	28.18	11.54	1.86	29.67	12.09	1.41	31.12	12.64	1.18
	67 (19.4)	825	21.33	13.74	2.50	22.80	14.32	2.22	825	24.06	14.87	1.92	25.46	15.46	1.67	26.82	16.05	1.43	825	25.46	15.46	1.67	26.82	16.05	1.43	28.12	16.59	1.21
	63 (17.2)	825	19.66	16.76	2.48	21.01	17.35	2.21	825	22.17	17.92	1.92	23.46	18.51	1.67	24.71	19.11	1.44	825	23.46	18.51	1.67	24.71	19.11	1.44	25.92	19.72	1.23
	57 (13.9)	825	18.72	18.72	2.47	19.79	19.79	2.20	825	20.71	20.71	1.91	21.71	21.71	1.67	22.67	22.67	1.45	825	21.71	21.71	1.67	22.67	22.67	1.45	23.60	23.60	1.24
	72 (22.2)	825	23.53	13.78	2.53	25.17	14.37	2.23	825	26.56	14.92	1.92	28.10	15.50	1.66	29.60	16.09	1.41	825	28.10	15.50	1.66	29.60	16.09	1.41	31.02	16.63	1.18
80 (26.7)	67 (19.4)	825	21.28	17.58	2.50	22.75	18.19	2.22	825	24.00	18.75	1.92	25.40	19.35	1.67	26.74	19.96	1.43	825	25.40	19.35	1.67	26.74	19.96	1.43	28.05	20.56	1.21
	63 (17.2)	825	20.03	20.03	2.49	21.17	21.09	2.21	825	22.29	21.72	1.92	23.54	22.34	1.67	24.78	22.95	1.44	825	23.54	22.34	1.67	24.78	22.95	1.44	25.96	23.61	1.23
	57 (13.9)	825	19.99	19.99	2.49	21.10	21.10	2.21	825	22.06	22.06	1.91	23.08	23.08	1.67	24.09	24.09	1.44	825	23.08	23.08	1.67	24.09	24.09	1.44	25.06	25.06	1.23
	72 (22.2)	650	15.43	6.56	1.50	16.55	6.96	1.36	650	17.40	7.27	1.13	18.52	7.59	0.97	19.58	8.06	0.82	650	18.52	7.59	0.97	19.58	8.06	0.82	20.65	8.45	0.67
	67 (19.4)	650	13.88	9.30	1.50	14.90	9.71	1.36	650	15.70	10.04	1.14	16.69	10.46	0.99	17.67	10.87	0.85	650	16.69	10.46	0.99	17.67	10.87	0.85	18.63	11.27	0.71
80 (26.7)	63 (17.2)	650	12.80	11.44	1.50	13.73	11.87	1.37	650	14.47	12.22	1.14	15.39	12.65	1.00	16.27	13.10	0.87	650	15.39	12.65	1.00	16.27	13.10	0.87	17.17	13.48	0.73
	57 (13.9)	650	12.38	12.38	1.50	13.13	13.13	1.37	650	13.73	13.73	1.14	14.44	14.44	1.01	15.14	15.14	0.88	650	14.44	14.44	1.01	15.14	15.14	0.88	15.81	15.81	0.76
	72 (22.2)	650	15.37	9.34	1.50	16.49	9.75	1.36	650	17.33	10.09	1.13	18.42	10.48	0.97	19.51	10.89	0.82	650	18.42	10.48	0.97	19.51	10.89	0.82	20.58	11.27	0.67
	67 (19.4)	650	13.87	12.03	1.50	14.88	12.46	1.36	650	15.67	12.80	1.14	16.66	13.25	0.99	17.62	13.69	0.85	650	16.66	13.25	0.99	17.62	13.69	0.85	18.59	14.08	0.71
	57 (13.9)	650	13.28	13.28	1.50	14.07	14.07	1.37	650	14.69	14.69	1.14	15.58	15.21	1.00	16.44	15.74	0.87	650	15.58	15.21	1.00	16.44	15.74	0.87	17.23	16.25	0.73
75 (23.9)	72 (22.2)	650	11.91	5.24	1.08	12.82	5.56	1.00	650	10.38	4.52	0.57	11.19	4.70	0.49	11.92	5.07	0.40	650	11.19	4.70	0.49	11.92	5.07	0.40	12.67	5.34	0.30
	67 (19.4)	650	10.68	7.75	1.09	11.52	8.07	1.01	650	9.32	6.60	0.59	10.00	6.88	0.52	10.68	7.16	0.44	650	10.00	6.88	0.52	10.68	7.16	0.44	11.35	7.44	0.35
	63 (17.2)	650	9.85	9.65	1.09	10.61	10.02	1.02	650	8.58	8.20	0.60	9.20	8.49	0.54	9.81	8.79	0.47	650	9.20	8.49	0.54	9.81	8.79	0.47	10.41	9.08	0.38
	57 (13.9)	650	9.79	9.79	1.09	10.43	10.43	1.02	650	8.47	8.47	0.60	8.98	8.98	0.54	9.48	9.48	0.48	650	8.98	8.98	0.54	9.48	9.48	0.48	9.96	9.96	0.40
	72 (22.2)	650	11.85	7.79	1.08	12.79	8.13	1.00	650	10.33	6.64	0.57	11.10	6.91	0.49	11.86	7.20	0.40	650	11.10	6.91	0.49	11.86	7.20	0.40	12.62	7.48	0.30
80 (26.7)	67 (19.4)	650	10.87	9.78	1.09	11.51	10.58	1.01	650	9.33	8.66	0.58	10.00	8.96	0.52	10.67	9.26	0.44	650	10.00	8.96	0.52	10.67	9.26	0.44	11.33	9.56	0.35
	63 (17.2)	650	10.56	10.56	1.09	11.24	11.24	1.02	650	9.12	9.12	0.59	9.67	9.67	0.52	10.20	10.20	0.45	650	9.67	9.67	0.52	10.20	10.20	0.45	10.72	10.72	0.37
	57 (13.9)	650	10.54	10.54	1.09	11.22	11.22	1.02	650	9.11	9.11	0.59	9.65	9.65	0.52	10.18	10.18	0.45	650	9.65	9.65	0.52	10.18	10.18	0.45	10.69	10.69	0.37
	72 (22.2)	650	11.91	5.24	1.08	12.82	5.56	1.00	650	10.38	4.52	0.57	11.19	4.70	0.49	11.92	5.07	0.40	650	11.19	4.70	0.49	11.92	5.07	0.40	12.67	5.34	0.30
	67 (19.4)	650	10.68	7.75	1.09	11.52	8.07	1.01	650	9.32	6.60	0.59	10.00	6.88	0.52	10.68	7.16	0.44	650	10.00	6.88	0.52	10.68	7.16	0.44	11.35	7.44	0.35

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage  
 Stage 1 – Compressor speed limited to stage two at 105 and 115 outdoor.

HVH825

DETAILED COOLING CAPACITIES# – COMFORT + DEHUMIDIFY MODE

EDB °F (°C)	EVAR AIR	HVH825 / FCM4x48***L Comfort + Dehumidify Mode Condenser Entering Air Temperature °F (°C)																							
		105 (40.5)					95 (35)					75 (23.9)					65 (18.3)								
		Capacity MBtuh		ID SCFM	Total Sys. KW	Sens†	Capacity MBtuh		ID SCFM	Total Sys. KW	Sens†	Capacity MBtuh		ID SCFM	Total Sys. KW	Sens†	Capacity MBtuh		ID SCFM	Total Sys. KW	Sens†	Capacity MBtuh		ID SCFM	Total Sys. KW
75 (23.9)	72 (22.2)	24.05	9.74				2.20	10.23				1.90	26.93				10.87	1.64				28.53	11.51		
	67 (19.4)	21.69	12.60	2.19	13.11	1.89	24.30	13.88	1.65	25.76	14.68	1.42	27.35	15.63	1.20										
	63 (17.2)	19.98	14.84	2.17	15.36	1.88	22.40	16.25	1.65	23.76	17.17	1.43	25.20	18.29	1.22										
	57 (13.9)	17.96	17.96	2.15	18.68	1.87	20.01	19.72	1.64	21.32	20.70	1.43	22.50	22.16	1.24										
	72 (22.2)	23.98	12.65	2.20	13.15	1.90	26.85	13.94	1.64	28.46	14.73	1.40	30.15	15.64	1.18										
80 (26.7)	67 (19.4)	21.63	15.47	2.19	15.99	1.89	24.25	16.80	1.65	25.71	17.85	1.42	27.28	19.03	1.20	608	634	663	708	708	708	708	708	708	708
	63 (17.2)	19.98	17.70	2.17	18.23	1.88	22.39	19.25	1.65	23.75	20.31	1.43	25.21	21.65	1.22										
	57 (13.9)	19.08	19.08	2.16	19.91	1.88	21.11	21.11	1.65	22.34	22.34	1.43	23.76	23.76	1.23										
	72 (22.2)	15.55	6.31	1.34	6.61	1.11	17.39	7.04	0.97	18.54	7.49	0.82	19.78	8.00	0.67										
	67 (19.4)	13.99	8.14	1.35	8.46	1.12	15.68	8.96	0.98	16.71	9.53	0.84	17.84	10.19	0.71										
75 (23.9)	63 (17.2)	12.85	9.59	1.35	9.91	1.12	14.42	10.48	0.99	15.37	11.12	0.86	16.42	11.92	0.73	437	452	475	510	510	510	510	510	510	
	57 (13.9)	11.51	11.51	1.35	12.02	1.12	12.80	12.70	1.00	13.64	13.47	0.88	14.57	14.45	0.77										
	72 (22.2)	15.51	8.19	1.34	8.49	1.11	17.34	9.02	0.97	18.49	9.57	0.82	19.72	10.27	0.67										
	67 (19.4)	13.96	10.01	1.35	10.33	1.12	15.64	10.92	0.98	16.67	11.58	0.84	17.81	12.41	0.71										
	63 (17.2)	12.84	11.44	1.35	11.79	1.12	14.41	12.41	0.99	15.36	13.18	0.86	16.40	14.13	0.73										
80 (26.7)	57 (13.9)	12.26	12.26	1.35	12.79	1.12	13.57	13.57	1.00	14.43	14.43	0.87	15.44	15.44	0.75	437	452	475	510	510	510	510	510	510	
	72 (22.2)	11.60	4.69	1.00	3.59	0.58	9.47	3.82	0.52	10.00	4.04	0.45	10.52	4.25	0.32										
	67 (19.4)	10.38	6.01	1.01	4.45	0.60	8.46	4.67	0.54	8.93	4.88	0.48	9.39	5.10	0.41										
	63 (17.2)	9.51	7.00	1.01	5.10	0.61	7.72	5.33	0.56	8.15	5.55	0.50	8.56	5.76	0.44										
	57 (13.9)	10.39	5.98	1.01	6.09	0.62	6.74	6.31	0.58	7.10	6.52	0.54	7.47	6.73	0.48										
80 (26.7)	72 (22.2)	11.57	6.04	1.00	4.49	0.58	9.45	4.72	0.52	9.98	4.95	0.45	10.49	5.17	0.37	342	342	342	342	342	342	342	342		
	67 (19.4)	10.36	7.32	1.01	5.34	0.60	8.44	5.57	0.54	8.91	5.79	0.48	9.37	6.01	0.41										
	63 (17.2)	9.50	8.34	1.01	5.99	0.61	7.71	6.23	0.56	8.14	6.45	0.51	8.54	6.67	0.44										
	57 (13.9)	8.99	8.99	1.02	6.65	0.61	6.96	6.96	0.58	7.27	7.27	0.53	7.56	7.56	0.48										
	72 (22.2)	11.60	4.69	1.00	3.49	0.58	9.30	3.76	0.52	9.74	3.95	0.45	10.45	4.23	0.32										
75 (23.9)	67 (19.4)	10.38	6.01	1.01	4.24	0.59	8.31	4.55	0.54	8.69	4.72	0.48	9.32	5.06	0.41	342	222	229	245	245	245	245	245		
	63 (17.2)	9.51	7.00	1.01	4.82	0.60	7.58	5.17	0.56	7.93	5.31	0.51	8.50	5.70	0.45										
	57 (13.9)	8.42	8.42	1.02	5.65	0.61	6.61	6.07	0.58	6.92	6.18	0.54	7.42	6.65	0.49										
	72 (22.2)	11.57	6.03	1.00	4.29	0.58	9.28	4.61	0.52	9.72	4.78	0.45	10.43	5.13	0.37										
	67 (19.4)	10.36	7.32	1.01	5.03	0.59	8.29	5.39	0.54	8.68	5.55	0.48	9.31	5.95	0.41										
80 (26.7)	63 (17.2)	9.50	8.34	1.01	5.61	0.60	7.57	6.01	0.56	7.92	6.14	0.51	8.49	6.59	0.45	342	222	229	245	245	245	245	245		
	57 (13.9)	8.99	8.99	1.02	6.30	0.61	6.76	6.76	0.57	6.98	6.98	0.53	7.49	7.49	0.48										
	72 (22.2)	11.60	4.69	1.00	3.49	0.58	9.30	3.76	0.52	9.74	3.95	0.45	10.45	4.23	0.32										
	67 (19.4)	10.38	6.01	1.01	4.24	0.59	8.31	4.55	0.54	8.69	4.72	0.48	9.32	5.06	0.41										
	63 (17.2)	9.51	7.00	1.01	4.82	0.60	7.58	5.17	0.56	7.93	5.31	0.51	8.50	5.70	0.45										

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage

Stage 1 – Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 43

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE & COMFORT + DEHUMIDIFY MODE CONTINUED  
HVH825

COOLING INDOOR MODEL		CAPACITY	POWER	FURNACE MODEL
FCM4X48**L	1.00	1.00		
FCM4X24**L	1.01	1.10		
EA4X36L14A*	1.01	1.05	*8MV*0701412**	
EA4X36L17A*	1.00	1.09	*9MA*0601714A**	
EA4X36L17A*	1.01	1.05	*9MA*0801714A**	
EA4X36L17A*	1.01	1.05	*8MV*0901716**	
EA4X36L17A*	1.01	1.10	*9MA*0602120A**	
EA4X36L21A*	1.00	1.09	*9MA*0601714A**	
EN(A,D,W)4X36L17**	1.00	1.09	*9MA*0801714A**	
EN(A,D,W)4X36L17**	1.01	1.09	*9MA*0601714A**	
EN(A,D)4X36L21**	1.00	1.09	*8MV*0901716**	
EN(A,D)4X36L21**	1.01	1.05	*9MA*0602120A**	
EN(A,D)4X36L21**	1.01	1.05	*9MA*0802120A**	
ENDX42L17**	1.02	1.11	*9MA*0601714A**	
ENDX42L17**	1.02	1.06	*9MA*0801714A**	
ENDX42L17**	1.03	1.07	*8MV*0901716**	
EN(A,D,W)4X42L21**	1.01	1.05	*9MA*0602120A**	
EHD4X36AAL	1.02	1.16	*9MA*0601714A**	
EHD4X36AAL	1.02	1.11	*9MA*0801714A**	
EHD4X36AAL	1.02	1.11	*9MA*0602120A**	
EHD4X36AAL	1.03	1.11	*8MV*0701412**	
EHD4X36AAL	1.03	1.11	*8MV*0901716**	
EHD4X42AAL	1.03	1.11	*9MA*0601714A**	
EHD4X42AAL	1.03	1.11	*9MA*0801714A**	
EHD4X42AAL	1.03	1.11	*9MA*0602120A**	
EHD4X42AAL	1.03	1.11	*8MV*0701412**	
EHD4X42AAL	1.03	1.12	*8MV*0901716**	

2-STAGE (HL-Stage 5, Lo-Stage 2)		COOLING INDOOR MODEL	HIGH SPEED CAR	POWER	LOW SPEED CAR	POWER	FURNACE MODEL
FVMA48**L	1.00	1.00	1.00	1.00	1.00	1.00	
FVMA36**L	0.94	0.98	0.98	0.97	1.00		
FVMA24**L	0.93	1.06	0.98	0.96	1.02		
EA4X24L14A*	0.93	1.01	1.06	0.96	1.14		*9MX*0401410A**
EA4X24L17A*	0.98	1.07	1.01	0.96	1.12		*9MX*0401712A**
EA4X24L17A*	0.96	1.07	1.01	1.01	1.12		OMV098J12*
EA4X24L17A*	0.98	1.07	1.01	1.01	1.19		OLV098A12*
EA4X30L14A*	0.95	1.08	1.02	1.02	1.14		OMV112K14A
EA4X30L14A*	0.94	1.03	0.96	0.96	1.13		*9MX*0401410A**
EA4X30L17A*	0.99	1.08	1.00	1.00	1.14		*9MX*0401712A**
EA4X30L17A*	0.99	1.08	1.00	1.02	1.17		OMV098J12*
EA4X30L17A*	1.00	1.04	1.02	1.02	1.13		OLV098A12*
EA4X36L14A*	0.95	1.08	0.96	0.96	1.13		OMV112K14A
EA4X36L17A*	0.94	1.03	0.97	0.97	1.11		*9MX*0401410A**
EN(A,D)4X24L17**	0.98	1.11	1.00	1.00	1.16		OMV098J12*
EN(A,D)4X24L17**	0.98	1.11	1.02	1.02	1.22		OLV098A12*
EN(A,D)4X30L14**	0.94	1.07	1.02	1.02	1.16		OMV112K14A
EN(A,D)4X30L14**	0.94	1.07	0.96	0.96	1.13		*9MX*0401410A**
EN(A,D)4X30L17**	0.93	1.02	0.96	1.00	1.12		*9MX*0401712A**
EN(A,D)4X30L17**	0.99	1.08	1.00	1.00	1.14		OMV098J12*
EN(A,D)4X30L17**	0.99	1.08	1.02	1.02	1.18		OLV098A12*
EN(A,D)4X30L17**	1.00	1.04	1.02	1.02	1.13		OMV112K14A
EN(A,D,W)4X36L17**	0.93	1.02	0.96	0.96	1.12		*9MX*0401712A**
END4X42L17**	0.95	1.03	0.98	0.98	1.11		*9MX*0401410A**
EHD4X24AAL	0.94	1.12	0.96	0.96	1.14		*9MX*0401410A**
EHD4X24AAL	0.93	1.06	0.97	0.96	1.12		*9MX*0401712A**
EHD4X30AAL	0.95	1.08	0.97	0.97	1.12		*9MX*0401410A**
EHD4X30AAL	0.94	1.03	0.98	0.98	1.11		*9MX*0401712A**
EHD4X36AAL	0.97	1.10	0.98	0.98	1.12		*9MX*0401410A**
EHD4X36AAL	0.96	1.04	0.98	0.98	1.10		*9MX*0401712A**

HVH825

HEAT PUMP HEATING PERFORMANCE – EFFICIENCY MODE

INDOOR AIR		7 (-13.9)						17 (-8.3)						27 (-2.8)							
		Capacity MBtuh		Total Sys. KWt		ID SCFM	Capacity MBtuh		Total Sys. KWt		ID SCFM	Capacity MBtuh		Total Sys. KWt		ID SCFM	Capacity MBtuh		Total Sys. KWt		
EDB °F (°C)		Total	Integ†	Total	Integ†	825	Total	Integ†	Total	Integ†	650	Total	Integ†	Total	Integ†	825	Total	Integ†	Total	Integ†	
		65 (18.3)		13.73	12.61		1.94	18.34	20.11	18.34		2.16	22.21	19.73	825		22.21	19.73	2.08	22.21	19.73
70 (21.1)	450	13.57	12.47	2.01	18.14	19.90	18.14	2.26	21.97	19.52	825	21.97	19.52	2.17	21.97	19.52	2.17	21.97	19.52	2.17	
75 (23.3)		13.48	12.39	2.08	17.97	19.71	17.97	2.36	21.73	19.30	825	21.73	19.30	2.27	21.73	19.30	2.27	21.73	19.30	2.27	
STAGE 5																					
65 (18.3)		9.32	8.57	1.42	10.27	11.26	10.27	1.36	13.17	11.70	650	13.17	11.70	1.22	13.17	11.70	1.22	13.17	11.70	1.22	
70 (21.1)	340	9.21	8.46	1.48	10.13	11.11	10.13	1.42	12.99	11.54	650	12.99	11.54	1.29	12.99	11.54	1.29	12.99	11.54	1.29	
75 (23.3)		9.10	8.36	1.54	10.00	10.96	10.00	1.48	12.82	11.39	650	12.82	11.39	1.35	12.82	11.39	1.35	12.82	11.39	1.35	
STAGE 3																					
65 (18.3)		9.32	8.56	1.42	10.24	11.23	10.24	1.35	13.17	11.70	650	13.17	11.70	1.22	13.17	11.70	1.22	13.17	11.70	1.22	
70 (21.1)	340	9.19	8.45	1.48	10.10	11.07	10.10	1.41	12.99	11.54	650	12.99	11.54	1.29	12.99	11.54	1.29	12.99	11.54	1.29	
75 (23.3)		9.07	8.34	1.53	9.91	10.87	9.91	1.47	12.82	11.39	650	12.82	11.39	1.35	12.82	11.39	1.35	12.82	11.39	1.35	
STAGE 1																					
65 (18.3)		9.32	8.56	1.42	10.24	11.23	10.24	1.35	13.17	11.70	650	13.17	11.70	1.22	13.17	11.70	1.22	13.17	11.70	1.22	
70 (21.1)	340	9.19	8.45	1.48	10.10	11.07	10.10	1.41	12.99	11.54	650	12.99	11.54	1.29	12.99	11.54	1.29	12.99	11.54	1.29	
75 (23.3)		9.07	8.34	1.53	9.91	10.87	9.91	1.47	12.82	11.39	650	12.82	11.39	1.35	12.82	11.39	1.35	12.82	11.39	1.35	

INDOOR AIR		37 (2.8)						47 (8.3)						57 (13.9)							
		Capacity MBtuh		Total Sys. KWt		ID SCFM	Capacity MBtuh		Total Sys. KWt		ID SCFM	Capacity MBtuh		Total Sys. KWt		ID SCFM	Capacity MBtuh		Total Sys. KWt		
EDB °F (°C)		Total	Integ†	Total	Integ†	825	Total	Integ†	Total	Integ†	650	Total	Integ†	Total	Integ†	650	Total	Integ†	Total	Integ†	
		65 (18.3)		25.00	22.75		2.11	27.16	27.16	27.16		2.11	31.19	27.16	650		31.19	27.16	2.28	31.19	27.16
70 (21.1)	825	24.69	22.46	2.21	26.80	26.80	26.80	2.21	29.98	26.80	650	29.98	26.80	2.36	29.98	26.80	2.36	29.98	26.80	2.36	
75 (23.3)		24.36	22.17	2.31	26.41	26.41	26.41	2.31	28.66	26.41	650	28.66	26.41	2.42	28.66	26.41	2.42	28.66	26.41	2.42	
STAGE 5																					
65 (18.3)		15.11	13.75	1.25	17.04	17.04	17.04	1.25	19.10	17.04	650	19.10	17.04	1.27	19.10	17.04	1.27	19.10	17.04	1.27	
70 (21.1)	650	14.89	13.55	1.32	16.77	16.77	16.77	1.32	18.78	16.77	650	18.78	16.77	1.35	18.78	16.77	1.35	18.78	16.77	1.35	
75 (23.3)		14.67	13.35	1.39	16.51	16.51	16.51	1.40	18.44	16.51	650	18.44	16.51	1.42	18.44	16.51	1.42	18.44	16.51	1.42	
STAGE 1																					
65 (18.3)		10.20	9.28	0.80	7.58	7.58	7.58	0.44	9.05	7.58	585	9.05	7.58	0.42	9.05	7.58	0.42	9.05	7.58	0.42	
70 (21.1)	650	9.99	9.09	0.85	7.40	7.40	7.40	0.48	8.83	7.40	585	8.83	7.40	0.47	8.83	7.40	0.47	8.83	7.40	0.47	
75 (23.3)		9.81	8.93	0.90	7.22	7.22	7.22	0.52	8.62	7.22	585	8.62	7.22	0.52	8.62	7.22	0.52	8.62	7.22	0.52	

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage  
**Stage 5** – Compressor speed limited to stage four at 7 and stage three at 57 outdoor; **Stage 1** – Compressor speed limited to stage two at 27 and 37 outdoor.  
 See additional notes on page 45

**HVH825**  
**HEAT PUMP HEATING PERFORMANCE – COMFORT MODE**

INDOOR AIR	HVH825 / FCM4X48***L Heating Comfort Mode											
	7 (-13.9)				17 (-8.3)				27 (-2.8)			
	ID SCFM	Capacity MBtuh		Total Sys. KW†	ID SCFM	Capacity MBtuh		Total Sys. KW†	ID SCFM	Capacity MBtuh		Total Sys. KW†
EDB °F (°C)	Total	Integ†		Total	Integ†			Total	Integ†			
65 (18.3)	13.73	12.61	1.94	20.11	18.34	2.16	22.21	19.73	2.08			
70 (21.1)	13.57	12.47	2.01	19.90	18.14	2.26	21.97	19.52	2.17			
75 (23.3)	13.48	12.39	2.08	19.71	17.97	2.36	21.73	19.30	2.27			
65 (18.3)	9.32	8.57	1.42	11.26	10.27	1.36	13.17	11.70	1.22			
70 (21.1)	9.21	8.46	1.48	11.11	10.13	1.42	12.99	11.54	1.29			
75 (23.3)	9.10	8.36	1.54	10.96	10.00	1.48	12.82	11.39	1.35			
65 (18.3)	9.32	8.56	1.42	11.23	10.24	1.35	8.59	7.63	0.80			
70 (21.1)	9.19	8.45	1.48	11.07	10.10	1.41	8.45	7.50	0.83			
75 (23.3)	9.07	8.34	1.53	10.87	9.91	1.47	8.30	7.37	0.88			
INDOOR AIR	HVH825 / FCM4X48***L Heating Comfort Mode											
EDB °F (°C)	37 (2.8)				47 (8.3)				57 (13.9)			
	ID SCFM	Capacity MBtuh		Total Sys. KW†	ID SCFM	Capacity MBtuh		Total Sys. KW†	ID SCFM	Capacity MBtuh		Total Sys. KW†
	Total	Integ†		Total	Integ†		Total	Integ†	Total	Integ†		
65 (18.3)	25.00	22.75	2.11	27.16	27.16	2.11	19.19	19.19	1.28			
70 (21.1)	24.69	22.46	2.21	26.80	26.80	2.21	19.22	19.22	1.36			
75 (23.3)	24.36	22.17	2.31	26.41	26.41	2.31	18.44	18.44	1.42			
65 (18.3)	15.11	13.75	1.25	17.04	17.04	1.25	19.10	19.10	1.27			
70 (21.1)	14.89	13.55	1.32	16.77	16.77	1.32	18.78	18.78	1.35			
75 (23.3)	14.67	13.35	1.39	16.51	16.51	1.40	18.44	18.44	1.42			
65 (18.3)	10.20	9.28	0.80	7.58	7.58	0.44	9.05	9.05	0.42			
70 (21.1)	9.99	9.09	0.85	7.40	7.40	0.48	8.83	8.83	0.47			
75 (23.3)	9.81	8.93	0.90	7.22	7.22	0.52	8.62	8.62	0.52			

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage  
**Stage 5** – Compressor speed limited to stage four at 7 and stage three at 57 outdoor, **Stage 1** – Compressor speed limited to stage three at 7 and 17 and to stage two at 27 and 37 outdoor.  
 See additional notes on page 45

DETAILED HEATING CAPACITIES# - EFFICIENCY MODE & COMFORT MODE CONTINUED

HVH825

HEATING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
FCM4X48**L	1.00	1.00	
FCM4X24**L	1.08	1.10	
EA4X36L14A*	1.07	1.11	*8MV*0701412**
EA4X36L17A*	1.07	1.11	*9MA*0601714A**
EA4X36L17A*	1.07	1.11	*9MA*0801714A**
EA4X36L17A*	1.07	1.09	*8MV*0901716**
EA4X36L17A*	1.07	1.09	*9MA*0602120A**
EN(A,D,W)4X36L17**	1.08	1.13	*9MA*0601714A**
EN(A,D,W)4X36L17**	1.08	1.12	*9MA*0801714A**
EN(A,D,W)4X36L17**	1.07	1.10	*8MV*0901716**
EN(A,D)4X36L21**	1.08	1.12	*9MA*0602120A**
EN(A,D)4X36L21**	1.08	1.11	*9MA*0802120A**
ENDX42L17**	1.07	1.09	*9MA*0601714A**
ENDX42L17**	1.07	1.08	*9MA*0801714A**
ENDX42L17**	1.06	1.06	*8MV*0901716**
EN(A,D,W)4X42L21**	1.07	1.10	*9MA*0602120A**
EHDX36AAL	1.07	1.09	*9MA*0601714A**
EHDX36AAL	1.07	1.08	*9MA*0801714A**
EHDX36AAL	1.06	1.07	*8MV*0701412**
EHDX36AAL	1.06	1.06	*8MV*0901716**
EHDX42AAL	1.06	1.07	*9MA*0601714A**
EHDX42AAL	1.06	1.07	*9MA*0801714A**
EHDX42AAL	1.06	1.07	*9MA*0602120A**
EHDX42AAL	1.05	1.05	*8MV*0701412**
EHDX42AAL	1.05	1.05	*8MV*0901716**

2-STAGE (Hi-Stage 5, Lo-Stage 2)		COOLING INDOOR MODEL	HIGH SPEED CAP.	POWER	LOW SPEED CAP.	POWER	FURNACE MODEL
FVM4X48**L	1.00	EA4X36L17A*	1.09	1.00	1.00	1.00	
FVM4X36**L	1.01	EA4X30L17A*	1.03	1.09	1.01	1.00	
FVM4X24**L	1.03	EA4X24L17A*	1.07	1.16	1.05	1.14	*9MX*0401410A**
EA4X24L14A*	1.05	EA4X24L17A*	1.05	1.17	1.05	1.13	*9MX*0401712A**
EA4X24L17A*	1.09	EA4X24L17A*	1.09	1.15	1.08	1.12	OMV098J12*
EA4X24L17A*	1.09	EA4X24L17A*	1.09	1.15	1.09	1.11	OLV098A12*
EA4X30L14A*	1.09	EA4X30L17A*	1.09	1.13	1.08	1.10	OMV112K14A
EA4X30L14A*	1.05	EA4X30L17A*	1.03	1.14	1.02	1.11	*9MX*0401410A**
EA4X30L17A*	1.07	EA4X30L17A*	1.07	1.12	1.06	1.10	*9MX*0401712A**
EA4X30L17A*	1.07	EA4X30L17A*	1.07	1.12	1.07	1.07	OMV098J12*
EA4X30L17A*	1.07	EA4X30L17A*	1.07	1.10	1.06	1.06	OMV112K14A
EA4X36L14A*	1.04	EA4X36L14A*	1.04	1.12	1.02	1.09	*9MX*0401410A**
EA4X36L17A*	1.03	EA4X36L17A*	1.03	1.14	1.02	1.08	*9MX*0401712A**
EN(A,D)4X24L17**	1.09	EN(A,D)4X24L17**	1.09	1.13	1.09	1.12	OMV098J12*
EN(A,D)4X24L17**	1.09	EN(A,D)4X24L17**	1.09	1.13	1.09	1.09	OLV098A12*
EN(A,D)4X30L17**	1.09	EN(A,D)4X30L17**	1.09	1.12	1.09	1.08	OMV112K14A
EN(A,D)4X30L17**	1.05	EN(A,D)4X30L17**	1.05	1.14	1.02	1.11	*9MX*0401410A**
EN(A,D)4X30L17**	1.03	EN(A,D)4X30L17**	1.03	1.16	1.02	1.09	*9MX*0401712A**
EN(A,D)4X30L17**	1.07	EN(A,D)4X30L17**	1.07	1.12	1.06	1.09	OMV098J12*
EN(A,D)4X30L17**	1.07	EN(A,D)4X30L17**	1.07	1.12	1.07	1.06	OLV098A12*
EN(A,D)4X30L17**	1.07	EN(A,D)4X30L17**	1.07	1.10	1.06	1.05	OMV112K14A
EN(A,D)4X36L17**	1.03	EN(A,D)4X36L17**	1.03	1.16	1.02	1.09	*9MX*0401712A**
ENDX42L17**	1.03	ENDX42L17**	1.03	1.12	1.02	1.07	*9MX*0401712A**
EHDX24AAL	1.06	EHDX24AAL	1.06	1.13	1.04	1.13	*9MX*0401410A**
EHDX30AAL	1.05	EHDX30AAL	1.05	1.16	1.04	1.13	*9MX*0401712A**
EHDX30AAL	1.05	EHDX30AAL	1.05	1.10	1.04	1.11	*9MX*0401410A**
EHDX30AAL	1.04	EHDX30AAL	1.04	1.13	1.04	1.10	*9MX*0401712A**
EHDX36AAL	1.04	EHDX36AAL	1.04	1.09	1.02	1.08	*9MX*0401410A**
EHDX36AAL	1.03	EHDX36AAL	1.03	1.11	1.02	1.07	*9MX*0401712A**

HVH836

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE

EDB °F (°C)	EVAP AIR	HVH836 / FCIMAX48***L Efficiency Mode Condenser Entering Air Temperature °F (°C)																							
		115 (46.1)				105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)			
		ID SCF M	Capacity MBtuh Total	Sens ‡	Total Sys. KW**	ID SCF M	Capacity MBtuh Total	Sens ‡	Total Sys. KW**	ID SCF M	Capacity MBtuh Total	Sens ‡	Total Sys. KW**	ID SCF M	Capacity MBtuh Total	Sens ‡	Total Sys. KW**	ID SCF M	Capacity MBtuh Total	Sens ‡	Total Sys. KW**	ID SCF M	Capacity MBtuh Total	Sens ‡	Total Sys. KW**
75 (23.9)	72 (22.2)		33.66	13.76	3.92	35.83	14.56	3.62	3.33	39.71	16.02	3.03	1050	41.70	16.78	2.74	1050	43.66	17.54	2.45	1050	43.66	17.54	2.45	
	67 (19.4)	1050	30.67	18.58	3.83	32.63	19.41	3.55	3.26	36.14	20.93	2.98	1050	37.96	21.76	2.70	1050	39.71	22.50	2.42	1050	39.71	22.50	2.42	
	63 (17.2)		28.43	22.37	3.76	30.25	23.22	3.49	3.20	33.50	24.78	2.93	1050	35.17	25.58	2.67	1050	36.77	26.36	2.41	1050	36.77	26.36	2.41	
	57 (13.9)		26.29	26.29	3.70	27.67	27.67	3.42	3.14	30.12	30.12	2.88	1050	31.51	31.06	2.63	1050	32.87	31.93	2.38	1050	32.87	31.93	2.38	
	72 (22.2)		33.58	18.53	3.92	35.75	19.37	3.62	3.33	39.61	20.91	3.03	1050	41.61	21.68	2.74	1050	43.56	22.44	2.45	1050	43.56	22.44	2.45	
80 (26.7)	67 (19.4)	1050	30.58	23.31	3.83	32.54	24.17	3.55	3.26	36.06	25.73	2.98	1050	37.87	26.55	2.70	1050	39.64	27.35	2.42	1050	39.64	27.35	2.42	
	63 (17.2)		28.45	27.05	3.77	30.25	27.93	3.49	3.20	33.48	29.54	2.93	1050	35.15	30.40	2.67	1050	36.73	31.18	2.41	1050	36.73	31.18	2.41	
	57 (13.9)		27.92	27.92	3.75	29.37	29.37	3.47	3.18	31.93	31.93	2.91	1050	33.21	33.21	2.65	1050	34.45	34.45	2.39	1050	34.45	34.45	2.39	
	72 (22.2)		21.50	9.09	2.51	22.99	9.62	2.19	1.85	25.46	10.52	1.56	900	26.89	11.04	1.32	900	28.22	11.54	1.09	900	28.22	11.54	1.09	
	67 (19.4)	900	19.38	12.78	2.49	20.72	13.34	2.18	1.84	23.03	14.33	1.57	900	24.32	14.88	1.33	900	25.58	15.44	1.11	900	25.58	15.44	1.11	
75 (23.9)	63 (17.2)		17.85	15.69	2.47	19.07	16.26	2.18	1.83	21.24	17.32	1.57	900	22.42	17.89	1.34	900	23.59	18.46	1.12	900	23.59	18.46	1.12	
	57 (13.9)		17.16	17.16	2.47	18.15	18.15	2.17	1.82	19.90	19.90	1.57	900	20.84	20.84	1.34	900	21.76	21.76	1.13	900	21.76	21.76	1.13	
	72 (22.2)		21.43	12.83	2.51	22.91	13.39	2.19	1.85	25.39	14.36	1.56	900	26.81	14.92	1.32	900	28.20	15.46	1.09	900	28.20	15.46	1.09	
	67 (19.4)	900	19.34	16.49	2.49	20.67	17.07	2.18	1.84	22.97	18.13	1.57	900	24.25	18.71	1.33	900	25.52	19.29	1.11	900	25.52	19.29	1.11	
	63 (17.2)		18.40	18.40	2.48	19.44	19.44	2.18	1.83	21.35	21.04	1.57	900	22.50	21.67	1.34	900	23.66	22.27	1.12	900	23.66	22.27	1.12	
80 (26.7)	57 (13.9)		18.36	18.36	2.48	19.40	19.40	2.18	1.83	21.20	21.20	1.57	900	22.18	22.18	1.34	900	23.13	23.13	1.12	900	23.13	23.13	1.12	
	72 (22.2)		14.47	6.38	1.82	15.58	6.77	1.53	0.66	11.51	4.98	0.49	600	12.34	5.28	0.34	600	13.17	5.58	0.22	600	13.17	5.58	0.22	
	67 (19.4)	800	13.00	9.42	1.82	14.02	9.86	1.54	0.69	10.28	7.17	0.52	600	11.02	7.49	0.37	600	11.76	7.81	0.25	600	11.76	7.81	0.25	
	63 (17.2)		12.02	11.77	1.82	12.97	12.18	1.55	0.70	9.43	8.87	0.54	600	10.10	9.21	0.39	600	10.77	9.55	0.27	600	10.77	9.55	0.27	
	57 (13.9)		11.94	11.94	1.82	12.73	12.73	1.55	0.71	9.25	9.25	0.54	600	9.81	9.81	0.40	600	10.36	10.36	0.28	600	10.36	10.36	0.28	
80 (26.7)	72 (22.2)		14.41	9.47	1.82	15.54	9.92	1.52	0.71	11.46	7.22	0.54	600	12.29	7.55	0.40	600	13.12	7.88	0.28	600	13.12	7.88	0.28	
	67 (19.4)	800	13.03	12.45	1.82	14.03	12.93	1.54	0.71	10.28	9.37	0.54	600	11.01	9.72	0.40	600	11.75	10.07	0.28	600	11.75	10.07	0.28	
	63 (17.2)		12.86	12.86	1.82	13.70	13.70	1.54	0.69	9.99	9.99	0.52	600	10.58	10.58	0.38	600	11.17	11.17	0.26	600	11.17	11.17	0.26	
	57 (13.9)		12.84	12.84	1.82	13.67	13.67	1.54	0.69	9.97	9.97	0.52	600	10.56	10.56	0.38	600	11.15	11.15	0.26	600	11.15	11.15	0.26	
	72 (22.2)		21.50	9.09	2.51	22.99	9.62	2.19	1.85	25.46	10.52	1.56	900	26.89	11.04	1.32	900	28.22	11.54	1.09	900	28.22	11.54	1.09	

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage  
 Stage 1 - Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 43

HVH836

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE

EDB °F (°C)	EVAIP. AIR EWB °F (°C)	HVH836 / FCM4X48***L Comfort + Dehumidify Mode Condenser Entering Air Temperature °F (°C)																			
		105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)			
		ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW	ID SCFM	Capacity MBtuh Total	Sens†	Total Sys. KW
75 (23.9)	72 (22.2)	34.41	13.87	3.52	36.07	14.52	3.23	3.23	36.26	15.40	2.95	2.95	40.48	16.29	2.67	2.67	948	42.89	17.25	2.40	2.40
	67 (19.4)	31.28	17.66	3.45	32.82	18.35	3.16	2.89	34.81	19.41	2.89	2.89	36.83	20.49	2.63	2.63	948	39.01	21.75	2.38	2.38
	63 (17.2)	28.96	20.61	3.39	30.39	21.30	3.10	2.85	32.22	22.51	2.85	2.85	34.07	23.75	2.60	2.60	948	30.74	18.23	4.07	4.07
	57 (13.9)	25.84	24.91	3.30	27.09	25.64	3.03	2.79	28.72	27.04	2.79	2.79	30.37	28.48	2.56	2.56	948	28.52	21.76	3.99	3.99
	72 (22.2)	34.33	17.65	3.52	35.98	18.32	3.23	2.95	38.18	19.39	2.95	2.95	40.34	20.45	2.67	2.67	948	28.01	26.01	3.90	3.90
80 (26.7)	67 (19.4)	31.22	21.37	3.45	32.75	22.08	3.16	2.89	34.75	23.33	2.89	2.89	36.76	24.61	2.63	2.63	948	33.65	18.17	4.17	4.17
	63 (17.2)	28.92	24.31	3.39	30.34	25.03	3.10	2.85	32.18	26.41	2.85	2.85	34.02	27.82	2.60	2.60	948	30.66	22.60	4.07	4.07
	57 (13.9)	26.99	26.99	3.34	28.06	28.06	3.05	2.81	29.68	29.68	2.81	2.81	31.34	31.34	2.57	2.57	948	28.51	26.12	3.99	3.99
	72 (22.2)	21.33	8.62	2.14	22.26	8.99	1.80	1.53	23.79	9.60	1.53	1.53	25.26	10.19	1.29	1.29	664	26.82	10.82	1.07	1.07
	67 (19.4)	19.21	10.97	2.13	20.08	11.37	1.78	1.53	21.48	12.15	1.53	1.53	22.80	12.86	1.30	1.30	664	24.22	13.70	1.08	1.08
75 (23.9)	63 (17.2)	17.68	12.82	2.12	18.52	13.25	1.77	1.53	19.80	14.15	1.53	1.53	21.03	14.96	1.30	1.30	664	22.34	15.92	1.09	1.09
	57 (13.9)	15.76	15.54	2.10	16.50	16.02	1.75	1.52	17.65	17.11	1.52	1.52	18.74	18.07	1.31	1.31	664	19.91	19.23	1.11	1.11
	72 (22.2)	21.30	11.04	2.14	22.20	11.42	1.80	1.53	23.73	12.20	1.53	1.53	25.20	12.92	1.29	1.29	664	26.77	13.74	1.07	1.07
	67 (19.4)	19.17	13.36	2.13	20.04	13.77	1.78	1.53	21.43	14.71	1.53	1.53	22.75	15.55	1.30	1.30	664	24.18	16.55	1.08	1.08
	63 (17.2)	17.67	15.20	2.12	18.51	15.64	1.77	1.53	19.79	16.70	1.53	1.53	21.01	17.64	1.30	1.30	664	22.33	18.78	1.09	1.09
57 (13.9)	16.63	16.63	2.11	17.30	17.30	1.76	1.52	18.49	18.49	1.52	1.52	19.59	19.59	1.30	1.30	664	20.84	20.84	1.10	1.10	
75 (23.9)	72 (22.2)	14.17	5.74	1.50	9.11	3.88	0.68	0.52	9.70	3.92	0.52	0.52	10.29	4.16	0.38	0.38	257	11.09	4.48	0.26	0.26
	67 (19.4)	12.71	7.33	1.51	8.12	4.54	0.70	0.54	8.64	4.78	0.54	0.54	9.16	5.03	0.40	0.40	257	9.89	5.42	0.28	0.28
	63 (17.2)	11.65	8.59	1.51	7.40	5.21	0.71	0.56	7.88	5.46	0.56	0.56	8.35	5.71	0.42	0.42	257	9.01	6.16	0.30	0.30
	57 (13.9)	10.35	10.35	1.51	6.44	6.21	0.72	0.57	6.86	6.46	0.57	0.57	7.27	6.71	0.44	0.44	257	7.86	7.24	0.32	0.32
	72 (22.2)	14.11	7.38	1.50	9.09	4.60	0.68	0.52	9.68	4.85	0.52	0.52	10.26	5.10	0.38	0.38	257	11.06	5.50	0.26	0.26
80 (26.7)	67 (19.4)	12.68	8.97	1.51	8.10	5.46	0.70	0.54	8.62	5.71	0.54	0.54	9.14	5.97	0.40	0.40	257	9.86	6.44	0.28	0.28
	63 (17.2)	11.65	10.21	1.51	7.38	6.13	0.71	0.56	7.86	6.39	0.56	0.56	8.34	6.65	0.42	0.42	257	9.00	7.18	0.30	0.30
	57 (13.9)	11.03	11.03	1.51	6.76	6.76	0.72	0.57	7.12	7.12	0.57	0.57	7.46	7.46	0.44	0.44	257	8.06	8.06	0.32	0.32
	72 (22.2)	14.17	5.74	1.50	8.96	3.62	0.69	0.52	9.48	3.83	0.52	0.52	10.23	4.13	0.38	0.38	257	11.09	4.48	0.26	0.26
	67 (19.4)	14.17	5.74	1.50	7.98	4.42	0.71	0.55	8.44	4.62	0.55	0.55	9.11	4.99	0.41	0.41	257	9.88	5.42	0.28	0.28
75 (23.9)	63 (17.2)	14.17	5.74	1.50	7.27	5.05	0.72	0.56	7.69	5.25	0.56	0.56	8.30	5.85	0.42	0.42	246	9.01	6.16	0.30	0.30
	57 (13.9)	14.17	5.74	1.50	6.32	5.98	0.73	0.58	6.69	6.17	0.58	0.58	7.23	6.64	0.44	0.44	246	7.85	7.24	0.33	0.33
	72 (22.2)	14.17	5.74	1.50	8.94	4.49	0.69	0.52	9.43	4.69	0.52	0.52	10.20	5.06	0.38	0.38	246	11.06	5.50	0.26	0.26
	67 (19.4)	14.17	5.74	1.50	7.96	5.29	0.71	0.55	8.42	5.49	0.55	0.55	9.09	5.91	0.41	0.41	246	9.86	6.43	0.28	0.28
	63 (17.2)	14.17	5.74	1.50	7.26	5.92	0.72	0.56	7.67	6.11	0.56	0.56	8.29	6.58	0.42	0.42	246	8.99	7.17	0.30	0.30
57 (13.9)	14.17	5.74	1.50	6.58	6.58	0.72	0.57	6.86	6.86	0.57	0.57	7.40	7.40	0.44	0.44	246	8.06	8.06	0.32	0.32	

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage  
 Stage 1 - Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 43



DETAILED COOLING CAPACITIES# - EFFICIENCY MODE & COMFORT + DEHUMIDIFY MODE CONTINUED

HVH836

COOLING INDOOR MODEL		CAPACITY	POWER	FURNACE MODEL	2-STAGE (HI-Stage 5, Lo-Stage 2)			FURNACE MODEL		
COOLING INDOOR MODEL	FURNACE MODEL	CAPACITY	POWER	FURNACE MODEL	COOLING INDOOR MODEL	HIGH SPEED CAP.	POWER	LOW SPEED CAP.	POWER	
EA4X36L14A*	*8MV*0701412**	0.95	1.05	*9MA*0802120A**	EN(A,D)W4X42L21**	0.96	1.07	1.00	1.00	OMV154L20A
EA4X36L17A*	*9MA*0601714A**	0.95	1.11	*9MA*1002122A**	EN(A,D)W4X42L21**	0.96	1.07	1.00	1.00	OMV088L12*
EA4X36L17A*	*8MV*0901716**	0.95	1.05	*8MV*1102120**	EN(A,D)W4X42L21**	0.96	1.07	1.00	1.00	OMV112K14A
EA4X36L21A*	*9MA*0802120A**	0.95	1.06	*9MA*0602120A**	EN(A,D)W4X48L21**	0.98	1.08	1.00	1.08	OMV112K14A
EA4X36L21A*	*9MA*0802120A**	0.95	1.05	*9MA*1002122A**	EN(A,D)W4X48L21**	0.98	1.03	1.00	1.03	*9MX*0601714A**
EA4X36L21A*	*8MV*1102120**	0.96	1.06	*8MV*1102120**	EN(A,D)W4X48L21**	0.98	1.03	1.00	1.00	*9MX*0601714A**
EA4X42L21A*	*9MA*0602120A**	0.96	1.06	*8MV*1352422**	EN(A,D)W4X48L21**	0.98	1.03	1.00	1.00	OLV098A12*
EA4X42L21A*	*9MA*0802120A**	0.96	1.07	*9MA*0801714A**	EHD(X)36AAL	0.96	1.13	1.09	1.24	OLV112A16A
EA4X42L21A*	*8MV*1102120**	0.96	1.07	*9MA*0602120A**	EHD(X)36AAL	0.97	1.13	1.09	1.23	OLV112A16A
EA4X42L24A*	*9MA*1202422A**	0.96	1.07	*9MA*0802120A**	EHD(X)36AAL	0.98	1.08	0.97	1.14	OMV154L20A
EA4X48L17A*	*8MV*1352422**	0.96	1.07	*9MA*1002122A**	EHD(X)36AAL	0.98	1.08	0.98	1.14	*9MX*0601714A**
EA4X48L17A*	*9MA*0601714A**	0.97	1.07	*9MA*1202422A**	EHD(X)36AAL	0.98	1.14	0.92	1.02	OMV112K14A
EA4X48L17A*	*9MA*0801714A**	0.98	1.08	*8MV*0701412**	EHD(X)36AAL	0.97	1.07	0.92	1.02	OMV112K14A
EA4X48L17A*	*8MV*0901716**	0.98	1.03	*8MV*0901716**	EHD(X)36AAL	0.97	1.08	0.94	1.05	*9MX*0601714A**
EA4X48L21A*	*9MA*0602120A**	0.97	1.07	*8MV*1102120**	EHD(X)36AAL	0.98	1.08	0.94	1.05	OLV098A12*
EA4X48L21A*	*9MA*0802120A**	0.98	1.08	*8MV*1352422**	EHD(X)36AAL	0.98	1.08	0.95	1.00	OMV112K14A
EA4X48L21A*	*9MA*1102120**	0.98	1.03	*9MA*0601714A**	EHD(X)42AAL	0.97	1.13	0.96	1.07	OLV112A16A
EA4X48L21A*	*8MV*1102120**	0.98	1.03	*9MA*0801714A**	EHD(X)42AAL	0.98	1.08	0.97	1.02	*9MX*0601712A**
EA4X48L24A*	*9MA*1202422A**	0.98	1.03	*9MA*0602120A**	EHD(X)42AAL	0.98	1.08	0.97	1.02	*9MX*0601714A**
EA4X48L24A*	*8MV*1352422**	0.98	1.03	*9MA*0802120A**	EHD(X)42AAL	0.98	1.09	0.97	1.02	OLV098A12*
EN(A,D)W4X36L17**	*9MA*0601714A**	0.95	1.11	*9MA*1002122A**	EHD(X)42AAL	0.98	1.09	0.97	1.02	OLV112K14A
EN(A,D)W4X36L17**	*9MA*0801714A**	0.95	1.11	*9MA*1202422A**	EHD(X)42AAL	0.98	1.09	0.97	1.02	OLV112A16A
EN(A,D)W4X36L17**	*8MV*0901716**	0.95	1.05	*8MV*0701412**	EHD(X)42AAL	0.98	1.08	0.97	1.14	*9MX*0401712A**
EN(A,D)W4X36L17**	*8MV*0701412**	0.96	1.06	*8MV*0901716**	EHD(X)42AAL	0.98	1.09	0.97	1.13	*9MX*0601412A**
EN(A,D)W4X36L21**	*9MA*0602120A**	0.95	1.11	*8MV*1102120**	EHD(X)42AAL	0.98	1.09	0.97	1.07	*9MX*0601714A**
EN(A,D)W4X36L21**	*9MA*0802120A**	0.95	1.05	*8MV*1352422**	EHD(X)42AAL	0.98	1.09	0.97	1.07	*9MX*0601412A**
EN(A,D)W4X36L21**	*8MV*1102120**	0.95	1.05	*9MA*1002122A**	EHD(X)42AAL	0.98	1.14	0.97	1.14	*9MX*0601714A**
EN(A,D)W4X36L21**	*9MA*1002122A**	0.95	1.05	*9MA*0601714A**	EHD(X)48AAL	0.98	1.14	0.98	1.03	*9MX*0601412A**
EN(A,D)W4X36L21**	*8MV*0901716**	0.96	1.07	*9MA*0602120A**	EHD(X)48AAL	0.98	1.09	0.98	1.14	*9MX*0601714A**
EN(A,D)W4X36L21**	*8MV*0701412**	0.96	1.06	*9MA*0801714A**	EHD(X)48AAL	0.98	1.09	0.98	1.03	*9MX*0601412A**
EN(A,D)W4X42L21**	*9MA*0602120A**	0.96	1.06	*9MA*1002122A**	EHD(X)48AAL	0.99	1.09	0.98	1.03	*9MX*0601714A**
EN(A,D)W4X42L21**	*8MV*1102120**	0.96	1.06	*8MV*1352422**	EHD(X)48AAL	0.99	1.09	0.98	1.03	*9MX*0601412A**
EN(A,D)W4X42L21**	*9MA*0801714A**	0.96	1.06	*9MA*0602120A**	EHD(X)48AAL	0.99	1.09	0.98	1.03	*9MX*0601714A**
EN(A,D)W4X42L21**	*8MV*1102120**	0.96	1.06	*9MA*0802120A**	EHD(X)48AAL	0.99	1.09	0.98	1.03	*9MX*0601412A**

COOLING INDOOR MODEL		CAPACITY	POWER	FURNACE MODEL	2-STAGE (HI-Stage 5, Lo-Stage 2)			FURNACE MODEL		
COOLING INDOOR MODEL	FURNACE MODEL	CAPACITY	POWER	FURNACE MODEL	COOLING INDOOR MODEL	HIGH SPEED CAP.	POWER	LOW SPEED CAP.	POWER	
EA4X36L14A*	*8MV*0701412**	0.95	1.05	*9MA*0802120A**	EN(A,D)W4X42L21**	0.96	1.07	1.00	1.00	OMV154L20A
EA4X36L17A*	*9MA*0601714A**	0.95	1.11	*9MA*1002122A**	EN(A,D)W4X42L21**	0.96	1.07	1.00	1.00	OMV088L12*
EA4X36L17A*	*8MV*0901716**	0.95	1.05	*8MV*1102120**	EN(A,D)W4X42L21**	0.96	1.07	1.00	1.00	OMV112K14A
EA4X36L21A*	*9MA*0802120A**	0.95	1.06	*9MA*0602120A**	EN(A,D)W4X48L21**	0.98	1.08	1.00	1.08	OMV112K14A
EA4X36L21A*	*9MA*0802120A**	0.95	1.05	*9MA*1002122A**	EN(A,D)W4X48L21**	0.98	1.03	1.00	1.03	*9MX*0601714A**
EA4X36L21A*	*8MV*1102120**	0.96	1.06	*8MV*1102120**	EN(A,D)W4X48L21**	0.98	1.03	1.00	1.00	*9MX*0601714A**
EA4X42L21A*	*9MA*0602120A**	0.96	1.06	*8MV*1352422**	EN(A,D)W4X48L21**	0.98	1.03	1.00	1.00	OLV098A12*
EA4X42L21A*	*9MA*0802120A**	0.96	1.07	*9MA*0801714A**	EHD(X)36AAL	0.96	1.13	1.09	1.24	OLV112A16A
EA4X42L21A*	*8MV*1102120**	0.96	1.07	*9MA*0602120A**	EHD(X)36AAL	0.97	1.13	1.09	1.23	OLV112A16A
EA4X42L24A*	*9MA*1202422A**	0.96	1.07	*9MA*0802120A**	EHD(X)36AAL	0.98	1.08	0.97	1.14	OMV154L20A
EA4X48L17A*	*8MV*1352422**	0.96	1.07	*9MA*1002122A**	EHD(X)36AAL	0.98	1.08	0.98	1.14	*9MX*0601714A**
EA4X48L17A*	*9MA*0601714A**	0.97	1.07	*9MA*1202422A**	EHD(X)36AAL	0.98	1.14	0.92	1.02	OMV112K14A
EA4X48L17A*	*9MA*0801714A**	0.98	1.08	*8MV*0701412**	EHD(X)36AAL	0.97	1.07	0.92	1.02	OMV112K14A
EA4X48L17A*	*8MV*0901716**	0.98	1.03	*8MV*0901716**	EHD(X)36AAL	0.97	1.08	0.94	1.05	*9MX*0601714A**
EA4X48L21A*	*9MA*0602120A**	0.97	1.07	*8MV*1102120**	EHD(X)36AAL	0.98	1.08	0.94	1.05	OLV098A12*
EA4X48L21A*	*9MA*0802120A**	0.98	1.08	*8MV*1352422**	EHD(X)36AAL	0.98	1.08	0.95	1.00	OMV112K14A
EA4X48L21A*	*9MA*1102120**	0.98	1.03	*9MA*0601714A**	EHD(X)42AAL	0.97	1.13	0.96	1.07	OLV112A16A
EA4X48L21A*	*8MV*1102120**	0.98	1.03	*9MA*0801714A**	EHD(X)42AAL	0.98	1.08	0.97	1.02	*9MX*0601712A**
EA4X48L24A*	*9MA*1202422A**	0.98	1.03	*9MA*0602120A**	EHD(X)42AAL	0.98	1.08	0.97	1.02	*9MX*0601714A**
EA4X48L24A*	*8MV*1352422**	0.98	1.03	*9MA*0802120A**	EHD(X)42AAL	0.98	1.09	0.97	1.02	OLV098A12*
EN(A,D)W4X36L17**	*9MA*0601714A**	0.95	1.11	*9MA*1002122A**	EHD(X)42AAL	0.98	1.09	0.97	1.02	OLV112K14A
EN(A,D)W4X36L17**	*9MA*0801714A**	0.95	1.11	*9MA*1202422A**	EHD(X)42AAL	0.98	1.09	0.97	1.02	OLV112A16A
EN(A,D)W4X36L17**	*8MV*0901716**	0.95	1.05	*8MV*0701412**	EHD(X)42AAL	0.98	1.08	0.97	1.14	*9MX*0401712A**
EN(A,D)W4X36L17**	*8MV*0701412**	0.96	1.06	*8MV*0901716**	EHD(X)42AAL	0.98	1.09	0.97	1.13	*9MX*0601412A**
EN(A,D)W4X36L21**	*9MA*0602120A**	0.95	1.11	*8MV*1102120**	EHD(X)42AAL	0.98	1.09	0.97	1.07	*9MX*0601714A**
EN(A,D)W4X36L21**	*9MA*0802120A**	0.95	1.05	*8MV*1352422**	EHD(X)42AAL	0.98	1.09	0.97	1.07	*9MX*0601412A**
EN(A,D)W4X36L21**	*8MV*1102120**	0.95	1.05	*9MA*1002122A**	EHD(X)42AAL	0.98	1.14	0.97	1.14	*9MX*0601714A**
EN(A,D)W4X36L21**	*9MA*1002122A**	0.95	1.05	*9MA*0601714A**	EHD(X)48AAL	0.98	1.14	0.98	1.03	*9MX*0601412A**
EN(A,D)W4X36L21**	*8MV*0901716**	0.96	1.07	*9MA*0602120A**	EHD(X)48AAL	0.98	1.09	0.98	1.14	*9MX*0601714A**
EN(A,D)W4X36L21**	*8MV*0701412**	0.96	1.06	*9MA*0801714A**	EHD(X)48AAL	0.98	1.09	0.98	1.03	*9MX*0601412A**
EN(A,D)W4X42L21**	*9MA*0602120A**	0.96	1.06	*9MA*1002122A**	EHD(X)48AAL	0.99	1.09	0.98	1.03	*9MX*0601714A**
EN(A,D)W4X42L21**	*8MV*1102120**	0.96	1.06	*8MV*1352422**	EHD(X)48AAL	0.99	1.09	0.98	1.03	*9MX*0601412A**
EN(A,D)W4X42L21**	*9MA*0801714A**	0.96	1.06	*9MA*0602120A**	EHD(X)48AAL	0.99	1.09	0.98	1.03	*9MX*0601714A**
EN(A,D)W4X42L21**	*8MV*1102120**	0.96	1.06	*9MA*0802120A**	EHD(X)48AAL	0.99	1.09	0.98	1.03	*9MX*0601412A**

**HVH836**  
**HEAT PUMP HEATING PERFORMANCE – EFFICIENCY MODE**

INDOOR AIR	HVH836 / FCM4X48***L Heating Efficiency Mode									
	7 (-13.9)					17 (-8.3)				
	EDB °F (°C)	ID SCFM	Capacity MBtuh	Total Sys. KWt	ID SCFM	Capacity MBtuh	Total Sys. KWt	ID SCFM	Capacity MBtuh	Total Sys. KWt
65 (18.3)	450	16.00	14.70	2.35	1200	23.19	21.15	1200	26.38	2.51
			15.90	2.44		23.00	20.97		26.13	2.61
			15.75	2.53		22.80	20.79		25.87	2.72
70 (21.1)	360	10.11	9.29	1.52	500	12.21	11.13	900	14.64	1.49
			9.99	1.58		12.06	10.99		14.47	1.56
			9.87	1.64		11.91	10.86		14.29	1.63
75 (23.3)	360	10.10	9.28	1.51	500	12.21	11.14	900	10.13	1.49
			9.98	1.57		12.06	11.00		9.98	1.56
			9.85	1.64		11.92	10.86		9.83	1.63

INDOOR AIR	HVH836 / FCM4X48***L Heating Efficiency Mode									
	37 (2.8)					47 (8.3)				
	EDB °F (°C)	ID SCFM	Capacity MBtuh	Total Sys. KWt	ID SCFM	Capacity MBtuh	Total Sys. KWt	ID SCFM	Capacity MBtuh	Total Sys. KWt
65 (18.3)	1200	30.62	27.87	2.60	1200	34.60	34.60	900	22.12	2.89
			30.29	2.72		34.20	34.20		21.86	2.82
			29.94	2.84		33.79	33.79		21.51	2.94
70 (21.1)	900	17.02	15.49	1.35	900	19.45	19.45	900	22.19	1.35
			16.79	1.42		19.17	19.17		21.81	1.44
			16.57	1.50		18.89	18.89		21.45	1.52
75 (23.3)	900	11.92	10.84	0.92	700	7.88	7.88	700	9.16	0.44
			11.73	0.98		7.70	7.70		8.95	0.49
			11.55	1.04		7.52	7.52		8.74	0.53

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage  
**Stage 5** – Compressor speed limited to stage four at 7 and stage three at 57 outdoor, **Stage 1** – Compressor speed limited to stage three at 7 and 17 and to stage two at 27 and 37 outdoor.  
 See additional notes on page 45

HVH836

HEAT PUMP HEATING PERFORMANCE – COMFORT MODE

INDOOR AIR	HVH836 / FCM4X48***L Heating Comfort Mode														
	7 (-13.9)					17 (-8.3)									
	ID SCFM	Capacity MBtuh		Total Sys. KW†	ID SCFM	Capacity MBtuh		Total Sys. KW†	ID SCFM	Capacity MBtuh					
EDB °F (°C)	Total	Integ†		Total	Integ†		Total	Integ†	Total	Integ†					
65 (18.3)	16.04	14.74	2.38		22.29	20.33	2.79		25.50	22.65	2.87				
70 (21.1)	15.86	14.57	2.46	595	22.09	20.14	2.90	735	25.24	22.42	2.79				
75 (23.3)	15.74	14.46	2.56		21.88	19.95	3.01		24.99	22.20	2.90				
65 (18.3)	9.92	9.11	1.64		11.82	10.78	1.69		13.89	12.34	1.55				
70 (21.1)	9.80	9.01	1.70	325	11.68	10.65	1.76	425	13.71	12.18	1.62				
75 (23.3)	9.69	8.90	1.76		11.53	10.52	1.83		13.54	12.02	1.69				
65 (18.3)	9.90	9.10	1.63	STAGE 1 – FCM4X48***L ONLY								9.37	8.32	1.09	
70 (21.1)	9.78	8.99	1.69	277	11.46	10.45	1.85	341	9.22	8.19	1.14				
75 (23.3)	9.66	8.88	1.75		11.32	10.32	1.92		9.06	8.05	1.20				
65 (18.3)	9.90	9.10	1.63	STAGE 1 – ALL OTHER INDOOR COILS								9.37	8.32	1.09	
70 (21.1)	9.78	8.99	1.69	277	11.46	10.45	1.85	341	9.22	8.19	1.14				
75 (23.3)	9.66	8.88	1.75		11.32	10.32	1.92		9.06	8.05	1.20				
INDOOR AIR	HVH836 / FCM4X48***L Heating Comfort Mode														
EDB °F (°C)	37 (2.8)					47 (8.3)					57 (13.9)				
	ID SCFM	Capacity MBtuh		Total Sys. KW†	ID SCFM	Capacity MBtuh		Total Sys. KW†	ID SCFM	Capacity MBtuh		Total Sys. KW†			
	Total	Integ†		Total	Integ†		Total	Integ†	Total	Integ†		Total			
65 (18.3)	29.79	27.11	2.72		34.01	34.01	2.75		21.71	21.71	1.46				
70 (21.1)	29.45	26.80	2.84	1014	33.62	33.62	2.88	736	21.29	21.29	1.55				
75 (23.3)	29.09	26.48	2.96		33.20	33.20	3.01		20.98	20.98	1.64				
65 (18.3)	16.28	14.82	1.53		18.77	18.77	1.49		21.39	21.39	1.46				
70 (21.1)	16.06	14.61	1.61	626	18.51	18.51	1.57	737	21.31	21.31	1.55				
75 (23.3)	15.84	14.41	1.69		18.23	18.23	1.65		20.96	20.96	1.64				
65 (18.3)	11.08	10.08	1.09	STAGE 1 – FCM4X48***L ONLY								7.82	7.92	0.67	
70 (21.1)	10.89	9.91	1.15	250	6.75	6.75	0.68	250	7.73	7.73	0.71				
75 (23.3)	10.70	9.74	1.21		6.58	6.58	0.72		7.55	7.55	0.76				
65 (18.3)	11.09	10.09	1.09	STAGE 1 – ALL OTHER INDOOR COILS								7.68	7.68	0.73	
70 (21.1)	10.89	9.91	1.15	199	6.46	6.46	0.76	217	7.50	7.50	0.77				
75 (23.3)	10.70	9.74	1.21		6.31	6.31	0.80		7.31	7.31	0.82				

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage  
**Stage 5** – Compressor speed limited to stage four at 7 and stage three at 57 outdoor; **Stage 1** – Compressor speed limited to stage three at 7 and 17 and to stage two at 27 and 37 outdoor.  
 See additional notes on page 45

DETAILED HEATING CAPACITIES# - EFFICIENCY MODE & COMFORT MODE CONTINUED

HVH836

HEATING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
EA4X36L14A*	1.05	1.12	*8MV*0701412**
EA4X36L17A*	1.04	1.08	*8MV*0901716**
EA4X36L17A*	1.05	1.14	*9MA*0601714A**
EA4X36L17A*	1.05	1.12	*9MA*0801714A**
EA4X36L21A*	1.04	1.08	*8MV*1102120**
EA4X36L21A*	1.04	1.10	*9MA*0602120A**
EA4X36L21A*	1.04	1.08	*9MA*0802120A**
EA4X36L21A*	1.02	1.05	*9MA*1002122A**
EA4X42L21A*	1.04	1.09	*9MA*0602120A**
EA4X42L21A*	1.04	1.07	*9MA*0802120A**
EA4X42L21A*	1.04	1.07	*9MA*1002122A**
EA4X42L24A*	1.02	1.05	*8MV*1352422**
EA4X48L21A*	1.04	1.07	*9MA*1202422A**
EA4X48L17A*	1.00	1.01	*8MV*0901716**
EA4X48L17A*	1.02	1.07	*9MA*0601714A**
EA4X48L21A*	1.02	1.05	*9MA*0801714A**
EA4X48L21A*	1.01	1.02	*8MV*1102120**
EA4X48L21A*	1.02	1.05	*9MA*0602120A**
EA4X48L21A*	1.02	1.03	*9MA*0802120A**
EA4X48L24A*	1.01	1.02	*9MA*1002122A**
EA4X48L24A*	1.02	1.01	*8MV*1352422**
EA4X48L24A*	1.02	1.03	*9MA*1202422A**
EA4X48L24A*	1.04	1.07	*8MV*0701412**
EA4X48L24A*	1.02	1.04	*8MV*0901716**
EA4X48L24A*	1.02	1.03	*8MV*1102120**
EA4X48L24A*	1.02	1.03	*8MV*1352422**
EA4X48L24A*	1.04	1.07	*9MA*0601714A**
EA4X48L24A*	1.04	1.07	*9MA*0801714A**
EA4X48L24A*	1.02	1.05	*9MA*1002122A**
EA4X48L24A*	1.02	1.04	*9MA*1202422A**

HEATING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
EHD4X36AAL	1.02	1.05	*9MA*1202422A**
EHD4X42AAL	1.02	1.05	*8MV*0701412**
EHD4X42AAL	1.02	1.03	*8MV*0901716**
EHD4X42AAL	1.02	1.03	*8MV*102120**
EHD4X42AAL	1.02	1.02	*8MV*1352422**
EHD4X42AAL	1.04	1.08	*9MA*0601714A**
EHD4X42AAL	1.02	1.05	*9MA*0602120A**
EHD4X42AAL	1.02	1.05	*9MA*0801714A**
EHD4X42AAL	1.02	1.04	*9MA*0802120A**
EHD4X42AAL	1.02	1.03	*9MA*1002122A**
EHD4X42AAL	1.02	1.04	*9MA*1202422A**
EHD4X48AAL	1.02	1.04	*8MV*0701412**
EHD4X48AAL	1.02	1.02	*8MV*0901716**
EHD4X48AAL	1.02	1.02	*8MV*102120**
EHD4X48AAL	1.02	1.01	*8MV*1352422**
EHD4X48AAL	1.04	1.08	*9MA*0601714A**
EHD4X48AAL	1.02	1.05	*9MA*0602120A**
EHD4X48AAL	1.02	1.03	*9MA*0801714A**
EHD4X48AAL	1.02	1.02	*9MA*1002122A**
EHD4X48AAL	1.02	1.03	*9MA*1202422A**
EN(A,D)W4X36L21**	1.05	1.10	*8MV*1102120**
EN(A,D)W4X36L21**	1.05	1.13	*9MA*0602120A**
EN(A,D)W4X36L21**	1.05	1.11	*9MA*0802120A**
EN(A,D)W4X36L21**	1.05	1.11	*9MA*1002122A**
EN(A,D)W4X48L24**	1.02	1.02	*8MV*1352422**
EN(A,D)W4X48L24**	1.02	1.03	*9MA*1202422A**
EN(A,D)W4X36L17**	1.02	1.10	*8MV*0701412**
EN(A,D)W4X36L17**	1.05	1.11	*8MV*0901716**
EN(A,D)W4X36L17**	1.05	1.15	*9MA*0601714A**
EN(A,D)W4X36L17**	1.05	1.14	*9MA*0801714A**
EN(A,D)W4X42L21**	1.04	1.07	*8MV*1102120**
EN(A,D)W4X42L21**	1.05	1.10	*9MA*0602120A**
EN(A,D)W4X42L21**	1.04	1.08	*9MA*0802120A**
EN(A,D)W4X42L21**	1.02	1.07	*9MA*1002122A**
EN(A,D)W4X48L21**	1.02	1.02	*8MV*102120**
EN(A,D)W4X48L21**	1.02	1.05	*9MA*0602120A**
EN(A,D)W4X48L21**	1.02	1.03	*9MA*0802120A**
EN(A,D)W4X48L21**	1.02	1.03	*9MA*1002122A**
EN(A,D)W4X48L21**	1.02	1.07	*8MV*0701412**
EN(A,D)W4X48L21**	1.02	1.05	*8MV*0901716**
EN(A,D)W4X48L21**	1.05	1.11	*9MA*0601714A**
EN(A,D)W4X48L21**	1.05	1.11	*9MA*0801714A**

2-STAGE (HI-Stage 5, Lo-Stage 2)		COOLING INDOOR MODEL		HIGH SPEED CAP.	POWER	LOW SPEED CAP.	POWER	FURNACE MODEL
FVM4X48**L	1.00	1.06	1.01	1.00	1.00	1.00	1.00	
FVM4X36**L	1.04	1.08	1.04	1.04	1.08	1.04	1.08	
EA4X36L14A*	1.05	1.16	1.03	1.03	1.13	1.03	1.13	*9MX*0601412A**
EA4X36L17A*	1.04	1.11	1.02	1.02	1.10	1.02	1.10	*9MX*0601714A**
EA4X36L17A*	1.04	1.12	1.04	1.04	1.10	1.04	1.10	OLV098A12*
EA4X36L17A*	1.03	1.10	1.03	1.03	1.07	1.03	1.07	OMV112K14A
EA4X36L21A*	1.04	1.10	1.04	1.04	1.08	1.04	1.08	OLV112A16A
EA4X42L21A*	1.03	1.08	1.04	1.04	1.07	1.03	1.07	OLV112A16A
EA4X48L17A*	1.02	1.06	1.03	1.03	1.05	1.03	1.05	OMV154L20A
EA4X48L17A*	1.01	1.04	1.00	1.00	1.05	1.05	1.05	*9MX*0601714A**
EN(A,D)W4X36L17**	1.05	1.12	1.05	1.05	1.12	1.05	1.12	OMV112K14A
EN(A,D)W4X36L17**	1.04	1.12	1.03	1.03	1.12	1.03	1.12	*9MX*0601714A**
EN(A,D)W4X36L17**	1.04	1.13	1.04	1.04	1.11	1.04	1.11	OLV098A12*
EN(A,D)W4X36L17**	1.04	1.11	1.03	1.03	1.09	1.03	1.09	OMV112K14A
EN(A,D)W4X36L17**	1.04	1.11	1.04	1.04	1.10	1.04	1.10	OLV112A16A
END4X42L17**	1.03	1.08	1.02	1.02	1.08	1.02	1.08	*9MX*0601714A**
END4X42L17**	1.04	1.08	1.04	1.04	1.08	1.04	1.08	OMV098L12*
END4X42L17**	1.04	1.09	1.04	1.04	1.08	1.04	1.08	OLV098A12*
END4X42L17**	1.03	1.07	1.03	1.03	1.05	1.03	1.05	OMV112K14A
EN(A,D)W4X42L21**	1.04	1.08	1.04	1.04	1.08	1.04	1.08	OLV112A16A
EHD4X36AAL	1.05	1.12	1.05	1.05	1.12	1.05	1.12	*9MX*0401712A**
EHD4X36AAL	1.05	1.12	1.03	1.03	1.11	1.03	1.11	*9MX*0601412A**
EHD4X36AAL	1.03	1.07	1.02	1.02	1.08	1.02	1.08	*9MX*0601714A**
EHD4X36AAL	1.05	1.11	1.03	1.03	1.10	1.03	1.10	*9MX*0601412A**
EHD4X36AAL	1.03	1.06	1.02	1.02	1.07	1.02	1.07	*9MX*0601714A**
EHD4X48AAL	1.04	1.10	1.03	1.03	1.09	1.03	1.09	*9MX*0601412A**
EHD4X48AAL	1.03	1.05	1.02	1.02	1.06	1.02	1.06	*9MX*0601714A**

HVH837

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE

EDB °F (°C)	EVAR AIR	HVH837 / FCIMAX48***L Efficiency Mode Condenser Entering Air Temperature °F (°C)																							
		115 (46.1)				105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)			
		ID SCF M	Capacity MBtuh Total	Sens ‡	Total Sys. KW**	ID SCF M	Capacity MBtuh Total	Sens ‡	Total Sys. KW**	ID SCF M	Capacity MBtuh Total	Sens ‡	Total Sys. KW**	ID SCF M	Capacity MBtuh Total	Sens ‡	Total Sys. KW**	ID SCF M	Capacity MBtuh Total	Sens ‡	Total Sys. KW**	ID SCF M	Capacity MBtuh Total	Sens ‡	Total Sys. KW**
75 (23.9)	72 (22.2)	1050	33.34	13.88	3.38	35.38	14.43	2.99	37.11	15.07	2.60	39.00	15.77	2.25	40.82	16.46	1.93	42.56	17.12	1.64	1050	42.56	17.12	1.64	
	67 (19.4)		30.28	18.76	3.34	32.11	19.52	2.97	33.70	20.19	2.58	35.41	20.92	2.26	37.04	21.61	1.95	38.64	22.30	1.66					
	63 (17.2)		28.02	22.76	3.31	29.71	23.52	2.95	31.19	24.21	2.57	32.77	24.95	2.25	34.29	25.67	1.95	35.77	26.37	1.67					
	57 (13.9)		26.22	26.22	3.28	27.53	27.53	2.93	28.66	28.66	2.56	29.86	29.86	2.25	31.00	31.00	1.96	32.09	32.09	1.69					
	72 (22.2)		33.22	18.74	3.38	35.26	19.50	2.99	36.99	20.17	2.60	38.88	20.89	2.25	40.70	21.60	1.93	42.44	22.28	1.64					
80 (26.7)	67 (19.4)	1050	30.18	23.76	3.34	32.01	24.54	2.97	33.60	25.23	2.58	35.31	25.97	2.26	36.94	26.69	1.95	38.54	27.40	1.66	1050	38.54	27.40	1.66	
	63 (17.2)		28.06	27.66	3.31	29.73	28.49	2.95	31.18	29.21	2.57	32.75	29.98	2.25	34.26	30.72	1.95	35.73	31.44	1.67					
	57 (13.9)		27.88	27.88	3.31	29.25	29.25	2.95	30.44	30.44	2.57	31.68	31.68	2.25	32.88	32.88	1.96	34.02	34.02	1.68					
	72 (22.2)		22.97	9.60	3.06	24.68	10.23	2.52	26.27	10.83	1.97	27.96	11.46	1.55	29.61	12.08	1.19	31.25	12.70	0.88					
	67 (19.4)		20.76	13.46	3.06	22.31	14.15	2.53	23.77	14.82	1.99	25.28	15.50	1.58	26.77	16.18	1.23	28.24	16.87	0.92					
75 (23.9)	63 (17.2)	900	19.15	16.49	3.06	20.58	17.23	2.54	21.93	17.94	2.00	23.33	18.68	1.60	24.69	19.40	1.25	26.04	20.13	0.95	900	26.04	20.13	0.95	
	57 (13.9)		18.30	18.30	3.06	19.47	19.47	2.54	20.57	20.57	2.01	21.69	21.69	1.61	22.78	22.78	1.27	23.85	23.85	0.98					
	72 (22.2)		22.86	13.49	3.06	24.58	14.18	2.52	26.17	14.84	1.97	27.85	15.54	1.55	29.51	16.22	1.19	31.14	16.90	0.88					
	67 (19.4)		20.69	17.29	3.06	22.23	18.04	2.53	23.70	18.78	1.99	25.20	19.52	1.58	26.69	20.27	1.23	28.16	21.01	0.92					
	63 (17.2)		19.55	19.55	3.06	20.79	20.79	2.54	22.01	21.83	2.00	23.37	22.66	1.60	24.72	23.46	1.25	26.05	24.25	0.95					
80 (26.7)	57 (13.9)	900	19.52	19.52	3.06	20.75	20.75	2.54	21.91	21.91	2.00	23.09	23.09	1.60	24.24	24.24	1.26	25.37	25.37	0.96	900	25.37	25.37	0.96	
	72 (22.2)		17.86	7.53	2.92	19.41	8.11	2.31	21.42	8.72	1.81	23.03	9.33	1.40	24.64	10.04	1.00	26.86	11.04	0.70					
	67 (19.4)		16.10	10.65	2.94	17.51	11.32	2.34	19.41	12.03	1.84	21.31	12.64	1.43	23.21	13.27	1.03	25.41	13.87	0.73					
	63 (17.2)		14.87	13.08	2.95	16.15	13.82	2.36	17.86	14.64	1.88	19.74	15.52	1.46	21.91	16.40	1.05	24.56	14.41	0.75					
	57 (13.9)		14.32	14.32	2.95	15.40	15.40	2.37	16.67	16.67	1.91	18.58	18.58	1.46	20.75	20.75	1.06	23.00	23.00	0.76					
75 (23.9)	72 (22.2)	800	17.78	10.67	2.92	19.33	11.35	2.31	21.42	12.16	1.85	23.53	13.07	1.44	25.67	14.01	1.04	27.71	15.05	0.74	800	27.71	15.05	0.74	
	67 (19.4)		16.07	13.74	2.94	17.46	14.50	2.34	19.33	15.37	1.91	21.28	16.38	1.46	23.49	17.24	1.05	25.67	16.24	0.75					
	63 (17.2)		15.31	15.31	2.94	16.47	16.47	2.35	17.86	17.86	1.91	19.74	19.74	1.46	21.91	21.91	1.06	24.02	24.02	0.76					
	57 (13.9)		15.28	15.28	2.94	16.44	16.44	2.35	17.86	17.86	1.91	19.74	19.74	1.46	21.91	21.91	1.06	24.02	24.02	0.76					
	72 (22.2)		17.86	10.67	2.92	19.33	11.35	2.31	21.42	12.16	1.85	23.53	13.07	1.44	25.67	14.01	1.04	27.71	15.05	0.74					
80 (26.7)	67 (19.4)	800	16.07	13.74	2.94	17.46	14.50	2.34	19.33	15.37	1.91	21.28	16.38	1.46	23.49	17.24	1.05	25.67	16.24	0.75	800	25.67	16.24	0.75	
	63 (17.2)		15.31	15.31	2.94	16.47	16.47	2.35	17.86	17.86	1.91	19.74	19.74	1.46	21.91	21.91	1.06	24.02	24.02	0.76					
	57 (13.9)		15.28	15.28	2.94	16.44	16.44	2.35	17.86	17.86	1.91	19.74	19.74	1.46	21.91	21.91	1.06	24.02	24.02	0.76					
	72 (22.2)		17.86	10.67	2.92	19.33	11.35	2.31	21.42	12.16	1.85	23.53	13.07	1.44	25.67	14.01	1.04	27.71	15.05	0.74					
	67 (19.4)		16.07	13.74	2.94	17.46	14.50	2.34	19.33	15.37	1.91	21.28	16.38	1.46	23.49	17.24	1.05	25.67	16.24	0.75					

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage  
 Stage 1 - Compressor speed limited to stage two at 105 and 115 outdoor.  
 See additional notes on page 43

HVH837

DETAILED COOLING CAPACITIES# – COMFORT + DEHUMIDIFY MODE

EDB °F (°C)	HVH837 / FCM4X60***L Comfort + Dehumidify Mode Condenser Entering Air Temperature °F (°C)										HVH837 / FCM4X60***L Comfort + Dehumidify Mode Condenser Entering Air Temperature °F (°C)										HVH837 / FCM4X60***L Comfort + Dehumidify Mode Condenser Entering Air Temperature °F (°C)									
	105 (40.5)					95 (35)					85 (29.4)					75 (23.9)					65 (18.3)									
	EVAP. AIR EWB °F (°C)	ID SCFM	Capacity Total	MBtuh Sens†	Total Sys. KW	ID SCFM	Capacity Total	MBtuh Sens†	Total Sys. KW	ID SCFM	Capacity Total	MBtuh Sens†	Total Sys. KW	ID SCFM	Capacity Total	MBtuh Sens†	Total Sys. KW	ID SCFM	Capacity Total	MBtuh Sens†	Total Sys. KW	ID SCFM	Capacity Total	MBtuh Sens†	Total Sys. KW					
75 (23.9)	72 (22.2)	812	34.02	13.71	2.91	35.60	14.33	2.52	812	37.64	15.13	2.19	39.66	15.93	1.89	41.83	16.79	1.61	948	888	888	948	888	39.66	15.93	1.89				
	67 (19.4)		30.97	17.74	2.85	32.42	18.38	2.47	812	34.27	19.38	2.17	36.10	20.40	1.88	37.30	21.11	1.73												
	63 (17.2)		28.74	20.92	2.80	30.10	21.57	2.43	812	31.81	22.72	2.14	32.83	23.41	2.00	34.63	24.80	1.72												
	57 (13.9)		25.73	25.56	2.73	26.83	26.26	2.37	812	27.87	27.05	2.26	29.38	28.45	1.98	31.01	30.18	1.72												
	57 (13.9)		34.41	17.92	2.77	35.26	18.16	2.58	812	37.27	19.15	2.25	39.27	20.16	1.94	41.41	21.33	1.65												
80 (26.7)	67 (19.4)	812	30.67	21.50	2.92	32.12	22.15	2.53	812	33.95	23.33	2.22	35.78	24.54	1.92	37.75	26.02	1.85	948	888	888	948	888	35.78	24.54	1.92				
	63 (17.2)		28.49	24.67	2.87	29.84	25.33	2.49	812	31.53	26.66	2.19	33.25	28.05	1.90	35.08	29.75	1.64												
	57 (13.9)		27.02	27.02	2.82	28.04	28.04	2.45	812	29.59	29.59	2.16	31.17	31.17	1.88	32.28	32.28	1.75												
	72 (22.2)		22.84	9.21	2.45	24.22	9.76	1.91	566	26.00	10.47	1.51	27.69	11.14	1.16	29.54	11.89	0.87												
	67 (19.4)		20.96	11.85	2.26	22.23	12.44	1.76	566	23.85	13.36	1.39	25.39	14.20	1.07	27.68	15.11	0.70												
75 (23.9)	63 (17.2)	566	19.62	14.03	2.06	20.81	14.66	1.60	566	22.32	15.74	1.25	21.65	15.23	1.74	23.11	16.32	1.38	665	625	625	665	625	21.65	15.23	1.74				
	57 (13.9)		17.72	17.24	1.86	18.79	17.93	1.43	566	18.37	17.54	2.03	19.57	18.63	1.65	20.88	19.98	1.32												
	72 (22.2)		24.22	12.44	1.66	23.40	11.90	2.24	566	25.13	12.78	1.80	26.78	13.60	1.41	28.58	14.55	1.07												
	67 (19.4)		20.25	13.91	2.65	21.49	14.53	2.09	566	23.07	15.61	1.68	24.57	16.59	1.32	26.21	17.77	1.01												
	57 (13.9)		18.96	16.11	2.46	20.15	16.72	1.93	566	21.61	17.97	1.55	23.01	19.07	1.22	24.55	20.43	0.93												
80 (26.7)	57 (13.9)	566	18.02	18.02	2.26	18.96	18.96	1.77	566	20.34	20.34	1.42	21.63	21.63	1.11	21.07	21.07	1.53	665	625	625	665	625	23.01	19.07	1.22				
	72 (22.2)		17.97	7.25	2.27	14.42	5.88	1.11	500	15.67	6.37	0.76	16.94	6.86	0.46	18.21	7.36	0.27												
	67 (19.4)		15.37	8.76	2.23	13.55	8.09	0.95	500	14.69	8.66	0.64	15.85	9.23	0.39	15.11	8.71	0.70												
	63 (17.2)		14.72	10.65	1.87	12.96	10.01	0.78	500	14.03	10.64	0.50	13.42	10.01	0.94	14.30	10.52	0.88												
	57 (13.9)		13.65	13.33	1.50	12.28	12.28	0.60	500	11.69	11.69	1.18	12.40	12.40	0.90	12.11	12.11	0.72												
75 (23.9)	72 (22.2)	500	18.97	9.81	1.10	14.74	8.00	1.27	500	15.86	8.48	0.83	15.67	8.28	0.72	16.90	8.84	0.45	500	500	500	500	500	15.67	8.28	0.72				
	67 (19.4)		15.73	10.94	2.56	13.71	10.22	1.18	500	13.59	9.93	0.96	14.70	10.56	0.65	15.82	11.20	0.41												
	63 (17.2)		14.92	12.81	2.31	12.02	11.19	1.17	500	13.04	11.88	0.82	14.08	12.56	0.55	15.13	13.26	0.33												
	57 (13.9)		13.31	13.31	2.25	12.15	12.15	0.98	500	13.05	13.05	0.67	13.95	13.95	0.42	13.19	13.19	0.79												
	72 (22.2)		17.21	6.93	2.27	11.89	4.85	1.16	236	12.71	5.21	0.82	13.90	5.70	0.54	15.29	6.25	0.32												
80 (26.7)	67 (19.4)	417	14.73	8.14	2.23	11.15	5.91	0.99	417	11.87	6.32	0.68	12.96	6.90	0.43	12.64	6.74	0.80	267	246	246	267	246	12.96	6.90	0.43				
	63 (17.2)		14.10	9.74	1.87	10.62	6.89	0.80	417	11.31	7.28	0.52	10.96	7.06	1.03	11.97	7.72	0.76												
	57 (13.9)		12.97	12.07	1.50	9.73	8.24	0.61	417	9.18	7.68	1.24	9.95	8.34	0.96	10.04	8.43	0.79												
	72 (22.2)		18.18	9.13	1.10	12.17	5.90	1.33	417	12.87	6.23	1.01	12.88	6.23	0.81	14.20	6.88	0.53												
	67 (19.4)		15.07	9.98	2.56	11.27	6.98	1.22	417	11.00	6.75	1.02	12.04	7.40	0.72	13.26	8.18	0.47												
75 (23.9)	63 (17.2)	417	14.28	11.55	2.30	9.83	7.28	1.22	417	10.51	7.69	0.87	11.50	8.42	0.60	12.66	9.30	0.37	267	246	246	267	246	11.50	8.42	0.60				
	57 (13.9)		12.37	12.37	2.25	9.04	8.60	1.02	417	9.64	9.01	0.72	10.53	9.87	0.47	10.28	9.71	0.91												

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage

Stage 1 – Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 43



HVH837

HEAT PUMP HEATING PERFORMANCE – EFFICIENCY MODE

INDOOR AIR	7 (-13.9)				17 (-8.3)				27 (-2.8)				
	EDB °F (°C)	ID SCFM	Capacity MBtuh		ID SCFM	Capacity MBtuh		ID SCFM	Capacity MBtuh		Total Sys. KWt	Capacity MBtuh	
			Total	Integ†		Total	Integ†		Total	Integ†			
65 (18.3) 70 (21.1) 75 (23.3)	500	13.79 13.48 13.08	1.95 2.00 2.04	500	1200	28.01 27.72 27.36	3.22 3.35 3.47	1200	34.01 33.69 33.30	30.20 29.92 29.58	3.21 3.35 3.48	34.01 33.69 33.30	30.20 29.92 29.58
	450	13.70 13.33 12.87	1.98 2.02 2.05	1200	1200	28.01 27.72 27.36	3.22 3.35 3.47	1200	34.01 33.69 33.30	30.20 29.92 29.58	3.21 3.35 3.48	34.01 33.69 33.30	30.20 29.92 29.58
	500	11.13 10.92 10.64	1.72 1.78 1.83	500	900	13.20 13.00 12.78	1.82 1.89 1.96	900	17.03 16.82 16.60	15.12 14.94 14.74	1.63 1.71 1.80	17.03 16.82 16.60	15.12 14.94 14.74
65 (18.3) 70 (21.1) 75 (23.3)	360	10.86 10.52 10.11	1.82 1.85 1.86	500	900	13.20 13.00 12.78	1.82 1.89 1.96	900	17.03 16.82 16.60	15.12 14.94 14.74	1.63 1.71 1.80	17.03 16.82 16.60	15.12 14.94 14.74
	500	11.13 10.91 10.64	1.72 1.78 1.83	500	900	13.19 12.99 12.78	1.82 1.89 1.96	900	13.77 13.60 13.41	12.23 12.08 11.91	1.51 1.55 1.63	13.77 13.60 13.41	12.23 12.08 11.91
	360	10.87 10.52 10.11	1.83 1.85 1.86	500	900	13.19 12.99 12.78	1.82 1.89 1.96	900	13.77 13.60 13.41	12.23 12.08 11.91	1.51 1.55 1.63	13.77 13.60 13.41	12.23 12.08 11.91
65 (18.3) 70 (21.1) 75 (23.3)	1200	34.23 33.85 33.46	3.24 3.38 3.52	1200	1200	40.49 39.49 39.49	3.21 3.35 3.48	900	25.27 24.90 24.49	25.27 24.90 24.49	1.66 1.75 1.85	25.27 24.90 24.49	25.27 24.90 24.49
	1200	34.23 33.85 33.46	3.24 3.38 3.52	1200	1200	40.49 39.49 39.49	3.21 3.35 3.48	900	25.27 24.90 24.49	25.27 24.90 24.49	1.66 1.75 1.85	25.27 24.90 24.49	25.27 24.90 24.49
	900	17.91 17.67 17.43	1.65 1.74 1.83	900	900	22.48 21.84 21.84	1.66 1.84 1.84	900	25.26 24.82 24.43	25.26 24.82 24.43	1.66 1.75 1.85	25.26 24.82 24.43	25.26 24.82 24.43
65 (18.3) 70 (21.1) 75 (23.3)	900	17.91 17.67 17.43	1.65 1.74 1.83	900	900	22.48 21.84 21.84	1.66 1.84 1.84	900	25.26 24.82 24.43	25.26 24.82 24.43	1.66 1.75 1.85	25.26 24.82 24.43	25.26 24.82 24.43
	900	15.15 14.94 14.73	1.51 1.60 1.68	700	700	11.61 11.40 11.19	0.70 0.76 0.82	700	14.22 13.94 13.65	14.22 13.94 13.65	0.68 0.74 0.81	14.22 13.94 13.65	14.22 13.94 13.65
	900	15.15 14.94 14.73	1.51 1.60 1.68	700	700	11.61 11.40 11.19	0.70 0.76 0.82	700	14.22 13.94 13.65	14.22 13.94 13.65	0.68 0.74 0.81	14.22 13.94 13.65	14.22 13.94 13.65

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage

Stage 5 – Compressor speed limited to stage four at 7 and stage three at 57 outdoor, Stage 1 – Compressor speed limited to stage three at 7 and 17 and to stage two at 27 and 37 outdoor.

See additional notes on page 45



HVH837

HEAT PUMP HEATING PERFORMANCE – COMFORT MODE

INDOOR AIR	HVH837 / FCM4X60***L Heating Comfort Mode Outdoor Coil Entering Air Temperature °F (°C)														
	7 (-13.9)					17 (-8.3)					27 (-2.8)				
	ID SCFM		Capacity MBtuh		Total	ID SCFM		Capacity MBtuh		Total	ID SCFM		Capacity MBtuh		Total
<b>EDB °F (°C)</b>			Integ†		Total Sys. KW†			Integ†		Total Sys. KW†			Integ†		Total Sys. KW†
<b>65 (18.3)</b>	500		15.03		1.95	595		29.43		3.54	735		33.56		3.54
<b>70 (21.1)</b>	500		14.68		2.00	595		28.74		3.60	735		33.03		3.65
<b>75 (23.3)</b>	500		14.23		2.04	595		27.40		3.54	735		32.53		3.75
<b>65 (18.3)</b>	434		14.85		1.99	595		29.43		3.54	735		33.56		3.54
<b>70 (21.1)</b>	434		14.41		2.03	595		28.74		3.60	735		33.03		3.65
<b>75 (23.3)</b>	434		13.90		2.05	595		27.40		3.54	735		32.53		3.75
<b>65 (18.3)</b>	500		12.11		1.72	500		14.47		1.82	500		16.81		1.86
<b>70 (21.1)</b>	500		11.88		1.78	500		14.26		1.89	500		16.58		1.94
<b>75 (23.3)</b>	500		11.58		1.83	500		14.01		1.96	500		16.33		2.02
<b>65 (18.3)</b>	277		11.00		1.82	325		14.13		2.05	425		16.74		1.97
<b>70 (21.1)</b>	277		10.46		1.81	325		13.78		2.09	425		16.49		2.05
<b>75 (23.3)</b>	277		10.14		1.84	325		13.37		2.12	425		16.22		2.12
<b>65 (18.3)</b>	500		12.11		1.72	500		14.47		1.82	500		13.59		1.76
<b>70 (21.1)</b>	500		11.88		1.78	500		14.26		1.89	500		13.40		1.74
<b>75 (23.3)</b>	500		11.58		1.83	500		14.01		1.96	500		13.19		1.81
<b>65 (18.3)</b>	277		11.00		1.82	277		13.71		2.11	341		13.42		1.92
<b>70 (21.1)</b>	277		10.47		1.81	277		13.27		2.12	341		13.19		1.98
<b>75 (23.3)</b>	277		10.14		1.84	277		12.79		2.13	341		12.95		2.04
<b>INDOOR AIR</b>	<b>HVH837 / FCM4X60***L Heating Comfort Mode</b>														
<b>Outdoor Coil Entering Air Temperature °F (°C)</b>															
<b>37 (2.8)</b>					<b>47 (8.3)</b>					<b>57 (13.9)</b>					
<b>EDB °F (°C)</b>	ID SCFM		Capacity MBtuh		Total Sys. KW†	ID SCFM		Capacity MBtuh		Total Sys. KW†	ID SCFM		Capacity MBtuh		Total Sys. KW†
			Integ†					Integ†					Integ†		
<b>65 (18.3)</b>	875		37.18		3.48	1014		40.10		3.34	737		24.96		1.77
<b>70 (21.1)</b>	875		36.72		3.61	1014		39.59		3.47	737		24.55		1.86
<b>75 (23.3)</b>	875		36.23		3.73	1014		39.05		3.60	737		24.14		1.95
<b>65 (18.3)</b>	875		37.18		3.48	1014		40.10		3.34	737		24.96		1.77
<b>70 (21.1)</b>	875		36.72		3.61	1014		39.59		3.47	737		24.55		1.86
<b>75 (23.3)</b>	875		36.23		3.73	1014		39.05		3.60	737		24.14		1.95
<b>65 (18.3)</b>	526		19.31		1.91	626		22.06		1.84	737		24.96		1.77
<b>70 (21.1)</b>	526		19.04		1.99	626		21.73		1.93	737		24.38		1.85
<b>75 (23.3)</b>	526		18.75		2.08	626		21.39		2.02	737		24.12		1.95
<b>65 (18.3)</b>	500		19.31		1.91	626		22.06		1.84	737		24.96		1.77
<b>70 (21.1)</b>	500		19.04		1.99	626		21.73		1.93	737		24.55		1.86
<b>75 (23.3)</b>	500		18.75		2.08	626		21.39		2.02	737		24.14		1.95
<b>65 (18.3)</b>	405		16.30		1.76	199		11.40		0.77	217		13.86		0.77
<b>70 (21.1)</b>	405		16.06		1.84	199		11.19		0.83	217		13.45		0.83
<b>75 (23.3)</b>	405		15.81		1.92	199		10.97		0.89	217		13.18		0.89
<b>65 (18.3)</b>	405		16.15		1.92	199		10.53		1.24	217		12.45		1.23
<b>70 (21.1)</b>	405		15.90		1.99	199		10.31		1.28	217		12.27		1.28
<b>75 (23.3)</b>	405		15.64		2.07	199		10.08		1.33	217		11.98		1.33

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage  
**Stage 5** – Compressor speed limited to stage four at 7 and stage three at 17 and stage three at 57 outdoor; **Stage 1** – Compressor speed limited to stage two at 27 and 37 outdoor.

See additional notes on page 45

DETAILED HEATING CAPACITIES# - EFFICIENCY MODE & COMFORT MODE CONTINUED

HVH837

HEATING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
FCM4X36**L	1.00	1.09	
FCM4X48**L	1.00	1.02	
FCM4X60**L	1.00	1.00	
EA*4X36L14A*	1.00	1.11	*8MV*0701412**
EA*4X36L17A*	1.00	1.10	*8MV*0701412**
EA*4X36L17A*	1.00	1.09	*8MV*0901716**
EA*4X36L17A*	1.00	1.11	*9MA*0601714A**
EA*4X36L21A*	1.00	1.11	*9MA*0801714A**
EA*4X36L21A*	1.00	1.08	*8MV*0901716**
EA*4X36L21A*	1.00	1.08	*8MV*1102120**
EA*4X36L21A*	1.00	1.11	*9MA*0601714A**
EA*4X36L21A*	1.00	1.10	*9MA*0801714A**
EA*4X36L21A*	1.00	1.09	*9MA*080120A**
EA*4X36L21A*	1.00	1.08	*9MA*1002122A**
EA*4X42L21A*	1.00	1.06	*8MV*0901716**
EA*4X42L21A*	1.00	1.06	*8MV*1102120**
EA*4X42L21A*	1.00	1.09	*9MA*0601714A**
EA*4X42L21A*	1.00	1.08	*9MA*0801714A**
EA*4X42L21A*	1.00	1.07	*9MA*080120A**
EA*4X42L21A*	1.00	1.06	*9MA*1002122A**
EA*4X42L24A*	1.00	1.06	*8MV*1102120**
EA*4X42L24A*	1.00	1.05	*8MV*1352422**
EA*4X42L24A*	1.00	1.07	*9MA*0602120A**
EA*4X42L24A*	1.00	1.07	*9MA*0802120A**
EA*4X42L24A*	1.00	1.06	*9MA*1002122A**
EA*4X42L24A*	1.00	1.04	*9MA*1002122A**
EA*4X48L17A*	1.00	1.03	*8MV*0901716**
EA*4X48L17A*	1.00	1.03	*8MV*1102120**
EA*4X48L17A*	1.00	1.06	*9MA*0601714A**
EA*4X48L17A*	1.00	1.05	*9MA*0801714A**
EA*4X48L17A*	1.00	1.03	*9MA*1002120A**
EA*4X48L17A*	1.00	1.03	*9MA*1002122A**
EA*4X48L21A*	1.00	1.03	*8MV*1102120**
EA*4X48L21A*	1.00	1.03	*8MV*1352422**
EA*4X48L21A*	1.00	1.05	*9MA*0602120A**
EA*4X48L21A*	1.00	1.04	*9MA*0802120A**
EA*4X48L21A*	1.00	1.03	*9MA*1002122A**
EA*4X48L21A*	1.00	1.03	*8MV*0901716**
EA*4X48L21A*	1.00	1.03	*8MV*1102120**
EA*4X60L21A*	1.00	1.06	*9MA*0601714A**
EA*4X60L21A*	1.00	1.05	*9MA*0602120A**
EA*4X60L21A*	1.00	1.04	*9MA*0801714A**
EA*4X60L21A*	1.00	1.03	*9MA*0802120A**
EA*4X60L21A*	1.00	1.03	*9MA*1002122A**
EA*4X60L21A*	1.00	1.02	*8MV*1102120**
EA*4X60L21A*	1.00	1.05	*8MV*1352422**
EA*4X60L24A*	1.00	1.02	*9MA*0602120A**
EA*4X60L24A*	1.00	1.05	*9MA*0602120A**
EA*4X60L24A*	1.00	1.04	*9MA*0802120A**
EA*4X60L24A*	1.00	1.03	*9MA*1002122A**
EA*4X60L24A*	1.00	1.03	*8MV*0901716**
EA*4X60L24A*	1.00	1.03	*8MV*1102120**
EA*4X60L24A*	1.00	1.05	*9MA*0602120A**
EA*4X60L24A*	1.00	1.04	*9MA*0802120A**
EA*4X60L24A*	1.00	1.03	*9MA*1002122A**
EA*4X60L24A*	1.00	1.03	*8MV*0901716**
EA*4X60L24A*	1.00	1.03	*8MV*1102120**
EHD4X36AAL	1.00	1.04	

EHD4X36AAL	1.00	1.04	*8MV*1102120**
EHD4X36AAL	1.00	1.03	*8MV*1352422**
EHD4X36AAL	1.00	1.07	*9MA*0601714A**
EHD4X36AAL	1.00	1.05	*9MA*0602120A**
EHD4X36AAL	1.00	1.05	*9MA*0801714A**
EHD4X36AAL	1.00	1.04	*9MA*0802120A**
EHD4X36AAL	1.00	1.04	*9MA*1002122A**
EHD4X36AAL	1.00	1.04	*9MA*1002122A**
EHD4X42AAL	1.00	1.02	*8MV*0901716**
EHD4X42AAL	1.00	1.02	*8MV*1102120**
EHD4X42AAL	1.00	1.05	*9MA*0601714A**
EHD4X42AAL	1.00	1.04	*9MA*0602120A**
EHD4X42AAL	1.00	1.04	*9MA*0801714A**
EHD4X42AAL	1.00	1.02	*9MA*0802120A**
EHD4X42AAL	1.00	1.02	*9MA*1002122A**
EHD4X48AAL	1.00	1.01	*8MV*0901716**
EHD4X48AAL	1.00	1.01	*8MV*1102120**
EHD4X48AAL	1.00	1.04	*9MA*0601714A**
EHD4X48AAL	1.00	1.05	*9MA*0602120A**
EHD4X48AAL	1.00	1.03	*9MA*0801714A**
EHD4X48AAL	1.00	1.04	*9MA*0802120A**
EHD4X48AAL	1.00	1.02	*9MA*1002120A**
EHD4X48AAL	1.00	1.01	*8MV*0901716**
EHD4X48AAL	1.00	1.01	*8MV*1102120**
EHD4X60AAL	1.00	1.04	*8MV*1352422**
EHD4X60AAL	1.00	1.04	*9MA*0601714A**
EHD4X60AAL	1.00	1.03	*9MA*0602120A**
EHD4X60AAL	1.00	1.04	*9MA*0801714A**
EHD4X60AAL	1.00	1.02	*9MA*0802120A**
EHD4X60AAL	1.00	1.01	*8MV*0901716**
EHD4X60AAL	1.00	1.02	*8MV*1102120**
EHD4X60AAL	1.00	1.04	*9MA*0601714A**
EHD4X60AAL	1.00	1.03	*9MA*0602120A**
EHD4X60AAL	1.00	1.04	*9MA*0801714A**
EHD4X60AAL	1.00	1.02	*9MA*0802120A**
EHD4X60AAL	1.00	1.01	*8MV*0901716**
EHD4X60AAL	1.00	1.02	*8MV*1102120**
EHD4X60AAL	1.00	1.04	*9MA*0601714A**
EHD4X60AAL	1.00	1.04	*9MA*0602120A**
EHD4X60AAL	1.00	1.09	*9MA*0801714A**
EHD4X60AAL	1.00	1.09	*9MA*0802120A**
EHD4X60AAL	1.00	1.02	*9MA*1002122A**
EHD4X60AAL	1.00	1.02	*8MV*0901716**
EHD4X60AAL	1.00	1.02	*8MV*1102120**
EHD4X60AAL	1.00	1.04	*9MA*0601714A**
EHD4X60AAL	1.00	1.04	*9MA*0602120A**
EHD4X60AAL	1.00	1.11	*9MA*0801714A**
EHD4X60AAL	1.00	1.09	*9MA*0802120A**
EHD4X60AAL	1.00	1.02	*9MA*1002122A**
EHD4X60AAL	1.00	1.09	*8MV*0901716**
EHD4X60AAL	1.00	1.09	*8MV*1102120**
EHD4X60AAL	1.00	1.13	*9MA*0601714A**
EHD4X60AAL	1.00	1.11	*9MA*0801714A**
EHD4X60AAL	1.00	1.06	*8MV*0901716**
EHD4X60AAL	1.00	1.06	*8MV*1102120**
EHD4X60AAL	1.00	1.09	*9MA*0601714A**
EHD4X60AAL	1.00	1.08	*9MA*0602120A**
EHD4X60AAL	1.00	1.07	*9MA*0801714A**
EHD4X60AAL	1.00	1.07	*9MA*0802120A**
EHD4X60AAL	1.00	1.06	*9MA*1002122A**
EHD4X60AAL	1.00	1.02	*8MV*0901716**
EHD4X60AAL	1.00	1.02	*8MV*1102120**

EN(A,D,W)4X48L21**	1.00	1.05	*9MA*0601714A**
EN(A,D,W)4X48L21**	1.00	1.04	*9MA*0602120A**
EN(A,D,W)4X48L21**	1.00	1.04	*9MA*0801714A**
EN(A,D,W)4X48L21**	1.00	1.02	*9MA*0802120A**
EN(A,D,W)4X48L21**	1.00	1.02	*9MA*1002122A**
EN(A,D,W)4X48L21**	1.00	1.02	*8MV*1102120**
EN(A,D,W)4X48L21**	1.00	1.02	*8MV*1352422**
EN(A,D,W)4X48L21**	1.00	1.04	*9MA*0602120A**
EN(A,D,W)4X48L21**	1.00	1.02	*9MA*0802120A**
EN(A,D,W)4X48L21**	1.00	1.02	*9MA*1002122A**
EN(A,D,W)4X48L21**	1.00	1.04	*9MA*1002122A**
EN(A,D,W)4X48L21**	1.00	1.04	*9MA*0601714A**
EN(A,D,W)4X48L21**	1.00	1.07	*9MA*0601714A**
EN(A,D,W)4X48L21**	1.00	1.06	*9MA*0801714A**

2-STAGE (HI-Stage 5, Lo-Stage 2)					
COOLING INDOOR MODEL	HIGH SPEED CAP.	POWER	LOW SPEED CAP.	POWER	FURNACE MODEL
FCM4X60**L	1.00	1.00	1.00	1.00	
EA*4X36L14A*	1.01	1.18	1.06	1.23	*9MX*0601412A**
EA*4X36L17A*	1.01	1.17	1.07	1.21	*9MX*0401712A**
EA*4X36L17A*	1.00	1.14	1.06	1.21	*9MX*0601714A**
EA*4X36L17A*	1.11	1.28	1.07	1.19	OMV098A12*
EA*4X36L17A*	1.11	1.29	1.07	1.18	OLV098A12*
EA*4X36L17A*	1.10	1.26	1.06	1.17	OMV112K14A
EA*4X36L21A*	1.11	1.26	1.06	1.15	OLV112A16A
EA*4X42L21A*	1.10	1.22	1.06	1.14	OLV112A16A
EA*4X42L24A*	1.10	1.22	1.05	1.12	OMV154L20A
EA*4X48L17A*	0.97	1.02	1.03	1.11	*9MX*0601714A**
EA*4X48L17A*	0.97	1.02	1.03	1.11	*9MX*0601714A**
EHD4X36AAL	1.01	1.12	1.05	1.20	*9MX*0601412A**
EHD4X36AAL	1.01	1.11	1.06	1.18	*9MX*0601412A**
EHD4X36AAL	0.99	1.07	1.05	1.16	*9MX*0601714A**
EHD4X36AAL	1.01	1.11	1.06	1.18	*9MX*0601412A**
EHD4X36AAL	0.99	1.07	1.05	1.16	*9MX*0601714A**
EN(A,D,W)4X36L21**	1.11	1.27	1.07	1.18	OLV112A16A
EN(A,D,W)4X36L21**	1.11	1.29	1.07	1.20	OMV098J12*
EN(A,D,W)4X36L17**	1.11	1.28	1.06	1.18	OMV112K14A
EN(A,D,W)4X42L21**	1.11	1.23	1.06	1.14	OLV112A16A
EN(A,D,W)4X42L21**	0.99	1.08	1.05	1.16	*9MX*0601714A**
EN(A,D,W)4X42L21**	1.10	1.21	1.07	1.14	OMV098J12*
EN(A,D,W)4X42L21**	1.10	1.22	1.06	1.13	OLV098A12*
EN(A,D,W)4X42L21**	1.10	1.22	1.06	1.14	OLV112K14A

HVH848

DETAILED COOLING CAPACITIES# – EFFICIENCY MODE

EDB °F (°C)	EVAP AIR	HVH848 / FCIMAX48***L Efficiency Mode Condenser Entering Air Temperature °F (°C)																							
		115 (46.1)				105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)			
		ID SCF M	Capacity MBtuh Total	Sens ‡	Total Sys. KW**	ID SCF M	Capacity MBtuh Total	Sens ‡	Total Sys. KW**	ID SCF M	Capacity MBtuh Total	Sens ‡	Total Sys. KW**	ID SCF M	Capacity MBtuh Total	Sens ‡	Total Sys. KW**	ID SCF M	Capacity MBtuh Total	Sens ‡	Total Sys. KW**	ID SCF M	Capacity MBtuh Total	Sens ‡	Total Sys. KW**
75 (23.9)	72 (22.2)	1400	44.46	17.96	5.30	47.55	19.13	4.76	50.59	20.28	4.26	53.58	21.41	3.78	56.49	22.53	3.33	59.24	23.64	2.90	62.18	24.77	2.88	65.00	26.00
	67 (19.4)	1400	40.53	24.37	5.19	43.36	25.62	4.67	46.12	26.85	4.18	48.81	28.07	3.72	51.44	29.27	3.28	54.03	30.47	2.88	56.91	31.70	2.86	59.73	33.03
	63 (17.2)	1400	37.62	29.42	5.09	40.24	30.72	4.59	42.79	32.02	4.12	45.28	33.30	3.67	47.70	34.55	3.25	50.09	35.81	2.86	52.95	37.04	2.83	55.99	38.81
	57 (13.9)	1400	34.79	34.79	4.99	36.84	36.84	4.50	38.82	38.82	4.04	40.75	40.75	3.61	42.87	42.14	3.21	44.94	43.50	2.83	47.77	43.50	2.83	50.50	43.50
	53 (11.1)	1400	44.36	24.28	5.30	47.46	25.53	4.77	50.50	26.76	4.26	53.48	27.99	3.78	56.39	29.19	3.33	59.24	30.40	2.90	62.18	31.70	2.88	65.00	33.03
80 (26.7)	72 (22.2)	1400	40.43	30.64	5.19	43.26	31.96	4.67	46.02	33.28	4.18	48.71	34.57	3.72	51.35	35.85	3.28	53.94	37.15	2.88	56.91	38.81	2.86	60.75	40.75
	67 (19.4)	1400	37.66	35.55	5.10	40.25	36.99	4.59	42.77	38.38	4.12	45.25	39.75	3.67	47.66	41.09	3.25	50.04	42.41	2.86	52.95	43.50	2.83	55.99	43.50
	63 (17.2)	1400	36.88	36.88	5.07	39.04	39.04	4.56	41.10	41.10	4.09	43.11	43.11	3.64	45.06	45.06	3.23	46.95	46.95	2.84	49.89	46.95	2.84	53.71	46.95
	57 (13.9)	1400	29.36	12.30	3.08	31.57	13.11	2.74	33.80	13.87	2.38	35.73	14.66	2.08	37.85	15.46	1.79	39.94	16.25	1.53	42.07	16.25	1.53	46.30	16.25
	53 (11.1)	1200	26.65	17.55	3.05	28.66	18.45	2.73	30.51	19.30	2.38	32.44	20.17	2.09	34.35	21.05	1.82	36.25	21.92	1.56	39.16	21.92	1.56	43.01	21.92
75 (23.9)	72 (22.2)	1100	24.64	21.63	3.04	26.47	22.60	2.72	28.19	23.52	2.38	29.95	24.47	2.10	31.72	25.42	1.83	33.46	26.36	1.58	36.27	26.36	1.58	40.03	26.36
	67 (19.4)	1100	23.69	23.69	3.03	25.21	25.21	2.71	26.63	26.63	2.37	28.09	28.09	2.10	29.52	29.52	1.84	30.92	30.92	1.60	33.73	30.92	1.60	40.54	30.92
	63 (17.2)	1200	29.26	17.54	3.08	31.47	18.44	2.74	33.50	19.28	2.38	35.64	20.16	2.08	37.75	21.04	1.79	39.84	21.91	1.53	42.95	21.91	1.53	49.70	21.91
	57 (13.9)	1200	26.58	22.70	3.06	28.58	23.70	2.73	30.43	24.64	2.38	32.35	25.61	2.09	34.25	26.57	1.82	36.15	27.54	1.56	39.06	27.54	1.56	45.81	27.54
	53 (11.1)	1200	25.33	25.33	3.04	26.94	26.94	2.72	28.40	28.38	2.38	30.14	29.65	2.10	31.85	30.76	1.83	33.56	31.83	1.58	36.37	31.83	1.58	43.12	31.83
75 (23.9)	72 (22.2)	1100	25.37	10.73	2.67	27.27	11.42	2.37	29.54	8.42	1.06	20.95	8.94	0.89	22.36	9.47	0.72	23.78	10.00	0.56	26.19	10.00	0.56	32.90	10.00
	67 (19.4)	1100	22.95	15.36	2.66	24.75	16.20	2.37	27.86	12.16	1.09	18.94	12.78	0.92	20.22	13.39	0.76	21.49	14.00	0.61	24.29	14.00	0.61	30.01	14.00
	63 (17.2)	1100	21.20	18.93	2.65	22.84	19.87	2.38	26.38	15.07	1.11	17.54	15.80	0.95	18.70	16.45	0.79	19.87	17.13	0.65	22.84	17.13	0.65	28.55	17.13
	57 (13.9)	1100	20.51	20.51	2.65	21.90	21.90	2.38	26.01	16.01	1.11	17.02	17.02	0.96	18.02	18.02	0.81	19.01	19.01	0.67	22.01	19.01	0.67	27.54	19.01
	53 (11.1)	1100	25.29	15.39	2.67	27.28	16.22	2.37	29.46	12.19	1.06	20.87	12.80	0.89	22.28	13.41	0.72	23.69	14.03	0.56	26.50	14.03	0.56	32.90	14.03
80 (26.7)	72 (22.2)	1100	22.91	19.93	2.66	24.69	20.87	2.37	27.66	15.85	1.09	18.93	16.56	0.92	20.19	17.27	0.76	21.46	17.97	0.61	24.29	17.97	0.61	30.01	17.97
	67 (19.4)	1100	21.96	21.96	2.66	23.43	23.43	2.38	27.13	17.13	1.10	18.21	18.21	0.93	19.27	19.27	0.78	20.33	20.33	0.64	23.33	20.33	0.64	29.04	20.33
	63 (17.2)	1100	21.92	21.92	2.66	23.39	23.39	2.38	27.10	17.10	1.10	18.18	18.18	0.93	19.24	19.24	0.78	20.29	20.29	0.64	23.29	20.29	0.64	28.99	20.29
	57 (13.9)	1100	25.29	15.39	2.67	27.28	16.22	2.37	29.46	12.19	1.06	20.87	12.80	0.89	22.28	13.41	0.72	23.69	14.03	0.56	26.50	14.03	0.56	32.90	14.03
	53 (11.1)	1100	22.91	19.93	2.66	24.69	20.87	2.37	27.66	15.85	1.09	18.93	16.56	0.92	20.19	17.27	0.76	21.46	17.97	0.61	24.29	17.97	0.61	30.01	17.97

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage  
 Stage 1 – Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 43

**HVH848**  
**DETAILED COOLING CAPACITIES# – COMFORT + DEHUMIDIFY MODE**

EDB °F (°C)	EVAP. AIR EWB °F (°C)	HVH848 / FOMax***L Comfort + Dehumidify Mode Condenser Entering Air Temperature °F (°C)														
		105 (40.5)			95 (35)			85 (29.4)			75 (23.9)			65 (18.3)		
		ID SCFM	Capacity MBtuh Total	Total Sys. KW	ID SCFM	Capacity MBtuh Total	Total Sys. KW	ID SCFM	Capacity MBtuh Total	Total Sys. KW	ID SCFM	Capacity MBtuh Total	Total Sys. KW	ID SCFM	Capacity MBtuh Total	Total Sys. KW
75 (23.9)	72 (22.2)	46.15	18.51	4.57	49.48	19.81	4.11	52.80	21.11	3.68	56.10	22.38	3.28	58.13	23.21	2.80
	67 (19.4)	42.05	23.76	4.47	45.08	25.46	4.03	48.10	27.15	3.62	51.08	28.84	3.24	52.88	29.26	2.77
	63 (17.2)	39.02	27.87	4.39	41.83	29.88	3.97	44.61	31.87	3.57	47.36	33.85	3.20	49.01	33.96	2.76
	57 (13.9)	35.01	33.85	4.28	37.53	36.29	3.88	40.02	38.72	3.51	42.47	41.16	3.16	43.86	40.86	2.73
	72 (22.2)	46.07	23.69	4.57	49.40	25.39	4.11	52.71	27.07	3.68	55.99	28.76	3.28	58.04	29.22	2.80
80 (26.7)	67 (19.4)	41.97	28.88	4.47	45.00	30.96	4.03	48.01	33.04	3.62	50.99	35.10	3.24	52.80	35.16	2.77
	63 (17.2)	38.97	32.95	4.39	41.78	35.35	3.97	44.56	37.73	3.57	47.31	40.09	3.20	48.95	39.83	2.76
	57 (13.9)	36.54	36.54	4.32	39.18	39.18	3.92	41.80	41.80	3.53	44.40	44.40	3.17	45.07	45.07	2.73
	72 (22.2)	29.64	11.97	2.58	31.86	12.87	2.24	34.06	13.75	1.96	36.31	14.65	1.69	38.02	15.76	1.45
	67 (19.4)	26.82	15.33	2.57	28.87	16.54	2.24	30.87	17.64	1.96	32.91	18.82	1.71	35.37	20.54	1.48
75 (23.9)	63 (17.2)	24.74	17.92	2.56	26.64	19.39	2.23	28.46	20.78	1.97	30.37	22.07	1.72	32.64	24.25	1.50
	57 (13.9)	22.07	21.73	2.54	23.80	23.54	2.22	25.49	25.08	1.97	27.16	26.77	1.74	29.37	29.37	1.53
	72 (22.2)	29.56	15.35	2.58	31.78	16.57	2.24	33.99	17.69	1.96	36.22	18.85	1.69	38.92	20.56	1.45
	67 (19.4)	26.77	18.65	2.57	28.80	20.17	2.24	30.80	21.51	1.96	32.83	22.97	1.71	35.29	25.26	1.48
	63 (17.2)	24.72	21.24	2.56	26.62	23.01	2.23	28.48	24.54	1.97	30.35	26.20	1.72	32.64	28.94	1.50
80 (26.7)	57 (13.9)	23.28	23.28	2.55	25.15	25.15	2.23	26.88	26.88	1.97	28.66	28.66	1.73	31.18	31.18	1.52
	72 (22.2)	25.50	10.32	2.25	17.80	7.20	1.03	19.19	7.76	0.86	20.61	8.34	0.70	22.05	8.92	0.55
	67 (19.4)	23.02	13.19	2.25	16.09	9.17	1.06	17.34	9.88	0.90	18.62	10.62	0.74	19.92	11.37	0.60
	63 (17.2)	21.21	15.43	2.25	14.83	10.71	1.07	15.98	11.55	0.92	17.16	12.41	0.77	18.35	13.29	0.64
	57 (13.9)	18.95	18.71	2.24	13.20	12.99	1.09	14.23	14.01	0.95	15.29	15.05	0.81	16.35	16.12	0.68
75 (23.9)	72 (22.2)	25.43	13.24	2.25	17.75	9.19	1.03	19.14	9.91	0.86	20.56	10.65	0.70	21.99	11.40	0.55
	67 (19.4)	22.97	16.07	2.25	16.05	11.14	1.06	17.30	12.01	0.90	18.57	12.91	0.74	19.86	13.83	0.60
	63 (17.2)	21.20	18.29	2.25	14.82	12.68	1.07	15.97	13.68	0.92	17.15	14.70	0.77	18.34	15.74	0.63
	57 (13.9)	20.00	20.00	2.25	13.93	13.93	1.08	15.01	15.01	0.94	16.13	16.13	0.79	17.26	17.26	0.66
	72 (22.2)	25.50	10.32	2.25	17.80	7.20	1.03	19.19	7.76	0.86	20.61	8.34	0.70	22.05	8.92	0.55
80 (26.7)	67 (19.4)	23.02	13.19	2.25	16.09	9.17	1.06	17.34	9.88	0.90	18.62	10.62	0.74	19.92	11.37	0.60
	63 (17.2)	21.21	15.43	2.25	14.83	10.71	1.07	15.98	11.55	0.92	17.16	12.41	0.77	18.35	13.29	0.64
	57 (13.9)	18.95	18.71	2.24	13.20	12.99	1.09	14.23	14.01	0.95	15.29	15.05	0.81	16.35	16.12	0.68
	72 (22.2)	25.43	13.24	2.25	17.75	9.19	1.03	19.14	9.91	0.86	20.56	10.65	0.70	21.99	11.40	0.55
	67 (19.4)	22.97	16.07	2.25	16.05	11.14	1.06	17.30	12.01	0.90	18.57	12.91	0.74	19.86	13.83	0.60

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage  
 Stage 5 – Compressor speed limited to stage four at 65 outdoor; Stage 1 – Compressor speed limited to stage two at 105 outdoor.

See additional notes on page 43

DETAILED COOLING CAPACITIES# – EFFICIENCY MODE & COMFORT + DEHUMIDIFY MODE CONTINUED  
HVH848

COOLING INDOOR MODEL	2-STAGE (HL-Stage 5, Lo-Stage 2)				FURNACE MODEL
	COOLING INDOOR MODEL	HIGH SPEED CAR	POWER	LOW SPEED CAR	
FCM4X48**L	1.00	1.00	1.00	1.00	
EA*4X48L17A*	0.97	1.00	0.99	1.00	
EA*4X48L21A*	0.98	1.05	1.08	1.01	
EA*4X48L21A*	0.98	1.05	1.08	1.02	
EA*4X48L21A*	0.98	1.06	1.10	1.02	
EA*4X48L21A*	0.98	1.05	1.06	1.01	
EA*4X48L21A*	0.98	1.04	1.06	1.01	
EA*4X60L21A*	1.00	1.03	1.05	1.00	
EA*4X60L21A*	1.00	1.04	1.07	1.01	
EA*4X60L24A*	1.00	1.03	1.03	0.99	
EA*4X60L24A*	0.97	1.04	1.04	0.99	
EN(A,D)W4X48L21**	0.98	1.06	1.07	1.03	
EN(A,D)W4X48L21**	0.98	1.06	1.06	1.02	
EN(A,D)W4X48L21**	0.98	1.04	1.03	1.00	
EN(A,D)W4X48L21**	0.98	1.04	1.05	1.01	
EN(A,D)W4X60L24**	0.98	1.06	1.09	1.02	
EN(A,D)W4X60L24**	1.00	1.07	1.07	1.03	
EN(A,D)W4X60L24**	1.00	1.00	1.07	1.01	
EHD4X48AAL	0.99	1.15			
EHD4X48AAL	0.99	1.15			
EHD4X48AAL	0.99	1.15			
EHD4X48AAL	0.99	1.15			
EHD4X48AAL	0.99	1.09			
EHD4X48AAL	0.99	1.09			
EHD4X60AAL	0.99	1.15			
EHD4X60AAL	1.00	1.10			
EHD4X60AAL	1.00	1.10			
EHD4X60AAL	1.00	1.10			
EHD4X60AAL	1.00	1.10			
EHD4X60AAL	1.01	1.11			

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
FCM4X48**L	1.00	1.00	
EA*4X48L17A*	0.97	1.08	*8MV*0801716**
EA*4X48L21A*	0.98	1.06	*9MA*0602120A**
EA*4X48L21A*	0.98	1.08	*9MA*0802120A**
EA*4X48L21A*	0.98	1.02	*9MA*1002122A**
EA*4X48L21A*	0.98	1.02	*8MV*1102120**
EA*4X48L21A*	0.98	1.02	*9MA*1202422A**
EA*4X48L21A*	0.98	1.02	*8MV*1352422**
EA*4X60L21A*	0.99	1.09	*9MA*0602120A**
EA*4X60L21A*	1.00	1.05	*9MA*0802120A**
EA*4X60L21A*	1.00	1.05	*9MA*1002122A**
EA*4X60L21A*	1.00	1.05	*8MV*1102120**
EA*4X60L24A*	1.00	1.05	*9MA*1202422A**
EA*4X60L24A*	1.00	1.05	*8MV*1352422**
EN(A,D)W4X48L21**	0.97	1.06	*9MA*0602120A**
EN(A,D)W4X48L21**	0.98	1.02	*9MA*0802120A**
EN(A,D)W4X48L21**	0.98	1.02	*8MV*1102120**
EN(A,D)W4X48L21**	0.98	1.02	*9MA*1202422A**
EN(A,D)W4X48L21**	0.98	1.02	*8MV*1352422**
EN(A,D)W4X60L24**	1.00	1.05	*9MA*1202422A**
EN(A,D)W4X60L24**	1.00	1.00	*8MV*1352422**
EHD4X48AAL	0.99	1.15	*9MA*0602120A**
EHD4X48AAL	0.99	1.15	*9MA*0802120A**
EHD4X48AAL	0.99	1.09	*9MA*1002122A**
EHD4X48AAL	0.99	1.15	*9MA*1202422A**
EHD4X48AAL	0.99	1.15	*8MV*0801716**
EHD4X48AAL	0.99	1.09	*8MV*1102120**
EHD4X48AAL	0.99	1.09	*8MV*1352422**
EHD4X60AAL	0.99	1.15	*9MA*0602120A**
EHD4X60AAL	1.00	1.10	*9MA*0802120A**
EHD4X60AAL	1.00	1.10	*9MA*1002122A**
EHD4X60AAL	1.00	1.10	*9MA*1202422A**
EHD4X60AAL	1.00	1.10	*8MV*0801716**
EHD4X60AAL	1.00	1.10	*8MV*1102120**
EHD4X60AAL	1.01	1.11	*8MV*1352422**

HVH848

HEAT PUMP HEATING PERFORMANCE – EFFICIENCY MODE

INDOOR AIR		HVH848 / FCMA48***L Heating Efficiency Mode Outdoor Coil Entering Air Temperature °F (°C)														
		7 (-13.9)					17 (-8.3)					27 (-2.8)				
EDB °F (°C)	ID SCFM	Capacity MBtuh		Total Sys. KWt	ID SCFM	Capacity MBtuh		Total Sys. KWt	ID SCFM	Capacity MBtuh		Total Sys. KWt	ID SCFM	Capacity MBtuh		Total Sys. KWt
		Total	Integ†			Total	Integ†			Total	Integ†			Total	Integ†	
STAGE 5																
65 (18.3)	700	22.65	20.82	2.72	1600	35.57	32.43	3.74	1600	40.44	35.92	3.87	1600	40.44	35.92	3.87
70 (21.1)		22.10	20.31	2.77		35.20	32.09	3.88		40.08	35.59	4.02				
75 (23.3)		20.89	19.19	2.73		34.73	31.67	4.00		39.66	35.23	4.17				
STAGE 3																
65 (18.3)	600	17.23	15.83	2.08	700	20.92	18.71	2.19	1275	24.10	21.40	2.18	1275	24.10	21.40	2.18
70 (21.1)		16.82	15.46	2.13		20.25	18.46	2.29		23.86	21.19	2.29				
75 (23.3)		16.32	15.00	2.17		19.94	18.18	2.37		23.61	20.97	2.40				
STAGE 1																
65 (18.3)	600	17.23	15.83	2.08	700	20.51	18.70	2.19	1275	20.26	17.99	1.88	1275	20.26	17.99	1.88
70 (21.1)		16.82	15.46	2.13		20.24	18.45	2.28		20.03	17.79	1.97				
75 (23.3)		16.32	15.00	2.17		19.93	18.17	2.37		19.81	17.60	2.07				

INDOOR AIR		HVH848 / FCMA48***L Heating Efficiency Mode Outdoor Coil Entering Air Temperature °F (°C)														
		37 (2.8)					47 (8.3)					57 (13.9)				
EDB °F (°C)	ID SCFM	Capacity MBtuh		Total Sys. KWt	ID SCFM	Capacity MBtuh		Total Sys. KWt	ID SCFM	Capacity MBtuh		Total Sys. KWt	ID SCFM	Capacity MBtuh		Total Sys. KWt
		Total	Integ†			Total	Integ†			Total	Integ†			Total	Integ†	
STAGE 5																
65 (18.3)	1600	46.06	41.92	4.02	1600	51.02	51.02	4.13	1275	35.74	35.74	2.39	1275	35.74	35.74	2.39
70 (21.1)		45.63	41.52	4.18		50.50	50.50	4.30		35.29	35.29	2.51				
75 (23.3)		45.16	41.10	4.34		49.96	49.96	4.47		34.80	34.80	2.64				
STAGE 3																
65 (18.3)	1275	27.80	25.30	2.26	1275	31.75	31.75	2.33	1275	35.74	35.74	2.39	1275	35.74	35.74	2.39
70 (21.1)		27.51	25.03	2.37		31.38	31.38	2.45		35.28	35.28	2.51				
75 (23.3)		27.20	24.76	2.49		31.01	31.01	2.58		34.80	34.80	2.64				
STAGE 1																
65 (18.3)	1275	23.56	21.44	1.94	1000	16.14	16.14	0.88	1000	18.69	18.69	0.87	1000	18.69	18.69	0.87
70 (21.1)		23.29	21.19	2.04		15.90	15.90	0.95		18.40	18.40	0.94				
75 (23.3)		23.01	20.94	2.15		15.65	15.65	1.02		18.10	18.10	1.02				

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage  
**Stage 5** – Compressor speed limited to stage four at 7 and stage three at 57 outdoor; **Stage 1** – Compressor speed limited to stage three at 7 and 17 and to stage two at 27 and 37 outdoor.  
 See additional notes on page 45

HVH848

HEAT PUMP HEATING PERFORMANCE – COMFORT MODE

INDOOR AIR	HVH860 / FCM4X60***L Heating Comfort Mode											
	7 (-13.9)				17 (-8.3)				27 (-2.8)			
	ID SCFM	Capacity MBtuh		Total Sys. KW†	ID SCFM	Capacity MBtuh		Total Sys. KW†	ID SCFM	Capacity MBtuh		Total Sys. KW†
EDB °F (°C)	Total	Integ†		Total	Integ†			Total	Integ†			Total
65 (18.3)	22.44	20.62	2.78	34.33	31.30	3.70		39.97	35.50	3.80		3.80
70 (21.1)	20.06	18.43	2.60	33.36	30.42	3.99	934	40.36	35.85	4.06	1139	4.06
75 (23.3)	20.34	18.69	2.57	32.54	29.67	3.83		39.62	35.19	4.44		4.44
65 (18.3)	16.76	15.40	2.15	20.49	18.68	2.24		23.71	21.06	2.29	724	2.29
70 (21.1)	15.82	14.54	2.03	20.28	18.49	2.36	633	23.55	20.92	2.43		2.43
75 (23.3)	15.13	13.91	2.12	19.73	17.99	2.41		23.38	20.76	2.56		2.56
65 (18.3)	16.80	15.44	2.16	20.44	18.64	2.30		19.82	17.60	1.98	629	1.98
70 (21.1)	16.51	15.17	2.43	20.20	18.42	2.41	569	20.00	17.77	1.98		1.98
75 (23.3)	13.93	12.80	2.31	18.49	16.86	2.70		19.83	17.61	2.09		2.09
INDOOR AIR	HVH860 / FCM4X60***L Heating Comfort Mode											
EDB °F (°C)	37 (2.8)				47 (8.3)				57 (13.9)			
	ID SCFM	Capacity MBtuh		Total Sys. KW†	ID SCFM	Capacity MBtuh		Total Sys. KW†	ID SCFM	Capacity MBtuh		Total Sys. KW†
	Total	Integ†		Total	Integ†			Total	Integ†			
65 (18.3)	45.25	41.18	4.09	50.80	50.80	4.12		35.14	35.14	2.47	996	2.47
70 (21.1)	45.69	41.58	4.37	51.38	51.38	4.42	1550	34.47	34.47	2.34		2.34
75 (23.3)	46.09	41.94	4.66	51.92	51.92	4.74		34.72	34.72	2.52		2.52
65 (18.3)	27.37	24.91	2.37	31.23	31.23	2.43		35.14	35.14	2.47	996	2.47
70 (21.1)	27.16	24.72	2.51	30.96	30.96	2.58	905	34.84	34.84	2.62		2.62
75 (23.3)	26.96	24.54	2.66	30.69	30.69	2.73		34.50	34.50	2.78		2.78
65 (18.3)	23.02	20.95	2.06	15.27	15.27	1.19		17.49	17.49	1.15	403	1.15
70 (21.1)	22.56	20.53	2.16	14.75	14.75	1.17	350	16.87	16.87	1.22		1.22
75 (23.3)	22.78	20.73	2.16	14.36	14.36	1.23		16.27	16.27	1.20		1.20

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage  
**Stage 5** – Compressor speed limited to stage four at 7 and stage three at 57 outdoor, **Stage 1** – Compressor speed limited to stage three at 7 and 17 and to stage two at 27 and 37 outdoor.  
 See additional notes on page 45

DETAILED HEATING CAPACITIES# - EFFICIENCY MODE & COMFORT MODE CONTINUED

HVH848

HEATING INDOOR MODEL	CAPACITY	POWER	2-STAGE (Hi-Stage 5, Lo-Stage 2)				FURNACE MODEL
			HEATING INDOOR MODEL	HIGH SPEED CAP.	POWER	LOW SPEED CAP.	
FCM4X48**L	1.00	1.00					
EA4X48L17A*	1.04	1.03					*8MV*0901716**
EA4X48L21A*	1.04	1.03					*8MV*1102120**
EA4X48L21A*	1.05	1.08					*9MA*0602120A**
EA4X48L21A*	1.04	1.05					*9MA*0802120A**
EA4X48L21A*	1.04	1.04					*9MA*1002122A**
EA4X48L24A*	1.03	1.01					*8MV*1352422**
EA4X48L24A*	1.04	1.04					*9MA*1202422A**
EA4X60L21A*	1.02	1.02					*8MV*1102120**
EA4X60L21A*	1.03	1.07					*9MA*0602120A**
EA4X60L21A*	1.02	1.03					*9MA*0802120A**
EA4X60L21A*	1.01	1.01					*9MA*1002122A**
EA4X60L24A*	1.01	1.00					*8MV*1352422**
EA4X60L24A*	1.02	1.02					*9MA*1202422A**
EHD4X48AAL	1.05	1.04					*8MV*0901716**
EHD4X48AAL	1.05	1.04					*8MV*1102120**
EHD4X48AAL	1.05	1.03					*8MV*1352422**
EHD4X48AAL	1.06	1.08					*9MA*0602120A**
EHD4X48AAL	1.05	1.05					*9MA*0802120A**
EHD4X48AAL	1.05	1.04					*9MA*1002122A**
EHD4X48AAL	1.05	1.04					*9MA*1202422A**
EHD4X60AAL	1.03	1.01					*8MV*0901716**
EHD4X60AAL	1.03	1.00					*8MV*1102120**
EHD4X60AAL	1.02	0.99					*8MV*1352422**
EHD4X60AAL	1.04	1.05					*9MA*0602120A**
EHD4X60AAL	1.03	1.01					*9MA*0802120A**
EHD4X60AAL	1.03	1.01					*9MA*1002122A**
EN(A,D)4X48L24**	1.04	1.03					*8MV*1352422**
EN(A,D)4X48L21**	1.05	1.05					*9MA*1202422A**
EN(A,D)W4X48L21**	1.05	1.04					*8MV*1102120**
EN(A,D)W4X48L21**	1.06	1.09					*9MA*0602120A**
EN(A,D)W4X48L21**	1.05	1.06					*9MA*0802120A**
EN(A,D)W4X60L24**	1.05	1.04					*9MA*1002122A**
EN(A,D)W4X60L24**	1.03	1.03					*8MV*1352422**
EN(A,D)W4X60L24**	1.03	1.03					*9MA*1202422A**

HEATING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL	2-STAGE (Hi-Stage 5, Lo-Stage 2)				FURNACE MODEL
				HEATING INDOOR MODEL	HIGH SPEED CAP.	POWER	LOW SPEED CAP.	
FVM4X48**L	1.00	1.00						
FVM4X60**L	1.00	0.99						
EA4X48L17A*	1.05	1.08						*9MX*0801716A**
EA4X48L21A*	1.05	1.08						*9MX*1002120A**
EA4X48L21A*	1.06	1.10						OLV112A16A
EA4X48L24A*	1.05	1.06						OLV154F20A
EA4X48L24A*	1.04	1.06						OMV154L20A
EA4X60L21A*	1.03	1.05						*9MX*1002120A**
EA4X60L21A*	1.04	1.07						OLV112A16A
EA4X60L24A*	1.03	1.03						OLV154F20A
EA4X60L24A*	1.03	1.04						OMV154L20A
EN(A,D)W4X48L21**	1.06	1.07						*9MX*1002120A**
EN(A,D)W4X48L24**	1.06	1.06						OLV154F20A
EN(A,D)W4X48L24**	1.06	1.07						OMV154L20A
EN(A,D)W4X60L24**	1.04	1.03						OLV154F20A
EN(A,D)W4X60L24**	1.04	1.05						OMV154L20A
EHD4X48AAL	1.06	1.09						*9MX*0801716A**
EHD4X48AAL	1.06	1.07						*9MX*1002120A**
EHD4X60AAL	1.05	1.07						*9MX*0801716A**



HVH860

DETAILED COOLING CAPACITIES# - EFFICIENCY MODE

EDB °F (°C)	EVAP AIR °F (°C)	HVH860 / FCMA460***L Efficiency Mode Condenser Entering Air Temperature °F (°C)																										
		115 (46.1)				105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)						
		ID SCF M	Capacity MBtuh Total	Sens †	Total Sys. KW**	ID SCF M	Capacity MBtuh Total	Sens †	Total Sys. KW**	ID SCF M	Capacity MBtuh Total	Sens †	Total Sys. KW**	ID SCF M	Capacity MBtuh Total	Sens †	Total Sys. KW**	ID SCF M	Capacity MBtuh Total	Sens †	Total Sys. KW**	ID SCF M	Capacity MBtuh Total	Sens †	Total Sys. KW**			
75 (23.9)	72 (22.2)	1600	54.16	21.71	7.27	58.13	23.22	6.50	62.05	24.71	5.83	65.88	26.19	5.23	69.70	27.67	4.69	73.51	29.16	4.22	1600	69.70	27.67	4.69	73.51	29.16	4.22	
	67 (19.4)		49.48	29.16	7.08	53.10	30.83	6.32	56.82	32.47	5.65	60.10	34.10	5.06	63.54	35.73	4.54	66.97	37.36	4.08								
	63 (17.2)		46.01	35.04	6.94	49.36	36.81	6.19	52.82	38.56	5.52	55.84	40.30	4.93	59.02	42.03	4.42	62.18	43.77	3.96								
	57 (13.9)		42.15	42.15	6.80	44.79	44.79	6.03	47.47	47.22	5.36	50.24	49.26	4.78	53.01	51.19	4.27	55.79	53.12	3.82								
	72 (22.2)		54.02	29.01	7.27	57.99	30.66	6.51	61.91	32.31	5.83	65.73	33.94	5.23	69.54	35.58	4.69	73.38	37.25	4.22								
80 (26.7)	67 (19.4)	1600	49.35	36.40	7.08	52.97	38.20	6.32	56.50	39.99	5.65	59.97	41.75	5.06	63.42	43.53	4.54	66.85	45.31	4.08	1600	63.42	43.53	4.54	66.85	45.31	4.08	
	63 (17.2)		45.98	42.19	6.95	49.31	44.12	6.19	52.56	46.03	5.52	55.76	47.91	4.94	58.94	49.79	4.42	62.09	51.66	3.96								
	57 (13.9)		44.59	44.59	6.89	47.37	47.37	6.12	50.06	50.06	5.44	52.70	52.70	4.85	55.28	55.28	4.33	57.84	57.84	3.87								
	72 (22.2)		35.59	14.62	3.53	38.22	15.60	3.17	40.53	16.44	2.81	43.15	17.42	2.52	45.75	18.40	2.26	48.31	19.37	2.03		1350	45.75	18.40	2.26	48.31	19.37	2.03
	67 (19.4)		32.14	20.20	3.49	34.58	21.25	3.13	36.71	22.19	2.76	39.08	23.23	2.48	41.41	24.27	2.22	43.72	25.33	1.99								
63 (17.2)	29.59	24.58	3.46	31.84	25.69	3.11	33.86	26.69	2.73	36.06	27.78	2.44	38.24	28.87	2.19	40.37	29.94	1.96										
57 (13.9)	27.84	27.84	3.44	29.62	29.62	3.09	31.23	31.23	2.70	32.94	32.94	2.42	34.60	34.60	2.16	36.29	36.28	1.94										
72 (22.2)	35.48	20.25	3.53	38.16	21.30	3.17	40.41	22.20	2.81	43.03	23.25	2.52	45.63	24.29	2.26	48.16	25.35	2.03										
80 (26.7)	67 (19.4)	1350	32.03	25.76	3.49	34.46	26.87	3.13	36.60	27.89	2.76	38.97	28.99	2.48	41.31	30.09	2.22	43.64	31.19	1.99	1350	41.31	30.09	2.22	43.64	31.19	1.99	
	63 (17.2)		29.79	29.79	3.46	31.90	31.19	3.11	33.89	32.31	2.73	36.06	33.48	2.45	38.22	34.66	2.19	40.34	35.78	1.96								
	57 (13.9)		29.73	29.73	3.46	31.58	31.58	3.11	33.26	33.26	2.72	35.03	35.03	2.44	36.78	36.78	2.18	38.50	38.50	1.95								
	72 (22.2)		26.64	11.15	2.26	28.72	11.89	2.04	31.20	8.81	1.13	33.24	9.36	0.98	35.22	9.89	0.82	37.66	10.41	0.64		975	35.22	9.89	0.82	37.66	10.41	0.64
	67 (19.4)		23.82	15.86	2.25	25.70	16.41	2.04	28.84	12.09	1.11	30.25	12.62	0.97	32.61	13.15	0.82	34.93	13.66	0.65								
63 (17.2)	21.78	19.18	2.24	23.51	19.96	2.03	27.10	14.65	1.10	28.39	15.16	0.97	30.66	15.66	0.82	32.87	16.17	0.66										
57 (13.9)	20.87	20.87	2.23	22.22	22.22	2.03	26.17	16.17	1.10	27.13	17.13	0.97	28.04	18.04	0.83	29.90	18.90	0.68										
72 (22.2)	26.55	15.78	2.26	28.63	16.54	2.04	31.10	12.29	1.13	32.65	12.79	0.98	34.14	13.29	0.82	36.57	13.80	0.64										
80 (26.7)	67 (19.4)	1200	23.75	20.23	2.25	25.64	21.01	2.04	28.79	15.49	1.11	30.19	16.00	0.97	32.54	16.51	0.82	34.86	17.00	0.65	975	32.54	16.51	0.82	34.86	17.00	0.65	
	63 (17.2)		22.48	22.48	2.24	23.92	23.92	2.03	27.50	17.50	1.11	28.50	18.45	0.97	29.71	19.00	0.82	30.90	19.49	0.66								
	57 (13.9)		22.45	22.45	2.24	23.87	23.87	2.03	27.47	17.47	1.11	28.45	18.45	0.97	29.40	19.40	0.82	30.29	20.29	0.67								
	72 (22.2)		26.64	11.15	2.26	28.72	11.89	2.04	31.20	8.81	1.13	33.24	9.36	0.98	35.22	9.89	0.82	37.66	10.41	0.64								
	67 (19.4)		23.82	15.86	2.25	25.70	16.41	2.04	28.84	12.09	1.11	30.25	12.62	0.97	32.61	13.15	0.82	34.93	13.66	0.65								

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage  
 Stage 1 - Compressor speed limited to stage two at 105 and 115 outdoor.

See additional notes on page 43

HVH860

DETAILED COOLING CAPACITIES# - COMFORT + DEHUMIDIFY MODE

EDB °F (°C)	EVAP. AIR		105 (40.5)				95 (35)				85 (29.4)				75 (23.9)				65 (18.3)			
	EWB °F (°C)	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	ID SCFM	Capacity MBtuh		Total Sys. KW	
			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†			Total	Sens†		Total
75 (23.9)	72 (22.2)		56.98	22.75	6.30		61.18	24.39	5.69		65.39	26.02	5.16		69.54	27.67	4.65		72.77	28.99	4.11	
	67 (19.4)		57.22	39.64	4.45		52.98	29.89	5.92		56.86	32.03	5.32		60.74	34.16	4.81		64.57	36.23	4.32	
	63 (17.2)	1367	50.09	48.04	4.68	1440	52.36	48.62	4.14	1514	50.15	35.79	5.59	1566	53.79	38.31	5.01	1488	57.43	40.86	4.52	
	57 (13.9)		62.88	32.18	5.53		66.96	34.17	4.99		70.04	35.24	4.44		45.89	44.38	5.24		49.20	47.47	4.68	
	72 (22.2)		54.69	37.56	5.71		58.47	40.09	5.17		62.20	42.47	4.65		64.99	43.29	4.12		61.11	31.39	5.46	
80 (26.7)	67 (19.4)		48.26	40.83	5.99	1440	51.80	43.73	5.39	1514	55.34	46.67	4.87	1566	58.95	49.38	4.37	1488	61.43	50.01	3.85	
	63 (17.2)	1367	48.26	40.83	5.99	1440	46.16	46.16	5.69	1514	49.48	49.48	5.10	1566	52.81	52.81	4.60	1488	56.00	56.00	4.11	
	57 (13.9)		45.30	45.30	5.89		48.58	48.58	5.29		51.87	51.87	4.77		54.71	54.71	4.27		57.84	57.84	3.87	
	72 (22.2)		36.31	14.61	3.03		38.82	15.60	2.68		41.60	16.70	2.41		44.40	17.81	2.17		47.48	19.02	1.97	
	67 (19.4)	959	32.79	18.66	3.00	1013	35.12	19.95	2.63	1066	37.63	21.32	2.37	1120	40.17	22.70	2.13	1210	42.96	24.35	1.93	
75 (23.9)	63 (17.2)		30.18	21.81	2.97		32.38	23.24	2.61		34.71	24.92	2.34		37.06	26.53	2.10		39.65	28.52	1.91	
	57 (13.9)		26.75	26.42	2.95		28.76	28.28	2.57		30.84	30.17	2.31		32.95	32.10	2.07		35.30	34.56	1.88	
	72 (22.2)		36.22	18.72	3.03		38.73	19.96	2.68		41.49	21.36	2.41		44.30	22.74	2.17		47.35	24.41	1.97	
	67 (19.4)	959	32.71	22.72	3.00	1013	35.04	24.28	2.63	1066	37.54	25.92	2.37	1120	40.08	27.58	2.13	1210	42.87	29.65	1.93	
	57 (13.9)		30.13	25.85	2.97		32.33	27.85	2.61		34.66	29.50	2.34		37.01	31.38	2.10		39.60	33.79	1.91	
80 (26.7)	72 (22.2)		28.27	28.27	2.96		30.32	30.32	2.59		32.44	32.44	2.32		34.59	34.59	2.06		37.14	37.14	1.89	
	67 (19.4)	748	23.68	13.47	1.96	600	17.11	9.75	1.07	600	18.24	10.22	0.93	647	19.74	11.04	0.79	700	21.29	11.89	0.63	
	63 (17.2)		21.61	15.64	1.95		15.49	11.27	1.06		16.55	11.74	0.93		17.93	12.67	0.79		19.36	13.65	0.64	
	57 (13.9)		18.94	18.82	1.95		13.48	13.48	1.05		14.35	13.97	0.93		15.59	15.07	0.80		16.85	16.25	0.66	
	72 (22.2)		26.42	13.61	1.96		19.25	9.91	1.08		20.51	10.39	0.94		22.16	11.21	0.78		23.84	12.06	0.61	
75 (23.9)	67 (19.4)	748	23.63	16.38	1.96	600	17.06	11.86	1.07	600	18.20	12.32	0.93	647	19.69	13.29	0.79	700	21.24	14.31	0.63	
	63 (17.2)		21.58	18.54	1.95		15.48	13.38	1.06		16.52	13.83	0.93		17.91	14.91	0.79		19.34	16.06	0.64	
	57 (13.9)		20.17	20.17	1.95		14.47	14.47	1.05		15.19	15.19	0.93		16.42	16.42	0.80		17.73	17.73	0.65	
	72 (22.2)		26.49	10.68	1.96		19.30	7.79	1.08		20.56	8.28	0.94		22.21	8.94	0.78		23.90	9.62	0.61	
	67 (19.4)	748	23.68	13.47	1.96	600	17.11	9.75	1.07	600	18.24	10.22	0.93	647	19.74	11.04	0.79	700	21.29	11.89	0.63	

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage Stage 5 - Compressor speed limited to stage four at 65 outdoor; Stage 1 - Compressor speed limited to stage two at 105 outdoor.

DETAILED COOLING CAPACITIES# – EFFICIENCY MODE & COMFORT + DEHUMIDIFY MODE CONTINUED  
HVH860

COOLING INDOOR MODEL	2-STAGE (HL-Stage 5, Lo-Stage 2)				FURNACE MODEL
	COOLING INDOOR MODEL	HIGH SPEED CAP	POWER	LOW SPEED CAP	
FVMA X60**L	FVMA X60**L	1.00	1.00	1.00	OLV154F20A
EN(A,D)WJX60L24**	EN(A,D)WJX60L24**	1.00	1.11	1.00	

COOLING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
FCM4X60**L	1.00	1.00	
EA*4X60L21A*	0.96	1.07	*9MA*0602120A**
EA*4X60L21A*	0.97	1.02	*9MA*0802120A**
EA*4X60L21A*	0.97	1.02	*9MA*1002122A**
EA*4X60L21A*	0.97	1.02	*8MV*1102120**
EA*4X60L24A*	0.96	1.07	*9MA*0602120A**
EA*4X60L24A*	0.97	1.02	*9MA*0802120A**
EA*4X60L24A*	0.97	1.02	*9MA*1002122A**
EA*4X60L24A*	0.97	1.02	*9MA*1202422A**
EA*4X60L24A*	0.97	1.02	*8MV*1102120**
EA*4X60L24A*	0.97	0.97	*8MV*1352422**
EN(A,D)WJX60L24**	0.96	1.02	*9MA*0602120A**
EN(A,D)WJX60L24**	0.97	1.02	*9MA*0802120A**
EN(A,D)WJX60L24**	0.97	1.02	*9MA*1002122A**
EN(A,D)WJX60L24**	0.97	1.02	*9MA*1202422A**
EN(A,D)WJX60L24**	0.97	0.97	*8MV*1102120**
EN(A,D)WJX60L24**	0.97	0.97	*8MV*1352422**
EHD4X60AAL	0.96	1.07	*9MA*0602120A**
EHD4X60AAL	0.97	1.02	*9MA*0802120A**
EHD4X60AAL	0.98	1.03	*9MA*1002122A**
EHD4X60AAL	0.98	1.02	*9MA*1202422A**
EHD4X60AAL	0.98	1.03	*8MV*1102120**
EHD4X60AAL	0.98	1.03	*8MV*1352422**

NOTES:

- \* Tested combination.
  - † Total and sensible capacities are net capacities. Blower motor heat has been subtracted.
  - ‡ Sensible capacities are shown for both 80°F (27°C) and 75°F (24°C) entering air at the indoor coil.
  - # Detailed cooling capacities are based on indoor and outdoor unit at the same elevation per AHRI standard 210/240–2008. If additional tubing length and/or indoor unit is located above outdoor unit, a slight variation in capacity may occur.
  - \*\* System kw is total of indoor and outdoor unit kilowatts.
- NOTE:** When the required data falls between the published data, interpolation may be performed. Extrapolation is not an acceptable practice.
- EWB** — Entering Wet Bulb

# HVH860 HEAT PUMP HEATING PERFORMANCE – EFFICIENCY MODE

INDOOR AIR		HVH860 / FCIMAX60***L Heating Efficiency Mode Outdoor Coil Entering Air Temperature °F (°C)												
		7 (-13.9)					17 (-8.3)					27 (-2.8)		
EDB °F (°C)	ID SCFM	Capacity MBtuh		Total Sys. KWt	ID SCFM	Capacity MBtuh		Total Sys. KWt	ID SCFM	Capacity MBtuh		Total Sys. KWt		
		Total	Integ†			Total	Integ†			Total	Integ†			
<b>STAGE 5</b>														
65 (18.3)	840	29.44	27.05	3.99	1600	48.43	44.16	6.49	1600	55.69	49.46	6.61		
70 (21.1)		29.47	27.09	4.22		44.73	49.84	7.02						
75 (23.3)		29.57	27.17	4.47		45.40	50.28	7.61						
<b>STAGE 3</b>														
65 (18.3)	700	20.47	18.81	2.46	900	24.06	21.94	2.39	1275	28.38	25.21	2.32		
70 (21.1)		20.30	18.66	2.58		21.75	24.94	2.44						
75 (23.3)		20.25	18.60	2.73		21.58	24.68	2.56						
<b>STAGE 1</b>														
65 (18.3)	700	20.47	18.81	2.46	900	24.06	21.93	2.39	1275	21.17	18.80	1.57		
70 (21.1)		20.31	18.66	2.58		21.75	18.55	1.56						
75 (23.3)		20.27	18.62	2.73		21.57	18.30	1.65						

INDOOR AIR		HVH860 / FCIMAX60***L Heating Efficiency Mode Outdoor Coil Entering Air Temperature °F (°C)												
		37 (2.8)					47 (8.3)					57 (13.9)		
EDB °F (°C)	ID SCFM	Capacity MBtuh		Total Sys. KWt	ID SCFM	Capacity MBtuh		Total Sys. KWt	ID SCFM	Capacity MBtuh		Total Sys. KWt		
		Total	Integ†			Total	Integ†			Total	Integ†			
<b>STAGE 5</b>														
65 (18.3)	1600	64.63	58.81	6.84	1600	73.25	73.25	7.06	1400	43.82	43.82	2.61		
70 (21.1)		64.85	59.01	7.31		73.27	73.27	7.50						
75 (23.3)		65.13	59.27	7.81		73.33	73.33	7.98						
<b>STAGE 3</b>														
65 (18.3)	1275	33.13	30.14	2.42	1275	38.00	38.00	2.52	1400	43.82	43.82	2.61		
70 (21.1)		32.71	29.76	2.53		37.45	37.45	2.63						
75 (23.3)		32.29	29.38	2.85		36.91	36.91	2.75						
<b>STAGE 1</b>														
65 (18.3)	1275	24.69	22.46	1.57	900	16.76	16.76	0.84	900	19.39	19.39	0.96		
70 (21.1)		24.31	22.12	1.66		16.40	16.40	0.93						
75 (23.3)		23.94	21.78	1.76		16.04	16.04	1.02						

Operation in this area is restricted to maintain reliable system operation and customer comfort. The system will default to the next available stage  
**Stage 5** – Compressor speed limited to stage four at 7 and stage three at 57 outdoor; **Stage 1** – Compressor speed limited to stage three at 7 and 17 and to stage two at 27 and 37 outdoor.  
 See additional notes on page 45



DETAILED HEATING CAPACITIES# - EFFICIENCY MODE & COMFORT MODE CONTINUED

HVH860

HEATING INDOOR MODEL		2-STAGE (Hi-Stage 5, Lo-Stage 2)				FURNACE MODEL
HEATING INDOOR MODEL	FURNACE MODEL	HIGH SPEED CAP.	POWER	LOW SPEED CAP.	POWER	FURNACE MODEL
FVMAX60**L		1.00	1.00	1.00	1.00	
EN(A,D)WJ4X60L24**		1.00	1.04	1.04	1.10	OLV154F20A

HEATING INDOOR MODEL	CAPACITY	POWER	FURNACE MODEL
FCM4X60**L	1.00	1.00	
EA*4X60L21A*	0.97	1.02	*8MV*1102120**
EA*4X60L21A*	0.96	1.07	*9MA*0602120A**
EA*4X60L21A*	0.97	1.02	*9MA*0802120A**
EA*4X60L21A*	0.97	1.02	*9MA*1002122A**
EA*4X60L24A*	0.97	1.02	*8MV*1102120**
EA*4X60L24A*	0.97	0.97	*8MV*1352422**
EA*4X60L24A*	0.96	1.07	*9MA*0602120A**
EA*4X60L24A*	0.97	1.02	*9MA*0802120A**
EA*4X60L24A*	0.97	1.02	*9MA*1002122A**
EA*4X60L24A*	0.97	1.02	*9MA*1202422A**
EHD4X60AAL	0.98	1.03	*8MV*1102120**
EHD4X60AAL	0.98	1.03	*8MV*1352422**
EHD4X60AAL	0.96	1.07	*9MA*0602120A**
EHD4X60AAL	0.97	1.02	*9MA*0802120A**
EHD4X60AAL	0.98	1.03	*9MA*1002122A**
EHD4X60AAL	0.97	1.02	*9MA*1202422A**
EN(A,D)WJ4X60L24**	0.97	0.97	*8MV*1102120**
EN(A,D)WJ4X60L24**	0.97	0.97	*8MV*1352422**
EN(A,D)WJ4X60L24**	0.96	1.02	*9MA*0602120A**
EN(A,D)WJ4X60L24**	0.97	1.02	*9MA*0802120A**
EN(A,D)WJ4X60L24**	0.97	1.02	*9MA*1002122A**
EN(A,D)WJ4X60L24**	0.97	1.02	*9MA*1202422A**

**GUIDE SPECIFICATIONS**

**GENERAL**

**System Description**

Outdoor-mounted, air-cooled, split-system heat pump unit suitable for ground or rooftop installation. Unit consists of a hermetic compressor, an air-cooled coil, forward-swept blade propeller-type condenser fan, and a control box. Unit will discharge supply air upward as shown on contract drawings. Unit will be used in a refrigeration circuit to match up to a packaged fan coil or coil unit.

**Quality Assurance**

- Unit will be rated in accordance with the latest edition of AHRI Standard 240.
- Unit will be certified for capacity and efficiency, and listed in the latest AHRI directory.
- Unit construction will comply with latest edition of ASHRAE and with NEC.

**Equipment**

- Factory-assembled, single-piece, air-cooled heat pump unit. Contained within the unit enclosure is all factory wiring, piping, controls, compressor, refrigerant charge R-410A refrigerant, and special features required prior to field start-up.

**Unit Cabinet**

- Unit cabinet will be constructed of galvanized steel, bonderized, and coated with a powder coat paint.

**Fans**

- Condenser fan will be direct-drive propeller type, forward swept blade, discharging air upward.
- Condenser fan motors will be totally enclosed, 1-phase type with class B insulation and permanently lubricated.
- Shafts will be corrosion resistant.
- Fan blades will be statically and dynamically balanced.
- Condenser fan openings will be equipped with coated steel wire safety guards.

**Compressor**

- Compressor will be hermetically sealed.
- Compressor will be mounted on rubber vibration isolators.
- Compressor will be covered with a sound absorbing blanket.

**Condenser Coil**

- Condenser coil will be air cooled.
- Coil will be constructed of aluminum fins mechanically bonded to copper tubes which are then cleaned, dehydrated, and sealed.

**Refrigeration Components**

- Refrigeration circuit components will include liquid-line front-seating shutoff valve with sweat connections, vapor-line front-seating shutoff valve with sweat connections, system charge of R-410A refrigerant, POE compressor oil, accumulator, charge compensator, electronic expansion valve, and reversing valve.

**AIR-COOLED, SPLIT-SYSTEM HEAT PUMP (C,H,T)VH8**

- Unit will be constructed in accordance with UL standards and will carry the UL label of approval. Unit will have C-UL approval.
- Unit cabinet will be capable of withstanding Federal Test Method Standard No. 141 (Method 6061) 500-hr salt spray test.
- Air-cooled condenser coils are pressure tested and the outdoor units are leak tested.
- Unit constructed in ISO9001 approved facility.

**Delivery, Storage, and Handling**

- Unit will be shipped as single package only and is stored and handled per unit manufacturer's recommendations.

**Warranty (for inclusion by specifying engineer)**

- U.S. and Canada only.

**PRODUCTS**

- Unit will be equipped with high-pressure switch, suction pressure transducer, and filter drier for R-410A refrigerant.

**Operating Characteristics**

- The capacity of the unit will meet or exceed \_\_\_\_\_ Btuh at a suction temperature of \_\_\_\_\_ °F (°C). The power consumption at full load will not exceed \_\_\_\_\_ kW.
- Combination of the unit and the evaporator or fan coil unit will have a total net cooling capacity of \_\_\_\_\_ Btuh or greater at conditions of \_\_\_\_\_ CFM entering air temperature at the evaporator at \_\_\_\_\_ °F (°C) wet bulb and \_\_\_\_\_ °F (°C) dry bulb, and air entering the unit at \_\_\_\_\_ °F (°C).
- The system will have a SEER of \_\_\_\_\_ Btuh/watt or greater at DOE conditions.

**Electrical Requirements**

- Nominal unit electrical characteristics will be \_\_\_\_\_ v, single phase, 60 hz. The unit will be capable of satisfactory operation within voltage limits of \_\_\_\_\_ v to \_\_\_\_\_ v.
- Unit electrical power will be single point connection.
- Control circuit will be 24v.
- Compliant with IEC 61000-4-5 Transient Surge Requirement.

**Special Features**

- Refer to section of this literature identifying accessories and descriptions for specific features and available enhancements.
- Observer® control with appropriate software version is required for full featured operation.

### SYSTEM DESIGN SUMMARY

1. Intended for outdoor installation with free air inlet and outlet. Outdoor fan external static pressure available is less than 0.01-in. wc.
2. This product is not qualified for low ambient cooling operation.  
Minimum cooling outdoor operating temperatures:
  - Communicating systems: 40°F (4.44°C)
  - Non-communicating systems: 55°F (12.8°C)
3. The maximum outdoor operating ambient in cooling mode is 115°F (46.11°C).
4. Minimum outdoor operating air temperature for heating mode is 10°F (-12.2°C).
5. Maximum outdoor operating air temperature for heating mode is 66°F (18.9°C).
6. For reliable operation, unit should be level in all horizontal planes.
7. This unit is qualified for up to 100 ft (30.5 m) equivalent length of line set without additional accessories.
8. If any refrigerant tubing is buried, provide a 6 in. (152.4 mm) vertical rise to the valve connections at the unit. Refrigerant tubing lengths up to 36 in. (914.4 mm) may be buried without further consideration. Do not bury refrigerant lines longer than 36 in. (914.4 mm).
9. Use only copper wire for electric connection at unit. Aluminum and clad aluminum are not acceptable for the type of connector provided.
10. Do not apply capillary tube indoor coils to these units.
11. R-410A refrigerant TXV required on indoor coil.

### Accessory Description and Usage

#### Support Feet

Raises unit above base pad. 2 and 3 ton kit contains 5 feet for stable installation with small base. 4 and 5 ton kit contains 4 feet.

Usage Guideline:

Recommended in cold climates where snow can accumulate around unit. Allows improved base pan drainage.

Recommended for rooftop applications.

#### Thermostatic Expansion Valve (TXV)

A modulating flow-control valve which meters refrigerant liquid flow rate into the evaporator in response to the superheat of the refrigerant gas leaving the evaporator.

Usage Guideline:

Required if indoor unit does not already contain R-410A refrigerant TXV

#### Vapor Line Muffler

An external muffler installed in the vapor line to minimize vibration transmitted through refrigerant lines

Usage Guideline:

Recommended if vapor line is not installed per recommendations in the installation instructions and vibration may be transmitted into the structure.

### WALL CONTROL

TSTAT0201CW	Observer® Self Configuring Communicating Wall Control	ALL
-------------	---	-----

### ACCESSORY USAGE GUIDELINES

KIT NUMBER	KIT NAME	Unit Size (Voltage/Series)					
		24	25	36	37	48	60
NASA00201SF	Support Feet, 4" (102mm) tall	X	X	X	X	X	X
NAEA40501TX	TXV Kit, R-410A 2010 and later Piston Coils	X	X				
NAEA40601TX				X	X		
NAEA40701TX						X	X
NAEB40501TX			X				
NAEB40601TX	TXV Kit, R-410A 2010 and later Piston Coils			X	X		
NAEB40701TX						X	
1187979	Vapor Line Muffler	X	X	X	X	X	X

X = Accessory