



Definite Purpose **Contactors**


All contactors with lugs

NOARK DP Contactors provide high performance with both flexibility and reliability. They are designed to match numerous applications including:

- HVACR
 - Resistive heating
 - Refrigeration equipment
 - Motors
 - Welding
- Pumps
 - Power supplies
 - Food service equipment
 - Compressors
 - Business machines



NOARK

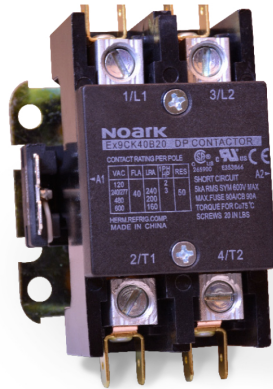

Exclusive to

Available as:

- Rated current from 20-90 A
- 1, 2, 3, and 4 pole configurationsRefrigeration equipment
- Enclosed coil standard for all 3 and 4 pole frame sizes
- Open coil standard for all 1 and 2 pole frame sizes
- Industry standard mounting plate provides easily accessible mounting holes
- Connection terminal options, including screw or lug connections each with quick connect spades
- Coil is Class B 266 °F (130 °C) insulation system with a wide range of voltages and 50/60 Hz ratings
- Double E magnet assembly provides optimal performance with reduced power consumption
- 1NO+1NC auxiliary contact block with 600 VAC rating available as an option
- Base assembly is made from high arc-resistant polyester

Certifications

- UL 508 Recognized, File No. E353866
- CSA Certified, C22.2 No. 265900
- IEC/EN 60947 Compliant
- CE Approved
- Compliance to ARI-780 HVAC standards
- RoHS Compliant

Part #	Description	Case Qty
N4143	1.5P 24V 30A W/ LUGS	64
N4164	1.5P 24V 40A W/ LUGS	64
N4101	2P 24V 20A W/ LUGS	64
N4104	2P 24V 25A W/ LUGS	64
N4107	2P 24V 30A W/ LUGS	64
N4161	2P 24V 40A W/ LUGS	64
N4102	2P 120V 20A W/ LUGS	64
N4105	2P 120V 25A W/ LUGS	64
N4108	2P 120V 30A W/ LUGS	64
N4162	2P 120V 40A W/ LUGS	64
N4106	2P 240V 25A W/ LUGS	64
N4109	2P 240V 30A W/ LUGS	64
N4163	2P 240V 40A W/ LUGS	64

Part #	Description	Case Qty
N4113	3P 24V 30A W/ LUGS	54
N4116	3P 24V 40A W/ LUGS	54
N4128	3P 24V 50A W/ LUGS	27
N4114	3P 120V 30A W/ LUGS	54
N4117	3P 120V 40A W/ LUGS	54
N4129	3P 120V 50A W/ LUGS	27
N4135	3P 120V 75A W/ LUGS	12
N4115	3P 240V 30A W/ LUGS	54
N4118	3P 240V 40A W/ LUGS	54
N4130	3P 240V 50A W/ LUGS	27
N4133	3P 240V 60A W/ LUGS	27
N4136	3P 240V 75A W/ LUGS	12




Eaton Contactors – Compact Series

20–40A, Compact Single- and Two-Pole—C25


Eaton's 20–40A, single- and two-pole, Type C25 contactors from Eaton's electrical sector feature a compact, efficient design with a low VA coil and straight-through wiring. New contactor housing design effectively limits dust and other contaminants from magnet structure—reduces or eliminates noise. These economically priced, UL recognized/ CSA certified, ampere rated devices are well suited for use in heating/ air conditioning, refrigeration, data processing and food service applications.

Standards and Certifications:

- UL Recognized Components: UL File Number E1491, Guides N-LDX2 and NLDX8
- CSA Certified Components: CSA C22.2 No. 14-05, File Number 238083 Class 3211 84
- IEC 60947-4-1
- EN 60947-4-1
- ARI 780/790 Standard
- CE
- RoHS Compliance

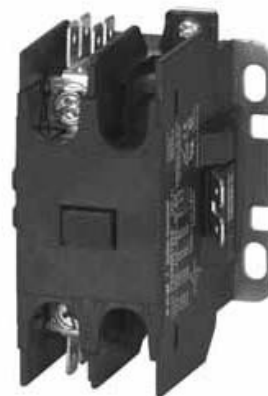

Compact 1-Pole

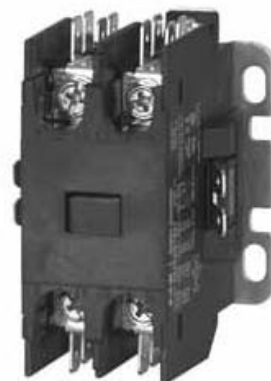

Compact 1-Pole with Shunt



Compact 2-Pole

Global No.	Eaton No.	Description (Case Qty. 50)
4140	C25CNB125T	1 Pole + Shunt 25A 24V
4141	C25CNB125A	1 Pole + Shunt 25A 120V
4142	C25CNB125B	1 Pole + Shunt 25A 208/240V
4143	C25CNB130T	1 Pole + Shunt 30A 24V
4144	C25CNB130A	1 Pole + Shunt 30A 120V
4145	C25CNB130B	1 Pole + Shunt 30V 208/240V
4101	C25BNB220T	2 Pole 20A 24V
4102	C25BNB220A	2 Pole 20A 120V
4103	C25BNB220B	2 Pole 20A 208/240V
4104	C25BNB225T	2 Pole 25A 24V
4105	C25BNB225A	2 Pole 25A 120V
4106	C25BNB225B	2 Pole 25A 208/240V
4107	C25BNB230T	2 Pole 30A 24V
4108	C25BNB230A	2 Pole 30A 120V
4109	C25BNB230B	2 Pole 30A 208/240V
4109B	C25DND230C	2 Pole 30A 480V
4161C	C2BNB240T	2 Pole 40A 24V
4161CL	C25BNF240T	2 Pole w/ Lug 40A 24V
4162C	C25BNB240A	2 Pole 40A 120V
4162CL	C25BNF240A	2 Pole w/ Lug 40A 120V
4163CL	C25BNB240B	2 Pole 40A 208/240V
4163CL	C25BNF240B	2 Pole w/ Lug 40A 208/240V



Eaton Contactors – Compact Series

Compact Contactors Product Selection – Open Type



Ampere Ratings*					Max. Motor Horse- power		Max. Motor Kilowatts		Catalog No.**
Inductive Full Load	Resistive	Locked Rotor							
		240-277V	480V	600V	115V	230V	115V	230V	
		Single Pole							
25	30	150	50	40	2	3	1.5	2.2	C25ANB125_
30	40	150	75	50	2	5	1.5	3.7	C25ANB130_
40	50	240	200	160	3	7-1/2	2.2	5.5	C25ANB140_
Single-Pole with Shunt									
25	30	150	50	40	2	3	1.5	2.2	C25CNB125_
30	40	150	75	50	2	5	1.5	3.7	C25CNB130_
40	50	240	200	160	3	7-1/2	2.2	5.5	C25CNB140_
Double Pole									
20	30	120	100	80	1-1/2	3	1.1	2.2	C25BNB220_
25	35	150	125	100	2	3	1.5	2.2	C25BNB225_
30	40	150	125	100	2	5	1.5	3.7	C25BNB230_
40	50	240	200	160	3	7-1/2	2.2	5.5	C25BNB240_

*Rating per pole.

Incomplete Catalog Number. Replace underscore () in Catalog Number with Coil Suffix letter from **Magnet Coil Selection.

Magnet Coil Selection	
AC Coil Voltage 50/60 Hz	Coil Suffix
24	T
110 - 120	A
208 - 240	B
277	H
380 – 415 (50 Hz); 440 – 480 (60 Hz)	C

Coil Characteristics			
AC Coil Voltage 50/60 Hz	Max. Inrush VA	Max. Sealed VA	Max. Sealed Watts
One-Pole			
24	33	6	2
120	33	6	2
208/240	33	6	2
480	33	6	2
Two-Pole			
24	41	6.5	3
120	41	6.5	3
208/240	41	6.5	3
277	41	6.5	3
480	41	6.5	3

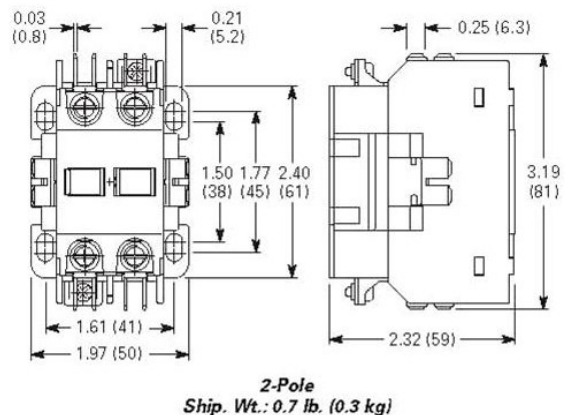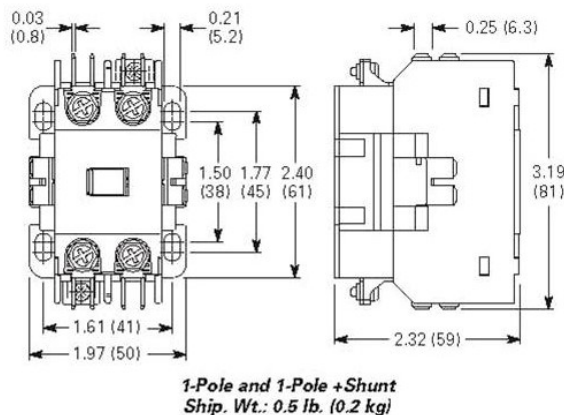

Customer Service: (800) 531-5967

Trust the (G)

www.GlobalTheSource.com




Eaton Contactors – Standard Series

15–360A, Two-, Three- and Four-Pole—C25

Type C25 Definite Purpose Contactors 15A through 360A, from Eaton's electrical sector incorporate most competitive contactor mounting dimensions into a single baseplate. Contactors are dual-rated with inductive and resistive ratings as well as horsepower and kilowatt ratings. C25 contactors are furnished with pressure plates and quick connect terminals as standard on 15, 25 and 30A devices and with box lugs and quick-connect terminals on 40, 50, 60 and 75A. Contactors will accept add-on auxiliary contacts—order factory assembled or as kits for field installation. The separately available snap-on mechanical interlock permits interlocking two contactors for reversing or two-speed applications. Contactors rated 15–50A only are available with DIN rail mount as a factory installed option.

Standards and Certifications:

- UL Recognized Components UL File No. E-1491, Guide NLDX2
- UL recognized, CSA certified and conform to ARI 780
- CSA Certified Components: File No. LR353, Class 3211 04,481301 and 122201
- IEC 60947-4-1
- EN 60947-4-1
- CE mark
- RoHS Compliance (15A to 50A and 90A)

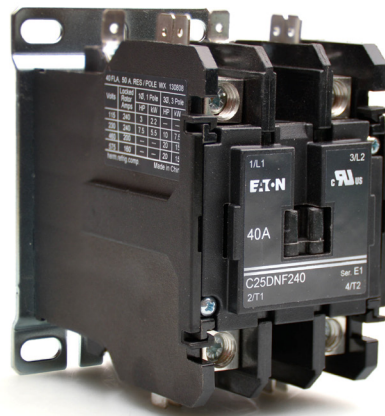

Global No.	Eaton No.	Description (Case Qty 20)
4161	C25DNF240T	2 Pole w/ Lug 40A 24V
4162	C25DNF240A	2 Pole w/ Lug 40A 120V
4163	C25DNF240B	2 Pole w/ Lug 40A 208/240V
4163A	C25DNF240C	2 Pole w/ Lug 40A 480V
4110	C25DND325T	3 Pole 25A 24V
4111	C25DND325A	3 Pole 25A 120V
4112	C25DND325B	3 Pole 25A 208/240V
4113	C25DND330T	3 Pole 30A 24V
4114	C25DND330A	3 Pole 30A 120V
4115	C25DND330B	3 Pole 30A 208/240V
4113C	C25DND330C	3 Pole 30A 480V
4116	C25DNF340T	3 Pole w/ Lug 40A 24V
4117	C25DNF340A	3 Pole w/ Lug 40A 120V
4118	C25DNF340B	3 Pole w/ Lug 40A 208/240V
4118C	C25DNF340C	3 Pole w/ Lug 40A 480V

Global No.	Eaton No.	Description (Case Qty 20)
4128	C25FNF350T	3 Pole w/ Lug 50A 24V
4129	C25FNF350A	3 Pole w/ Lug 50A 120V
4130	C25FNF350B	3 Pole w/ Lug 50A 208/240V
4130C	C25FNF350C	3 Pole w/ Lug 50A 480V
4131	C25FNF360T	3 Pole w/ Lug 60A 24V
4132	C25FNF360A	3 Pole w/ Lug 60A 120V
4133	C25FNF360B	3 Pole w/ Lug 60A 208/240V
4133C	C25FNF360C	3 Pole w/ Lug 60A 480V
4134	C25FNF375T	3 Pole w/ Lug 75A 24V
4135	C25FNF375A	3 Pole w/ Lug 75A 120V
4136	C25FNF375B	3 Pole w/ Lug 75A 208/240V
4137	C25GNF390T	3 Pole w/ Lug 90A 24V
4138	C25GNF390A	3 Pole w/ Lug 90A 120V
4139	C25GNF390B	3 Pole w/ Lug 90A 208/240V
4119	C25ENF440T	4 Pole w/ Lug 40A 24V
4120	C25ENF440A	4 Pole w/ Lug 40A 120V
4121	C25ENF440B	4 Pole w/ Lug 40A 208/240V

Customer Service: (800) 531-5967

Trust the 

www.GlobalTheSource.com





Eaton Contactors – Standard Series

IEC/CE Ratings (IEC 60947-4-1, EN 60947-4-1) for 15A through 50A C25D_Contactors

C25D_ Inductive Rating	AC-1 (Ic)		AC-3 (Ie)		AC-4 (Ie)		AC-8a	
	480V	600V	480V	600V	480V	600V	480V	600V
15A	20A	20A	15A	15A	15A	—	15A	15A
25A	30A	30A	25A	25A	25A	—	25A	25A
30A	40A	40A	30A	30A	30A	—	30A	30A
40A	50A	—	40A	—	40A	—	40A	—
50A	60A	65A	50A	50A	50A	—	50A	50A

IEC/CE Ratings (IEC 60947-4-1, EN 60947-4-1) for 15A through 50A C25D_Contactors

Voltage	2-Pole, 15 – 30A Inductive			2-Pole, 40A Inductive			3-Pole, 15 – 30A Inductive			3-Pole, 40A Inductive		
	UL/ CSA		DC-3/ DC-5	UL/ CSA		DC-3/ DC-5	UL/ CSA		DC-3/ DC-5	UL/ CSA		DC-3/ DC-5
	FLA	hp	I _e	FLA	hp	I _e	FLA	hp	I _e	FLA	hp	I _e
240V DC 3 Poles in Series	—	—	—	—	—	—	4	3/4	4	5	1	5
120V DC 3 Poles in Series	—	—	—	—	—	—	8	3/4	8	10	1	10
120V DC 2 Poles in Series	5.5	1/2	5.5	8	3/4	8	5.5	1/2	5.5	8	3/4	8
120V DC per Pole	2	1/10	2	3.5	1/4	3.5	2	1/10	2	3.5	1/4	3.5
24V DC per Pole	15	—	15	20	—	20	15	—	15	20	—	20

Contactor Torque Ratings

Contactor Size	Terminal	Wire Range	Tightening Torque
15 – 50A	8–32 Binding Head Screw	12 – 14 AWG	22 lb-in
	Screw/Pressure Plate	8 – 14 AWG	15 lb-in
	Box Lug	12 – 14 AWG	15 lb-in
		10 AWG	25 lb-in
		8 AWG	40 lb-in
		4 – 6 AWG	45 lb-in
60 – 75A	Box Lug	10 – 14 AWG	40 lb-in
		8 AWG	45 lb-in
		3 – 6 AWG	50 lb-in
90A	Box Lug	1/0 – 14 AWG	60 lb-in
120A	Box Lug	8 AWG	40 lb-in
		4 – 6 AWG	45 lb-in
		3 – 1/0 AWG	50 lb-in
200 – 300A	Box Lug	6 – 350 MCM	200 lb-in
360A	Box Lug	2 – 750 MCM	550 lb-in

Lighting Duty Ratings

C25D Inductive Rating	Tungsten & Ballast (480V)
25A	30A
30A	40A
40A	50A
50A	60A

Customer Service: (800) 531-5967

Trust the

www.GlobalTheSource.com





Eaton Contactors – Standard Series

C25 Contactors Product Selection— Open Type

Ampere Ratings				Max. Motor Horse-power		Max. Motor Kilowatts		Number of Poles	Open Type with Metal Mounting Plate	Open Type with DIN Rail Adapter
Inductive Full Load	Resistive per Pole	Line Voltage	Locked Rotor	1-Phase	3-Phase	1-Phase	3-Phase		Catalog No. ①②	
15	20	115	90	3/4	—	0.40	—	2	C25DND215_	C25DRD215_
		230	90	2	3	1.5	2.2	3	C25DND315_	C25DRD315_
		460	75	—	5	—	3.7			
		575	60	—	5	—	3.7			
25	35	115	150	2	—	1.5	—	2	C25DND225_	C25DRD225_
		230	150	3	7-1/2	2.2	5.5	3	C25DND325_	C25DRD325_
		460	125	—	10	—	7.5	4	C25END425_	
		575	100	—	10	—	7.5			
30	40	115	180	2	—	1.5	—	2	C25DND230_	C25DRD230_
		230	180	5	10	3.7	7.5	3	C25DND330_	C25DRD330_
		460	150	—	15	—	11	4	C25END430_	
		575	120	—	15	—	11			
40	50	115	240	3	—	2.2	—	2	C25DNF240_	C25DRF240_
		230	240	7-1/2	10	5.5	7.5	3	C25DNF340_	C25DRF340_
		460	200	—	20	—	15	4	C25ENF440_	
		575	160	—	20	—	15			
50	65	115	300	3	—	2.2	—	2	C25DNJ250_	C25DRJ250_
		230	300	10	15	7.5	11	3	C25DNJ350_	C25DRJ350_
		460	250	—	30	—	22			
		575	200	—	30	—	22			
60	75	115	360	5	—	3.7	—	2	C25FNF260_	NA
		230	360	10	20	7.5	15	3	C25FNF360_	
		460	300	—	40	—	30			
		575	240	—	40	—	30			
75	90	115	450	5	—	3.7	—	2	C25FNF275_	NA
		230	450	15	20	11	18.5	3	C25FNF375_	
		460	375	—	50	—	37			
		575	300	—	50	—	37			
90	120	115	540	7-1/2	—	5.7	—	2	C25GNF290_	NA
		230	540	20	30	15.1	22	3	C25GNF390_	
		460	450	—	50	—	37			
		575	360	—	50	—	37			
120	140	115	720	—	—	—	—	3	C25HNE3120_	NA
		230	720	—	—	—	—			
		460	570	—	—	—	—			
		575		—	—	—	—			
200	200	240	1200	—	—	—	—	3	C25KNE3200_	NA
		480	1200	—	—	—	—			
		600	1000	—	—	—	—			
				—	—	—	—			
300	300	240	1800	—	—	—	—	3	C25KNE3300_	NA
		480	1800	—	—	—	—			
		600	1500	—	—	—	—			
				—	—	—	—			

Customer Service: (800) 531-5967

Trust the 

www.GlobalTheSource.com





Eaton Contactors – Standard Series

C25 Contactors Product Selection— Open Type

Ampere Ratings				Max. Motor Horse-power		Max. Motor Kilo-watts		Number of Poles	Open Type with Metal Mounting Plate	Open Type with DIN Rail Adapter
Inductive Full Load	Resistive per Pole	Line Voltage	Locked Rotor	1-Phase	3-Phase	1-Phase	3-Phase		Catalog No. ①②	
360	360	240 480 600	2320 2320 1900	— — —	— — —	— — —	— — —	3	C25LNE3360_	NA

- ① **Incomplete Catalog Number.** Replace underscore(_) in Catalog Number with Magnet Coil Suffix from table below.
- ② Carton quantities including 20 individually packaged units are available for 2- and 3-pole units through 60A inductive.
- ③ Contactors with DC coils (only available up to 75A) include an early break NC auxiliary contact, C320KGD1.
- ④ Available only for 15A through 75A contactors and 4-pole contactors.
- ⑤ Available through 75A.
- ⑥ Available through 120A.
- ⑦ Available 120 – 360A.
- ⑧ Available 15 – 90A, others 240V
- ⑨ Available through 50A.
- ⑩ 104 – 120V 50/60 Hz for 60A, 75A and all 4-Pole Contactors (25A-40A).
- ⑪ Class H AC Coils available as option for 15A – 50A Contactor. Add 2before AC Coil Suffix letter.

Magnet Coil Selection

Voltage		Coil Suffix
60 Hz	50 Hz	
AC ⑪		
12 ⑤	12	R
24 ⑥	24	T
110 - 120 ⑩	110 - 120	A
208 ⑦	208	E
208 - 240 ⑧	208 - 240	B
240 ⑨	220	J
277	-	H
-	380 - 415	L
440 - 480	440 - 480	C
550 - 600	550 - 600	D
DC ③		
12		1R
24		1T
48		1W
120		1A ④





Contactors Accessories

EAT•N - Auxiliary Contact Kits

Optional Features — Factory Installed

To order C25, C65, A25 and B25 Contactors and Starters with options listed below, change the basic Catalog Number listed in the Selection Table as noted.

Description	Code Letter	*
-------------	-------------	---

Terminals — 15 through 40A

Replace letter in the 6th position of Catalog Number with Code Letter listed below. EXAMPLE: Change C25DND215 to C25DNC215.				
Pressure Plate Without Quick Connect Terminals With Quick Connect Terminals	C	N/C		
	D	Standard		
Binding Head Screws Without Quick Connect Terminals With Quick Connect Terminals	A	N/C		
	B	N/C		
Lugs Without Quick Connect Terminals With Quick Connect Terminals		2-Pole	3-Pole	4-Pole
	E			
	F			

Terminals — 50 through 75A

Replace letter in the 6th position of Catalog Number with Code Letter listed below. EXAMPLE: Change C25FNF250 to C25FNE250.				
Lugs Without Quick Connect Terminals With Quick Connect Terminals	E	N/C		
	F	Standard		

Auxiliary Contacts

Add Code Letter listed below to complete Catalog Number using Code Letter listed below. EXAMPLE: Change C25DND215A to C25DND215AA.				
Description	With Standard Pressure Plate Terminals		With Quick Connect Terminals	
	Code Letter	*	Code Letter	*

For 15 through 90A


Factory Installed	A		F	
1NO	B		G	
1NC	C		H	
1NO-1NC	D		J	
2NO	E		K	
2NC				

For 120 through 360A

1NO	A			
1NO-1NC	C			
2NO	D			
2NC	E			

Special Marking

Special contactor marking, consult local sales office.
90A available only with binding head screw and quick connect terminals.

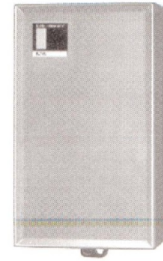


NEMA 1
Enclosure
Cat. No.
C799B19

Separate Enclosures — NEMA 1

Application	Catalog Number	*
15 through 40A, 2- and 3-Pole	C799B18	
50 and 60A, 2- and 3-Pole or 25 through 40A, 4-Pole	C799B19	

Optional Features — For Field Installation



Side Mounted
Auxiliary
Contact

Auxiliary Contact Kits (Side Mounted)

Heavy-Duty Pilot Rated for 10A at 600V AC				
Circuit	With Standard Pressure Plate Terminals		With Pressure Plate and Quick Connect Terminals	
	Catalog Number	*	Catalog Number	*

For 15 through 75A

1NO	C320KG1		C320KG11	
1NC	KG2		KG12	
1NO-1NC	KG3		KG13	
2NO	KG4		KG14	
2NC	KG5		KG15	

For 90A

1NO	—		C320DPG10	
1NC			DPG01	
1NO-1NC			DPG11	
2NO			DPG20	

For 120 through 360A

1NO	C320KGS20		—	
1NC	KGS21			
1NO-1NC	KGS22			





Contactor Accessories

EATON - Fast Trip – Class 10 Heater Packs

- Manual or Automatic Reset
- Heater packs are shipped 3 to a carton

Heater packs H2101B to H2117B are to be used only with Series B overload relays. The load lugs are built into the overload relay base to allow load wiring prior to heater pack installation. The previous heater design had integral load lugs. The Series B heater packs are electrically equivalent to the previous heater design.



Fast Trip— Class 10 Heater Packs					
Global No. (In- cludes 3 Heater Packs) ①	Motor Full Load Ampere Rating ②				Overload Relay Size
	Dial Position				
	A	B	C	D	
For Use with NEMA Sizes 00-0 Series C, NEMA Sizes 1-2 Series B, IEC Sizes A-F Series C, IEC Sizes G-K Series B					
H2101B-3	.260	.313	.367	.420	32A or 75A
H2102B-3	.384	.464	.543	.623	
H2103B-3	.570	.688	.806	.924	
H2104B-3	.846	1.02	1.20	1.37	
H2105B-3	1.28	1.55	1.83	2.10	
H2106B-3	1.92	2.33	2.74	3.15	
H2107B-3	2.30	2.79	3.28	3.77	
H2108B-3	3.38	4.10	4.82	5.54	
H2109B-3	4.96	6.03	7.09	8.16	
H2110B-3	7.07	8.58	10.1	11.6	
H2111B-3	9.60	11.2	12.8	14.4	
H2112B-3	14.4	17.5	20.7	23.8	
H2113B-3	18.7	21.8	25.0	28.1	
H2114B-3	23.5	27.3	31.0	34.8	
For Use with Size 2, IEC Sizes G-K Only— Series B					
H2115B-3	28.3	32.6	37.0	41.3	75A
H2116B-3	36.6	42.3	48.1	53.8	
H2117B-3	53.8	80.8	67.9	74.9	





Global Contactor Information

Global Part Number*	Poles	Amps	Volts	Global Noark	C-H	Square D	Furnas	Arrow Hart	Mars Series 910	Mars JARD
C25ANB125T	1	25	24		C25ANB125T			C251U10		
C25ANB125A	1	25	120		C25ANB125A			C251U20		
C25ANB125B	1	25	208/240		C25ANB125B			C251U30		
C25ANB130T	1	30	24		C25ANB130T			C301U10		
C25ANB130A	1	30	120		C25ANB130A			C301U20		
C25ANB130B	1	30	208/240		C25ANB130B			C301U30		
C25ANB140T	1	40	24		C25ANB140T					
C25ANB140A	1	40	120		C25ANB140A					
C25ANB140B	1	40	208/240		C25ANB140B					
4140	1.5	25	24		C25CNB125T	8910DP21V14	45DD10AJLL2	C251NU10		
4141	1.5	25	120		C25CNB125A	8910DP21V02	45DD10AFLL2	C251NU20		
4142	1.5	25	208/240		C25CNB125B	8910DP21V09	45DD10AGLL2	C251NU30		
4143	1.5	30	24	N4143	C25CNB130T	8910DP31V14	45ED10AJLL2	C301NU10	91311	
4144	1.5	30	120		C25CNB130A	8910DP31V02	45ED10AFLL2	C301NU20	91312	
4145	1.5	30	208/240		C25CNB130B	8910DP31V09	45ED10AGLL2	C301NU30	91313	
C25CNB140T	1.5	40	24		C25CNB140T		45GD10AJ			
C25CNF140T	1.5	40	24	N4164	C25CNF140T					17415
C25CNB140A	1.5	40	120		C25CNB140A		45GD10AF			
C25CNB140B	1.5	40	208/240		C25CNB140B		45GD10AG			
4101	2	20	24	N4101	C25BNB220T	8910DP12V14	45CA20AJ	C202U10		17125
4102	2	20	120	N4102	C25BNB220A	8910DP12V02	45CA20AF	C202U20		17126
4103	2	20	208/240		C25BNB220B	8910DP12V09	45CA20AG	C202U30		
C25BNB220C	2	20	480		C25BNB220C	8910DP12V06	45CA20AH	C202U60		
4104	2	25	24	N4104	C25BNB225T	8910DP22V14	45DA20AJ	C252U10		17225
4105	2	25	120	N4105	C25BNB225A	8910DP22V02	45DA20AF	C252U20		17226
4106	2	25	208/240	N4106*	C25BNB225B	8910DP22V09	45DA20AG	C252U30		17227
C25BNB225C	2	25	480		C25BNB225C	8910DP22V06	45DA20AH	C252U60		
4107	2	30	24	N4107	C25BNB230T	8910DP32V14	45EA20AJ	C302U10	91321	
4108	2	30	120	N4108	C25BNB230A	8910DP32V02	45EA20AF	C302U20	91322	
4109	2	30	208/240	N4109*	C25BNB230B	8910DP32V09	45EA20AG	C302U30	91323	
C25BNB230C	2	30	480		C25BNB230C	8910DP32V06	45EA20AH	C302U60		
4161C	2	40	24		C25BNB240T	8910DP42V14	45GA20AJ		91421	
4162C	2	40	120		C25BNB240A	8910DP42V02	45GA20AF		91422	
4163C	2	40	208/240		C25BNB240B	8910DP42V09	45GA20AG		91423	
C25BNB240C	2	40	480		C25BNB240C	8910DP42V06	45GA20AH			
4161CL	2	40	24		C25BNF240T					
4162CL	2	40	120		C25BNF240A					
4163CL	2	40	208/240		C25BNF240B					
C25DND225T	2	25	24		C25DND225T	8910DPA22V14	41NB20AJM	ACC220U10		
C25DND225A	2	25	120		C25DND225A	8910DPA22V02	41NB20AFM	ACC220U20		
C25DND225B	2	25	208/240		C25DND225B	8910DPA22V09	41BN20AGM	ACC220U30		
C25DND225C	2	25	480		C25DND225C	8910DPA22V06	41NB20AHM	ACC220U60		
C25DND230T	2	30	24		C25DND230T	8910DPA32V14	42BE15AJ106	ACC320U10		
C25DND230A	2	30	120		C25DND230A	8910DPA32V02	42BE15AF106	ACC320U20		
C25DND230B	2	30	208/240		C25DND230B	8910DPA32V09	42BE15AG106	ACC320U30		
C25DND230C	2	30	480		C25DND230C	8910DPA32V06	42BE15AH106	ACC320U60		
4161	2	40	24	N4161	C25DNF240T	8910DPA42V14	42CE15AJ106	ACC420U10	91421	17425
4162	2	40	120	N4162	C25DNF240A	8910DPA42V02	42CE15AF106	ACC420U20	91422	
4163	2	40	208/240	N4163*	C25DNF240B	8910DPA42V09	42CE15AG106	ACC420U30	91423	
C25DNF240C	2	40	480		C25DNF240C	8910DPA42V06	42CE15AH106	ACC420U60		
C25FNF250T	2	50	24		C25FNF250T	8910DPA52V14	42DE15AJ106	ACC520U10		
C25FNF250A	2	50	120		C25FNF250A	8910DPA52V02	42DE15AF106	ACC520U20		
C25FNF250B	2	50	208/240		C25FNF250B	8910DPA52V09	42DE15AG106	ACC520U30		
C25FNF250C	2	50	480		C25FNF250C	8910DPA52V06	42DE15AH106	ACC520U60		
C25FNF260T	2	60	24		C25FNF260T	8910DPA62V14	42EE15AJ106	ACC620U10		
C25FNF260A	2	60	120		C25FNF260A	8910DPA62V02	42EE15AF106	ACC620U20		
C25FNF260B	2	60	208/240		C25FNF260B	8910DPA62V09	42EE15AG106	ACC620U30		
C25FNF260C	2	60	480		C25FNF260C	8910DPA62V06	42EE15AH106	ACC620U60		
C25FNF275T	2	75	24		C25FNF275T	8910DPA72V14	42FE15AJ106	ACC720U10		
C25FNF275A	2	75	120		C25FNF275A	8910DPA72V02	42FE15AF106	ACC720U20		
C25FNF275B	2	75	208/240		C25FNF275B	8910DPA72V09	42FE15AG106	ACC720U30		
C25FNF275C	2	75	480		C25FNF275C	8910DPA72V06	42FE15AH106	ACC720U60		

*Global-Noark parts only available in 240V

Customer Service: (800) 531-5967

Trust the

www.GlobalTheSource.com



Global Contactor Information

Global Part Number*	Poles	Amps	Volts	Global Noark	C-H	Square D	Furnas	Arrow Hart	Mars Series 910	Mars JARD
C25GNF290T	2	90	24		C25GNF290T	8910DPA92V14	42GE15AJ106	ACC920U10		
C25GNF290A	2	90	120		C25GNF290A	8910DPA92V02	42GE15AF106	ACC920U20		
C25GNF290B	2	90	208/240		C25GNF290B	8910DPA92V09	42GE15AG106	ACC920T30		
C25GNF290C	2	90	480		C25GNF290C	8910DPA92V06	42GE15AH106	ACC920U60		
4110	3	25	24		C25DND325T	8910DPA23V14	41NB30AJM	ACC230U10	91231	
4111	3	25	120		C25DND325A	8910DPA23V02	41NB30AFM	ACC230U20		
4112	3	25	208/240		C25DND325B	8910DPA23V09	41NB30AGM	ACC230U30		
C25DND325C	3	25	480		C25DND325C	8910DPA23V06	41NB30AHM	ACC230U60		
4113	3	30	24	N4113	C25DND330T	8910DPA33V14	42BE35AJ106	ACC330U10	91331	
4114	3	30	120	N4114	C25DND330A	8910DPA33V02	42BE35AF106	ACC330U20	91332	
4115	3	30	208/240	N4115*	C25DND330B	8910DPA33V09	42BE35AG106	ACC330U30	91333	
C25DND330C	3	30	480		C25DND330C	8910DPA33V06	42BE35AH106	ACC330U60		
4116	3	40	24	N4116	C25DNF340T	8910DPA43V14	42CE35AJ106	ACC430U10	91431	
4117	3	40	120	N4117	C25DNF340A	8910DPA43V02	42CE35AF106	ACC430U20	91432	
4118	3	40	208/240	N4118*	C25DNF340B	8910DPA43V09	42CE35AG106	ACC430U30	91433	
C25DNF340C	3	40	480		C25DNF340C	8910DPA43V06	42CE35AH106	ACC430U60		
4128	3	50	24	N4128	C25FNF350T	8910DPA53V14	42DE35AJ106	ACC530U10	91531	
4129	3	50	120	N4129	C25FNF350A	8910DPA53V02	42DE35AF106	ACC530U20	91532	
4130	3	50	208/240	N4130*	C25FNF350B	8910DPA53V09	42DE35AG106	ACC530U30	91533	
C25FNF350C	3	50	480		C25FNF350C	8910DPA53V06	42DE35AH106	ACC530U60		
4131	3	60	24		C25FNF360T	8910DPA63V14	42EE35AJ106	ACC630U10	91631	
4132	3	60	120		C25FNF360A	8910DPA63V02	42EE35AF106	ACC630U20	91632	
4133	3	60	208/240	N4133*	C25FNF360B	8910DPA63V09	42EE35AG106	ACC630U30	91633	
C25FNF360C	3	60	480		C25FNF360C	8910DPA63V06	42EE35AH106	ACC630U60		
4134	3	75	24		C25FNF375T	8910DPA73V14	42FE35AJ106	ACC730U10	91731	
4135	3	75	120	N4135	C25FNF375A	8910DPA73V02	42FE35AF106	ACC730U20	91732	
4136	3	75	208/240	N4136*	C25FNF375B	8910DPA73V09	42FE35AG106	ACC730U30	91733	
C25FNF375C	3	75	480		C25FNF375C	8910DPA73V06	42FE35AH106	ACC730U60		
4137	3	90	24		C25GNF390T	8910DPA93V14	42GE35AJ106	ACC930U10		
4138	3	90	120		C25GNF390A	8910DPA93V02	42GE35AF106	ACC930U20		
4139	3	90	208/240		C25GNF390B	8910DPA93V09	42GE35AG106	ACC930U30		
C25GNF390C	3	90	4800		C25GNF390C	8910DPA93V06	42GE35AH106	ACC930U60		
4147	3	120	24		C25HNE3120T					
4148	3	120	120		C25HNE3120A					
4149	3	120	208/240		C25HNE3120B					
4180	3	200	24		C25KNE3200T					
4181	3	200	120		C25KNE3200A					
4182	3	200	208/240		C25KNE3200B					
C25END425T	4	25	24		C25END425T	8910DPA24V14	42AF25AJ			
C25END425A	4	25	120		C25END425A	8910DPA24V02	42AF25AF			
C25END425B	4	25	208/240		C25END425B	8910DPA24V09	42AF25AG			
C25END425C	4	25	480		C25END425C	8910DPA24V06	42AF25AH			
C25END430T	4	30	24		C25END430T	8910DPA34V14	42BE25AJ106	ACC340U10		
C25END430A	4	30	120		C25END430A	8910DPA34V02	42BE25AF106	ACC340U20		
C25END430B	4	30	208/240		C25END430B	8910DPA34V09	42BE25AG106	ACC340U30		
C25END430C	4	30	480		C25END430C	8910DPA34V06	42BE25AH106	ACC340U60		
4119	4	40	24		C25ENF440T	8910DPA44V14	42CE25AJ106	ACC440U10		
4120	4	40	120		C25ENF440A	8910DPA44V02	42CE25AF106	ACC440U20		
4121	4	40	208/240		C25ENF440B	8910DPA44V09	42CE25AG106	ACC440U30		
C25ENF440C	4	40	480		C25ENF440C	8910DPA44V06	42CE25AH106	ACC440U60		

*Global-Noark parts only available in 240V

Customer Service: (800) 531-5967

Trust the

www.GlobalTheSource.com

