


SNAPLOCK PIPE

Galvanized Steel

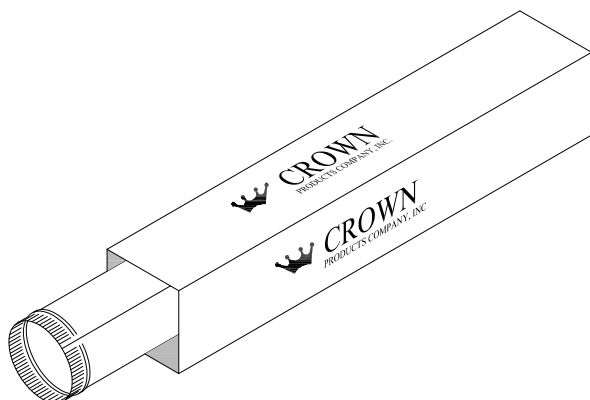

101 SNAPLOCK PIPE

Sizes: 3" through 30" diameter

DIAMETER	LENGTH	PACKAGING
3" - 14"	2 Ft.	20' per bundle
3" - 9"	5 Ft.	50' per carton
10" - 14"	5 Ft.	30' per bundle
12" - 20"	3 Ft.	30' per bundle
22" - 30"	3 & 4 Ft.	No Standard Packaging

Gauges:

Pipe is available in U.S. Gauges
 30 ga. thru 24 ga. in Reeves Snaplock
 22 ga. in ACME Lock (Hammerlock)

SMACNA GAUGE REQUIREMENTS


Galvanized Steel

Duct Diameter	Maximum 2" w.g. Positive Pressure. Longitudinal Snaplock Seam.	Duct Diameter	Maximum 2" w.g. Negative Pressure. Longitudinal Snaplock Seam.
3" thru 8"	28 ga.	6" thru 10"	28 ga.
9" thru 14"	26 ga.	12"	26 ga.
15" thru 26"	24 ga.	14" thru 16"	24 ga.
27" thru 36"	22 ga.	18" thru 20"	22 ga.
		22" thru 26"	20 ga.
		28" thru 30"	18 ga.

From SMACNA HVAC Duct Construction Standards Metal and Flexible - 2nd Edition, 1995

ALUMINUM FLEXIBLE PIPE

105 FLEX PIPE

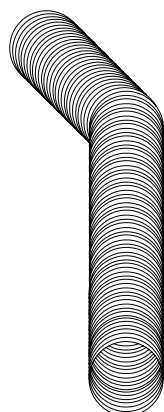

Not recommended for range hood duct.
 Ideal for bathroom and other air duct requirements.
 Furnished in 8-Ft. sections.

Duct Nominal Diameter (I.D.)	3" through 12"
Recommended Bend Radius	1.5 x Diameter to Center Line of Duct
Temperature Range	-60°F to +600°F
Maximum Operating Pressure	10" w.c. positive & 12" w.c. negative; 5,500 FPM
Listed U.L. 181	Class 0 Air Duct, meets requirements - NFPA Bulletin 90-A

107 FLEX PIPE

8-Ft. section - compressed to 38" long.
 Compressed aluminum pipe is not covered by the U.L. 181 test procedure.