




## **SPECIFICATIONS**








IBR/DOE RATINGS AND DATA								
Boiler Model No.	SL375	SLD375*	SL4100	SLD4100*	SL5125	SLD5125*	SL6150	SL7175
Firing Rate - #2 Fuel	0.75	0.75	1.00	1.00	1.25	1.25	1.50	1.75
Input BTU/HR (Oil)	105,000	105,000	140,000	140,000	175,000	175,000	210,000	245,000
DOE Capacity BTU/HR (Oil)	91,000	91,000	122,000	122,000	153,000	153,000	184,000	208,250
Net IBR Rating BTU/HR (Oil)	79,000	79,000	106,000	106,000	133,000	133,000	160,000	181,100
AFUE Rating (Oil)	85.5	85.5	86.5	86.5	86.9	86.9	86.9	85.0
Input BTU/HR (Gas)	90,000	90,000	115,000	115,000	150,000	150,000	175,000	245,000
DOE Capacity BTU/HR (Gas)	76,000	76,000	98,000	98,000	127,000	127,000	148,000	204,000
Net IBR Rating BTU/HR (Gas)	66,000	NA	85,000	NA	110,000	NA	129,000	177,000
AFUE Rating (Gas)	85.0	NA	85.1	NA	85.1	NA	85.1	83.4
Input BTU/HR (Gas)	105,000	105,000	140,000	140,000	175,000	175,000	210,000	NA
DOE Capacity BTU/HR (Gas)	88,000	88,000	118,000	118,000	145,000	145,000	177,000	NA
Net IBR Rating BTU/HR (Gas)	77,000	NA	103,000	NA	126,000	NA	154,000	NA
AFUE Rating (Gas)	83.6	NA	83.9	NA	83.5	NA	83.9	NA
Net Rating Sq. Ft.	526	526	707	707	887	887	1,067	1,207
Water Capacity	3.6	3.6	4.3	4.3	5.1	5.1	5.8	6.5
Approx. Shipping Weight	300	300	350	350	390	390	430	470
DIMENSIONS (Inches)								
Cabinet Height	28-7/8"	28-7/8"	28-7/8"	28-7/8"	28-7/8"	28-7/8"	28-7/8"	28-7/8"
Cabinet Width	17-3/4"	17-3/4"	17-3/4"	17-3/4"	17-3/4"	17-3/4"	17-3/4"	17-3/4"
Cabinet Length	19-1/4"	19-1/4"	22-3/4"	22-3/4"	26-1/4"	26-1/4"	29-3/4"	33-1/14"
Supply Outlet Height C.L.	25-5/8"	25-5/8"	25-5/8"	25-5/8"	25-5/8"	25-5/8"	25-5/8"	25-5/8"
Return Outlet Height C.L.	4-1/2"	4-1/2"	4-1/2"	4-1/2"	4-1/2"	4-1/2"	4-1/2"	4-1/2"
Flue Outlet Diameter	6"	6"	6"	6"	6"	6"	6"	6"
Flue Outlet Height C.L.	20-3/4"	20-3/4"	20-3/4"	20-3/4"	20-3/4"	20-3/4"	20-3/4"	20-3/4"

\* Direct Vent model

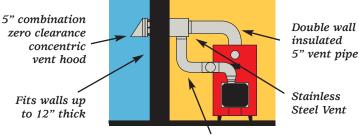

Wall thickness up to 12"

4" aluminum air intake (15" max. length)

5" exhaust connection



2.5m-11/08-BP











# SOLAIA

We are pleased to bring Solaia, a gem of European engineering and design, to the homes of America. Solaia boilers are manufactured in compliance with ISO 9002 standards and combine the high efficiency and convenient serviceability of European technology with Boyertown Furnace Company's more than 40 years of dependability, quality, and heating expertise.

#### *Isn't it nice to know you're making the right choice?*

You *can* get what you want ... and maybe more! The Solaia will provide exceptional value for your dollar, energy efficiency, proven performance, and comfort for years to come.

At the heart of it all is the belief that each homeowner is an individual and should be treated with the utmost respect. We at Boyertown Furnace are dedicated to this proposition and try to live up to it every single day.

### With efficiencies up to 86.9% AFUE ...

Solaia addresses ever-growing concerns about fuel prices, the environment, and the need for preserving the world's natural resources.

Higher efficiencies are a must in Europe, where fuel bills are five times as high as they are in the United States. The Solaia's 3-pass design keeps heated flue gases inside your boiler longer for greater thermal efficiency.



#### Serviceability ...

The easy-to-remove front jacket panel allows access to a one-piece, swingout door that is easy to open and can be completely removed from the vessel for internal inspection and overall maintenance.

#### Oil or Gas ...

The Solaia's service-friendly, quick-disconnect burner mount accommodates both Riello F5, Beckett AFG, Beckett NX, and Carlin EZ-1 oil burners and the Heatwise SU2A gas burner.

#### A blend of technology and efficiency ...


The Solaia is a low-mass, wet-base boiler with steel push nipples. Constructed of GG20 cast iron for greater durability, excellent heat transfer, and resistance to corrosion, the Solaia is the result of over 50 years of engineering and manufacturing experience. The unique turnaround design of the rear casting creates optimal flue gas passages through the boiler for high efficiency. There are no baffles to remove and the flue passages are easily accessible for cleaning and servicing. The Solaia boiler is "Energy Star Rated"

#### Optional "Solaia Sentry" Control Panel (below)

- Guaranteed to reduce fuel consumption 10-20%
- Reduces boiler on/off cycles up to 30%
- No programming needed; Pre-wired

with efficiencies up to 86.9%.





- 3 pass wet-base design (above)
- GG20 cast iron
- Low mass
- *High efficiency to 86.9%*
- Standard design pressure to 58 psi
- Superior serviceability with easy access to all flue passages
- Left- or right-hinged front door is completely removable in tight installations
- Limited Lifetime Warranty
- Direct vent capabilities
- Positive pressure fired vessel
- Energy Star Rating
- Oil or gas fired