


SAFE-T-SWITCH® MODEL SS3



File #: E209344

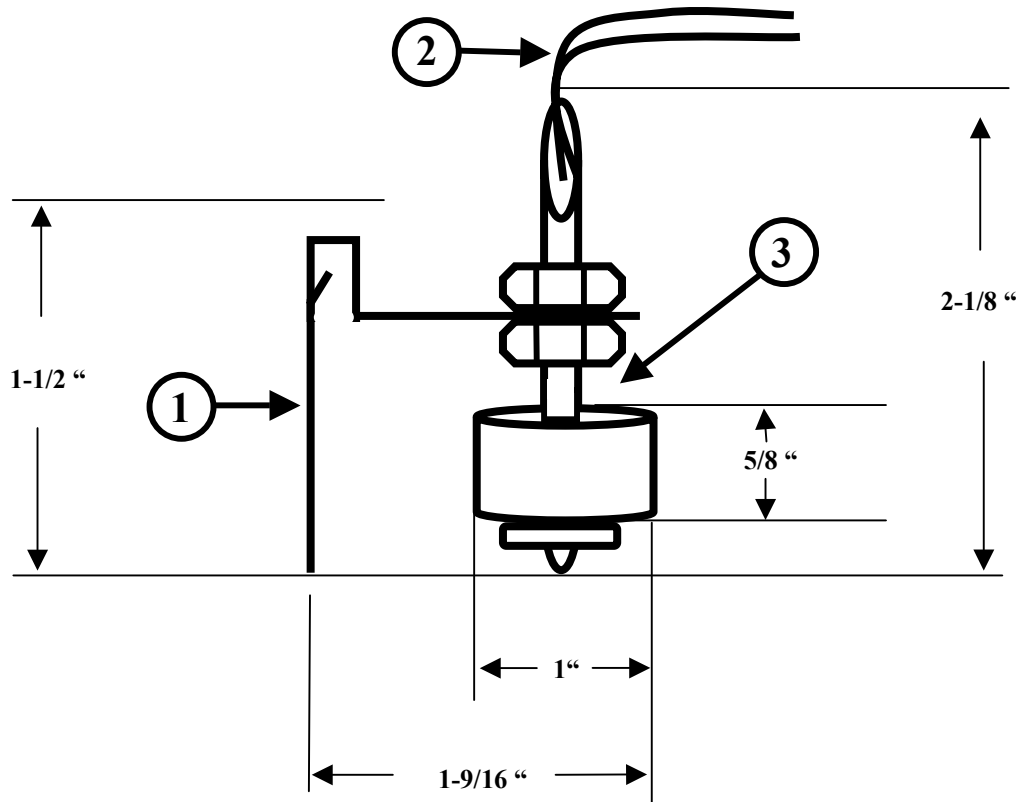

RECTORSEAL

2601 Spenwick Dr.
Houston, TX 77055

TEL #: 713-263-8001 or 800-231-3345

FAX: 713-263-7577 or 800-441-0051

www.rectorseal.com

PART NAME:

**MODEL SS3 A/C CONDENSATE
PAN OVERFLOW SWITCH**

- ① Stainless Steel Clip/Bracket
- ② 72"-Inch, 18AWG Cables
(Pre-wired/ Potted)
- ③ Electrically Potted Reed/Magnet
Switch Assembly

COMMENTS / REQUIREMENTS:

- ◆ Minimum Pan Depth: 1-1/2 Inch. Adjusts for deeper pans
- ◆ Sensitivity: 1/4-inch rise in float opens switch
- ◆ Potted, water sealed reed/magnet switch design
- ◆ Conforms to UL 508
- ◆ 1.25 Amp carry capacity
- ◆ 24 Volts A/C Class 2

SCALE:

NONE

DRAWN BY:

DATE:

8/8/16

DRAWING #:

SS1

APPROVED BY:

REVISION:

C