



CLOTH & DUCT TAPES

WE KNOW all jobs have one thing in common: they must be done right. That's why our complete line of cloth and duct tapes is engineered to exacting specs. When easy handling, varying adhesion levels and durable construction characteristics are needed, trust Shurtape to give every job a distinctive mark of **EXCELLENCE**.

GENERAL PURPOSE DUCT TAPES



SHURGRIP® UTILITY GRADE
GOOD CONFORMABILITY
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	17
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
THICKNESS (MILS)	6.0
ELONGATION (%)	14
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	-

For non-critical, general purpose use in packaging, bundling, sealing, repairing, holding and waterproofing; Also used in the remediation/abatement industry as a gooseneck tape.



SHURGRIP® LIGHT DUTY
GOOD SHEAR AND ADHESION
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	18
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	75
THICKNESS (MILS)	7.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	34, 56

For light duty sealing, seaming, repairing, holding and waterproofing applications that require aggressive stick and superior hold; For temporary or permanent use.



For ultimate performance, choose Shurtape duct tapes with Polybonded CO-EX Technology®. The co-extrusion process melds polyethylene, cloth and adhesive in a single, high temperature step, resulting in a permanent, airtight bond. This seamless construction creates added strength and will not delaminate.



GENERAL PURPOSE DUCT TAPES



ECONOMY GRADE
GOOD CONFORMABILITY
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	54
THICKNESS (MILS)	7.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	32 - 200
APPLICABLE STANDARDS*	-

For non-critical, general purpose use in packaging, bundling, sealing, seaming, repairing, holding and waterproofing; Also used in the remediation and restoration industries.



GENERAL PURPOSE GRADE
GOOD CONFORMABILITY
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
THICKNESS (MILS)	8.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	32 - 200
APPLICABLE STANDARDS*	38, 56

For non-critical, general purpose packaging, bundling, sealing, seaming, repairing, holding and waterproofing; Also used in plumbing applications and in the remediation and restoration industries.



SHURGRIP® MEDIUM DUTY
GOOD SHEAR AND ADHESION
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	18
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	85
THICKNESS (MILS)	8.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	34, 56

For medium duty sealing, seaming, repairing, holding and waterproofing applications that require aggressive stick and superior hold; Also used in the restoration industry; For temporary or permanent use.



SHURGRIP® HEAVY DUTY
EXCELLENT SHEAR AND ADHESION
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	90
THICKNESS (MILS)	9.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	35 - 200
APPLICABLE STANDARDS*	34, 56

For heavy duty sealing, seaming, repairing, holding and waterproofing applications that require aggressive stick and superior hold; Also used in the restoration industry; For temporary or permanent use.



ALL-PURPOSE GRADE
CONFORMABLE
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS (MILS)	9.0
ELONGATION (%)	16
SERVICE TEMPERATURE RANGE (°F)	32 - 200
APPLICABLE STANDARDS*	5

For general purpose use in industrial, carpet, plumbing, HVAC, sealing, waterproofing, patching, remediation and restoration applications.



ALL-PURPOSE GRADE
CONFORMABLE
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS (MILS)	9.0
ELONGATION (%)	16
SERVICE TEMPERATURE RANGE (°F)	32 - 200
APPLICABLE STANDARDS*	-

For general purpose use in industrial, plumbing, carpet, color-coding and splicing applications, as well as home and general repair applications, particularly where a discreet fix is needed.



ALL-PURPOSE DUCT TAPES



PC 618S
PERFORMANCE GRADE
EXCELLENT CONFORMABILITY
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
THICKNESS (MILS)	10.0
ELONGATION (%)	17
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	42, 56

For holding, securing, seaming, repairing, bundling, splicing, packaging and masking in HVAC, industrial, commercial, utilities, trucking and automotive applications; Can also be used as a condensation barrier in appliance assemblies.



PC 618C
PERFORMANCE GRADE
EXCELLENT CONFORMABILITY
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
THICKNESS (MILS)	10.0
ELONGATION (%)	17
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	42, 56

For holding, securing, seaming, repairing, bundling, splicing, packaging and masking in HVAC, industrial, commercial, utilities, trucking and automotive applications; Can also be used as a condensation barrier in appliance assemblies.



PC 619
SPECIALTY GRADE
CONFORMABLE
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS (MILS)	9.0
ELONGATION (%)	16
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	5

For general use, including color-coding, labeling, floor marking and book-binding; Also used for stage preparation in the motion picture and audio/visual industries; Can also be used for a variety of applications in the hospitality, motorsports and floral industries.



ABATEMENT DUCT TAPES



PC 608
CONTRACTOR GRADE ABATEMENT
EXCELLENT HOLD
BLENDED RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	68
THICKNESS (MILS)	9.0
ELONGATION (%)	16
SERVICE TEMPERATURE RANGE (°F)	25 - 200
APPLICABLE STANDARDS*	-

For use when building containments and a variety of other applications in remediation, restoration and abatement jobs; Can be used for mold and asbestos removal.



PC 629
INDUSTRIAL GRADE ABATEMENT
SUPERIOR HOLD
BLENDED RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	58
THICKNESS (MILS)	11.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	25 - 200
APPLICABLE STANDARDS*	-

For sealing walls, doors and windows in abatement applications; Ideal for use on rugged jobs in warm and cold climates, as well as dry and wet environments.



PC 610
PERFORMANCE GRADE ABATEMENT
SUPERIOR HOLD
BLENDED RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	56
THICKNESS (MILS)	10.0
ELONGATION (%)	18
SERVICE TEMPERATURE RANGE (°F)	25 - 200
APPLICABLE STANDARDS*	-

For sealing walls, doors and windows in abatement applications; Ideal for use on rugged jobs in warm and cold climates, as well as dry and wet environments.



PC 626
SPECIALTY GRADE
LUSTERLESS CAMOUFLAGE
OFFICIAL ARMY ACU DIGITAL
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	48
THICKNESS (MILS)	10.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	5

For sealing, waterproofing, holding, camouflaging, sound deadening, covering reflective surfaces and patching applications.



STUCCO DUCT TAPES



PC 622
PREMIUM GRADE, CLOTH DUCT
CONFORMABLE WITH EXCELLENT HOLD
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	36
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
THICKNESS (MILS)	12.5
ELONGATION (%)	14
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	40, 56

For protecting window and door frames during stucco applications; Used in high performance motorsports; For heavy duty bundling, holding and splicing.



PC 668
SPECIALTY GRADE, CLOTH DUCT
HOLDS STRONG
SYNTHETIC/NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	27.5
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	11.0
ELONGATION (%)	15
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	-

For two- and three-step (scratch, brown and finish) stucco processes where the job requirements dictate the protective barrier be left in place for the entire application.



PC 667
SPECIALTY GRADE, CLOTH DUCT
EASY TO TEAR
BLENDED RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS (MILS)	9.0
ELONGATION (%)	15
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	-

For protective masking of non-painted surfaces, including steel, vinyl, aluminum and anodized metals; Use in plastering, stucco, concrete, pool and tile applications.



PC 567
SPECIALTY GRADE, CLOTH DUCT
CONFORMABLE TO MOST SURFACES
BLENDED RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	46
THICKNESS (MILS)	8.0
ELONGATION (%)	14
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	34, 56

For protecting surfaces when pressure washing and applying stucco.



See page 42 for Polyethylene Stucco Masking Tapes



HVAC DUCT TAPES



PC 857
UL PRINTED COATED CLOTH
HIGH STRENGTH AND HOLD
SYNTHETIC RUBBER BLEND ADHESIVE

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	14.0
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	50 - 212
APPLICABLE STANDARDS*	43, 55, 56, 57

Used in the HVAC industry to seal, seam and join Class 1 Flex Duct.



PC 858CA
UL PRINTED COATED CLOTH
HIGH STRENGTH AND HOLD
SYNTHETIC RUBBER BLEND ADHESIVE
CEC APPROVED

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	14.0
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	50 - 212
APPLICABLE STANDARDS*	43, 55, 56, 57

Used in the HVAC industry to seal, seam and join Class 1 Flex Duct; Approved for use by the California Energy Commission.



PC 609
PERFORMANCE GRADE
EXCELLENT HOLD
BLENDED RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	71
THICKNESS (MILS)	10.0
ELONGATION (%)	16
SERVICE TEMPERATURE RANGE (°F)	25 - 200
APPLICABLE STANDARDS*	34, 56

For use in the HVAC industry to repair thermal insulation and flexible ducts, and to seal metal ductwork; Used in the manufactured housing industry to seam bottom boards and for patching, seaming and sealing; Used for packaging, bundling, holding, wrapping and waterproofing; Also used for asbestos and mold remediation.



SF 682
SHURFLEX® PROFESSIONAL GRADE
FLEXIBLE AND CONFORMABLE
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
THICKNESS (MILS)	10.0
ELONGATION (%)	18
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	35, 56

For use in the HVAC industry for airtight and moisture-free seaming, connecting, splicing, patching and sealing of sheet metal and flex duct, rigid ductboards, air vents, insulation, fibrous filter banks and pollution collection systems.



SF 683
SHURFLEX® PROFESSIONAL GRADE
FLEXIBLE AND CONFORMABLE
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
THICKNESS (MILS)	10.0
ELONGATION (%)	18
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	35, 56

For use in the HVAC industry for airtight and moisture-free seaming, connecting, splicing, patching and sealing of sheet metal and flex duct, insulation, rigid ductboards, air vents and fiberboard.



MJ 100
PROFESSIONAL GRADE
FIBERGLASS MESH
WATER-BASED ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	75.5
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	8
THICKNESS (MILS)	9.0
ELONGATION (%)	3.83
SERVICE TEMPERATURE RANGE (°F)	-
APPLICABLE STANDARDS*	-

For reinforcing joints, seams and connections when paint-on mastic is used in HVAC applications; Can also be applied to drywall seams before the application of joint compound.

HEAVY DUTY DUCT TAPES



PROFESSIONAL GRADE
EXCELLENT CONFORMABILITY
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	62
THICKNESS (MILS)	11.0
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	38, 56

For demanding HVAC applications to hold, seal and seam sheet metal and flex duct, exhaust vents and pre-formed insulation; Can also be used in industrial applications for holding, splicing, protecting and packaging.



HEAVY DUTY DUCT TAPE
POLYETHYLENE COATED BACKING
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	95
THICKNESS (MILS)	11.5
ELONGATION (%)	3
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	-

For sealing and seaming ductwork in the HVAC industry; Can also be used for protection, splicing, bundling, seaming and sealing applications that demand higher tensile strength and easy tear capabilities; For temporary and permanent uses in the auto industry.



EXTREME HOLD PROFESSIONAL GRADE
EXCELLENT CONFORMABILITY
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	32
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
THICKNESS (MILS)	11.5
ELONGATION (%)	24
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	38, 56

For demanding HVAC applications to hold, seal and seam sheet metal; Can also be used for heavy duty industrial applications like holding, bundling, splicing, protecting and packaging.



HEAVY DUTY PROFESSIONAL GRADE
EXCELLENT HOLD
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	29
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	104
THICKNESS (MILS)	14.5
ELONGATION (%)	11
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	44, 56

For use in high performance motorsports applications, pre-manufactured housing and RV assembly, critical industrial applications and for protection during sandblasting and metal-peening operations.



SUPER BOTTOM BOARD
SUPERIOR ADHESION AND HOLD
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	125
THICKNESS (MILS)	17.0
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	41, 56

For seaming and sealing bottom board materials in pre-manufactured housing and RV assembly, set-up and maintenance; Can also be used to protect surfaces in metal-peening operations.



T-REX® SUPER-TOUGH, ALL-WEATHER
QUICK STICK
NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	52
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	100
THICKNESS (MILS)	17.0
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	32 - 200
APPLICABLE STANDARDS*	-

For use on rough or dirty surfaces; For heavy duty repairs that demand a ferociously strong hold; Can also be used as a bottom board tape in the manufactured housing industry.



SPECIALTY DUCT TAPES



ECONOMICAL NUCLEAR GRADE
EXCELLENT HOLDING POWER
NATURAL RUBBER ADHESIVE
MEETS ASME NQA-1 GUIDELINES

TENSILE (LBS/IN WIDTH)	28
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	58
THICKNESS (MILS)	11.5
ELONGATION (%)	12
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	2, 3, 50

For a variety of purposes in the construction, operation and maintenance of nuclear power facilities; Can also be used for holding to stainless steel pipes, color-coding and sealing endcaps on stainless steel pipes.



NUCLEAR GRADE
EXCELLENT HOLDING POWER
NATURAL RUBBER ADHESIVE
MEETS ASME NQA-1 GUIDELINES

TENSILE (LBS/IN WIDTH)	36
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
THICKNESS (MILS)	13.0
ELONGATION (%)	14
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	2, 3, 50

For a more robust variety of purposes in the construction, operation and maintenance of nuclear power facilities; Can also be used for holding to stainless steel pipes, color-coding and sealing endcaps on stainless steel pipes.



MILITARY SPEC LUSTERLESS
EXCELLENT HOLDING POWER
NATURAL RUBBER ADHESIVE
ASTM D5486M TESTED

TENSILE (LBS/IN WIDTH)	45
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS (MILS)	12.5
ELONGATION (%)	12
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	12

For use as a premium, waterproof packaging tape that meets government specifications; Can also be used for moisture-proofing cartons, canisters and tubing.



T-REX®/PC 745

COATED CLOTH TAPES

P- 628



PROFESSIONAL GRADE GAFFER'S
MATTE-FINISH BACKING
HIGH TENSILE AND HOLDING POWER
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	75
THICKNESS (MILS)	10.75
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	-

For use in the convention, hospitality, exhibition and trade show industries, and for general use in the audio/visual, television, photography, theatrical and motion picture industries; Used for protection and book-binding, color-coding, labeling and stage marking; Also used in the HVAC industry.

P- 660




PROFESSIONAL GRADE GAFFER'S
MATTE-FINISH BACKING
HIGH TENSILE AND HOLDING POWER
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	75
THICKNESS (MILS)	10.75
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	-

For bundling or securing wires, cables and props in the audio/visual, television, photography, theatrical and motion picture industries; Also used for color-coding, labeling, marking and book-binding applications; Will fluoresce under black light.

P- 661

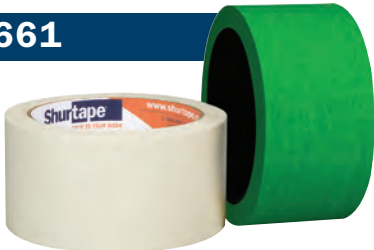

GLOW-IN-THE-DARK GAFFER'S
WRITABLE/PRINTABLE
HIGH ADHESION AND TACK
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS (MILS)	13.0
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	5, 17

Used for a multitude of applications, including safety marking, in the audio/visual, television, photography, theatrical and motion picture industries; Also used for labeling and marking various objects, such as: safety/critical equipment, exit/directional signage, tripping hazards, access handles, sports equipment and tools.



P- 665



PROFESSIONAL GRADE GAFFER'S
MATTE-FINISH BACKING
HIGH ADHESION AND TACK
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS (MILS)	11.0
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	20

For demanding applications that require clean removal in the audio/visual, television, photography, theatrical and motion picture industries, such as holding wiring, lighting and props.

P- 672



PREMIUM GRADE GAFFER'S
LIGHT DUTY
MATTE-FINISH BACKING
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	70
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	77
THICKNESS (MILS)	12.0
ELONGATION (%)	6
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	20

For sealing containers and protection from welding splatter; Can also be used for general holding, bundling and temporary repair applications.

P- 691



PREMIUM GRADE GAFFER'S
MEDIUM DUTY
MATTE-FINISH BACKING
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	70
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS (MILS)	12.25
ELONGATION (%)	6
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	20, 48

For sealing containers and rooms, abrasion protection, and general holding, bundling and repair applications; Meets water leachable requirements for detrimental elements (Fl & Br <250PPM; S & C<500PPM) in accordance with MIL-STD-2041D.

P- 68



PREMIUM GRADE GAFFER'S
HEAVY DUTY
MATTE-FINISH BACKING
SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	70
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	83
THICKNESS (MILS)	12.5
ELONGATION (%)	6
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	20

For book-binding, color-coding and gaffer's applications; For sealing containers and rooms, abrasion protection, and general holding, bundling and repair applications.



P- 665



FOIL, FILM & FOAM TAPES

WE KNOW your reputation is on the line. That's why we offer a comprehensive assortment of foil, film and foam tapes that are engineered for performance in a range of jobs, from HVAC and insulation to electrical, safety marking and more. With options that meet the code, perform in the cold and deliver superior results, Shurtape has you covered with the tapes you need to ensure your work exceeds your **EXACTING STANDARDS**.

ALUMINUM FOIL TAPES



AF 100
2-MIL DEAD-SOFT ALUMINUM FOIL
FLEXIBLE AND EASY TO USE
ACRYLIC-BASED ADHESIVE
TRADITIONAL LINER

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS WITHOUT LINER (MILS)	4.2
ELONGATION (%)	2
APPLICATION TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	46, 54, 55, 56, 57

For joining and sealing joints, connections and seams on rigid fiberglass ductboard and flexible air duct.



AF 100E
2-MIL DEAD-SOFT ALUMINUM FOIL
FLEXIBLE AND EASY TO USE
ACRYLIC-BASED ADHESIVE
EASYPEEL® LINER

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS WITHOUT LINER (MILS)	4.2
ELONGATION (%)	2
APPLICATION TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	46, 54, 55, 56, 57

For joining and sealing joints, connections and seams on rigid fiberglass ductboard and flexible air duct.



AF 914CT
1.5-MIL ALUMINUM FOIL
SUPERIOR STABILITY
ACRYLIC-BASED ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	12
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
THICKNESS WITHOUT LINER (MILS)	3.4
ELONGATION (%)	3
APPLICATION TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	34, 56

For joining and sealing aluminum-backed and fibrous insulation and metal ductwork in temperatures ranging from -20 F to 260 F; Also used to repair metal and sheet metal.



ALUMINUM FOIL TAPES



AF 912
1.5-MIL DEAD-SOFT ALUMINUM FOIL
SOLVENT-FREE
SYNTHETIC RUBBER ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	11
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	90
THICKNESS WITHOUT LINER (MILS)	3.8
ELONGATION (%)	2
APPLICATION TEMPERATURE RANGE (°F)	32 - 230
APPLICABLE STANDARDS*	38, 56

For sealing and joining aluminum-backed duct wrap; Also used for temporary metal repair.



AF 973
2-MIL DEAD-SOFT ALUMINUM FOIL
SOLVENT-FREE
SYNTHETIC RUBBER ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	15
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	90
THICKNESS WITHOUT LINER (MILS)	4.4
ELONGATION (%)	2
APPLICATION TEMPERATURE RANGE (°F)	32 - 230
APPLICABLE STANDARDS*	36, 56

For sealing and joining aluminum-backed duct wrap, creating water and vapor barriers, and for temporary metal repair.



AF 982
FOIL/SCRIM/KRAFT (FSK)
SOLVENT-FREE
SYNTHETIC RUBBER ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	40
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
THICKNESS WITHOUT LINER (MILS)	6.6
ELONGATION (%)	1
APPLICATION TEMPERATURE RANGE (°F)	32 - 230
APPLICABLE STANDARDS*	40, 56

For maximum-strength sealing, seaming and joining scrim-reinforced pipe and duct insulation in all weather conditions.



AF 975CT
2-MIL ALUMINUM FOIL
SUPERIOR STABILITY
ACRYLIC-BASED ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	18
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
THICKNESS WITHOUT LINER (MILS)	4.0
ELONGATION (%)	3
APPLICATION TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	34, 56

For use in temperatures ranging from -20 F to 260 F when joining and sealing aluminum-backed or fibrous insulation and metal ductwork; Can also be used when repairing metal and sheet metal.



SF 685
PRINTED SHURMASTIC® FOIL
FORMS A PERMANENT BOND
BUTYL RUBBER ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	255
THICKNESS (MILS)	17.0
ELONGATION (%)	560
SERVICE TEMPERATURE RANGE (°F)	-20 - 200
APPLICABLE STANDARDS*	45, 51, 53, 56

For indoor or outdoor use to seal Class 1 Flex Duct, sheet metal and duct wrap vapor barriers; Also approved for subgrade application on PVC-coated duct; Paintable with paint recommended for aluminum.



SF 686
UL PRINTED SHURMASTIC® FOIL
INSTANT, WATER-RESISTANT GRIP
BUTYL RUBBER ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	23.8
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	111
THICKNESS (MILS)	17.0
ELONGATION (%)	-
SERVICE TEMPERATURE RANGE (°F)	-20 - 220
APPLICABLE STANDARDS*	51, 53, 55, 56, 57

For airtight and moisture-free sealing of Class 1 Flex Duct, sheet metal and duct wrap vapor barriers; Also approved for subgrade application on PVC-coated duct; Paintable with paint recommended for aluminum.



DC 181
UL PRINTED BOPP FILM
EXCELLENT CONFORMABILITY
ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	31
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	38
THICKNESS (MILS)	2.7
ELONGATION (%)	200
SERVICE TEMPERATURE RANGE (°F)	-10 - 210
APPLICABLE STANDARDS*	46, 55, 56, 57

For use on Class 1 Flex Duct for connecting, joining, sealing and patching flexible air ductwork.



FF 100
UL PRINTED BOPP FILM
EXCELLENT CONFORMABILITY
WATER-BASED ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS (MILS)	3.0
ELONGATION (%)	150
SERVICE TEMPERATURE RANGE (°F)	-14 - 176
APPLICABLE STANDARDS*	34, 55, 56, 57

For seaming and sealing reflective insulation; Can also be used to seal reflective insulation used as a radiant barrier inside an attic, crawlspace, side wall or other area inside a home or building; Delivers a permanent, airtight seal for the life of the system.



FF 100