

5-5/8" Diameter Stock Motors

Air Conditioners – Adapt-A-Lug® Motors

Features:


- Continuous Duty, Air Over
- Energy Efficient
- Permanent Split Capacitor
- Sleeve Bearing
- Thermally Protected
- 1.0 SF
- 3-Speed
- 60 Hz

OEM replacement for Chrysler, Sears, Whirlpool, Gibson, Carrier, Quiet Kool, Delco, Singer, American Standard, Fedders, Tappan, York and others.



100, 101, 102,
104, 105, 107,
113, 114, 118,
126, 489, 482

- Lugs available separately
- Use Kit No. 1327 - 1/4" Slot
1328 - 3/4" Slot
1329 - Length Adapter

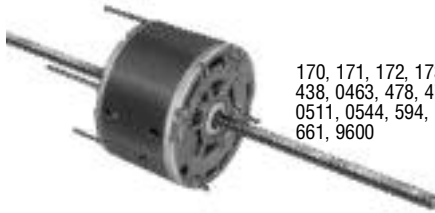

170, 171, 172, 173,
438, 0463, 478, 479,
0511, 0544, 594,
661, 9600



OPEN LE 448, 626



439

HP	RPM**	Speeds	Volts	Amps	Stock No.	Alternate	Shaft Diameter & Length	Capacitor	"A" Dim.	Iron Stack	Connection Diagram	No. Notes
1/8-1/10-1/15	1075	3	115	2.2-1.8-1.4	105		9 x 1/2 x 7-1/2	5MFD-370V	3-1/2	1	14u	2
1/8-1/10-1/15	1075	3	208-230	.74-.62-.50	100		9 x 1/2 x 7-1/2	5MFD-370V	3-1/2	1	14u	2
1/6-1/8-1/10	1075	3	115	3.5-2.2-1.7	126		9 x 1/2 x 7-1/2	5MFD-370V	3-1/2	1	14u	2
1/6-1/8-1/10	1075	3	115	2.8-2.1-1.6	478		8-1/2 x 1/2 x 7-1/2	7.5MFD-370V	3-1/2	1	14u	
1/6-1/8-1/10	1075	3	208-230	1.3-1.1-.78	118		9 x 1/2 x 7-1/2	5MFD-370V	3-1/2	1	14u	2
1/6-1/8-1/10	1075	3	208-230	1.3-1.0-.78	438		9 x 1/2 x 7-1/2	5MFD-370V	3-1/2	1	14u	
1/4-1/6-1/8	1075	3	115	3.6-2.2-1.7	114		9-1/2 x 1/2 x 9-1/2	5MFD-370V	4	1-1/2	14u	2
1/4-1/6-1/8	1075	3	115	3.8-2.4-2.0	479		9-1/2 x 1/2 x 9-1/2	7.5MFD-370V	4	1-1/4	14u	
1/4-1/6-1/8	1075	3	208-230	1.8-1.2-.95	113		10 x 1/2 x 10	5MFD-370V	4	1-1/4	14u	2
1/4-1/6-1/8	1075	3	208-230	1.8-1.2-.95	439		7-1/2 x 1/2 x 8-1/2	5MFD-370V	4	1-1/4	14u	
1/4-1/6-1/8	1075	3	208-230	1.8-1.2-1.0	0511		7 x 1/2 x 7	5MFD-370V	4	1-1/4	14u	
1/4-1/6-1/8	1075	3	277	1.3-.87-.67	626		7-7/8 x 1/2 x 7-7/8	5MFD-370V	4-1/4	1-1/2	14u	
1/3-1/4-1/6	1075	3	115	5.6-3.9-3.0	101		6-3/4 x 1/2 x 7	5MFD-370V	4-1/4	1-3/4	14u	2
1/3-1/4-1/6	1075	3	208-230	2.6-1.9-1.5	102		6-3/4 x 1/2 x 7	5MFD-370V	4-1/4	1-3/4	14u	2
1/3-1/4-1/5	1075	3	208-230	2.3-1.6-1.3	0463		7 x 1/2 x 7	5MFD-370V	4	1-1/2	14u	
1/3-1/4-1/6	1075	3	277	1.9-1.4-.85	448		7-5/8 x 1/2 x 7-5/8	7.5MFD-370V	4-3/4		1-3/4	14u
1/2-1/3-1/4	1075	3	115	7.3-5.6-4.0	594		7-1/2 x 1/2 x 7-1/2	10MFD-370V	5-1/4	2-1/2	14u	
1/2-1/3-1/4	1075	3	208-230	3.2-2.0-1.5	107		8 x 1/2 x 8	7.5MFD-370V	5	2-1/4	14u	2
1/2-1/3-1/4	1075	3	208-230	3.2-2.0-1.5	0544		7 x 1/2 x 7	7.5MFD-370V	5	2-1/4	14u	
3/4-1/2-1/3	1075	3	115	12.6-8.8-6.6	9600		8 x 1/2 x 8	10MFD-370V	5-1/2	2-1/2	14u	
3/4-1/2-1/3	1075	3	208-230	4.6-3.5-2.0	489		7 x 1/2 x 7-1/4	10MFD-370V	5-1/4	2-1/2	14u	2
1/6-1/10-1/15	1625	3	208-230	1.1-.54-.40	170		8-1/2 x 1/2 x 8-1/2	5MFD-370V	3-3/4	1	14u	1
1/4-1/6-1/8	1625	3	115	3.3-2.5-2.0	661		8-1/2 x 1/2 x 8-1/2	5MFD-370V	4	1-1/4	14u	
1/4-1/6-1/8	1625	3	208-230	1.7-1.0-.74	171		8-1/2 x 1/2 x 8-1/2	5MFD-370V	4-1/4	1-1/4	14u	
1/3-1/4-1/6	1625	3	115	4.3-3.1-2.5	104		8-5/8 x 1/2 x 8-5/8	5MFD-370V	4-1/4	1-1/2	14u	2
1/3-1/4-1/6	1625	3	208-230	2.5-1.5-1.1	172		8-1/2 x 1/2 x 8-1/2	5MFD-370V	4-1/2	1-1/2	14u	
1/2-1/3-1/4	1625	3	208-230	3.8-2.7-2.2	173		8-1/2 x 1/2 x 8-1/2	5MFD-370V	5	2	14u	
3/4-1/2-1/3	1625	3	208-230	4.2-3.0-2.0	482		7-1/2 x 1/2 x 7-1/2	7.5MFD-370V	5-1/4	2-1/2	14u	2

Notes:

1. Special OEM Replacement Motor (See Pages 97-122)
 2. Mounting Accessories Packaged with Motor
- **Approx 150 rpm between speeds

