



Cavagna Group

Advanced solutions for gas control



Propane Regulators, Valves and Equipment

2016 - 2017 EDITION 



cavagna group

Advanced solutions for gas control

Divisions



**LPG
REGULATORS**



**LPG VALVES AND
TANK EQUIPMENT**



**HIGH PRESSURE
EQUIPMENT**



**NATURAL GAS
AND METERING
DIVISION**



**ALTERNATIVE
FUEL SYSTEMS**



**ENGINEERING
AND SERVICES**

reca
ITALY



omeca
ITALY



omeca
ITALY



reca
ITALY



omeca
ITALY



cavimatic
ITALY



Kosangas
PORTUGAL



cavagna group asia
THAILAND



pergola
ITALY



MESURA
FRANCE



bigas
ITALY



**cavagna group
engineering**
ITALY



**zhongshan
cavagna**
CHINA



Kosan
INTERNATIONAL
ITALY



MESURA
TUNISIA



CONGRIF
VENEZUELA



MESURA Nimal
Gas Controls
INDIA



n.p.
ITALY



cemco kosangas
CHILE



**cavagna group
sudamericana ltda**
COLOMBIA



Since 1949, the Cavagna Group has supplied the worldwide gas control industry with products of superior quality and value.

Our new comprehensive catalog features a complete line of products and accessories for the LPG and cryogenic gas containers.

Cavagna is a registered trademark.
© Copyright 2003 Cavagna North America, Inc.

The Cavagna Group began operation in 1949 in Northern Italy and continues to grow today. Since its origin, the Group has become a world leader in the forging and machining of brass and stainless steel.

For over seventy years the Group has supplied safe products of superior quality and value. Technological advancement and sophisticated working procedures have allowed us to rapidly create new products and solutions for the gas control industry.

The Cavagna Group produces a wide range of products meeting international standards including:

- LPG Valves and Regulators
- Natural Gas regulators for domestic and industrial use
- ASME, Fork Lift, and Motor Fuel Tank Valves
- High Pressure Cylinder Valves
- Refrigeration Cylinder Valves
- Distribution and Regulation Equipment for Industrial Gases
- Distribution and Regulation Equipment for Medical Gases
- Comprehensive Range of Welding, Cutting Equipment and Special Gases
- CNG - AUTOGAS products

The Group's design engineers and laboratory technicians closely cooperate with worldwide regulatory institutions, both in the writing of international performance standards and in the creation of new products. In North America our products are recognized by AGA, ASME, CGA, IAS, and UL as conforming to ANSI, NFPA and other recognized standards.

The Cavagna Group of companies has invested heavily in personnel, individual training, and robotic technology to meet the quality standards required by our customers and the 140 countries we serve. With the establishment of Cavagna North America in 1996 and our North American Distribution Center, we have further expanded our service network to meet the demands of the global marketplace.

Our philosophy is to provide all of our customers with quality products, continuous innovation and superior service in a competitive environment.



LPG Regulators	PG. 5
LPG Tank Equipment	PG. 57
LPG Bulk Storage and Truck Equipment	PG. 75
Autogas Equipment	PG. 93
Filling Heads	PG. 99


▲ DANGER

- Leaking gas can cause deadly fires or explosions
- Only trained people should work on gas systems
- Inspect gas systems regularly
- Replace adapters or valves as required
- Failure to follow these directions can result in bodily injury or death

WARNING

The Cavagna Group, Cavagna North America, and its affiliates give notice that all products contained in this catalog must only be used with LP-Gas (liquefied petroleum gas). The products contained within this catalog must be installed in accordance with NFPA 54, NFPA 58, all D.O.T., federal, state, and local codes where applicable and only handled by trained experienced personnel. Periodic maintenance and inspection are necessary for all products contained within this catalog. If there are any questions or doubts concerning the use or handling of any products contained within this catalog, call:

cavagna north america inc. 732-469-2100

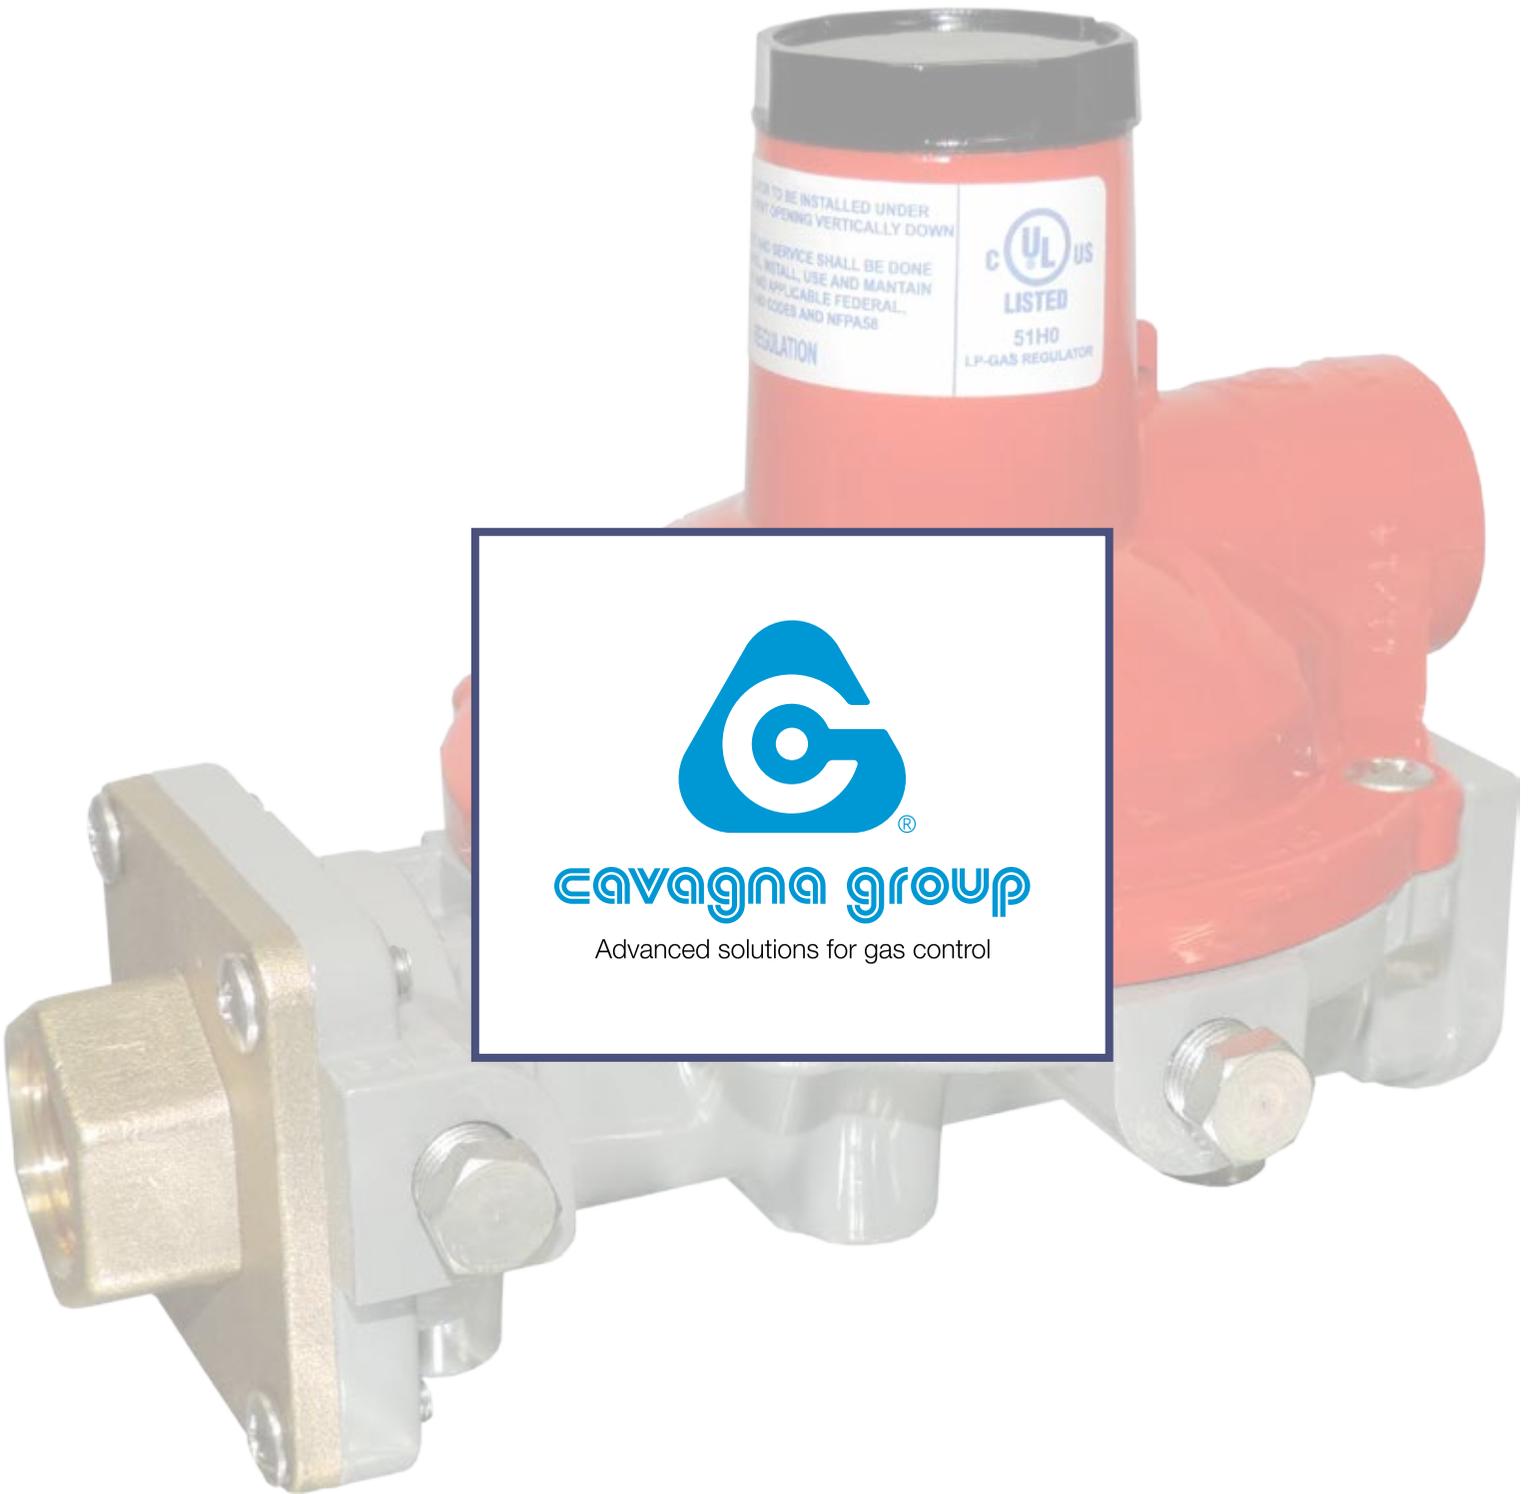

CAVAGNA group

Advanced solutions for gas control

Kosan⁺LINE

Gas pressure Regulators & Accessories

Installations	PG. 6
Residential - Commercial Regulators	PG. 9
Industrial Regulators	PG. 25
Pigtails and Connections	PG. 31
Outdoor Cooking	PG. 33
Recreational Vehicles	PG. 43



Installations

Regulators

The regulators are classified according to their use and according to the particular system they regulate the gas with. Therefore, first stage regulators and second stage regulators are designed to be used for residential and commercial installations. The first stage regulator is a regulator reducing the inlet pressure, coming from the withdrawal cylinder or tank, to a medium level suitable to feed consequently a second stage regulator, thus the first stage regulator reduces pressure down to 10 PSI. The second stage regulator is a regulator reducing the pressure, coming from a first stage regulator, directly to the inlet pressure of the user's appliances or to a medium pressure value in case of installations with Pressure Line Regulators. Cavagna Group gas regulators for residential and commercial installations are complying with UL 144 Standard. They are designed to be installed outdoors, following the manufacturer's instructions of installation. Cavagna Group Pressure Line Regulators are used in natural gas or in LPG installations, following a second stage regulator with medium pressure value. Pressure Line Regulators are regulators that are located upstream user's appliances to compensate possible pressure drops coming from the supply system or distribution network. All Pressure Line Regulators are designed for indoor installations and are complying with ANSI Z2180 Standard. Materials used for construction of products in this catalog are suitable for rated service pressure at temperatures of -40° F to + 165° F (-40°C to +74°C), unless otherwise specified.

Installation Types

Type A installation

The first stage regulator is connected to the tank valve as per 6.8. 1. 1. paragraph of the NFPA 58. It supplies a second stage regulator that is usually installed nearby the house.

Length and diameter of gas pipes connecting the first stage regulator to the second stage regulator have to be calculated in order to ensure the minimum supplying pressure to the regulator of second stage (5 PSI) and to ensure the maximum allowed capacity to gas appliances. At the same time length and diameter of gas pipes connecting the second stage regulator outlet to gas appliances have to be calculated in order to respect the maximum authorized capacity and pressure drop, as well as to ensure good functioning of the installation.

The first stage regulator must be mounted with cover turned upwards, but slightly bending downwards - please, refer to figure 1 - in order to allow the vent-hole to vent out possible water, which may enter the regulator.

The second stage regulator is usually installed outdoors and has to have its vent turned downwards, away from eventual openings of the building. See 6.8.1.6 paragraph of NFPA 58. As far as indoor installation instructions, please refer to paragraph "1 .3. Indoor installation".


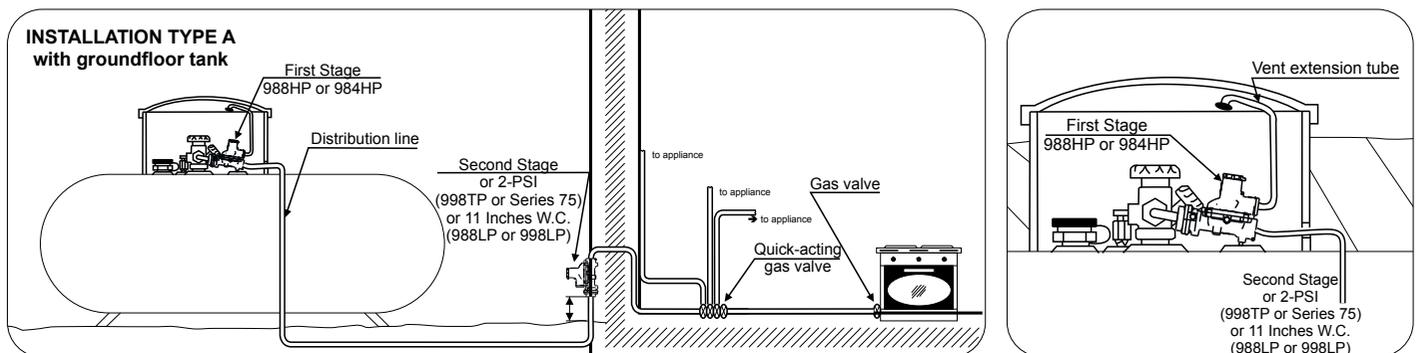


Figure 1

Installations

Type B installation

If the gas tank is placed nearby the building (i.e. underground tank), it is possible to use a group of regulation composed by first and second stages integrated, directly connected to gas tank valve. Length and diameter of gas pipes connecting the group of regulation to appliances have to be calculated in order to respect the maximum authorized loss of capacity and to ensure good functioning of the installation. The group of regulation has to be installed with cover turned upwards, slightly bending forwards. See figure 1.

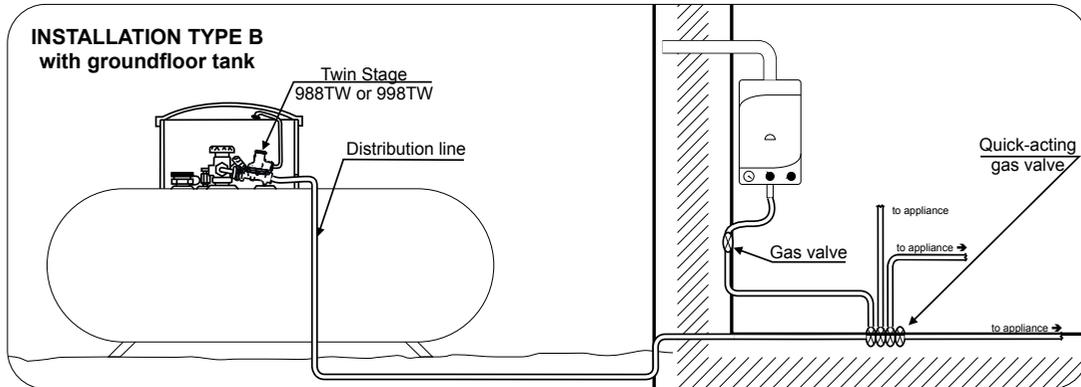

Type C installation

Type C installation is similar to Type A installations, however the supplying outlet pressure of the second stage regulator is 2 PSIG rather than 11" WC. The outlet pressure of the second stage regulator is stabilized by a Pressure Line Regulator placed inside the building, which supply gas appliances at normal pressure of 11" WC.

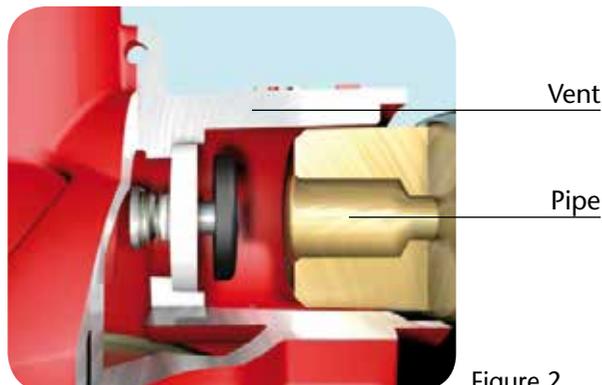
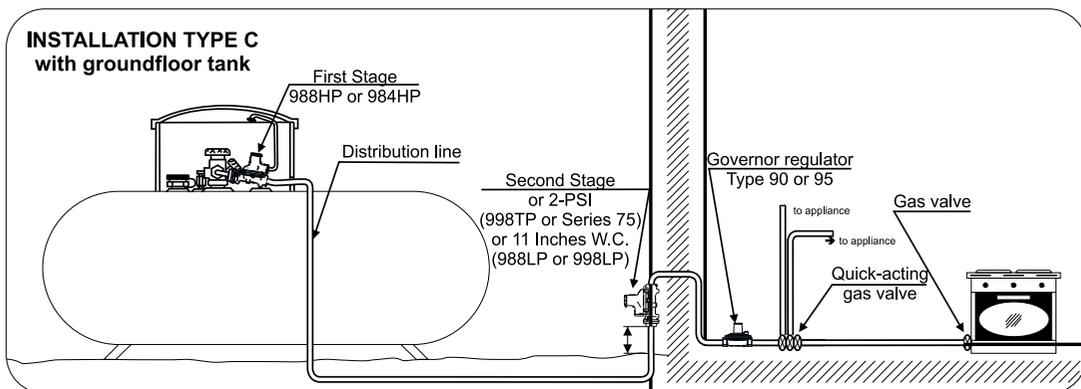


Figure 2

Installations

Installations

“INDOOR” installation

If the second stage regulator has to be installed inside the building, the gas flow through the venthole has to be vented outdoors. See figure 2. For this reason some precautions must be taken:

- Mounting the discharge pipe (male NPT thread) cannot interfere with normal functioning of the opening valve. See figure 2.
- Keep pipe length of bends to a minimum to prevent eventual loss of capacity compatible with normal valve function. In figure 3 you can find the dimensions to respect the valve’s normal function (H = 39 inch; L = 31 inch).

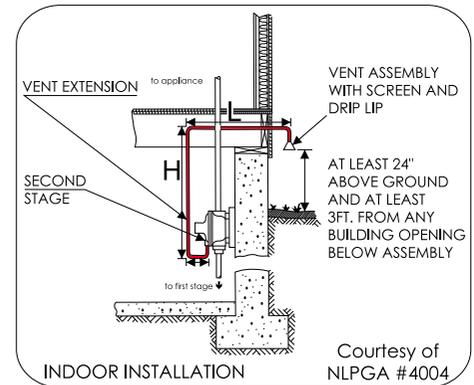


Figure 3

1.4 Regulator dimensions

The dimension of the regulator is indicated by three letters: L, W, H:

- L stands for the length between the inlet fitting and the outlet fitting included;
- W stands for the regulator width from side to side.
- H is the height of the regulator from the lower part of the body up to the highest part of the bonnet.

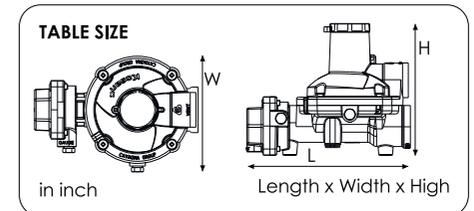


Figure 4

1.5 Tamper evident features

Gas regulators with the bonnet secured to the body by screws are protected from inappropriate disassembling by a tamper evident device that gets clearly altered in case anybody opens the regulator screws. See figure 5. Moreover adjustable regulators have a black plug on top of the bonnet, which has to be securely fastened once the outlet pressure has been set, thus it is compulsory to seal the black plug in order to prevent inappropriate regulation of the pressure by unauthorized personnel. See figure 6.



Figure 5

1.6 Mounting bracket

For any wall mounted regulators, adequate mounting brackets are essential:

- steel mounting bracket, if the regulator is made of aluminium;
- plastic mounting bracket, if the regulator is made of zinc alloy.

The isolation of the regulator from the wall prevents from eventual electric corrosion.

Type **P100A** - 17.1.110.0075

Type **P100L** - 17.1.110.0076

Type **P21** - 21-1-110-0032



L 6.692 x W 3.484 x H 0.248



L 7.48 x W 4.429 x H 0.216



L 6.299 x W 1.968 x H 0.688

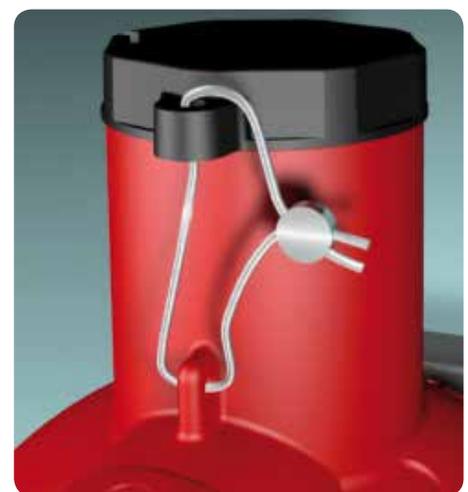


Figure 6

Kosan⁺LINE

Regulators Residential - Commercial

First Stage Regulators	PG. 10
Second Stage Regulators	PG. 11
Second Stage Regulators With Incorporated Dielectric Union	PG. 12
Regulators 2-PSI	PG. 13
Regulators Double Stage (TWIN)	PG. 14
Regulators Pol Double Stage	PG. 15
Automatic Changeovers	PG. 16



First Stage Regulators

Type 984HP



Type 988HP



Product description

The first stage regulator is a regulator reducing the inlet pressure, coming from the withdrawal cylinder, to a medium level suitable to feed a second stage regulator consequently. Therefore Type 984 HP regulators are designed for Type A installations, presented on page 6, or for installations Type C on page 7. They have to be used outdoors in correct mounting position with vent-hole turned downwards. In their standard version the Type 984 HP regulators are delivered with vent-hole turned in line with the outlet fitting.

Technical Specifications

- Body And Cover:** Aluminium
- Diaphragm:** Reinforced
- Supplying Pressure:** 25-250 PSIG
- Cover Screws:** Stainless Steel
- Inlet Fitting Screws:** Stainless Steel
- Gas Type:** Propane
- Setting Point:** Inlet Pressure 100 PSIG, 140,000 BTU, Outlet Pressure 10 PSIG
- Provided Flows:** Flow Based On 25 PSIG (1.725 Bar) Inlet Pressure And 20% Drop (In accordance with UL 144)
- Type 984HP** - L 4.881 x W 4.33 x H 3.917" Weight: 31.375 oz
- Type 988HP** - L 6.027 x W 4.33 x H 4.94" Weight: 48.75 oz

984HP & 988HP Configurations

Type	Capacities in BTU\hr (SCMH) propane	Inlet connection, inches	Outlet connection, inches	Outlet adjustment range, PSIG (bar)	Outlet pressure setting, PSIG (bar)
984HP - 04	1,000,000 (11.26)	1/4" NPT	1/2" NPT	No adjustment	10 (0.69)
988HP - 07	2,000,000 (22.51)	1/2" NPT		3/4" NPT	4 to 6 (0.28 to 0.41)
988HP - 08		POL			
988HP - 09	2,250,000 (25.33)	1/2" NPT	1/2" NPT	8 to 12 (0.55 to 0.83)	10 (0.69)
988HP - 04	2,100,000 (23.64)				
988HP - 01	2,400,000 (27.01)	3/4" NPT	3/4" NPT		
988HP - 05	2,100,000 (23.64)	POL	1/2" NPT		
988HP - 06	2,250,000 (25.33)		3/4" NPT		

Second Stage Regulators

Residential / Commercial

Type 988LP



Type 998LP



Product description

The second stage regulator is a regulator reducing the pressure coming from a first stage regulator directly to the inlet pressure of the user appliance or to a medium pressure value in case of installations with Line Pressure Regulators. Therefore Type 988 LP regulators are designed for Type A installations, see page 6 of the present catalogue. They have to be used outdoors in correct mounting position with venthole turned downwards. In the standard version these regulators are delivered with vent-hole in line with the inlet fitting. But there are three other configurations of the inlet and outlet fittings for the Type 998 LP model:

- Back Mount 998 LP-03, 998 LP-04 and 998LP-29 (fig. A)
- Angle Body 998 LP-05 (fig. B)
- In line inlet and outlet Flange 998 LP-09 and 998LP-10 (fig. C)

Technical Specifications

- Body And Cover:** Aluminium
- Diaphragm:** Reinforced
- Supplying Pressure:** 5-15 PSIG
- Cover Screws:** Stainless Steel
- Inlet Fitting Screws:** Stainless Steel
- Gas Type:** Propane
- Setting Point:** Inlet Pressure 10 PSIG, 140,000 BTU, Outlet Pressure 11 Inch WC
- Provided Flows:** Flow based On 10 PSIG (0.69 Bar) Inlet Pressure And 20% Drop (In accordance With UL144).
- Type 988LP** - L 6.027 x W 4.33 x H 4.94" Weight: 40.75 oz
- Type 998LP** - L 7.055 x W 5.657 x H 4.964" Weight: 57.625 oz

 Fig.A Back Mount Weight: 56.625 oz	 Fig.B Angle Body Weight: 58.25 oz	 Fig.C In line Weight: 106.25 oz
--	---	---

988LP & 998LP Configurations

Type	Capacities in BTU\hr (SCMH) propane	Inlet connection, inches	Outlet connection, inches	Outlet pressure range, inches W.C. (mbar)	Outlet pressure setting, inches W.C. (mbar)
988LP - 03	800,000 (9.01)	1/2" NPT	1/2" NPT	9 to 13 (22 to 32)	11 (27)
998LP - 19			3/4" NPT		
998LP - 22	1,000,000 (11.26)	3/4" NPT	3/4" NPT LAT		
998LP - 01	1,400,000 (15.76)		3/4" NPT 90°		
998LP - 28 ¹		920,000 (10.36)	3/4" NPT		
998LP - 02	1/2" NPT		3/4" NPT		
998LP - 03	1,000,000 (11.26)	3/4" NPT	1" NPT		
998LP - 04			1" NPT		
998LP - 29 ¹	2,300,000 (25.89)	1" NPT	1" NPT		
998LP - 10			1" NPT		
998LP - 09					

¹ Vent-hole in line with the outlet fitting.

Second Stage Regulators With Incorporated Dielectric Union

Type 998LP



Type 998TP



Product description

The KOSAN+ Guardian regulators incorporate a dielectric insulation. This regulator is an all in one solution and there is no need to buy separate dielectric unions. The Guardian reduces installation costs and time as well as potential leak points.

Technical Specifications

Type 998LP: L 7.055 x W 5.657 x H 4.964" - Weight: 57.50 oz

Type 998TP: L 7.055 x W 5.657 x H 4.964" - Weight: 57.50 oz

For Type LP see page 11.

For Type TP see page 13.

In accordance with NFPA 58

§ 6.9.3.16 Underground metallic piping, tubing, or both which convey LP-Gas from a gas storage container shall be provided with dielectric fittings at the building to electrically isolate it from the aboveground portion of the fixed piping system that enters a building. Such dielectric fitting shall be installed above ground and outdoors.

Kosan+ Guardian Configurations

Type	Capacities in BTU\hr (SCMH) propane	Inlet connection, inches	Outlet connection, inches	Outlet pressure range, inches W.C. (Mbar)	Outlet pressure setting, inches W.C. (Mbar)
988LP - 24	800,000 (9.01)	1/2" NPT	1/2" NPT	9 to 13 (22 to 32)	11 (27)
998LP - 39			3/4" NPT		
998LP - 40					
998LP - 41 ¹	1,400,000 (15.76)	3/4" NPT	3/4" NPT		
998LP - 31			3/4" NPT LAT		
998LP - 32					
998LP - 35	920,000 (10.36)	1/2" NPT	3/4" NPT 90°	1 to 2.2 PSIG (0.069 to 0.15 bar)	2 PSIG (0.14 bar)
998LP - 33	1,000,000 (11.26)	3/4" NPT			
998LP - 42 ¹		1/2" NPT			
998LP - 34					
988TP - 25	700,000 (7.88)	1/2" NPT	1/2" NPT	Non-adjustable	2 PSIG (0.14 bar)
998TP - 36	1,680,000 (18.91)	3/4" NPT	3/4" NPT	1 to 2.2 PSIG (0.069 to 0.15 bar)	
998TP - 37	1,500,000 (16.88)		3/4" NPT 90°		
998TP - 38	1,460,000 (16.43)	1/2" NPT	1/2" NPT		

¹ Vent-hole in line with the outlet fitting.

2-PSIG Regulators

Residential / Commercial

Type 988TP



Type 998TP



Product description

Type 988 TP regulators are designed for C Type of installations.

They are to be used outdoors in correct mounting position with vent-hole turned downwards.

In the standard version Type 988 TP regulators are delivered with the vent-hole turned in line with the outlet fitting. There is a special configuration of inlet and outlet fittings for the Type 998 TP model:

- Back Mount 998 LP-07 (fig. A).

Technical Specifications

Body And Cover: Aluminium

Diaphragm: Reinforced

Supplying Pressure: 5-15 PSIG

Cover Screws: Stainless Steel

Inlet Fitting Screws: Stainless Steel

Gas Type: Propane

Setting Point: Inlet Pressure 10 PSIG, 140,000 BTU, Outlet Pressure: 2 PSIG

Provided Flows: Flow Based On 10 PSIG (0.69 Bar) Inlet Pressure with a 20% Drop (In accordance With UL144)

Type 988TP: L 6.692 x W 4.33 x H 4.94" - Weight: 41.625 oz

Type 998TP: L 7.055 x W 5.657 x H 4.964" - Weight: 57.5 oz



998TP-07

Fig.A **Back Mount**

Weight: 57.875 oz

988TP & 998TP Configurations

Type	Capacities in BTU\hr (SCMH) propane	Inlet connection, inches	Outlet connection, inches	Outlet adjustment range, PSIG (bar)	Outlet pressure setting, PSIG (bar)
988TP - 22	700,000 (7.88)	1/2" NPT	1/2" NPT	1 to 2.2 (0.069 to 0.15)	2 (0.14)
998TP - 06	1,680,000 (18.91)	3/4" NPT	3/4" NPT		
998TP - 07	1,500,000 (16.88)		3/4" NPT 90°		
998TP - 08	1,460,000 (16.43)	1/2" NPT	1/2" NPT		

Twin Stage Regulators

Type 988TW



Type 998TW



Product description

The twin stage regulator is a regulator consisting of two regulation levels, which regulates the inlet pressure, coming from the withdrawal cylinder or tank directly to the inlet pressure of the user appliance.

Type 988 TW regulators are designed for Type B installations. They are to be used outdoors in correct mounting position with vent-hole turned downwards. In the standard version, Type 988 TW regulators are delivered with vent-hole turned in line with to the outlet fitting.

Technical Specifications

- Body And Cover:** Aluminium
- Diaphragm:** Reinforced
- Supplying Pressure:** 25-250 PSIG
- Cover Screws:** Stainless Steel
- Inlet Fitting Screws:** Stainless Steel
- Gas Type:** Propane
- Setting Point:** Inlet Pressure 10 PSIG, 140,000 BTU, Outlet Pressure: 11 Inch WC
- Provided Flows:** Flow Based On 10 PSIG (0.69 Bar) Inlet Pressure with a 20% Drop (In accordance With UL144)
- Type 988TW:** L 6.692 x W 4.33 x H 4.94" - Weight: 39.75 oz.
- Type 998TW:** L 7.055 x W 5.657 x H 4.964" - Weight: 54.875 oz.

988TW & 998TW configuration

Type	Capacities in BTU\hr (SCMH) propane	Inlet connection, inches	Outlet connection, inches	Outlet adjustment range, inches W.C. (mbar)	Outlet pressure setting, inches W.C. (mbar)
988TW - 15	750,000 (8.44)	1/4" NPT	1/2" NPT	9 to 13 (22 to 32)	11 (27)
988TW - 16 ¹			3/4" NPT		
998TW - 20					
988TW - 11	1,400,000 (15.76)	POL	3/4" NPT		
988TW - 12 ¹			1/2" NPT		
988TW - 28					
988TW - 17	750,000 (8.44)	POL	1/2" NPT		
988TW - 18 ¹			3/4" NPT		
998TW - 21					
988TW - 13	1,400,000 (15.76)	POL	3/4" NPT		
998TW - 14 ¹					
988TW - 27	450,000 (5.07)	1/4" NPT	3/4" NPT	1 to 2.2 PSIG (0.069 to 0.15 bar)	2 PSIG (0.14 bar)
998TW - 23	1,460,000 (16.43)	1/4" NPT	3/4" NPT	1 to 2.2 PSIG (0.069 to 0.15 bar)	2 PSIG (0.14 bar)

¹ First and Second-Stage spring case vents opposite gauge taps.

Automatic Changeovers

Type 524AC



Technical Specifications

Body And Cover Of The Automatic Changeover: Zamak
Diaphragm: Reinforced
Supplying Pressure: 25-250 PSIG
Cover Screws: Stainless Steel
Fittings: Brass
Gas: Propane Gas
Setting Point: Inlet Pressure 100 PSIG, 140,000 BTU, Outlet Pressure: 11 WC
Provided Flows: Flow Based On 25 PSIG (1.725 Bar) Inlet Pressure And 20% Drop (In accordance With UL144)
Type 524AC: L 9.921 x W 4.212 x H 5.275"

Product description

The double stage automatic changeover regulator Type 524 AC is a combination consisting of an automatic changeover working as a 1st stage coupled to a 2nd stage regulator. The 1st stage automatic changeover works as per the description found on the next page titled "functioning of the automatic changeover", which is connected to the 2nd stage regulator: Type 988 LP. Since the regulator body is made of zinc alloy, it is necessary to use the proper plastic mounting bracket for this type of regulator. Please refer to recommendations on page 8 of the present catalogue.

524AC configuration

Type	Capacities in BTU\hr (SCMH) propane	Inlet connection, inches	Outlet connection, inches	Vent size, inches
70-1-190-0321	600,000 (6.75)	1/4 Inverted Flare	1/2 NPT	3/4 NPT

Type 528B



Technical Specifications

Body And Cover Of The Automatic Changeover: Zamak
Diaphragm: Reinforced
Supplying Pressure: 25-250 PSIG
Fittings: Brass
Gas: Propane Gas
Setting Point: Inlet Pressure 100 PSIG, 140,000 BTU, Outlet Pressure: 11 WC
Provided Flows: Flow Based On 25 PSIG (1.725 Bar) Inlet Pressure And 20% Drop (In accordance With UL144)
Type 528B: L 7.677 x W 4.212 x H 4.094"

528B configuration

Type	Capacities in BTU\hr (SCMH) propane	Inlet connection, inches	Outlet connection, inches	Vent size, inches
52-1-890-0032	450,000 (5.07)	1/4 Inverted Flare	1/2"NPT	3/8"NPT

Type 924N



Technical Specifications

Body And Cover Of The Automatic Changeover: Zamak
Supplying Pressure: 25-250 PSIG
Fittings: Brass
Gas: Propane Gas
Setting Point: Inlet Pressure 100 PSIG, 70,000 BTU, Outlet Pressure: 11 WC
Provided Flows: Flow Based On 25 PSIG (1.725 Bar) Inlet Pressure And 20% Drop (In accordance With UL144)
Type 924N: L 5.314 x W 3.11 x H 3.897"

924N configuration

Type	Capacities in BTU\hr (SCMH) propane	Inlet connection, inches	Outlet connection, inches
52-A-890-0008	2200,000 (2.47)	1/4 Inverted Flare	3/8"NPT

Functioning And Reading Of The Automatic Changerover

The automatic changerover ensures continuous gas flow, automatically changing the gas withdrawal from the empty "service" cylinder to the full "reserve" one. The full-empty indicator incorporated into the bonnet of the automatic changerover indicates the exhaustion status of the "service" cylinder. The indicator color changes from green to red, when the "service" cylinder is exhausted. The rotation of the automatic changerover handle to the full "reserve" cylinder restores the green color on the indicator.

Start up

- Turn two cylinders' gas valves on at the same time. This is fundamental, which ensures the automatic changerover the ability to continuously supply the gas appliance, in case the service cylinder becomes empty. The automatic changerover cannot turn to the reserve gas bottle if its valve is closed.

Reading the automatic changerover's indicator: when the service gas bottle is full

- When the two gas cylinders are full, the automatic changerover's indicator turns to green while opening gas valves A and B.

- The arrow on the automatic changerover's knob indicates which one of the two gas cylinders is supplying gas: that is to say the "service gas bottle".

The other cylinder is the "reserve gas bottle".

Reading the automatic changerover's indicator: when the service gas bottle is empty

- When the service bottle is getting exhausted and reaches pressure values of inversion (lower than 10 PSIG), the automatic changerover turns automatically to the "reserve gas bottle" and the gas appliance continues working.




In this case the automatic changerover's indicator turns to red: the end user gets to know that the "service gas bottle" is empty: it is not supplying gas any more.

Substituting the empty gas bottle

- Close the valve of the service gas bottle A and turn the automatic changerover's knob 180° (see figure 3 a). If the reserve gas bottle is full and its valve is open, the automatic changerover's indicator turns to green (figure 3 b).

- Remove the empty gas bottle (figure 3c).

- Position a new full gas bottle. Open the gas valve A (figure 3d).

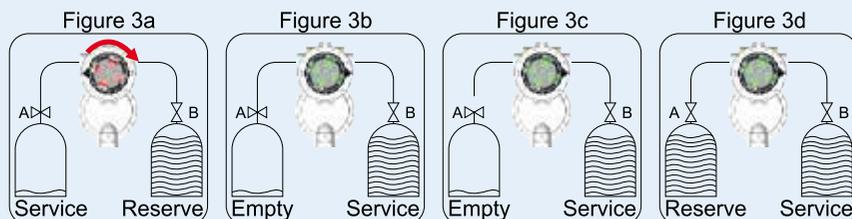

Pol Double Stage Regulator

Type 524AS



Technical Specifications

ASME Double Stage Regulator

Body And Cover Material: Zamak

Diaphragm: Reinforced

Supplying Pressure: 25-250 PSIG

Fittings: Brass

Gas: Propane

Setting Point: Inlet Pressure 100 PSIG, 70,000 BTU,

Outlet Pressure: 11 WC

Provided Flows: Flow Based On 25 PSIG (1.725 Bar) Inlet Pressure And 20% Drop (In accordance With UL144)

Type 524AS: L 6.389 x W 2.696 x H 2.488"

524AS Configuration

Type	Capacities in BTU/hr (SCMH) propane	Inlet connection, inches	Outlet connection, inches
52-A-490-0015	160,000 (1.80)	.880 P.O.L.	3/8" NPT

LPG & Natural gas Line Pressure Regulators

Type 90	PG. 18
Type 95	PG. 19
Type 96	PG. 20
Type 97	PG. 20
Type 98	PG. 20
Pipe and Tubing Selection Guide	PG. 22



Line Pressure Regulators

Type 90 2-PSI / 5-PSI inlet



Technical Specifications

Rated inlet pressure: 2 PSI / 5 PSI

Outlet pressure setting:

- 5"-9" w.c.
- 7"-9" w.c.
- 7"-11" w.c.
- 9"-12" w.c.
- 11"- 13" w.c.

Gases: Natural Gas or Propane

Code: The four digit code indicates the year and the calendar week, in which the regulator was manufactured (i.e. 1012: in twelfth week of 2010)

Ambient temp. range: -40/205°F (-40/96°C)

Pipe size NPT: 1/2" x 1/2"

Venting: Vent limiter "0" 3-18 1/8" NPT

Emergency exposure limits: 65 PSIG (4.5 BAR) inlet side only

Type 90: L 4.409 x W 3.956 x H 3.492" - Weight: 22.75 oz.


Applications

Type 90 OARA regulators are manufactured to supply the demands of both Line Pressure Regulators and Gas Appliance Regulators.

Features

- Precise regulating control of both full flow and of tiny pilot flows.
- All models are approved by IAS, in accordance with the two different standards.
- Manufactured in order to fulfil utility specifications for usage in residential, commercial and industrial applications.
- Materials of all component parts are carefully selected and corrosion-resistant.
- Diaphragm and washer are made of NITRILE RUBBER, which guarantees resistance to combustible gases.
- Rubber is selected to work at the following ambient temperatures: -40/205 °F (-40/96°C).
- Housings are made of rugged die-cast aluminium.
- Regulators are supplied with a vent limiter type "0" 3-18 thread 1/8" NPT. In case of diaphragm rupture, gas leakage is limited within ANSI standard levels.
- Manufacturing of the regulators in terms of balancing capacity guarantees excellent control of the outlet pressure in case of absence of flow.

PRESSURE DROP CHART



CAPACITIES based on 1" w.c. pressure drop from set point 0.64 sp gr gas expressed in BTU (PROPANE stabilizer)

Model	Outlet Pressure	1/2 PSIG= 34.5 mbar	3/4 PSIG= 52 mbar	1 PSIG= 69 mbar	2 PSIG= 138 mbar	5 PSIG= 345 mbar
90	6" w.c.	250,000	313,000	368,000	447,000	548,000
	7" w.c.	243,000	313,000	360,000	439,000	541,000
	8" w.c.	243,000	306,000	360,000	423,000	525,000
	9" w.c.	227,000	298,000	337,000	407,000	509,000
	10" w.c.	211,000	282,000	321,000	384,000	486,000
	11" w.c.	196,000	266,000	306,000	368,000	470,000
	12" w.c.	196,000	259,000	306,000	360,000	462,000

PRESSURE DROP - 0.64 sp gr gas expressed in CFH (m³/h)

Press. drop	7.0" PSIG= 17 mbar	1/2 PSIG= 34.5 mbar	3/4 PSIG= 52 mbar	1 PSIG= 69 mbar
Flow rate CFH (m³/h)	155 (4.3)	220 (6.1)	280 (7.8)	310 (8.7)

CAPACITIES based on 1" w.c. pressure drop from set point 0.64 sp gr gas expressed in CFH (m³/h)

Model	Outlet Pressure	1/2 PSIG= 34.5 mbar	3/4 PSIG= 52 mbar	1 PSIG= 69 mbar	2 PSIG= 138 mbar	5 PSIG= 345 mbar
90	6" w.c.	160 (4.5)	200 (5.6)	235 (6.6)	285 (8.0)	350 (9.8)
	7" w.c.	155 (4.3)	200 (5.6)	230 (6.4)	280 (7.8)	345 (9.7)
	8" w.c.	155 (4.3)	195 (5.5)	230 (6.4)	270 (7.6)	335 (9.4)
	9" w.c.	145 (4.1)	190 (5.3)	215 (6.0)	260 (7.3)	325 (9.1)
	10" w.c.	135 (3.8)	180 (5.0)	205 (5.7)	245 (6.7)	310 (8.7)
	11" w.c.	125 (3.5)	170 (4.8)	195 (5.5)	235 (6.6)	300 (8.4)
	12" w.c.	125 (3.5)	165 (5.5)	195 (5.5)	230 (6.4)	295 (8.3)

Line Pressure Regulators

Type 95

2-PSI / 5-PSI inlet



Technical Specifications

Rated inlet pressure: 2 PSI / 5 PSI

Outlet pressure setting:

7"-11" w.c.

11"-13" w.c.

Outlet pressure setting:

Type 951 8" at 200 CFH

Type 952 11" at 200 CFH

Gases: Natural Gas or Propane

Code: The four digit code indicates the year and the calendar week, in which the regulator was manufactured (i.e. 1012: in twelfth week of 2010)

Ambient temp. range: -40/205°F (-40/96°C)

Pipe size NPT: 3/4" x 3/4" - 1" x 1"

Venting: Vent limiter "0" 6-38 3/8" NPT

Emergency exposure limits: 65 PSIG (4.5 BAR) inlet side only

Type 95 - L 5.964 x W 5.551 x H 5.196" - Weight: 47.625 oz.


Application

The Type 95 OARA pressure regulators are manufactured to supply the highest performances both as Line Pressure Regulators and Gas Appliance Regulators.

Features

- Precise regulating control of both full flow and of tiny pilot flows.
- All models are approved by IAS, in accordance with the two different standards.
- Manufactured in order to fulfil utility specifications for usage in residential, commercial and industrial applications.
- Materials of all component parts are carefully selected and corrosion resistant.
- Diaphragm and washer are made of NITRILE RUBBER, which guarantees resistance to combustible gases.
- Rubber is selected to work at the following ambient temperatures: -40/205 °F (-40/96°C).
- Housings are made of rugged die-cast aluminium.
- Vent limiter is made of brass.
- Regulators are supplied with a vent limiter type "0" 6-38 thread 1/8" NPT. In case of diaphragm rupture, gas leakage is limited within ANSI standard levels.
- Manufacturing of the regulators in terms of balancing capacity guarantees excellent control of the outlet pressure in case of absence of flow.

PRESSURE DROP CHART



CAPACITIES based on 1" w.c. pressure drop from set point 0.64 sp gr gas expressed in BTU (PROPANE stabilizer)

Model	Outlet Pressure	½ PSIG= 34.5 mbar	¾ PSIG= 52 mbar	1 PSIG= 69 mbar	2 PSIG= 138 mbar	5 PSIG= 345 mbar
95	7" w.c.	570,000	632,000	701,000	810,000	1,011,000
	8" w.c.	563,000	618,000	701,000	798,000	997,000
	9" w.c.	536,000	597,000	674,000	784,000	997,000
	10" w.c.	516,000	591,000	632,000	777,000	983,000
	11" w.c.	473,000	564,000	583,000	741,000	962,000

PRESSURE DROP - 0.64 sp gr gas expressed in CFH (m3/h)

Press. drop	7.0" PSIG= 17 mbar	½ PSIG= 34.5 mbar	¾ PSIG= 52 mbar	1 PSIG= 69 mbar
Flow rate CFH (m3/h)	359 (10.1)	504 (14.3)	627 (17.7)	719 (20.3)

CAPACITIES based on 1" w.c. pressure drop from set point 0.64 sp gr gas expressed in CFH (m3/h)

Model	Outlet Pressure	½ PSIG= 34.5 mbar	¾ PSIG= 52 mbar	1 PSIG= 69 mbar	2 PSIG= 138 mbar	5 PSIG= 345 mbar
95	7" w.c.	364 (10.3)	403 (11.4)	447 (12.7)	517 (14.6)	645 (18.3)
	8" w.c.	359 (10.2)	394 (11.2)	447 (12.7)	509 (14.4)	636 (18.0)
	9" w.c.	342 (9.7)	381 (10.8)	430 (12.2)	500 (14.2)	636 (18.0)
	10" w.c.	329 (9.3)	377 (10.7)	403 (11.4)	496 (14.0)	627 (17.8)
	11" w.c.	302 (8.5)	360 (10.2)	372 (10.5)	473 (13.4)	614 (17.8)

Stabilizers

Type 96



L 2.362 x W 1.811 x H 2.008 - Weight: 3.527 oz

Type 97



L 2.953 x W 2.283 x H 2.362 - Weight: 8.748 oz

Type 98



L 2.756 x W 2.972 x H 3.346 - Weight: 11.146 oz

Application

- The regulators are intended for primary use of MAIN BURNER AND PILOT LOAD applications, they feature precise regulating control of both full flow and of tiny pilot flows.
- All models are tested by IAS, in order to check a minimum capacity of 0.15 cfh G
- The regulators can be mounted in any positions. **WARNIG!** The regulators are adjusted in the upright position, in case of installations in different positions, little modifications of the pressure adjustment can occur.
- The vent hole is supplied with thread to allow the connection to an eventual line.
- The "L" models have been manufactured with **FIXED ORIFICE** on the cover which limits the leakage in case of diaphragm rupture.
- These products can be supplied with a pressure outlet tap in order to check the outlet pressure of the regulator during the installation.
- Materials of all component parts are carefully selected and corrosion-resistant.
- Diaphragm and washer are made of **NITRILE RUBBER**, which guarantees resistance to combustible gases.
- Rubber is selected to work at the following ambient temperatures: - 40/205 °F (-40/96°C).
- Housings are made of rugged die-cast aluminium.

Technical Specifications

Rated inlet pressure:

Type 96: 1/2 PSI - 2 PSI

Type 97: 1/2 PSI

Type 98: 1/2 PSI

Outlet pressure range:

Type 96: 2.8"-12" w.c. (version with fixed cap available - code F)

Type 97: 2.8"-12" w.c.

Type 98: 2.8"-12" w.c.

PIPE SIZE NPT:

Type 96: 1/4" x 1/4" - 3/8" x 3/8"

Type 97: NPT 3/8" x 3/8" - 1/2" x 1/2"

Type 98: NPT 1/2" x 1/2" - 3/4" x 3/4"

different threads available on request

VENTING: Standard orifice Ø 1,4 mm - Limited orifice Ø 0,35 mm

Emergency exposure limits: 2.5 PSI (172 mbar)

Gases: Natural Gas or Propane

Ambient temp. range: -40/205°F (-40/96°C)

Type	Venting	INDIVIDUAL M.B. (BTU/hr)	Range of regulation (BTU/hr)		Regul. capacity M.B. and PILOT (BTU/hr)		Press. Drop capacity at 1.0" W.C.
		MAX	MAX	MIN	MAX	MIN	
96	Thread 5/16" - 24	50,000	65,000	150	50,000	150	48,000
	Fixed orifice	30,000					
97	Thread 1/8" NPT	90,000	120,000	150	90,000	150	100,000
97L	Fixed orifice	40,000					
98	Thread 1/8" NPT	170,000	250,000	150	240,000	150	230,000
98L	Fixed orifice	40,000					

Conversion Table

Type 90 / 2-5 PSI

Type	Part Number	Pipe size	Inlet Pressure	Setting	Natural Gas	LPG
90	44-1-190-0002	1/2"	2 PSIG	8"	7" - 11" w.c.	-
	44-1-190-0004			7"		7" - 11" w.c.
	44-1-190-0006			11"	-	
	44-1-190-0008			11"	9" - 12" w.c.	
	44-1-190-0009		5 PSIG	3.5"	2" - 6" w.c.	-
	44-1-190-0011			8"	7" - 11" w.c.	-
	44-1-190-0012			11"	-	7" - 11" w.c.
	44-1-190-0013			7"	-	11"-13" w.c.
44-1-190-0016	11"	-	11"-13" w.c.			

Type 95 / 2-5 PSI

Type	Part Number	Pipe size	Inlet Pressure	Setting	Natural Gas	LPG
95	44-1-290-0002	3/4"	2 PSIG	8"	7" - 11" w.c.	-
	44-1-290-0003			11"		7" - 11" w.c.
	44-1-290-0010		5 PSIG	8"	-	
	44-1-290-0011			11"	-	
	44-1-290-0015		-	11"-13" w.c.		

Type 96 / 1/2 - 2-PSI

Mod.	Part No.	Pipe size	Ini. Press	Setting	N.C.	L.P.G.
96	44-1-390-0003	3/8"	1/2 PSI	12"	-	8" - 12" w.c.
	44-1-390-0004			11"		8" - 11" w.c.
	44-1-390-0005			5.8"	4" - 5.8" w.c.	-
	44-1-390-0006			5"	2.8" - 5" w.c.	
	44-1-390-0008			10"	-	8" - 12" w.c.
	44-1-390-0010			6"	4" - 8" w.c.	-
	44-1-390-0013			10"	-	8" - 12" w.c.
	44-1-390-0014			6"	4" - 8" w.c.	-
	44-1-390-0016	1/4"	2 PSI	10"	-	8" - 12" w.c.
	44-1-390-0019	1/2"			8" - 12" w.c.	-
	44-1-390-0020	3/8"		4"	2.8" - 5.2" w.c.	
	44-1-390-0023	3/8"			7"	
	44-1-390-0025	1/4"		-		
	44-1-390-0026	3/8"		-		

Type 97 - 1/2 PSI

Type	Part Number	Pipe size	Inlet Pressure	Setting	Natural Gas	LPG	Convertible
97	44-1-490-0005	1/2"	1/2 PSI	-	-	-	4" - 11" w.c.
	44-1-490-0019						5" - 10" w.c.
	44-1-490-0034						4" - 11" w.c.

Type 98 - 1/2 PSI


Type	Part Number	Pipe size	Inlet Pressure	Setting	Natural Gas	LPG	Convertible
98	44-1-590-0002	3/4"	1/2 PSI	4"	3.3" - 6" w.c.	-	-
	44-1-590-0017	1/2"		-	-		4" - 10" w.c.
	44-1-590-0019			3/4"	4"	3.3" - 6" w.c.	-
	44-1-590-0025	1/2"		-	-	-	
	44-1-590-0028			4"	4" - 10" w.c.		
	44-1-590-0030	3/4"		-	-	4" - 11" w.c.	

Pipe and Tubing Selection Guide

Use the following simple method to assure the selection of the correct sizes of piping and tubing for LP-Gas vapor systems. Piping between the first and second stage is considered, as well as lower pressure (2 PSIG) piping between the 2 PSIG second stage or integral twin stage regulator and the line pressure regulator; and low pressure (inches of water column) piping between second stage, single stage, or integral twin stage regulators and appliances. The information supplied below is from NFPA 54 (National Fuel Gas Code) Appendix C, and NFPA 58 (Liquefied Petroleum Gas Code) Chapter 15; it can also be found in CETP (Certified Employee Training Program) published by the Propane Education and Research Council "Selecting Piping and Tubing" module 4.1.8. These illustrations are for demonstrative purposes, they are not intended for actual system design.

Instructions:

1. Determine the total gas demand for the system by adding up the BTU/hr input from the appliance nameplates and adding demand as appropriate for future appliances.
2. For second stage or integral twin stage piping:
 - A. Measure length of piping required from outlet of regulator to the appliance furthest away. No other length is necessary to do the sizing.
 - B. Make a simple sketch of the piping, as shown.
 - C. Determine the capacity to be handled by each section of piping. For example, the capacity of the line between a and b must handle the total demand of appliances A, B, and C; the capacity of the line from c to d must handle only appliance B, etc.
 - D. Using Table 3 select proper size of tubing or pipe for each section of piping, using values in BTU/hr for the length determined from step #2-A. If exact length is not on chart, use next longer length. Do not use any other length for this purpose! Simply select the size that shows at least as much capacity as needed for each piping section.
3. For piping between first and second stage regulators
 - A. For a simple system with only one second stage regulator, merely measure length of piping required between outlet of first stage regulator and inlet of second stage regulator. Select piping or tubing required from Table 1.
 - B. For systems with multiple second stage regulators, measure length of piping required to reach the second stage regulator that is furthest away. Make a simple sketch, and size each leg of piping using Table 1, 2, or 3 using values shown in column corresponding to the length as measured above, same as when handling second stage piping.

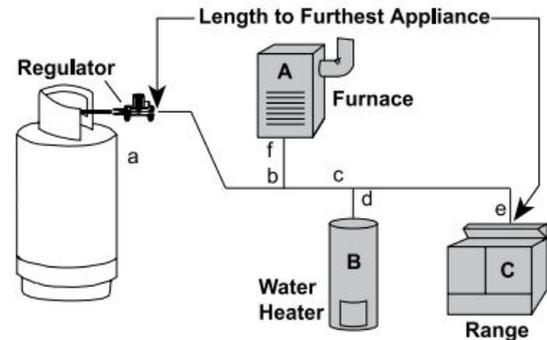

Example 1

Determine the sizes of piping or tubing required for the twin-stage LP-Gas installation shown.

Total piping length = 84 feet (use Table 3 @90 feet)

From a to b, demand = 38,000 + 35,000 + 30,000

= 103,000 BTU/hr; use 3/4" pipe


From b to c, demand = 38,000 + 35,000

= 73,000 BTU/hr; use 1/2" pipe or 3/4" tubing

From c to d, demand = 35,000 BTU/hr; use 1/2" pipe or 5/8" tubing

From c to e, demand = 38,000 BTU/hr; use 1/2" pipe or 5/8" tubing

From b to f, demand = 30,000 BTU/hr; use 1/2" pipe or 1/2" tubing

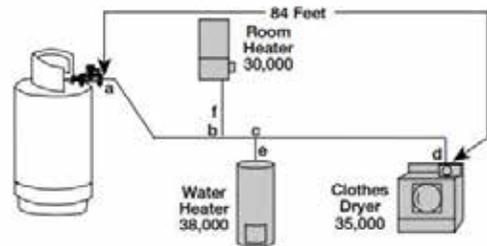

Example 2

Determine the sizes of piping or tubing required for the two-stage LP-Gas installation shown.

Total first stage piping length = 26 feet; first stage regulator setting is 10psig (use Table 1 or 2 @ 30 feet)

From aa to a, demand = 338,000 BTU/hr; use 1/2" pipe, 1/2" tubing, or 1/2" T plastic pipe.

Total second stage piping length = 58 feet (use Table 3 @ 60 feet)

From a to b, demand = 338,000 BTU/hr; use 1" pipe

From b to c, demand = 138,000 BTU/hr; use 3/4" pipe or 7/8" tubing


From c to d, demand = 100,000 BTU/hr; use 1/2" pipe or 3/4" tubing

From d to e, demand = 35,000 BTU/hr; use 1/2" pipe or 1/2" tubing

From b to f, demand = 200,000 BTU/hr; use 3/4" pipe or 7/8" tubing

From c to g, demand = 38,000 BTU/hr; use 1/2" pipe or 1/2" tubing

From d to h, demand = 65,000 BTU/hr; use 1/2" pipe or 5/8" tubing

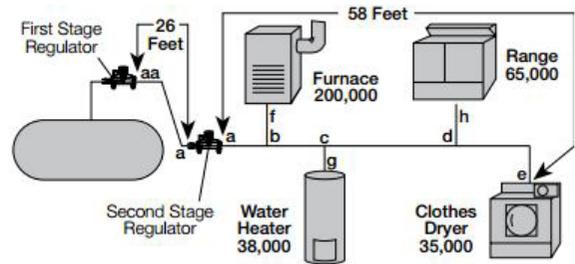

Example 3

Determine the sizes of piping or tubing required for the 2 PSI LP-Gas installation shown.

Total first stage piping length = 26 feet; first stage regulator setting is 10psig (use Table 1 or 2 @ 30 feet)

Total 2 PSI Piping Length = 19 ft. (use Table 4 @ 20 ft. or Table 6 @ 20 ft.)

From aa to a, demand= 338,000 BTU

use 3/8" CSST or 1/2" copper tubing or 1/2" pipe


From Regulator a to each appliance:

From a to b, demand= 65,000 BTU; length = 25 ft. (Table 5), use 1/2" CSST

From a to c, demand= 200,000 BTU; length = 30 ft. (Table 5) use 3/4" CSST

From a to d, demand= 38,000 BTU; length = 21 ft.* (Table 5) use 3/8" CSST *use 25 ft. column

From a to e, demand= 35,000 BTU; length = 40 ft. (Table 5) use 1/2" CSST

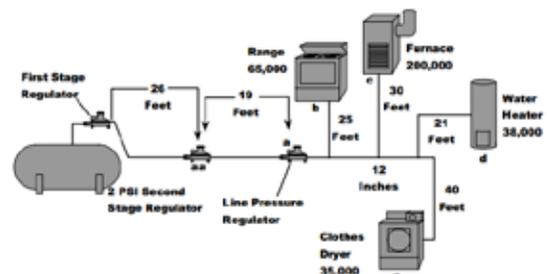

Pipe and Tubing Selection Guide

Table 1 – First Stage Pipe Sizing (Between First and Second Stage Regulators) 10 PSIG Inlet with a 1 PSIG Pressure Drop Maximum capacity of pipe or tubing, in thousands of BTU/hr or

Size of Pipe or		Length of Pipe or Tubing, Feet																			
Copper Tubing, Inches		10	20	30	40	50	60	70	80	90	100	125	150	175	200	225	250	275	300	350	400
Copper Tubing (O.D.) Pipe Size	3/8"	558	383	309	265	235	213	196	182	171	161	142	130	118	111	104	90	89	89	82	76
	1/2"	1387	870	700	599	531	481	443	412	386	365	323	293	269	251	235	222	211	201	185	172
	5/8"	2360	1622	1303	1115	988	896	824	767	719	679	601	546	502	467	438	414	393	375	345	321
	3/4"	3993	2475	2205	1887	1672	1515	1394	1297	1217	1149	1018	923	843	790	740	700	664	634	584	543
	1/2"	3339	2295	1843	1577	1398	1267	1165	1084	1017	961	852	772	710	660	619	585	556	530	488	454
	3/4"	6982	4799	3854	3298	2923	2649	2437	2267	2127	2009	1780	1613	1484	1381	1296	1224	1162	1109	1020	949
	1"	13153	9040	7259	6213	5507	4989	4590	4270	4007	3785	3354	3039	2796	2601	2441	2305	2190	2089	1922	1788
	1 1/4"	27004	18560	14904	12756	11306	10244	9424	8767	8226	7770	6887	6240	5741	5340	5011	4733	4495	4289	3945	3670
	1 1/2"	40461	27809	22331	19113	16939	15348	14120	13136	12325	11642	10318	9349	8601	8002	7508	7092	6735	6426	5911	5499
2"	77924	53556	43008	36809	32623	29559	27194	25299	23737	22422	19871	18005	16564	15410	14459	13658	12971	12375	11385	10591	

Table 2 – First Stage Plastic Tubing Sizing 10 PSIG Inlet with a 1 PSIG Pressure Drop - Maximum capacity of plastic tubing in thousands of BTU/hr of LP-Gas

Size of Plastic Tubing		Length of Tubing, Feet*																			
NPS	SDR	10	20	30	40	50	60	70	80	90	100	125	150	175	200	225	250	275	300	350	400
1/2 CTS	7.00	1387	954	762	653	578	524	482	448	421	397	352	319	294	273	256	242	230	219	202	188
1/2	9.33	3901	2681	2143	1835	1626	1473	1355	1261	1183	1117	990	897	826	778	721	681	646	617	567	528
1/2	11.00	7811	5369	4292	3673	3256	2950	2714	2525	2369	2238	1983	1797	1653	1539	1443	1363	1294	1235	1136	1057
1 CTS	11.00	9510	6536	5225	4472	3864	3591	3304	3074	2884	2724	2414	2188	2013	1872	1757	1659	1576	1503	1383	1287
1	11.00	14094	9687	7744	6628	5874	5322	4896	4555	4274	4037	3578	3242	2983	2775	2603	2459	2336	2228	2050	1907
1 1/4	10.00	24416	16781	13416	11482	10106	9220	8433	7891	7404	6994	6199	5616	5167	4807	4510	4260	4046	3860	3551	3304
1 1/2	11.00	-	-	20260	17340	15368	13924	12810	11918	11182	10562	9361	8482	7803	7259	6811	6434	6111	5830	5363	4989
2	11.00	66251	45534	36402	31155	27612	25019	23017	21413	20091	18978	16820	15240	14020	13043	12238	11560	10979	10474	9636	8965

Table 3 – Second Stage or Integral Twin Stage Pipe Sizing 11 Inches Water Column Inlet with a 1/2 Inch Water Column Drop Maximum capacity of pipe or tubing in thousands of BTU/hr of LP-Gas

Size of Pipe or		Length of Pipe or Tubing, Feet																			
Copper Tubing,		10	20	30	40	50	60	70	80	90	100	125	150	175	200	225	250	275	300	350	400
Copper Tubing (O.D.) Pipe Size	3/8"	49	34	27	23	20	19	-	16	-	14	12	11	-	10	-	9	-	8	7	7
	1/2"	110	76	61	52	46	42	38	36	33	32	28	26	-	22	-	19	-	18	16	15
	5/8"	206	141	114	97	86	78	71	67	62	59	52	48	-	41	-	36	-	33	30	28
	3/4"	348	239	192	164	146	132	120	113	105	100	89	80	-	69	-	61	-	55	51	47
	7/8"	536	368	296	253	224	203	185	174	161	154	137	124	-	106	-	94	-	85	78	73
	1/2"	291	200	161	137	122	110	102	94	87	84	74	67	62	58	54	51	48	46	43	40
	3/4"	608	418	336	287	255	231	212	198	185	175	155	141	129	120	113	107	101	97	89	83
	1"	1146	788	632	541	480	435	400	372	349	330	292	265	244	227	213	201	191	182	167	156
	1 1/4"	2353	1617	1299	1111	985	892	821	764	717	677	600	544	500	465	437	412	392	374	344	320
	1 1/2"	3525	2423	1946	1665	1476	1337	1230	1144	1074	1014	899	815	749	697	654	618	587	560	515	479
2"	6789	4666	3747	3207	2842	2575	2369	2204	2068	1954	1731	1569	1443	1343	1260	1190	1130	1078	992	923	

Table 4-Maximum Capacity of CSST In Thousands of BTU per hour of undiluted LP-Gases Pressure of 2 psi and a pressure drop of 1 psi (Based on a 1.52 Specific Gravity Gas)

Size	Designation	10	20	30	40	50	75	80	110	150	200	250	300	400	500
3/8"	13	426	262	238	203	181	147	140	124	101	86	77	69	60	53
	15	558	347	316	271	243	196	189	169	137	118	105	96	82	72
1/2"	18	927	591	540	469	420	344	333	298	245	213	191	173	151	135
	19	1106	701	640	554	496	406	393	350	287	248	222	203	175	158
3/4"	23	1735	1120	1027	896	806	663	643	578	477	415	373	343	298	268
	25	2168	1384	1266	1100	986	809	768	703	575	501	448	411	355	319
1"	30	4097	2560	2331	2012	1794	1457	1410	1256	1021	880	785	716	616	550
	31	4720	2954	2692	2323	2072	1685	1629	1454	1182	1019	910	829	716	638

Pipe and Tubing Selection Guide


Table 5-Maximum Capacity of CSST In Thousands of BTU per hour of undiluted LP-Gases Pressure of 11 Inch Water Column and a Pressure Drop of 0.5 Inch Water Column (Based on a 1.52 Specific Gravity Gas)

Size	Designation	5	10	15	20	25	30	40	50	60	70	80	90	100	150	200	250	300
3/8"	13	72	50	39	34	30	28	23	20	19	17	15	15	14	11	9	8	8
	15	99	69	55	49	42	39	33	30	26	25	23	22	20	15	14	12	11
1/2"	18	181	129	104	91	82	74	64	58	53	49	45	44	41	31	28	25	23
	19	211	150	121	106	94	87	74	66	60	57	52	50	47	36	33	30	26
3/4"	23	355	254	208	183	164	151	131	118	107	99	94	90	85	66	60	53	50
	25	426	303	248	216	192	177	153	137	126	117	109	102	98	75	69	61	57
A) J	30	744	521	422	365	325	297	256	227	207	191	178	169	159	123	112	99	90
	I	31	863	605	490	425	379	344	297	265	241	222	208	197	186	143	129	117

Table 6 – Copper Tube Sizing or Schedule 40 Pipe Sizing In Thousands of BTU per hour of undiluted LP-Gases 2 PSIG inlet with a 1PSIG pressure drop (Between 2 PSIG service regulator & line pressure regulator).

Size of Pipe or		Length of Pipe or Tubing, Feet																			
Copper Tubing,		10	20	30	40	50	60	70	80	90	100	150	200	250	300	350	400	450	500	600	700
Copper Tubing (O.D.)	3/8"	451	310	249	213	189	171	157	146	137	130	104	89	79	72	66	61	58	54	49	45
	1/2"	1020	701	563	482	427	387	356	331	311	294	236	202	179	162	149	139	130	123	111	102
	5/8"	1900	1306	1049	898	795	721	663	617	579	547	439	376	333	302	278	258	242	229	207	191
	3/4"	3215	2210	1774	1519	1346	1219	1122	1044	979	925	743	636	563	511	470	437	410	387	351	323
	1/2"	2687	1847	1483	1269	1125	1019	938	872	819	773	621	531	471	427	393	365	343	324	293	270
Pipe Size	3/4"	5619	3862	3101	2654	2352	2131	1961	1824	1712	1617	1298	1111	985	892	821	764	717	677	613	564
	1"	10585	7275	5842	5000	4431	4015	3694	3436	3224	3046	2446	2098	1855	1681	1546	1439	1350	1275	1155	1063
	1 1/4"	21731	14936	11994	10265	9098	8243	7584	7055	6620	6253	5021	4298	3809	3451	3175	2954	2771	2618	2372	2182
	1 1/2"	32560	22378	17971	15381	13632	12351	11363	10571	9918	9369	7524	6439	5707	5171	4757	4426	4152	3922	3554	3270
	2"	62708	43099	34610	29621	26253	23787	21884	20359	19102	18043	14490	12401	10991	9959	9162	8523	7997	7554	6844	6297

Accessories



Vent Limiter

Code 19-1-190-0004

Vent limiters are designed for use indoors and in spaces where limiting the amount of gas escapement due to diaphragm failure is critical. vent limiters should not be used outdoors if they are exposed to the environment. A vent limiting orifice or device does not release or relieve gas into the environment during normal operation. Connection: 3/8" NPT

Connections	Approximate Length
Vent limiter for use only with natural, manufactured, mixed gases and LP gas-air mixtures	2.5 (19.6)
Vent limiter for use with liquefied petroleum gases	1.0 (7.9)

Vent Protector

Code 19-1-190-0003

Designed for outdoor applications. Use on vent opening to protect breather hole from rain, snow, foreign particles and insects. Vent protector MUST be mounted in an upright position. For outdoor use with Pressure Line Regulators. Not a vent limiting device. Connection: 1/8" NPT

Kosan⁺LINE

Industrial Regulators

94 Series	PG. 26
81 Series	PG. 27
49 Series	PG. 28
47 Series	PG. 29
Regulators with OPSO	PG. 30
Pigtails and Connections	PG. 31



94 Series

Type 94HP



Technical Specifications

Body And Cover: Aluminium

Diaphragm: Reinforced

Supplying Pressure: 25-250 PSIG

Cover Screws: Stainless Steel

Gas Type: Propane

Setting Point: Inlet Pressure 100 PSIG, 350,000 BTU, Outlet Pressure 20 PSIG

Provided Flows: Flow based on Inlet Pressure 20 PSIG (1.38 Bar) greater than Outlet with 20% drop (In accordance With UL144)

Type 94HP: L 4.33 x W 4.72 x H 8.26

Product description

The 94 series direct operated regulators are designed for high-pressure service and can be used on either on vapor or liquid applications. Their outlet pressure ranges from 3 to 100 psig.

High pressure regulators usually reduce tank pressure to an intermediate pressure for use by another regulator.

They are also used for Final stage service on particular application, as high pressure burners as well as other medium sized commercial industrial applications. Type 942HP regulator is an adjustable high pressure regulator with a wide range of outlet pressures. It is not equipped with a limited relief valve.

Type 94HP regulator is an adjustable high pressure regulator with a wide range of outlet pressures.

It is equipped with a limited relief valve. Both types are equipped with a 1/4" FNPT side outlet which is normally plugged and provides an opening for an outlet pressure gauge.

94HP Configuration

Type	Description	Capacity BTU\HR	Inlet & Outlet connections	Outlet pressure setting	Outlet adjustment range
942HP - 03	Basic Regulator	2,600,000	1/2" NPT	10 PSIG	3-15 PSIG
942HP - 04		3,600,000		20 PSIG	5-35 PSIG
942HP - 05		4,200,000		40 PSIG	30-60 PSIG
942HP - 07		5,250,000	50 PSIG	35-100 PSIG	
942HP - 08		5,800,000	3/4" NPT	20 PSIG	5-35 PSIG
942HP - 06		6,500,000		40 PSIG	30-60 PSIG
948HP - 01	With Internal Relief Valve	2,600,000	1/2" NPT	10 PSIG	3-15 PSIG
948HP - 02		3,000,000		15 PSIG	5-20 PSIG
948HP - 03		3,600,000	3/4" NPT	20 PSIG	5-35 PSIG
948HP - 04		5,800,000			

81 Series

Type 81HP



Technical Specifications

- Body And Cover:** Aluminium
- Diaphragm:** Reinforced
- Supplying Pressure:** 25-250 PSIG
- Cover Screws:** Stainless Steel
- Inlet Fitting Screws:** Stainless Steel
- Gas Type:** Propane
- Setting Point:** Inlet Pressure 100 PSIG, 350,000 BTU, Outlet Pressure 10 PSIG
- Provided Flows:** Flow based on Inlet Pressure 20 PSIG (1.38 Bar) greater than Outlet with 20% drop (In accordance With UL144)
- Type 81HP** L 7.67 x W 4.72 x H 9.33

Product description

The 81 series direct operated regulators are designed for high-pressure service and for large loads like factories, office buildings, restaurants, etc. Their outlet pressure ranges from 5 to 20 psig. High pressure regulators usually reduce tank pressure to an intermediate pressure for use by another regulator. They are also used for Final stage service on particular application (pounds to pounds). Type 81 Hp regulator is an adjustable high pressure regulator with a wide range of outlet pressures. It can be equipped with a limited relief valve. Type 81 regulators are equipped with a 1/4" FNPT side outlet which is normally plugged and provides an opening for an outlet pressure gauge. Type 81 regulators can be equipped with Viton trim. Kosan+ 81 Series regulators have a temperature rating of -40°F to + 180°F (-40°C to 82°C)

81HP configuration

Type	Capacity BTU\HR	Orifice Size	Inlet & Outlet connections	Outlet pressure range	Outlet pressure setting
812HP - 03	6,100,000	3/8"	3/4" NPT	5-20 PSIG	10 PSIG
812HP - 04	10,700,000	1/2"			
812HP - 01	10,700,000		1" NPT		
812HP - 02 ²			3/4" NPT		
811HP - 02 ³	10,700,000		1" NPT		
811HP - 01 ³	10,700,000		3/4" NPT		
818HP - 11 ¹	6,100,000	3/8"	3/4" NPT		
812HP - 05	10,700,000	1/2"	2" NPT	5-20 PSIG	10 PSIG

¹ = Has Internal Relief
² = Fluorocarbon Trim (GLT Viton)
³ = w/monitoring

49 Series

Type 49HP



Type 492

Type 493

Type 494

Type 495

Technical Specifications

Body And Cover: Aluminium

Diaphragm: Reinforced

Supplying Pressure: 25-250 PSIG

Cover Screws: Stainless Steel

Gas Type: Propane

Setting Point: Inlet Pressure 100 PSIG, 200,000 BTU, Outlet Pressure 20 PSIG

Provided Flows: Flow based on Inlet Pressure 20 PSIG (1.38 Bar) greater than Outlet with 20% drop (In accordance With UL144)

Inlet & Outlet: 1/4" FNPT

Type 49HP: L 2.56 x W 2.89 x H 4.88

Product description

The 49 series direct operated regulators are designed for high pressure service and can be used on either vapor or liquid applications. Their outlet pressure ranges from 3 to 135 PSIG.

High pressure regulators usually reduce tank pressure to an intermediate pressure for use by another regulator.

NOTE: Type 49 regulators do not have internal relief valves, so these regulators can not be installed in fixed piping serving 0.5 appliance systems.

Type 492HP regulator is an adjustable high pressure regulator with handwheel adjustment.

Type 493HP regulator is an adjustable high pressure regulator with wrench adjustment and 3 spring ranges from 3 to 100 PSIG. Type 494HP regulator is a fixed high pressure regulator with no field adjustment. It is very compact.

Type 495HP regulator is an adjustable high pressure regulator with a dial cap adjustment. This cap eliminates the need for a gauge on portable applications. All types are equipped with a 1/4" FNPT side outlet which is normally plugged and provides an opening for an outlet pressure gauge.

49HP configuration

Type	Description	Capacity BTU\hr	Outlet pressure setting	Outlet adjustment range
492HP - 01	Basic Regulator (Handwheel Adjustment)	650,000	15 PSIG	3-20 PSIG
492HP - 02		750,000	20 PSIG	3-35 PSIG
492HP - 03		1,200,000	40 PSIG	30-60 PSIG
492HP - 04		1,000,000	50 PSIG	50-135 PSIG
492HP - 05 ¹		750,000	20 PSIG	5-35 PSIG
493HP - 02	Basic Regulator (Wrench Adjustment)	650,000	15 PSIG	3-20 PSIG
493HP - 01		750,000	20 PSIG	3-35 PSIG
493HP - 03		1,200,000	40 PSIG	30-60 PSIG
493HP - 04		1,000,000	50 PSIG	50-135 PSIG
493HP - 05 ¹		750,000	20 PSIG	5-35 PSIG
494HP - 02	Non-adjustable	400,000	10 PSIG	Non-Adjustable
494HP - 01		400,000	15 PSIG	
494HP - 03		750,000	20 PSIG	
495HP - 01	Dial Cap Adjustment	650,000	15 PSIG	5-20 PSIG
495HP - 02		750,000	20 PSIG	5-30 PSIG
495HP - 03		1,200,000	40 PSIG	20-50 PSIG

¹ = Inlet M POL

47 Series

Type 47



Technical Specifications

Body and Cover: Aluminium

Flange: Cast Iron

Vent connection: 1" NPT

Gas: Propane

Pressure: 3.5" w.c. to 5.5 PSIG
(9 mbar to 0.38 bar)

Range of variable pressures available on demand

Product Description

Series 47 regulators have been designed for reducing pressure in commercial and small industrial installations. Series 47 are equipped with a larger and adjustable flange and have a larger flow. Series 47 can be equipped with several types of overpressure protection systems, including pressure relief valve, overpressure shutoff (OPSO) valve or integral monitor regulation. They can be protected with OPSO against underpressure issues.

- Protected against corrosion with a consistent powder coating
- High capacity regulators up to 7.7 M BTU LP-Gas
- Overpressure protection systems
- Adjustable inlet/outlet position (Type 47 only)
- Complete range of inlet/outlet connections
- Aluminum body
- Cast iron flange
- Stainless steel screws and bolts
- High temperature resistant diaphragm

Safety Features

Pressure relief valve: A valve which relieves excess gas from the regulator cover if an overpressure occurs in the system.

Overpressure shutoff valve (OPSO): As per UL 144 it is a feature that operates to shut off the flow of gas when the regulator outlet pressure reaches the limits. Such a feature shall remain closed until it has been manually reset.

Monitor regulator: A second regulator unit combined with the second stage regulator designed to avoid overpressure in the downstream appliance.

Type 47 Configuration

Type	Capacity BTU	Orifice Size	Inlet - Outlet Connection	Outlet pressure range	Outlet pressure setting
478LP - o4	2,100,000	1/2"	3/4" NPT	6 - 14"wc	11"wc
478LP - o5	2,500,000		1" NPT		
478LP - o6	3,100,000		1" 1/4 NPT		

Regulators with OPSO

Regulators with OPSO

Type 468



Type 998



Product Description

Serie 998 regulators have been designed for reducing pressure in residential and commercial installations. The series 468 regulator has been designed for reducing pressure in light industrial installations. Series 998 and 468 regulators are equipped with two types of overpressure protection systems, including pressure relief valves and Overpressure shutoff (OPSO) valves. All series are well protected against corrosion with a consistent powder coating.

Overpressure Protection Systems

Pressure relief valve

A valve which relieves excess gas from the regulator cover if an overpressure occurs in the system.

Overpressure shutoff valve (OPSO)

As per UL 144 it is a feature that operates to shut off the flow of gas when the regulator outlet pressure reaches the limits. Such a feature shall remain closed until it has been manually reset.

Type 468 & 998 Configuration

Type	Capacity BTU\hr	Orifice	Inlet Connection inches	Outlet Connection inches	Outlet pressure Range, Inches W.C. (mbar)	Outlet pressure Setting, Inches W.C. (mbar)
46-1-890-0014	2,500,000 (28.15)	1/4" NPT	3/4" NPT	1" NPT	6 to 14 (14 to 34)	11 (27)
99-1-890-0056	1,400,000 (15.76)		1/2" NPT	3/4" NPT	9 to 13 (22 to 32)	
99-1-890-0057			3/4" NPT			



Copper Pigtails



Product Description

Pigtails are available in a variety of connections, sizes and style. Select the proper pigtail for a particular application.

Note: Cavagna Group recommends to install a new pigtail with every new and replaced regulator.

Connections	Approximate Length	Part Number	
		Part 1/4" tube	
		7/8" Hex Short Nipple	1 1/8" Hex Long Nipple
1/4" Inv. flare + M.POL	20"	30-A-190-0006	-
	36"	30-A-190-0007	-
1/4" NPT + M.POL	12"	30-A-190-0001	-
	20"	30-A-190-0002	-
M.POL + M.POL	12"	30-A-190-0004	-
	20"	30-A-190-0003	-
	48"	30-A-190-0005	-
		-	30-A-190-0008

Multiple Cylinder Manifold




Product Description

Code: 16.1.190.0184

For use in systems that require uninterrupted gas service during cylinder exchange. Especially for summer cottages, mobile homes and single appliance loads.

Inlet connections: F. POL Outlet connection: M.POL

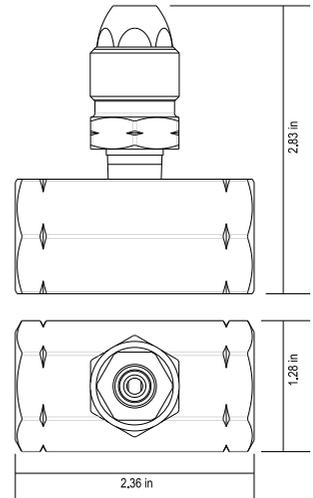

T Connection



Product Description

TEE fitting: 1/4" Inverted Flarex 1/4" Inverted Flarex 1/4" MPT

- Used for two cylinder application
- Built-in Back-Check Valves allows empty cylinder removal and refill as reserve cylinder remains operational

Code	Packaging	Carton Count
41-1-390-0014	box	12



CAVAGNA group

Advanced solutions for gas control

Outdoor Cooking

Installations	PG. 34
Low Pressure - Single Stage Regulators	PG. 36
Low Pressure - Double Stage Regulators	PG. 38
High Pressure Regulators - Fixed / Adjustable	PG. 39
Accessories	PG. 40




Installations

Regulators used in outdoor installations are single stage Type 698 regulators. They generally regulate the pressure of propane gas tanks to a pressure of 11 WC in low pressure applications, and to a pressure from 1 to 10 PSI in high pressure applications. Propane gas tanks can be from 25 to 250 PSI, depending on usage conditions. Type 698 regulators comply with single stage UL 144 Standard. These regulators can only be used in installations that have calorific power less than 100,000 BTU/h (29 kWh). See NFPA 58, paragraph 6.8.1. 9. For gas appliances having calorific power more than 1 00,000 BTU/h, double stage regulators Type 424 should be used.

Low pressure installations

Low pressure installations are supposed to supply gas appliances functioning at set pressure 11 inch WC, i.e. barbecues. The regulator is directly connected to the cylinder valve through its (ACME) inlet fitting and to the gas appliance through a low pressure flexible hose, complying with UL 569 Standard.

A Type

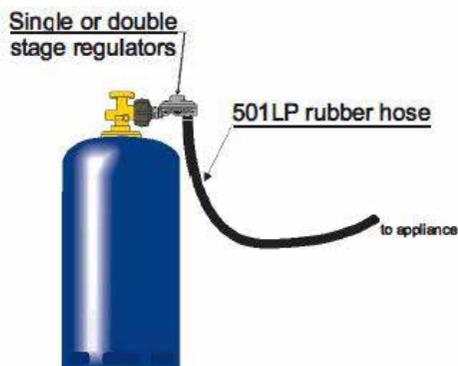


High pressure installations

High pressure installations are supposed to supply gas appliances functioning at a set or variable pressure from 1 to 10 PSI, i.e. fish cookers, turkey fryers, fish fryers, camping stoves and torches.


The regulator is directly connected to the cylinder valve through its inlet connection fitting and to the gas appliance through a high pressure flexible hose, complying with applicable UL Standard.

B Type

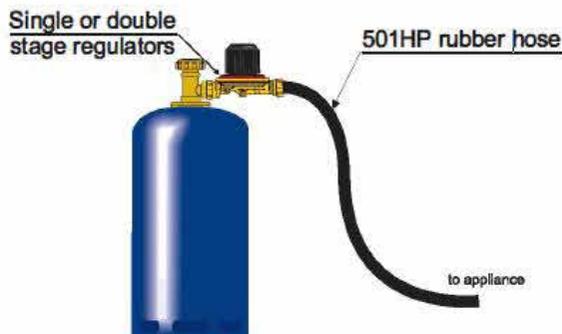

Type 698

Single stage pressure regulator's features equipped with gas fitting QCC1 Type 1, complying UL 2061 standard

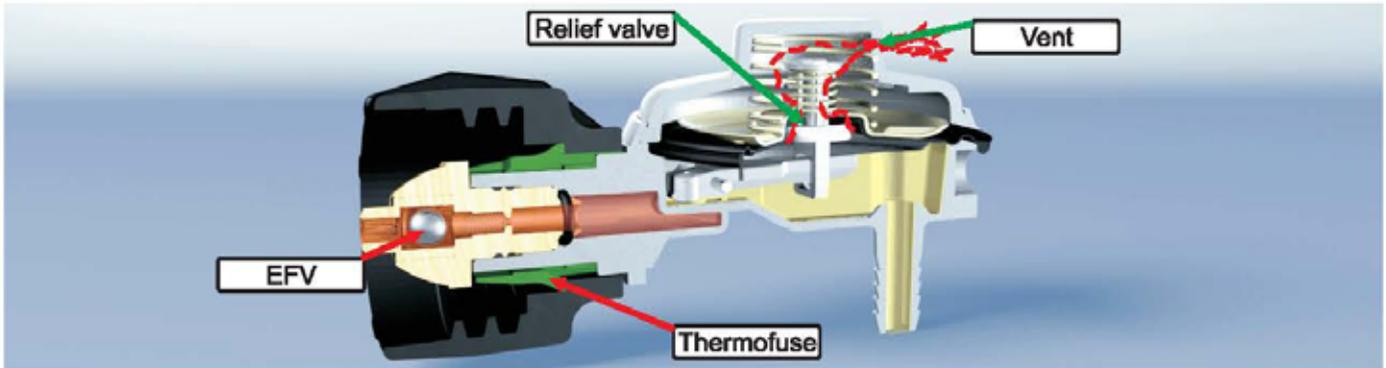


The gas tank pressure (from 25 to 250 PSI, red in the above picture) is regulated at 11 WC (yellow in the picture), the working pressure value for the gas appliances.

The regulator is designed not to produce any sound vibration that may disturb the end user, whichever pressure the gas tank has got.

- a) Excess flow valve, integrated in the QCC1 fitting. This device stops gas flow in case of excess offlowing.
- b) Thermo-fuse integrated in the QCC1 fitting. This device stops gas flow in case of excessive temperature during functioning (T= 240 °F/300 °F (116 °C/149 °C)).
- c) Relief valve. If the pressure of regulation increases too much, an integrated valve in the seat disk opens and the excess of gas vents to the outdoors through vent hole.

Type 424

Double stage pressure regulator's features equipped with gas fitting QCC1 Type 1, complying UL 2061 standard

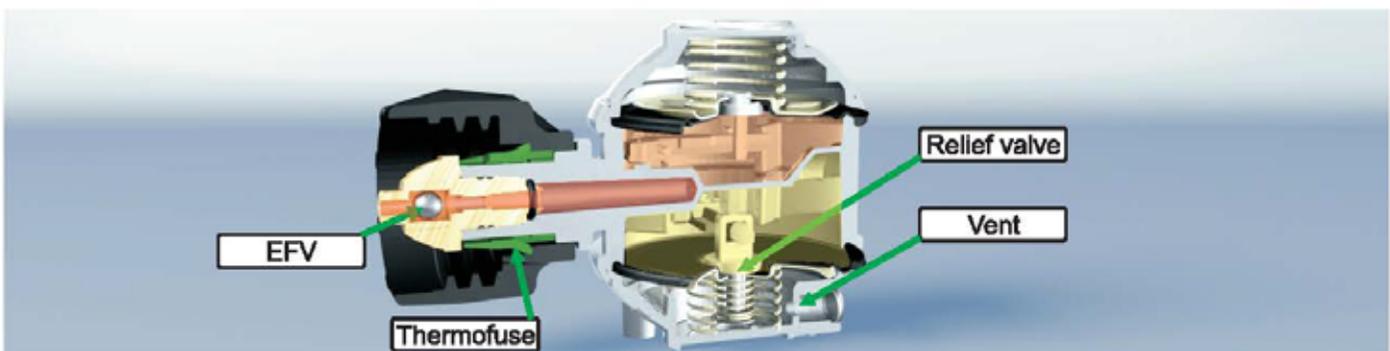

The gas tank pressure (from 25 to 250 PSI, red in the picture above) is reduced to 4 PSI by the first stage (orange in the picture). Then the second stage of regulation limits the pressure to 11 WC, final flow rate (yellow in the picture). The regulator is designed not to produce any sound vibration that may disturb the end user, whichever pressure the gas tank has got.

- a) Excess flow valve, integrated in the QCC1 fitting. This device stops gas flow in case of excess offlowing.
- b) Thermo-fuse integrated in the QCC1 fitting. This device stops gas flow in case of excessive temperature during functioning T = 240 °F/300 °F (116 °C/149 °C).
- c) Relief valve. If the pressure of regulation increases too much, an integrated valve in the seat disk opens and the excess of gas vents to the outdoors through vent hole.

Type 698 Single Barb



Type 698 Dual Barb



Technical Specifications

- Body:** Zinc alloy die casting EN1773
- Flow:** 70 000 BTH/h at 25 PSI and 120 000 BTU/hat 100 PSI
- Outlet:** single barb or dual barb or 3/8" FNPT at 90°
- Inlet:** 1/4 female NPT, QCC1
- Outlet pressure:** 11 wc
- Setting point:** 11 wc +/- 1 We; 35 000 BTU/h
- Inlet pressure:** 25-250 PSI
- Service Temperature:** -4 °F/122 °F (-20 °C/50 °C)

Type 698 Configuration

Type	Capacity BTU/h	Inlet Connection	Outlet Connection	Outlet pressure setting Inches WC (mbar)
69-C-890-0011	70,000	ACME 1,312 (1/4 FNPT, QCC1)	3/8" FNPT 90°	11 (27)
69-C-890-0012		1/4 FNPT		
69-C-890-0013		ACME 1,312 (1/4 FNPT, QCC1)	DOUBLE BARB 90° (HN 8.8)	
69-C-890-0014			SINGLE BARB inline (HN 8.8)	
69-C-890-0025		1/4 FNPT	SINGLE BARB 90° (HN 8.8)	
69-C-890-0032		.880 P.O.L.	3/8" FNPT 90°	
69-C-890-0033		1/4 FNPT	3/8" FNPT inline	
69-C-890-0034		.880 P.O.L.		
69-C-890-0041		ACME 1,312 (1/4 FNPT, QCC1)	3/8" SAE FLARE 90°	
69-C-890-0050			SINGLE BARB 90° (HN 8.8)	

Type 698 Single Barb - Kit Version



Type 698 Dual Barb - Kit Version



Technical Specifications

A) Outlet fitting single barb or dual barb

The thermoplastic hose of dimension 5/16 is complying with applicable UL standard; it is mounted at the regulator outlet, crimped by a ferrule. Both hose length - L1 and L2 - and hose quality (low pressure hose, working pressure 1 PSI; high pressure hose, working pressure 350 PSI) are on demand.

B) Outlet fitting 3/8" FNPT

The thermoplastic hose of dimension 5/16 is complying with UL 569 standard; it is screwed at the regulator outlet. As above mentioned, hose quality and length are on demand; see Accessories paragraph.

Type 698 Configuration

Type	Capacity BTU/h	Inlet Connection	Outlet Connection	Hose Length	Outlet pressure setting Inches WC (mbar)
70-A-890-0017	70,000	ACME 1,312 (1/4 FNPT, QCC1)	5/8" UNF female	16"	11 (27)
70-A-890-0020				18"	
70-A-890-0023			7/16" M	25"	
70-A-890-0027			5/8" UNF female	34"	
70-A-890-0030				24"	
70-A-890-0039				14"	
70-A-890-0040				20"	
70-A-890-0041				30"	
70-A-890-0051				11"	

Low Pressure - Single Stage

Type 758



Product Description

The Type 758 is a single stage regulator with inlet and outlet fitting at 180°. Normally it is directly connected to the gas cylinder through one of the inlet fittings presented at Accessories paragraph. The outlet fitting 3/8" MNPT is connected to the gas appliance through one of the hoses presented at Accessories paragraph.

Technical Specifications

Flow: 70 000 BTH/h at 25 PSI and 120 000 BTU/h at 100 PSI

Outlet: 3/8" FNPT at 180° in comparison with the regulator outlet

Inlet: 1/4" female NPT

Outlet pressure: 11 WC

Setting point: 11 WC +/- 1 WC; 35 000 BTU/h

Inlet pressure: 25-250 PSI

Temperature of functioning: -4 °F/122°F (-20 °C/ 50 °C)

Type 758 Configuration

Type	Capacity BTU/h	Inlet Connection	Outlet Connection	Outlet pressure setting Inches WC (mbar)
75-1-890-0076	150,000	1/4" FNPT	3/8" FNPT	11" wc (27)

Low Pressure - Double Stage

Type 424



Kit

Product Description

The thermoplastic hose of dimension 3/8 limits the pressure drops; it is complying with UL 569 standard and screwed at the regulator outlet. Hose quality and length are on demand; see Accessories paragraph.

Technical Specifications

Body: Zinc die casting EN1773

Flow: 110000 BTH/h at 25 PSI and 200000 BTU/h at 100 PSI

Outlet: 1/4" NPT female

Inlet: 1/4" female NPT QCC1

Outlet pressure: 11 WC

Setting point: 11 WC +/- 1 WC; 50000 BTU/h

Inlet pressure: 25-250 PSI

Temperature of functioning: -4 °F/122°F (-20 °C/ 50 °C)

Type 424 Configuration

Type	Capacity BTU/h	Inlet Connection	Outlet Connection	Outlet pressure setting Inches WC (mbar)	Hose Length
42-1-490-1061	100,000	ACME 1,312 (1/4 FNPT, QCC1)	5/8" UNF female	11" wc (27)	/
70-A-890-0048			1/2" SAE FLARE		36"
70-A-890-0050			1/4" FNPT		19"

Type 756 HP - Fixed



Technical Specifications

The single stage regulator has to be installed in compliance with state or federal laws and with NFPA58. It is designed to supply gas appliances functioning at pressure equal to or higher than 0.5 PSI. This regulator will be consequently connected to gas appliances through high pressure flexible hoses, see Accessories paragraph. Depending on the versions the outlet fitting may be at 90° or 180° in comparison with inlet fitting.

Technical Specifications

- Body:** Zinc die casting EN1773
- Outlet:** 1/4" FNPT at 90° or 80°, single barb at 90°
- Inlet:** 1/4" FNPT
- Outlet pressure:** 9 or 10 or 15 or 16 PSI
- Setting point:** 11 WC+/-1 WC; 35000 BTU/h
- Inlet pressure:** 25-250 PSI
- Temperature of functioning:** -4 °F/122°F (-20 °C/ 50 °C)

Type 755 HP - Adjustable



Technical Specifications

The regulator HP 755 Type is especially designed for gas appliances such as turkey fryers, fish fryers, camping stoves and torches, i.e. appliances that need variable pressure in terms of PSI. The regulation of the flow rate is allowed by rotating the regulation hand-wheel on the regulator that turns from position 0 to 10. Position "0" means TURNED OFF (no gas is flowing). For safety reasons position "0" is locked. Gas begins to flow by pressing the hand-wheel red button and turning clockwise the hand-wheel at the same time. Calorific power is shown by the casted digits on the regulator cover.

Technical Specifications

- Body:** Zinc die casting EN1773
- Outlet:** 1/4" FNPT or single barb at 90°
- Inlet:** 1/4" FNPT
- Outlet pressure:** 0-10 PSI
- Inlet pressure:** 25-250 PSI
- Temperature of functioning:** -4 °F/122°F (-20 °C/ 50 °C)

Type 755HP & 756HP configuration

Type	Description	Capacity BTU/h @ 100 PSIG Inlet	Outlet Pressure Setting	Outlet Adjustment Range
75-C-590-1002	Adjustable	280,000	-	0-10 PSIG
75-C-590-1005		320,000	-	0-15 PSIG
75-C-690-1001	Variable	460,000	10 PSIG	-

Type 1 ACME Nut Pigtail



Product Description

Pigtails are used with Double Stage Automatic Changeover Regulators for two cylinder systems or Standard Two Stage Regulators with "T" check connections

Safety features:

- Excess flow device: Limits gas flow in the event of hose rupture or accidental disconnection
- Thermofuse: A heat sensitive plug, which shuts off gas flow if temperature reaches above 240° F

Available in Bulk and Hang Tagged:

Type 1 ACME Nut Pigtail x 1/4" Inverted Flare

Code	Description	Carton Count
50-A-190-0055	12" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Bulk)	12
50-A-190-0032	12" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Hang Tagged)	
50-A-190-0064	15" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Bulk)	
50-A-190-0038	15" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Hang Tagged)	
50-A-190-0057	18" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Bulk)	
50-A-190-0039	18" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Hang Tagged)	
50-A-190-0106	20" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Bulk)	
50-A-190-0040	20" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Hang Tagged)	
50-A-190-0013	24" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Bulk)	
50-A-190-0041	24" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Hang Tagged)	
50-A-190-0066	30" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Bulk)	
50-A-190-0042	30" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Hang Tagged)	
50-A-190-0097	36" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Bulk)	
50-A-190-0043	36" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Hang Tagged)	
50-A-190-0067	40" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Bulk)	
50-A-190-0044	40" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Hang Tagged)	
50-A-190-0068	48" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Bulk)	
50-A-190-0045	48" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Hang Tagged)	
50-A-190-0015	60" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Bulk)	
50-A-190-0046	60" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Hang Tagged)	

Type 1 ACME Nut Pigtail x 1/4" MPT

Code	Description	Carton Count
50-A-190-0069	15" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" MPT (Bulk)	12
50-A-190-0033	15" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" MPT (Hang Tagged)	
50-A-190-0104	20" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" MPT (Bulk)	
50-A-190-0047	20" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" MPT (Hang Tagged)	



Accessories

LPG High Pressure Hoses

Product Description

Thermoplastic high pressure hose assemblies, working pressure of 350 psi with 1,700 psi burst rating



Available in Bulk and Hang Tagged:

1/4" I.D. High Pressure Hose 3/8" MPT x 3/8" Female Flare Swivel Nut

Code	Description	Carton Count
50-A-190-0063	24" LP Gas High Pressure Hose -1/4" I.D., 3/8" MPT x 3/8" Female Flare swivel (Bulk)	12
50-A-190-0034	24" LP Gas High Pressure Hose -1/4" I.D., 3/8" MPT x 3/8" Female Flare swivel (Hang Tagged)	
50-A-190-0059	24" LP Gas High Pressure Hose -1/4" I.D., 3/8" FPT x 3/8" Female Flare swivel (Bulk)	
50-A-190-0035	24" LP Gas High Pressure Hose -1/4" I.D., 3/8" FPT x 3/8" Female Flare swivel (Hang Tagged)	
50-A-190-0060	36" LP Gas High Pressure Hose -1/4" I.D., 3/8" FPT x 3/8" Female Flare swivel (Bulk)	
50-A-190-0048	36" LP Gas High Pressure Hose -1/4" I.D., 3/8" FPT x 3/8" Female Flare swivel (Hang Tagged)	
50-A-190-0061	48" LP Gas High Pressure Hose -1/4" I.D., 3/8" FPT x 3/8" Female Flare swivel (Bulk)	
50-A-190-0049	48" LP Gas High Pressure Hose -1/4" I.D., 3/8" FPT x 3/8" Female Flare swivel (Hang Tagged)	
50-A-190-0062	72" LP Gas High Pressure Hose -1/4" I.D., 3/8" FPT x 3/8" Female Flare swivel (Bulk)	
50-A-190-0050	72" LP Gas High Pressure Hose -1/4" I.D., 3/8" FPT x 3/8" Female Flare swivel (Hang Tagged)	
50-A-190-0058	144" LP Gas High Pressure Hose -1/4" I.D., 3/8" FPT x 3/8" Female Flare swivel (Bulk)	
50-A-190-0051	144" LP Gas High Pressure Hose -1/4" I.D., 3/8" FPT x 3/8" Female Flare swivel (Hang Tagged)	

3/8" I.D. High Pressure Hose 3/8" MPT x 3/8" Female Flare Swivel Nut

Code	Description	Carton Count
50-A-190-0026	24" LP Gas High Pressure Hose - 3/8" I.D., 3/8" MPT x 3/8" Female Flare swivel (Bulk)	12
50-A-190-0037	24" LP Gas High Pressure Hose - 3/8" I.D., 3/8" MPT x 3/8" Female Flare swivel (Hang Tagged)	
50-A-190-0071	30" LP Gas High Pressure Hose - 3/8" I.D., 3/8" MPT x 3/8" Female Flare swivel (Bulk)	
50-A-190-0052	30" LP Gas High Pressure Hose - 3/8" I.D., 3/8" MPT x 3/8" Female Flare swivel (Hang Tagged)	
50-A-190-0010	36" LP Gas High Pressure Hose - 3/8" I.D., 3/8" MPT x 1/2" Female Flare swivel (Bulk)	
50-A-190-0036	36" LP Gas High Pressure Hose - 3/8" I.D., 3/8" MPT x 1/2" Female Flare swivel (Hang Tagged)	

Inlet fitting connections with EFV (Excess flow valve)



16-1-190-0176
Handwheel soft
Nose POL soft w/EFV



16-1-190-0177
POL w/EFV



16-1-190-0178
Soft nose POL
w/EFV

Inlet fitting connections Without EFV



16-1-190-0179
Handwheel soft
Nose POL soft w/o EFV



16-1-190-0180
POL w/o EFV



16-1-190-0181
Soft nose POL
w/o EFV



CAVAGNA group

Advanced solutions for gas control

Recreational Vehicles

Installations	PG. 44
Automatic Changeover Kit	PG. 46
Functioning And Reading Of The Automatic Changeover	PG. 47
Automatic Changeover Advantages	PG. 47
Two-stage Regulator Kit	PG. 49
Single Stage 30 PSI Regulator	PG. 50
Single Stage 11" WC Regulator	PG. 50
Accessories	PG. 51
Hoses	PG. 53



Recreational Vehicles

Two stage gas regulators are designed and manufactured in accordance to UL 144 requirements (NFPA 1192; paragraph 5.2.15.2). Regulators are used with propane gas appliances functioning at 11 inchWC pressure. Gas pressure regulators, used in recreational vehicle (RV) installations, have two integrated stages of regulation with intermediate pressure of 10 PSI (NFPA 1192; paragraph 5.2.15.1). Depending on the kind of installation these regulators are used for, they can supply gas for a range of calorific power from 100,000 to 160,000 BTU. See technical description of gas appliances.

The second stage of the regulator is equipped with a safety valve Type 1 as per UL 144.

WARNING:


The regulator must be installed with vent hole pointing downwards to allow water to exit. (See NFPA 1192, paragraph 5.2.15.4).

WARNING:

100 % inspection at ReCa Italy manufacturing unit of the whole range of regulators is undertaken during manufacturing process as far as:

- setting pressure; see setting point at page 6 and 7 of the present catalogue;
- leakage test at the inlet (high pressure value to be used) and leakage test at the outlet (low and high pressure value to be used).

Installations

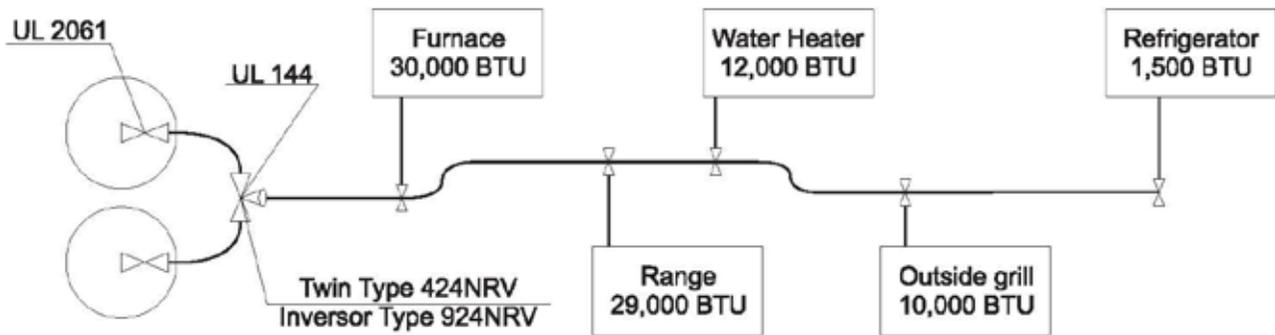

RV installations can be made on the basis of the following general diagram:

RV installations are supplied by single or double cylinder systems, or by ASME tanks. The integrated second stage regulator is connected to cylinders through flexible high pressure gas rubber hoses, equipped with fittings in accordance to UL 2061 (NFPA 1192; paragraph 5.2.16.4). Installations of integrated double stage regulators have to be in accordance with requirements expressed in NFPA 1192, paragraph 5.2.15.

Installations generally supply the following gas appliances:



- Furnace 30,000 BTU
- Range 29,000 BTU
- Water Heater 12,000 BTU
- Refrigerator 1,500 BTU
- Outside grill 10,000 BTU
- Total 81,000 BTU

WARNING:

Inside diameter and length of pipes must be calculated to ensure that supplying pressure is sufficient to run the gas appliances at the same time. All of the above mentioned gas appliances must run at the same time without any failure.

Recreational Vehicles

Gas cylinder and regulator shall be protected by a shelter or in a cylindrical cage, see following diagram (as per NFPA 1192, paragraphs 5.2.15.6; 5.2.15.7; 5.2.15.8).

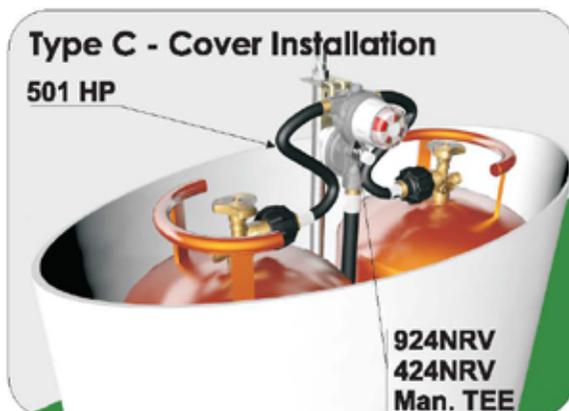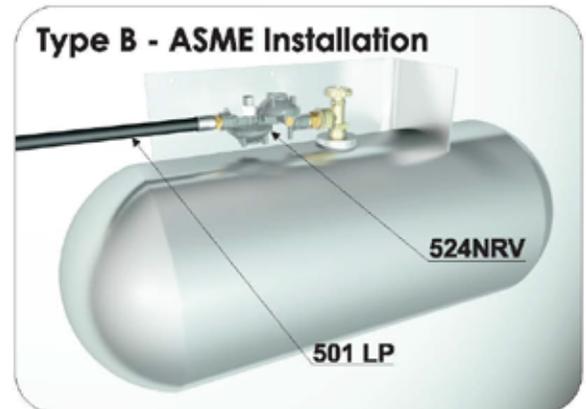

WARNING:

RV gas piping system must be tested for leakage prior to delivering vehicle to dealer network. Therefore, setting pressure test and leakage test have be done by authorized RV OEM. In case of any detected anomalies, the gas regulator kit is not likely to be responsible because the gas regulators are 100% tested while manufacturing.

Backflow check valve safety device

In accordance with requirements of NFPA 1192, paragraph 5.2.16.3, it is compulsory to have a “backflow check” device for double cylinder installations:

For Two stage group of regulation:

The device consists of a “T” fitting that prevents gas from flowing, in case one of the inlets of the regulator kit is not connected to one of the cylinders.

WARNING:

If a simple “T” fitting is used, it is obligatory to use flexible hoses equipped with “backflow check” device.

For automatic changeover:

The “Backflow Check” device can be integrated into the automatic changeover to prevent gas from flowing, in case one of its inlets is not connected to the cylinder.

WARNING:

If the automatic changeover is not equipped with “backflow check” device, it is obligatory that the «backflow check» device be provided with flexible hoses.



Automatic Changeover Kit

Type 924N



Technical Specifications

Inlets: (2) 1/4" inverted flare

Outlet: 3/8" FNPT

Capacity: 220,000 BTU/hr

Adjustable pressure setting

Stainless steel screws and bolts

High temperature resistant diaphragm

Kit includes already assembled mounting bracket and the plastic vent cover required by RVIA.

Protected against corrosion with a consistent powder coating

Safety Features

Built-in Back Check Valve: Allows empty cylinder removal and refill as reserve cylinder remains operational.

Overpressure Protection Device: Limits environmental propane release in case of regulator malfunction to a value less than 2 psi, significantly lower than mandated by UL standard 144.

Product Description

Automatically switches from empty service cylinder to full reserve cylinder, ensuring continuous gas flow to appliances. Highly visible full/empty indicator signals refill. This unique indicator is also visible from the top when viewed through propane tank cover lid, eliminating the need to remove the entire propane tank cover to view which cylinder is full or empty.

Item Packaging

Code	Description	Type of Packaging	Carton Count
52-A-890-0010	Automatic Changeover Regulator Kit Includes bracket and vent cover	Box	12
52-A-890-0011		Clamshell	

Type 528B



Technical Specifications

Inlets: (2) 1/4" inverted flare

Outlet: 1/2" FNPT

Capacity: 450,000 BTU/hr

Adjustable pressure setting

High temperature resistant diaphragm

Kit includes already assembled mounting bracket and the plastic vent cover required by RVIA.

Protected against corrosion with a consistent powder coating

Safety Features

Built-in Back Check Valve: Allows empty cylinder removal and refill as reserve cylinder remains operational.

Overpressure Protection Device: Limits environmental propane release in case of regulator malfunction to a value less than 2 psi, significantly lower than mandated by UL standard 144.

Product Description

Automatically switches from empty service cylinder to full reserve cylinder, ensuring continuous gas flow to appliances. Highly visible full/empty indicator signals refill. This unique indicator is also visible from the top when viewed through propane tank cover lid, eliminating the need to remove the entire propane tank cover to view which cylinder is full or empty.

Item Packaging

Code	Description	Type Of Packaging	Carton Count
52-1-890-0032	Automatic Changeover Regulator Kit Includes bracket and vent cover	Box	12

Functioning And Reading Of The Automatic Changeover

Make sure that the Automatic Changeover is connected to the two tank valves with high pressure gas hose. Make sure that the automatic changeover is mounted above the two tank valves. Open the two tank valves at the same time. This is fundamental to allow the automatic changeover to ensure the continuous functioning of the gas installation, in case one of the two cylinder tanks goes empty. The automatic changeover cannot namely pass to the reserve gas tank, if the tank valve is closed.

How to read the automatic changeover indicator: full gas tank

- Turn two cylinders' gas valves on at the same time. This is fundamental, which ensures the automatic changeover the ability to continuously supply the gas appliance, in case the service cylinder becomes empty. The automatic changeover cannot turn to the reserve gas bottle if its valve is closed.

How to read the automatic changeover indicator: empty gas tank


- When the two gas cylinders are full, the automatic changeover's indicator turns to green while opening gas valves A and B.
 - The arrow on the automatic changeover's knob indicates which one of the two gas cylinders is supplying gas: that is to say the "service gas bottle".
 The other cylinder is the "reserve gas bottle". See picture 1.

Reading the automatic changeover's indicator: when the service gas bottle is empty

- When the «service bottle» exhausts, the automatic changeover gets the sense negative pressure (gas bottle Figure 2 pressure less than 5 PSI). And automatically switches to the reserve bottle to supply the gas installation as normal. The end user will know that the service bottle is now empty understands such operation because the green because indicator turns red. See picture 2

How to substitute the empty gas tank with the full one

- Turn the tank valve A off and rotate the automatic changeover hand-wheel 180° (picture 3a). If the reserve service Reserve gas tank is full, the indicator will turn green (picture 3b).
 - Remove the empty gas bottle (figure 3c).
 - Position a new full gas bottle. Open the gas valve A (figure 3d).

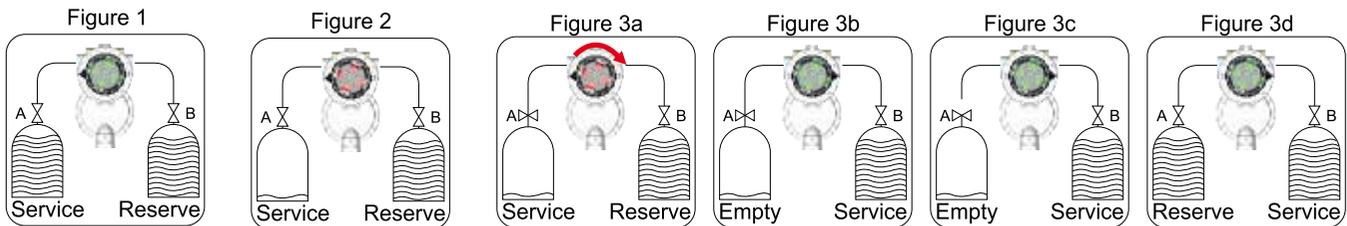

Automatic Changeover Advantages

Easy-to-read changeover indicator

The indicator displays the two different ways of functioning Service/Reserve by changing colour. Reading the indicator colour is fundamental for the user because he is able to know when to proceed to replace the empty gas tank with the reserve gas tank. The indicator is designed to guarantee the best reading as possible:

- Faraway visibility
- Frontal visibility
- Lateral visibility

Integrated "Back-flow check" device

As the "back-flow check" device is integrated in the automatic changeover 924 NRV Type, the user can apply gas high pressure hoses which are not equipped with their own back-flow check device. This always provides safety installation, even if the user replaces gas rubber hoses.

Automatic changeover inversion pressure value

The automatic changeover has to let the service cylinder get exhausted before inverting to the reserve gas tank. The automatic changeover performs even better at low pressure.

In fact the automatic changeover Type 924 NRV is designed to work with a pressure of inversion at 5 PSI (0.35 bar). This means that the inner pressure of the service gas cylinder must flow below 5 PSI to make the changeover begin to extract gas from the reserve bottle.

At this pressure value we know in fact that a propane gas bottle can be considered empty, whichever capacity or temperature functioning conditions the appliance is designed for.



Two-stage Regulator Kit

Type 524AS - Vertical Vent



Technical Specifications

Inlets: 1/4" FNPT

Outlet: 3/8" FNPT

Capacity: 160,000 BTU/hr

Vertical Vent

Kit includes the plastic vent covers required by RVIA

For use on RVs with single vertical tank or horizontal tank

Safety Features

Overpressure Protection Device: Limits environmental propane release in case of regulator malfunction to a value less than 2 psi, significantly lower than that mandated by UL standard 144

Product Description

A combination regulator; first stage reduces cylinder outlet pressure to 10 psi, and then second stage maintains a stable working pressure of 11" water column.

Item Packaging

Code	Description	Type of Packaging	Carton Count
52-A-490-0018	Two Stage Regulator Kit Includes bracket and vent cover	Box	12
52-A-490-0019		Clamshell	

Type 524AS - Horizontal Vent



Technical Specifications

Inlets: 1/4" FNPT

Outlet: 3/8" FNPT

Capacity: 160,000 BTU/hr

Horizontal Vent

Kit includes the plastic vent covers required by RVIA

For use on RVs with single vertical tank or horizontal tank

Safety Features

Overpressure Protection Device: Limits environmental propane release in case of regulator malfunction to a value less than 2 psi, significantly lower than that mandated by UL standard 144

Product Description

Automatically switches from empty service cylinder to full reserve cylinder, ensuring continuous gas flow to appliances. Highly visible full/empty indicator signals refill. This unique indicator is also visible from the top when viewed through propane tank cover lid, eliminating the need to remove the entire propane tank cover to view which cylinder is full or empty.

Item Packaging

Code	Description	Type Of Packaging	Carton Count
52-A-490-0020	Two Stage Regulator Kit Includes bracket and vent cover	Box	12



Two-stage Regulator Kit

Type 524AS - Horizontal Vent with EFV - P.O.L. inlet



Technical Specifications

Inlets: 1/4" FNPT

Outlet: 3/8" FNPT

Capacity: 160,000 BTU/hr

Horizontal Vent

Kit includes the plastic vent covers required by RVIA

For use on RVs with single vertical tank or horizontal tank

Safety Features

Overpressure Protection Device: Limits environmental propane release in case of regulator malfunction to a value less than 2 psi, significantly lower than that mandated by UL standard 144

Product Description

A combination regulator; first stage reduces cylinder outlet pressure to 10 psi, and then second stage maintains a stable working pressure of 11" water column.

Item Packaging

Code	Description	Type of Packaging	Carton Count
52-A-490-0021	Two Stage Regulator Kit Includes bracket and vent cover	Box	12
52-A-490-0022		Clamshell	



Single Stage 30 PSI

Type 914



Safety Features

Overpressure Protection Device: Limits environmental propane release in case of regulator malfunction to a value less than 2 PSI, significantly lower than that mandated by UL standard 144

Technical Specifications

High Pressure 30 PSI regulator

Outlet: 1/4" FNPT

Inlet: 1/4" FNPT

For use on application that require pounds per square inch (PSI) of pressure instead of low pressure water column inches

Item Packaging

Code	Description	Type Of Packaging	Carton Count
91-A-490-0002	Single- stage 30 PSI High Pressure Regulator	Box	12



Single Stage 11" WC

Type 698



Safety Features

Overpressure Protection Device: Limits environmental propane release in case of regulator malfunction to a value less than 2 PSI, significantly lower than that mandated by UL standard 144

Technical Specifications

Low Pressure 11 "WC

Outlet: 3/8" FNPT

Inlet: 1/4" FNPT

High Capacity

Approved only for small portable appliances

Item Packaging

Code	Description	Type Of Packaging	Carton Count
69-A-890-0002	Single- stage 11" WC Low Pressure Regulator	Box	12

Accessories

Excess Flow POL Adapter



Code	Description	Type Of Packaging	Carton Count
16-A-190-0002	Excess Flow POL Adapter	Box	12

POL Adapter



Code	Description	Type Of Packaging	Carton Count
16-1-190-0180	POL Adapter	Box	12

Inlet Fitting



Code	Description	Type Of Packaging	Carton Count
16-1-110-0825	Inlet Fitting	Box	12

T Connection



Code	Description	Type Of Packaging	Carton Count
41-1-390-0014	T Connection	Box	12

"L" Rack Mounting Bracket



Code	Description	Type Of Packaging	Carton Count
17-1-110-0073	"L" rack mounting bracket	Box	12

"Z" Wall Mount Bracket



Code	Description	Type Of Packaging	Carton Count
17-1-110-0059	"Z" wall mounting bracket	Box	12

Product Description

Excess Flow POL x 1/4" MPT
Complies with RV industry requirements for use with Two Stage regulators
The excess flow limiting device has a closing flow rate of 404 sdh of LP-gas at 100 psig (1 .1 gpm propane)

Product Description

POLx 1 /4" MPT
Complies with RV industry requirements for use with Two-Stage regulators

Product Description

1/4" Inverted flare x 1 /4" MPT
Commonly used for Automatic Changeover Regulator Inlets

Product Description

T Connection: 1 /4" Inverted Flare x 1 /4" Inverted Flare x 1/4" MPT
Used for two cylinder application
Built-in Back-Check Valves allows empty cylinder removal and refill as reserve cylinder remains operational

Product Description

"L" rack mounting brackets are used for Cavagna TwoStage or Automatic Changeover regulators
Mounting screws included

Product Description

"Z" wall mounting brackets are used for Cavagna Two Stage or Automatic Changeover regulators
Mounting screws included

Accessories

Plastic Regulator Vent Cover



Code	Description	Type Of Packaging	Carton Count
21-1-110-0161	Plastic Vent Cover	Box	12

Product Description

Plastic vent covers are used for Cavagna Two-Stage or Automatic Changeover regulators
Mounting screws included
Regulator vent covers are required by RIVA

Plastic Regulator Vent Cover



Code	Description	Type Of Packaging	Carton Count
21-1-110-0086	Plastic Vent Cover	Box	12

Product Description

Plastic complete protection cover for Two Stage ASME Type524AS
Mounting screws included
Regulator covers are required by RIVA

GASLOW™ Propane Gas Monitor Gauge



Code	Description	Type Of Packaging	Carton Count
66-C-290-0010 (AD-2G)	Glaslow Gas Monitor Gauge	Box	12

Product Description

Easy to read gas gauge indicates when fuel supplies are running low and cylinder needs to be refilled
Built-In leak detector:
Before turning on appliance(s) and after system is pressurized with gas, the gauge will indicate if there is a gas leak in the system
Packaged in clamshell
Full instructions included

GASLOW™ Propane Gas Monitor Gauge with remote



Code	Description	Type Of Packaging	Carton Count
66-C-290-0016 (AD-3GX)	Glaslow Gas Monitor Gauge	Box	12

Product Description

Light starts flashing when fuel supplies are running low and cylinder needs to be refilled
Built-In leak detector: before turning on appliance(s) and after system is pressurized with gas, the gauge will indicate if there is a gas leak in the system
Packaged in clamshell
Full instructions included

Package includes:

- Gaslow with electronic gauge
- Remote flashing light indicator
- Mounting bracket
- Full instructions
- 30" of connection cable (15 foot extension cable available) Uses 2 AAA batteries (not included)

Type 1 ACME Nut Pigtail



Product Description

Pigtails are used with Double Stage Automatic Changeover Regulators for two cylinder systems or Standard Two Stage Regulators with "T" check connections

Safety features:

- Excess flow device: Limits gas flow in the event of hose rupture or accidental disconnection
- Thermofuse: A heat sensitive plug, which shuts off gas flow if temperature reaches above 240° F

Available in Bulk and Hang Tagged:

Type 1 ACME Nut Pigtail x 1/4" Inverted Flare

Code	Description	Carton Count
50-A-190-0055	12" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Bulk)	12
50-A-190-0032	12" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Hang Tagged)	
50-A-190-0064	15" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Bulk)	
50-A-190-0038	15" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Hang Tagged)	
50-A-190-0057	18" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Bulk)	
50-A-190-0039	18" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Hang Tagged)	
50-A-190-0106	20" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Bulk)	
50-A-190-0040	20" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Hang Tagged)	
50-A-190-0013	24" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Bulk)	
50-A-190-0041	24" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Hang Tagged)	
50-A-190-0066	30" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Bulk)	
50-A-190-0042	30" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Hang Tagged)	
50-A-190-0097	36" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Bulk)	
50-A-190-0043	36" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Hang Tagged)	
50-A-190-0067	40" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Bulk)	
50-A-190-0044	40" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Hang Tagged)	
50-A-190-0068	48" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Bulk)	
50-A-190-0045	48" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Hang Tagged)	
50-A-190-0015	60" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Bulk)	
50-A-190-0046	60" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" inverted flare (Hang Tagged)	

Type 1 ACME Nut Pigtail x 1/4" MPT

Code	Description	Carton Count
50-A-190-0069	15" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" MPT (Bulk)	12
50-A-190-0033	15" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" MPT (Hang Tagged)	
50-A-190-0104	20" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" MPT (Bulk)	
50-A-190-0047	20" Pigtail -1/4" I.D. hose, Type 1 ACME nut x 1/4" MPT (Hang Tagged)	

LPG High Pressure Hoses

Product Description

Thermoplastic high pressure hose assemblies, working pressure of 350 psi with 1,700 psi burst rating



Available in Bulk and Hang Tagged:

1/4" I.D. High Pressure Hose 3/8" MPT x 3/8" Female Flare Swivel Nut

Code	Description	Carton Count
50-A-190-0063	24" LP Gas High Pressure Hose -1/4" I.D., 3/8" MPT x 3/8" Female Flare swivel (Bulk)	12
50-A-190-0034	24" LP Gas High Pressure Hose -1/4" I.D., 3/8" MPT x 3/8" Female Flare swivel (Hang Tagged)	
50-A-190-0059	24" LP Gas High Pressure Hose -1/4" I.D., 3/8" FPT x 3/8" Female Flare swivel (Bulk)	
50-A-190-0035	24" LP Gas High Pressure Hose -1/4" I.D., 3/8" FPT x 3/8" Female Flare swivel (Hang Tagged)	
50-A-190-0060	36" LP Gas High Pressure Hose -1/4" I.D., 3/8" FPT x 3/8" Female Flare swivel (Bulk)	
50-A-190-0048	36" LP Gas High Pressure Hose -1/4" I.D., 3/8" FPT x 3/8" Female Flare swivel (Hang Tagged)	
50-A-190-0061	48" LP Gas High Pressure Hose -1/4" I.D., 3/8" FPT x 3/8" Female Flare swivel (Bulk)	
50-A-190-0049	48" LP Gas High Pressure Hose -1/4" I.D., 3/8" FPT x 3/8" Female Flare swivel (Hang Tagged)	
50-A-190-0062	72" LP Gas High Pressure Hose -1/4" I.D., 3/8" FPT x 3/8" Female Flare swivel (Bulk)	
50-A-190-0050	72" LP Gas High Pressure Hose -1/4" I.D., 3/8" FPT x 3/8" Female Flare swivel (Hang Tagged)	
50-A-190-0058	144" LP Gas High Pressure Hose -1/4" I.D., 3/8" FPT x 3/8" Female Flare swivel (Bulk)	
50-A-190-0051	144" LP Gas High Pressure Hose -1/4" I.D., 3/8" FPT x 3/8" Female Flare swivel (Hang Tagged)	

3/8" I.D. High Pressure Hose 3/8" MPT x 3/8" Female Flare Swivel Nut

Code	Description	Carton Count
50-A-190-0026	24" LP Gas High Pressure Hose - 3/8" I.D., 3/8" MPT x 3/8" Female Flare swivel (Bulk)	12
50-A-190-0037	24" LP Gas High Pressure Hose - 3/8" I.D., 3/8" MPT x 3/8" Female Flare swivel (Hang Tagged)	
50-A-190-0071	30" LP Gas High Pressure Hose - 3/8" I.D., 3/8" MPT x 3/8" Female Flare swivel (Bulk)	
50-A-190-0052	30" LP Gas High Pressure Hose - 3/8" I.D., 3/8" MPT x 3/8" Female Flare swivel (Hang Tagged)	
50-A-190-0010	36" LP Gas High Pressure Hose - 3/8" I.D., 3/8" MPT x 1/2" Female Flare swivel (Bulk)	
50-A-190-0036	36" LP Gas High Pressure Hose - 3/8" I.D., 3/8" MPT x 1/2" Female Flare swivel (Hang Tagged)	




cavagna group

Advanced solutions for gas control

LPG Tank Equipment

Multi-Service Valve	PG. 56
420 Multivalve	PG. 57
Underground Multi-Service Valve	PG. 58
Underground Multi-Service Valve with Integrated Evacuation Valve	PG. 59
Compact Multi-Service Valve	PG. 60
Filler Valves	PG. 60
Filler Valves for Dispensers	PG. 61
Vapor Equalization Valve	PG. 61
Filler Valves with OPD	PG. 62
Internal Pressure Relief Valves for ASME And DOT Containers	PG. 63
External Pressure Relief Devices	PG. 63
Internal Pressure Relief Valves for DOT Fork Lift Cylinders	PG. 64
Fork Lift Connectors	PG. 64
Lawnmower Connectors	PG. 64
Service Valves for DOT Fork Lift and ASME Motor Fuel Containers	PG. 65
Fixed Liquid Level Gauges	PG. 65
Fork Lift DOT Multivalve	PG. 66
Liquid Withdrawal Valves with Excess Flow	PG. 67
Service Valves for ASME and DOT Containers or Fuel Line Application	PG. 68
Service Valves for DOT Cylinders	PG. 68
Type 1 ACME Cylinder Valve with OPD	PG. 69
Gaslow Measuring Systems	PG. 70
Tank Equipment Spare Parts	PG. 71





Multi-Service Valve



67.0805
67.0.490.0805



67.1033
67.0.490.1033

100 lb Multivalve with OPD

Features


- Multi-service valve with double back check filler valve
- Ideal for on site filling of DOT cylinders up to 200 lb LPG capacity without interrupting service
- Includes a service valve, back check filler valve, fixed maximum liquid level gauge (specify DT length when ordering)
- New high discharge flow capacity pressure relief valve (1123 UL listing)
- Reduced filler valve chamber reduces the waste of LPG during filling operation
- Increased high filling capacity
- Double O-ring replaceable stem

Application

These multi-service valves are suitable for 100-200 lb DOT containers.

Ordering Information

Part Number	Tank Connection	Vapor Service Connection	Filler Connection	Fixed Liquid Level Gauge	OPD	DT Length	Propane liquid capacity at various differential pressure (GPM)				Pressure Relief Valve Flow Capacity (SCFM) Air		
							10 PSIG	20 PSIG	50 PSIG	100 PSIG	PRV Setting	UL	ASME
67.0805	3/4" M NPT	POL (CGA 510)	1-3/4" ACME	not captive	-	10.6"	9	15	23	35	375	1123	n/a
67.0808	3/4" M NPT	POL (CGA 510)	1-3/4" ACME	not captive	-	11.6"	9	15	23	35	375	1123	n/a
67.0816	3/4" M NPT	POL (CGA 510)	1-3/4" ACME	not captive	-	8.2"	9	15	23	35	375	1123	n/a
67.0821	3/4" M NPT	POL (CGA 510)	1-3/4" ACME	not captive	-	10.2"	9	15	23	35	375	1123	n/a
67.1004	3/4" M NPT	POL (CGA 510)	1-3/4" ACME	not captive	-	8.6"	9	15	23	35	375	1123	n/a
67.1033	3/4" - 14 NGT	POL (CGA 510)	1-3/4" ACME	not captive	with OPD	9.6"	9	15	23	35	375	1123	n/a
67.1052	3/4" - 14 NGT	POL (CGA 510)	1-3/4" ACME	not captive	with OPD	10.3"	9	15	23	35	375	1123	n/a



420 Multivalve



67.1027
67.0.490.1027

Application


This multi-service valve is designed for use with 420 lb DOT containers.

Features

- Multi purpose valve with double back check filler valve
- Includes service valve, filler valve, fixed maximum liquid level gauge
- Reduced filler valve chamber minimizes LPG waste during filling operation
- Increased high filling capacity
- Double O-Ring replaceable stem

Ordering Information

Part Number	Tank Connection	Vapor Service Connection	Filler Connection	Fixed Liquid Level Gauge	DT Length	Pressure Relief Valve Flow Capacity (SCFM) Air	PRV Setting (PSIG)
67.1027	1" NPT	POL (CGA 510)	1-3/4" ACME	not captive	11.6"	1986	375



Underground Multi-Service Valve



67.0807
67.0.490.0807

68.2005
68.0.290.2005

Multi-Service Valve for ASME underground propane tank and Liquid Withdrawal Valve for liquid evacuation Kit



67.0807
67.0.490.0807

+



69.0010
69.0.190.0010

This multi-service valve is designed for use in a single opening ASME container with a riser of 2-1/2" M NPT. A separate opening is required for a liquid withdrawal valve.


Features

The solid brass multi-service valve incorporates:

- double back check filler valve
- vapor equalizing valve with excess flow
- pressure relief valve with protective cap
- service valve with Cavagna quality handwheel system
- plugged 1/4" F.NPT gauge boss
- fixed liquid level gauge with 36" DT
- "Junior" size float gauge flange opening. Specify float gauge when ordering
- internal threads accommodate 2-1/2" M NPT riser pipe connection and a 3/4" F.NPT connection for the filling valve opening
- double O-ring service valve: individual replacement system

Ordering Information

Part Number	Tank Connection	Vapor Service Connection	Filler Connection	Fixed Liquid Level Gauge	DT Length	Propane liquid capacity at various differential pressure (GPM)				Pressure Relief Valve Flow Capacity (SCFM) Air			
						10 PSIG	25 PSIG	50 PSIG	75 PSIG	PRV Setting	UL	ASME	
67.0807	2-1/2" M NPT	POL (CGA 510)	1-3/4" ACME	captive	36"	58	98	146	186	250	1918	1808	
68.2005	67.0807	2-1/2" M NPT	POL (CGA 510)	1-3/4" ACME	captive	36"	58	98	146	186	250	1918	1808
	69.0010	Container Connection		Outlet Connection		U.L. Closing Flow (Propane)				Wrench Hex Flat			
		3/4" M NPT		1-5/8" UN		20 GPM				1-3/4"			



Underground Multi-Service Valve with Integrated Evacuation Valve



67.1020
67.0.490.1020

This multi-service valve is designed for use in a single opening ASME container with a riser of 2-1/2" M NPT. A separate opening is NOT required for a liquid withdrawal valve.

Features

- Integrated liquid withdrawal valve in the body of the multi-service valve provides easy access
- Integrated service valve in the body of the multi-service valve
- New, compact design. More function in less space!
- 100% brass construction
- Replacement components available (see table below)

The solid brass multi-service valve incorporates:

- double back check filler valve
- vapor equalizing valve with excess flow
- pressure relief valve with protective cap
- service valve with Cavagna quality handwheel system
- integrated fixed liquid level gauge with 36" DT

Ordering Information

Part Number	Tank Connection	Vapor Service Connection	Filler Connection	Internal Threads		Fixed Liquid Level Gauge	DT Length	Propane liquid capacity at various differential pressure (GPM)				Pressure Relief Valve Flow Capacity (SCFM) Air		
								10 PSIG	25 PSIG	50 PSIG	75 PSIG	PRV Setting	UL	ASME
67.1020	2-1/2" M NPT	POL (CGA 510)	1-3/4" ACME	3/4" NPT L.H. Filler	3/4" NPT Liquid Withdrawal	captive	36"	58	98	146	186	250	1918	1808

SPARE PARTS FOR MULTI-VALVE

1609500304	Filler Valve Repair Kit
1609500305	Vapor Return Valve
6901900111	Liquid Withdrawal Valve
7001900217	Safety Pressure Relief Valve



Multi-Service Valve



67.0720
67.0.490.0720

Multi-service valve suitable for ASME tanks where a vapor service valve is required. This valve incorporates in the same body a service valve, a vapor withdrawal valve and a fixed level gauge.

Features

Improved Stem Seal - Two seals - a back seat and an O-ring protect against stem leakage in the service valve portion. When the service valve is fully open, the O-ring is not under pressure, increasing the service life of the O-ring.

Redesigned Body Configuration - Installation of the 67.0720 can be performed with a standard 1" socket wrench using the large center wrenching hex. The extremely low body silhouette (approximately 2-3/4") allows the use of small, economical hoods.

Convenient Level Gauge - Top mounting of the fixed liquid level gauge gives easy access.

Gauge Connection - The 1/4" F.NPT gauge connection can be plugged or left unplugged for installation of a pressure gauge.

Fixed level gauge - Please specify DT length when ordering.

Sealant - Pre-applied on the inlet thread.

Various DT lengths upon request.

Ordering Information

Part Number	Tank Connection	Vapor Service Connection	Vapor Line Connection	Gauge Boss	Fixed Liquid Level Gauge	Fixed Level Gauge DT Length	Wrench Hex Flat
67.0720	3/4" M NPT	Female POL CGA 510	1-1/4" M.ACME	1/4" F.NPT	Yes	Customizable Upon Request	1"

Filler Valves



Pre-applied sealant on the inlet thread.




66.1122
66.0.290.1122
3/4" M NPT
Forklift Filler Valve
Soft seal



66.1232
66.0.290.1232
1-1/4" M NPT
Filler Valve
Metal to metal seal

Ordering Information

Part Number	Container Connection	Line Connection	Wrench Hex Flat	Propane liquid capacity at various differential pressure (GPM)						
				10 PSIG	20 PSIG	25 PSIG	30 PSIG	40 PSIG	50 PSIG	75 PSIG
66.1122	3/4" M NPT	1-3/4" M.ACME	1-3/4"	17	23	-	28	33	37	-
66.1232	1-1/4" M NPT	1-3/4" M.ACME	1-3/4"	58	-	98	-	-	146	186
66.1134 TWO PIECE BODY	1-1/4" M NPT	1-3/4" M.ACME	1-3/4"	54	-	100	-	-	148	190



Snapfill

3/4" M NPT Forklift EN 12806
Snapfill Euro-style filler valve for use
on motor fuel cylinders.
Faster fill times and reduces injuries
from repetitive twisting motion.
Pre-applied sealant on the inlet thread.



66.1327
66.0.290.1327

Ordering Information

Part Number	Container Connection	Line Connection	Wrench Hex Flat
66.1327	3/4" M NPT	1 3/4" - ACME Ø30-EN12806	1-3/4"

Filler Valves for Dispensers



66.1261
66.0.290.1261



66.1262
66.0.290.1262

Features

- Double back-check filler valve with integral emergency shut-off ball valve: ALL-IN-ONE SOLUTION.
- Both valves are double back check filler valves that have: (1) a soft seated upper back check, and (2) a metal-to-metal lower back check seat.

- Eliminates the need for installing expensive and unreliable filler hose adapters as a temporary fix to a failed or leaky filler valve.
- Permits safe filler valve maintenance without tank evacuation.
- These two versions can be used either for underground or above ground

Ordering Information

Part Number	Tank Connection	Filler Connection	Wrench Hex Flat	Propane liquid capacity at various differential pressure (GPM)						
				10 PSIG	20 PSIG	25 PSIG	30 PSIG	40 PSIG	50 PSIG	75 PSIG
66.1261	1-1/4" NPT	1-3/4" 6 ACME	1-13/16"	54	-	98	-	-	146	186
66.1262	1-1/4" NPT	1-3/4" 6 ACME	1-13/16"	54	-	98	-	-	146	186



Vapor Equalization Valve




66.1206
66.0.290.1206

Upper back check valve and lower excess flow valve combined.
Pre-applied sealant on the inlet thread.

Ordering Information

Part Number	Tank Connection	Filler Connection	Wrench Hex Flat
66.1206	3/4" M NPT	1-1/4" 5 ACME	1-1/4"



Filler Valves with Overfill Prevention Device



66.1115
66.0.290.1115
Filler valve for vertical ASME and DOT containers. Specify tank diameter when ordering. Suitable for a 300 liter horizontal tank or 119VG tank. They can be fitted to other tank sizes upon request.



66.1154
66.0.290.1154
Filler valve with OPD for Automotive Application.



66.1157
66.0.290.1157

66.1272
66.0.290.1272
Remote Filler valve with OPD for Automotive Application.



Application

These valves incorporate a standard 1-1/4" flat wrenching hex allowing easy installation from the top with a socket wrench.

***When ordering it is necessary to specify tank dimension, mount angle and diameter to determine correct part number.**

Ordering Information

Part Number	Tank Connection	Filler Connection	Wrench Hex Flat	Specify tank dimension when ordering
66.1115	3/4" NPT	1-3/4" ACME	1-3/4"	*
66.1154	3/4" NPT	1-3/4" ACME	1-3/4"	*
66.1157	3/4" NPT	1/2" SAE	1-1/16"	*
66.1272	3/4" NPT	1/2" SAE	1-1/16"	*

* Specify when ordering



66.1101
66.0.290.1101
Filler valve suitable for underground tank. The extended body allows an easier refilling operation.



66.1106
66.0.290.1106
Filler valve with high flow capacity suitable for above ground containers. Specify tank size when ordering.



66.1093
66.0.290.1093
As with other valves that incorporate an OPD, "this valve also includes an extended filler valve with a manually operated shut-off ball valve.


Application

These filler valves are designed for horizontal and vertical LPG containers. All the valves are equipped with an overfill prevention device. Always specify the type of tank (horizontal or vertical), diameter of the tank and location of the filler valve in the flange of the tank.

Ordering Information


Part Number	Tank Connection	Filler Connection	Wrench Hex Flat	Specify tank dimension when ordering
66.1101	1-1/4" NPT	1-3/4" ACME	1-3/4"	*
66.1106	1-1/4" NPT	1-3/4" ACME	1-3/4"	*
66.1093	1-1/4" NPT	1-3/4" ACME	1-3/4"	*

* Specify when ordering



Internal Pressure Relief Valves for ASME And DOT Containers

Designed specifically for use as a primary pressure relief device on ASME containers up to 2000 gallon water capacity. Furnished with a rain cap for protection against contamination. See ordering information for part numbers. These valves have a pre-applied sealant on the container connection. These valves are ASME approved.

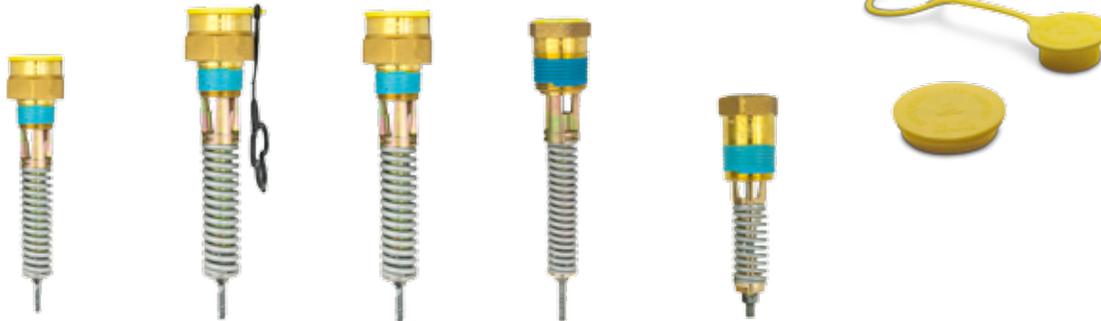

66.1128 66.0.290.1128 **66.1129** 66.0.290.1129 **66.1130** 66.0.290.1130 **66.1135** 66.0.290.1135 **66.1162** 66.0.290.1162

Type	Part number
66.1128	10.0.950.0203
66.1129	10.0.950.0204
66.1130	10.0.950.0205
66.1135	10.0.110.5032
66.0248	30.0.110.0278
66.1242	30.0.110.0277

Rain Caps for Internal Pressure Relief Valves



Ordering Information

Part Number	Container Connection	Start to Discharge Setting PSIG	UL (at 120% of set pressure) Flow capacity SCFM/AIR	ASME (at 120% of set pressure) Flow capacity SCFM/AIR	Wrench Hex Flat
66.1127	1" NPT	375	1491	n/a	1-5/16"
66.1128	3/4" NPT	250	2007	1807	1-9/16"
66.1129	1" NPT	250	2757	2493	1-3/4"
66.1130	1-1/4" NPT	250	4312	3913	2-1/4"
66.1242	1" NPT	312	1109	979	1-5/16"
66.1135	1" NPT	250	864	786	1-5/16"
66.1162	3/4"-NPT	312	690	690	1-1/16"

External Pressure Relief Devices



66.1139
Pressure relief valve for small containers and on-line pipe installations. Setting point: 250 PSIG.



66.1140
Pressure relief valve for small containers and on-line pipe installations. Setting point: 375 PSIG.



66.1311
Hydrostatic Pressure relief valve provides pressure relief at or in excess of the stated pressure setting, protecting against line or plumbing system failures.



Ordering Information

Part Number	Bottom Male Connection	Wrench grip hexagon	Thread type		Configuration suitable for a tank with a max surface area of:	PRV - Start to Discharge Setting (PSIG)	PRV-OVERPRESSURE 20%	Approval	PRV Orifice
			taper	parallel			CAPACITY SCFM-AIR		
66.1139 - PRV	1/4-18 NPT	14/16"	X		-	250	296-262	UL/ASME	7/8"
66.1140 - PRV	1/4-18 NPT	14/16"	X		-	375	486	UL CGA S1.1	7/8"
70.0073 - EU19	3/4-14 NPT	1 13/16"	X		73 sq.ft Aboveground 316 sq.ft Underground	250	1918-1808	UL/ASME	1-13/16"
66.1311	1/4-18 NPT	9/16"	X		-	440	-	UL	9/16

70.0073 (EU19)
External pressure relief valve ASME containers. Setting point: 250 PSIG.





Internal Pressure Relief Valves for DOT Fork Lift Cylinders



66.1027
66.0.290.1027
Designed specifically for use as primary relief valve on fork lift cylinders. A 45° deflector adapter is already included into the body of the valve. The valve is a one-piece hot forged brass body.



66.0248
66.0.290.0248
Designed specifically for use as primary relief valve on fork lift cylinders.

Ordering Information

Part Number	Container Connection	Start to Discharge Setting (PS)	UL (at 120% of set pressure) Flow capacity SCFM/AIR	Wrench Hex Flat
66.1027	3/4" NPT	375	400	1-1/16"
66.0248	3/4" NPT	375	400	1-1/16"

Fork Lift Connectors



These brass connectors are designed to join the carburetor fuel line to the service valve.



66.1024
66.0.290.1024
Half coupling ACME. For installation between the LPG engine fuel line and the fork lift service valve.

66.1023
66.0.290.1023
Female coupling ACME. For installation on the carburetor fuel line.



Lawnmower Connectors



66.1312
66.0.290.1312
Half coupling Left Hand ACME. For installation between the LPG engine fuel line and the lawnmower service valve.

66.1354
66.0.290.1354
Female coupling LH ACME. For installation on the carburetor vapor fuel line.



Ordering Information

Part Number	Inlet A	Outlet B	Normal Application
66.1024	3/8" F.NPT	1-1/4" M.ACME	Service Valve
66.1312	3/8" F.NPT	1-1/4" LH M.ACME	Service Valve
66.1023	1-1/4" F.ACME	1/4" F.NPT	Fuel
66.1354	1-1/4" LH F.ACME	1/4" F.NPT	Vapor Fuel

All the connectors automatically close when disconnected.



Service Valves for DOT Fork Lift and ASME Motor Fuel Containers



80.2062
80.0.380.2062

80.2063
80.0.390.2063



80.2064
80.0.390.2064

80.2146
80.0.390.2146



Application

These valves are designed for vapor or liquid withdrawal service on DOT fork lift containers (80-2064) and ASME containers. These valves are equipped with an excess flow limiter with different settings. Because these valves do not have an integrated pressure relief valve, they may only be used as an accessory valve on containers that have an independent PRV suitable for that containers capacity (such as 66.0248, 66.1057 or 66.1058 – see pressure relief valves).

Features

These valves are supplied with pre-applied sealant on the inlets. The 80.2064 also has pre-applied sealant on the outlet.

Double O-ring Stem Seal - Two O-rings form the stem seal for improved resistance to leakage caused by dirt or extreme temperatures.

Tamperproof Design - A travel stop keeps the handwheel from being removed which helps to prevent tampering.

It also prevents removal of the stem and provides an additional seal against gas leakage.

Sturdy Quality Brass Handwheel - Large, sturdy brass handwheel and stem threads less likely to break, even with rough handling.

Static Seat Disc - In the 73.0001 Valve the seat disc does not rotate, abrasive wear on the disc is eliminated, improving service life.

Recessed Excess Flow Valve - The recessed excess flow valve helps reduce the possibility of mechanical damage or fouling from excess pipe compound.

Ordering Information

Part Number	Container Connection	Outlet Connection	Normal Application	Excess Flow Closing
80.2063	3/4" M. NGT	3/8" SAE Flare (70)	ASME Motor Fuel	3.3 GPM
80.2062		3/8" SAE Flare (90)	ASME Motor Fuel	3.3 GPM
80.2146		POL (CGA 510)	ASME Motor Fuel	1.5 GPM
80.2064		3/8" 18 NPT	DOT Fork Lift	2.6 GPM

Fixed Liquid Level Gauges



66.1072
66.0.290.1072

Special DT length available. An optional instruction plate may be ordered for use with these valves. These valves incorporate a No. 54 drill size orifice. Captive screw.




66.1161
66.0.290.1161

Remote outgauge. Captive screw.



Part Number	Container Connection	Outlet Connection	DT Length
66.1072	1/4" M NPT	-	12"
66.1116	1/4" M NPT	-	5.4"
66.1117	1/4" M NPT	-	6.6"
66.1118	1/4" M NPT	-	3.8"
66.1119	1/4" M NPT	-	4.1"
66.1120	1/4" M NPT	-	5.6"
66.1121	1/4" M NPT	-	6.9"
66.1204	1/4" M NPT	-	Without
66.1125	1/4" M NPT	-	5.2"
66.1161	1/4" NPTF	1/4" SAE Flare	Without

Fork Lift DOT Multivalve

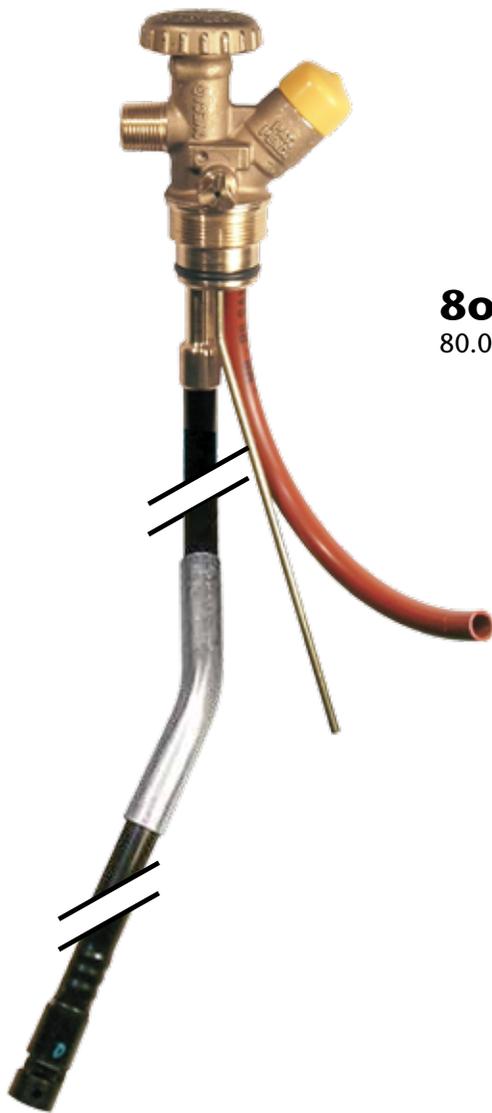

80.8190
80.0.390.8190




Application and description

- Designed specifically as a "One-Hole" solution for composite LPG cylinders in DOT fork lift service.
- One hole solution - fewer points for potential leaks.
- Multi function valve, including PRD and Excess Flow Valve.
- Straight threads reduce torque force into composite cylinder wall.

Ordering Information

Part Number	Inlet	Outlet	Application
80.8190	M 34	3/8-18 NPT	DOT Fork Lift



Liquid Withdrawal Valves with Excess Flow



These valves are designed for liquid withdrawal from stationary containers.



69.0010
69.0.190.0010

This new liquid withdrawal valve is designed for liquid evacuation prior to moving the tank. This valve can also be used on permanent installations equipped with an excess flow limiter. Designed according to the latest UL standard.
Pre-applied sealant



66.1109
66.0.290.1109

This adapter is designed to be used with a 69.0010 liquid withdrawal valve. Fully compatible with the new evacuation valves on the market.



69.0109
69.0.190.0109 

This new liquid withdrawal valve is designed for liquid evacuation prior to moving the tank. This valve can also be used on permanent installations equipped with an excess flow limiter. Designed according to the latest UL standard.
Pre-applied sealant

Ordering Information

Part Number	Container Connection	Outlet Connection	U.L. Closing Flow (Propane)	Wrench Hex Flat
69.0010	3/4" M NPT	1-5/8" UN	20 GPM	1-3/4"
66.1109	1-5/8" UN	3/4" NPT	n/a	n/a
69.0109	1-1/4" NPT	1-5/8" UN	36 GPM	1-3/4"



Service Valves for ASME and DOT Containers or Fuel Line Application



80.3135

80.0.490.3135

Designed specially for vapor withdrawal service on ASME and DOT containers. Because this valve has no integral pressure relief valve, it may only be used as an accessory valve on containers that have an independent pressure relief valve sufficient for that container's capacity. This valve can also be used as a service valve on a 420 lb vertical tank or a 300 liter horizontal tank. This valve also incorporates a fixed liquid level gauge. Specify DT length when ordering.



80.1199

80.0.290.1199

Open-close valve with POL outlet. Designed for vapor withdrawal only.

Features

- Double O-ring Stem Seal** - Two O-rings from the stem seal for improved resistance to leakage due to dirt or temperature extremes.
- Sturdy Quality Brass Handwheel** - New large sturdy brass handwheel and stem threads are less likely to break, even with rough handling. Repairable design based upon request.
- Static Seat Disc** - Because the seat disc does not rotate, abrasive wear on the disc is eliminated, improving service life.

Ordering Information

Part Number	Tank Connection	Vapor Service Connection	Fixed Liquid Level Gauge	Fixed Level Gauge DT Length
80.3135	3/4" NGT	POL CGA 510	Not captive	11.1"
80.3144	3/4" NGT	POL CGA 510	Not captive	5.8"
80.1199	3/4" NGT	POL CGA 510	N/A	N/A
80.3149	3/4" NGT	POL CGA 510	Not captive	11.0"
80.3190	3/4" NGT	POL CGA 510	Not captive	10.0"
80.3191	3/4" NGT	POL CGA 510	Not captive	10.63"



Service Valves for DOT Cylinders



80.5016

80.0.690.5016

DOT cylinder valve for vapor withdrawal up to 100 lb LPG capacity. Specify dip-tube length when ordering.

80.6032

80.0.790.6032

Heavy duty POL valve with pressure relief valve for 200 lb propane cylinders. Different DT lengths available.




Ordering Information

Part Number	Cylinder Connection	Outlet Connection	Normal Application	Liquid Level Gauge	DT Length	Relief Setting	UL rated discharge flow capacity (SCFM)
80.6032	3/4" NGT	Female POL (CGA 510)	DOT cylinder up to 100 lbs	Yes	10.2"	375	765
80.5016			Service valve on DOT cylinder	Yes	10.6"		366
80.5064			DOT cylinder up to 100 lbs	No	-		366



Type 1 ACME Cylinder Valve with Overfill Prevention Device (OPD)

These Type 1 ACME valves (CGA791) are intended for DOT cylinders up to 40 pounds LPG capacity (96 pounds water capacity). This valve has a vapor service outlet, relief valve, captive fixed liquid level gauge, and an overfill prevention device (OPD).

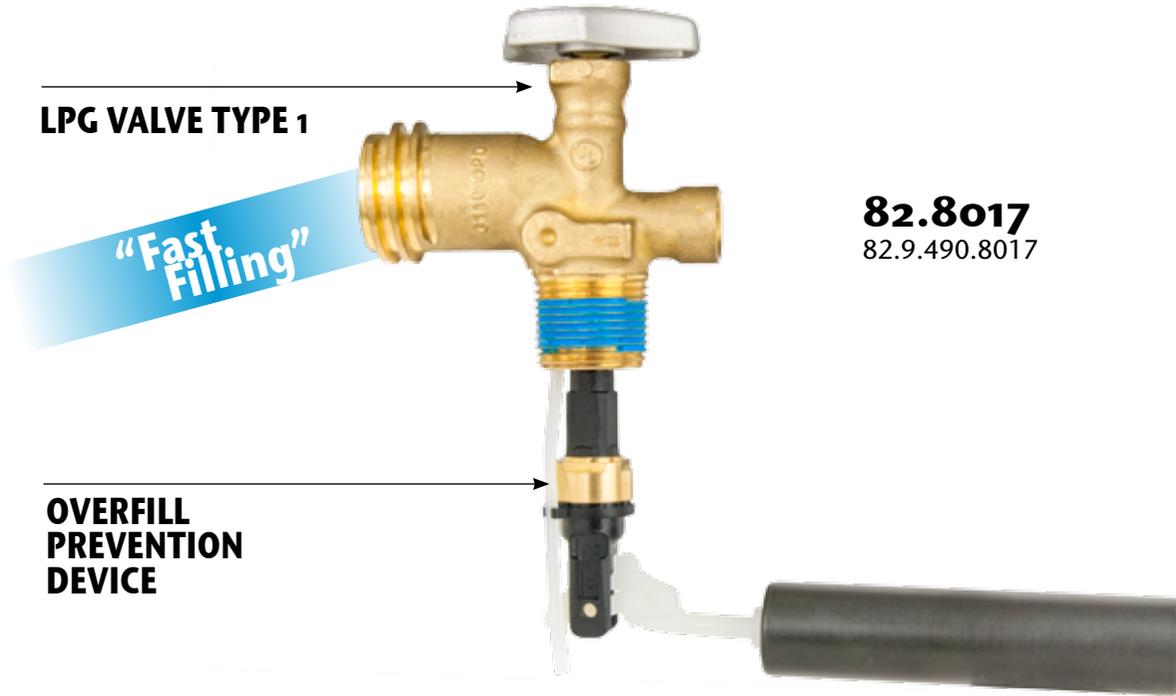

Features

- Rapid purging and filling with over one million BTU withdrawal capacity.
- Tri-lobular one-piece forged aluminum handwheel.
- Double “O-ring” stem seal for improved leak resistance.
- Pre-applied sealant.
- Quality “O-ring” check valve seat, opens only with positive seal.
- Brass safety cage surrounding critical welds provides additional protection to components for long-term operational performance.

Ordering Information

Part Number	Cylinder Capacity	Container Connection	Outlet Connection	Relief Setting	Dip Tube
82.8017	20 lbs	3/4" 14 NGT	Type 1 ACME and POL	375 PSIG	4.0"
82.8018	30 lbs	3/4" 14 NGT	Type 1 ACME and POL	375 PSIG	4.7"
82.8019	40 lbs	3/4" 14 NGT	Type 1 ACME and POL	375 PSIG	6.4"



Gaslow Measuring Systems



The Gaslow was the first, and is the only, measuring system to work in almost all gas cylinder applications with total accuracy. It is straightforward, cost-effective, easy to fit, and extremely reliable.

Its unique advanced calibration warns you when gas supplies are running low and tests the complete system for dangerous gas leaks. Ideal for boats, motorhomes, RV's, patio heaters, gas barbecues, and propane powered mosquito traps. The propane gas user can simply install an easy-to-read indicator for totally dependable results.

Low Level Monitoring

Users of propane gas know that it is extremely difficult to tell when the cylinder is running low.

Gaslow unique measuring instruments are fitted before the regulator on the high pressure side of the propane gas system to monitor the vaporization of the gas as it is being used to give advanced warning of low gas levels.

Leak Protection

Propane gas has an excellent record for safety but must be handled with care. With the gauge fitted directly onto the cylinder, its leak test function can give total peace of mind. They are the only units which will quickly and easily perform a pressure leak test on the complete system, including the cylinder connection.

Part N.
80-0020



Part N.
AD-2G



Gaslow 1500 Remote Tank Monitor



Gaslow remote propane monitor gauge with fuel indicator flashing light.

Light starts flashing when fuel supplies are running low and cylinder needs to be refilled. Plus start-up leak detection warning light:

- before turning on appliance(s) and after system is pressurized with gas, a flashing light will indicate a leak within 60 seconds on most propane systems.

Full instructions enclosed.

For Use With

gas grills, fish cookers, mosquito units, rv's & boats


Model# AD-3G

Included:

- 30 inches connection cable
- 15 Foot extension cables available - no limit to length of wire
- Electronic gauge and adapter with check lock seal
- Mounting bracket and remote flashing light indicator

Requires 2 AAA Batteries (not included)





Tank Equipment Spare Parts

The manufacturer declines all responsibility for incorrect use or application. We recommend using original parts or to replace the whole valve.

Rain Caps for Internal Pressure Relief Valves.



VINYL

- 30.0274**
- 30.0273**
- 30.0276**



PLASTIC

- 10.5032**
- 10.5036**
- 10.5033**
- 10.5037**



PLASTIC

- 10.0203**
- 10.0204**
- 10.0205**

10.5038

Ordering Information

Type for	Part number
66.1029 66.1129	30.0.110.0273 - 10.0.110.5033 - 10.0.950.0204
66.1030	30.0.110.0274 - 10.0.110.5036
66.1128	30.0.110.0274 - 10.0.950.0203
66.1031 66.1130	30.0.110.0276 - 10.0.110.5037 - 10.0.950.0205
66.1057 66.1058 66.1127 66.1135	10.0.110.5032
66.1162	10.0.110.5056
66.1027	10.0.110.5056
66.0248	10.0.110.5038



5605030021

Ug Wrench Kit
Valve Socket - 3/4" drive.
Fit Cavagna Multiservice valves
for ASME underground
propane tank.



51C1140001

Valve Socket
1/2 inch drive
Fits Cavagna
OPD Service Valves and
Fork Lift Service Valves



CAVAGNA group

Advanced solutions for gas control




ENDURANCE SERIES

LPG Bulk Storage and Truck Equipment

Threaded Internal Valves	PG. 74
Flanged Internal Valve 3"	PG. 76
Flanged Internal Valve 4"	PG. 76
Internal Valve Accessories	PG. 78
Rotary Cams Actuators	PG. 80
Latch/Remote Release Mechanisms	PG. 82
Full Internal Relief Valves	PG. 83
Flanged Full Internal Relief Valves	PG. 83
Accu-Max Float Gauges	PG. 84
Hose End Swivel Connectors	PG. 85
Hose End Fill Check Adapters	PG. 85
Rotary Gauge System	PG. 86
Excess Flow Valves	PG. 87
Double Check Filler Valve	PG. 88
Multipurpose Valve for NH3	PG. 89
Back Pressure Valves for Container or Line Applications	PG. 89






Threaded Internal Valves

These valves, designed as primary shut-offs to control product discharge in LP-Gas service, are predominantly used in the liquid and vapor openings of bobtail and other transport vehicles. All valves satisfy the requirements of NFPA 58 and can also be used in stationary storage tank applications. All Cavagna internal valves have a robust, one piece body design and an incorporated excess flow function. Each valve has a weak section that allows the pump or piping to “shear” in the event of an accident, thereby leaving the valve mechanism intact. Cavagna threaded valves are compact and can be operated either manually or remotely via cable or pneumatic control. Valves contain spring-loaded, PTFE packing providing excellent leakage protection and the standard disc material provided is Nitrile.




Part Number		Material	Inlet Connection	Outlet Connection	Closing Flow GPM Propane		LPG Vapor Capacity (SCFH/Propane)		Closing Flow GPM Ammonia NH ₃ + LPG
One Way	Two Way				Half Coupling	Full Coupling	25 PSIG	100 PSIG	
6902900101	-----	steel	1-1/4" M NPT	1-1/4" F NPT	30	-----	5.800	9.100	27
6902900102	-----	steel	1-1/4" M NPT	1-1/4" F NPT	50	35	7.650	12.900	45
6902900103	-----	steel	1-1/4" M NPT	1-1/4" F NPT	80	65	10.950	18.800	72
6902900195	-----	steel	1-1/2" M NPT	1-1/2" F NPT	30	-----	5.800	9.100	27
6902900196	-----	steel	1-1/2" M NPT	1-1/2" F NPT	50	35	7.650	12.900	45
6902900197	-----	steel	1-1/2" M NPT	1-1/2" F NPT	80	65	10.950	18.800	72
6902900104	6902900130	steel	2" M NPT	2" F NPT	100	60	21.550	36.800	90
6902900105	6902900131	steel	2" M NPT	2" F NPT	150	90	33.600	57.200	135
6902900106	6902900132	steel	2" M NPT	2" F NPT	250	130	-----	-----	225
6902900107	6902900112	steel	3" M NPT	3" F NPT	150	100	28.600	48.700	135
6902900108	6902900113	steel	3" M NPT	3" F NPT	200	125	43.500	73.900	180
6902900109	6902900114	steel	3" M NPT	3" F NPT	250	165	51.500	87.600	225
6902900110	6902900115	steel	3" M NPT	3" F NPT	400	235	80.100	139.000	360
6902900111	6902900116	steel	3" M NPT	3" F NPT	500	325	-----	-----	450




Threaded Internal Valves


1 1/2" ONE WAY




1-1/4" ONE WAY




2" ONE WAY

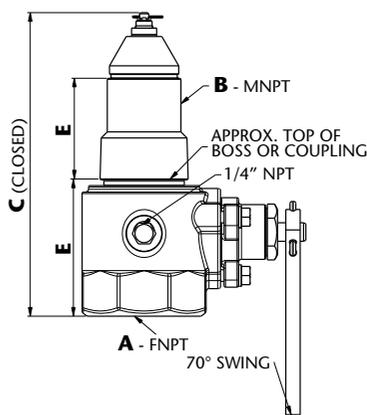


2" TWO WAY

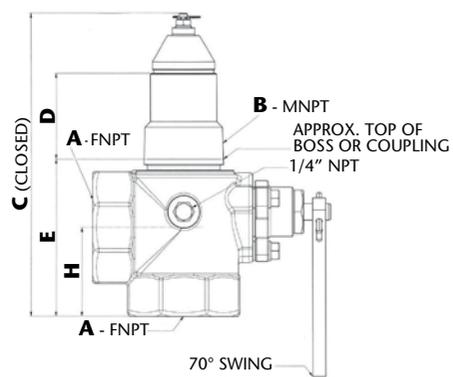

3" ONE WAY

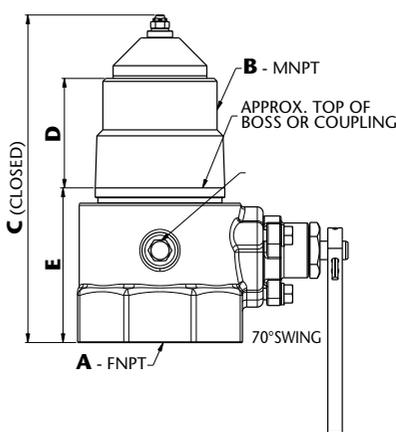


3" TWO WAY

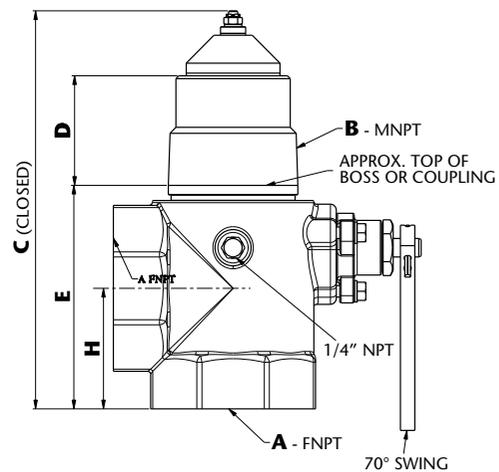

Threaded Valves specification:

Pressure Rating: 400 PSIG (27.58 bar) WOG
 Temperature: Up to 150°F (66°C)
 Body: Ductile Iron
 Packing: PTFE
 Seat disk: Synthetic rubber
 Stub, Shaft & Stem: stainless steel

DIMENSIONS					
A	B	C	D	E	H
1-1/4" NPT	1-1/4" NPT	5.90" (150 mm)	1.86" (47 mm)	2.88" (73 mm)	-----
1-1/2" NPT	1-1/2" NPT	5.90" (150 mm)	1.86" (47 mm)	2.88" (73 mm)	-----
2" NPT	2" NPT	8.26" (210 mm)	2.40" (61 mm)	4.05" (103 mm)	-----
3" NPT	3" NPT	8.85" (225 mm) ONE WAY	2.56" (65 mm) ONE WAY AND TWO WAY	4.54" (115.3 mm) ONE WAY	3.26" (83 mm)
		10.82" (275 mm) TWO WAY		6.50" (165.3 mm) TWO WAY	



Flanged Internal Valve 3"



Cavagna flanged valves, equipped with a built-in excess flow valve to prevent uncontrolled product release, are perfect for mounting a pump or other similar piping connections.

Mounting bolts weakened section, provided, allow the pump or piping to "shear" in the event of an accident, thereby leaving the valve intact. Cavagna flanged valves have a protection filter to avoid pump contamination from dirt and particles, easily removable when the valve is installed on the filling piping line. Cavagna flanged valves contain PTFE packing providing excellent leakage protection and the standard disc material provided is Nitrile, they can be operated manually or remotely via cable or pneumatic control.



Part Number		Material	Inlet Connection	Outlet Connection	Closing Flow GPM Propane	LPG Vapor Capacity (SCFH/Propane)		Closing Flow GPM Ammonia NH ₃ + LPG
Single	Double					25 PSIG Inlet	100 PSIG Inlet	
6902900117	6902900122	steel	3" 300lb ANSI RF Modified (4 7/8" dia bore)	3" 300lb. ANSI RF	150	25.100	42.700	135
6902900118	6902900123	steel	3" 300lb ANSI RF Modified (4 7/8" dia bore)	3" 300lb. ANSI RF	200	36.900	62.800	180
6902900119	6902900124	steel	3" 300lb ANSI RF Modified (4 7/8" dia bore)	3" 300lb. ANSI RF	250	42.200	71.800	225
6902900120	6902900125	steel	3" 300lb ANSI RF Modified (4 7/8" dia bore)	3" 300lb. ANSI RF	400	59.400	100.900	360
6902900121	6902900126	steel	3" 300lb ANSI RF Modified (4 7/8" dia bore)	3" 300lb. ANSI RF	500	-----	-----	450

Flanged Internal Valve 4"




Cavagna flanged valves, equipped with a built-in excess flow valve to prevent uncontrolled product release, are perfect for mounting a pump or other similar piping connections.

Mounting bolts weakened section, provided, allow the pump or piping to "shear" in the event of an accident, thereby leaving the valve intact. Cavagna flanged valves have a protection filter to avoid pump contamination from dirt and particles, easily removable when the valve is installed on the filling piping line. Cavagna flanged valves contain PTFE packing providing excellent leakage protection and the standard disc material provided is Nitrile, they can be operated manually or remotely via cable or pneumatic control.




Part Number	Material	Inlet Connection	Outlet Connection	Closing Flow GPM Propane
6902900141	steel	4" 300lb ANSI RF Modified (4 7/8" dia bore)	4" 300 lb. ANSI RF	340
6902900142	steel	4" 300lb ANSI RF Modified (4 7/8" dia bore)	4" 300 lb. ANSI RF	440
6902900143	steel	4" 300lb ANSI RF Modified (4 7/8" dia bore)	4" 300 lb. ANSI RF	600
6902900144	steel	4" 300lb ANSI RF Modified (4 7/8" dia bore)	4" 300 lb. ANSI RF	800
6902900145	steel	4" 300lb ANSI RF Modified (4 7/8" dia bore)	4" 300 lb. ANSI RF	1,000



Flanged Internal Valve

Internal Valves


3" Single and Double Flanged

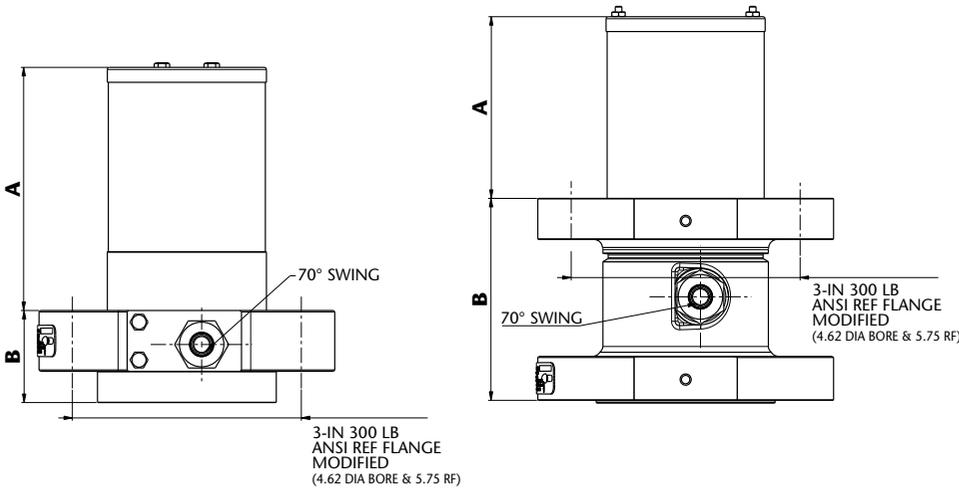

Flanged Valves specification:
 Pressure Rating: 400 PSIG (27.58 bar) WOG
 Temperature: Up to 150°F (66°C)
 Body: cast steel WCB
 Packing: PTFE
 Seat disk: Synthetic rubber
 Stub, Shaft & Stem: stainless steel
 Gaskets: Non asbestos spiral wound graphite


Part Number		DIMENSIONS		DIMENSIONS	
		A Single	B Single	A Double	B Double
Single	Double				
6902900117	6902900122	6.75" (171 mm)	2.56" (65 mm)	5.33" (133 mm)	5.62" (143 mm)
6902900118	6902900123				
6902900119	6902900124				
6902900120	6902900125				
6902900121	6902900126				

4" Single flanged

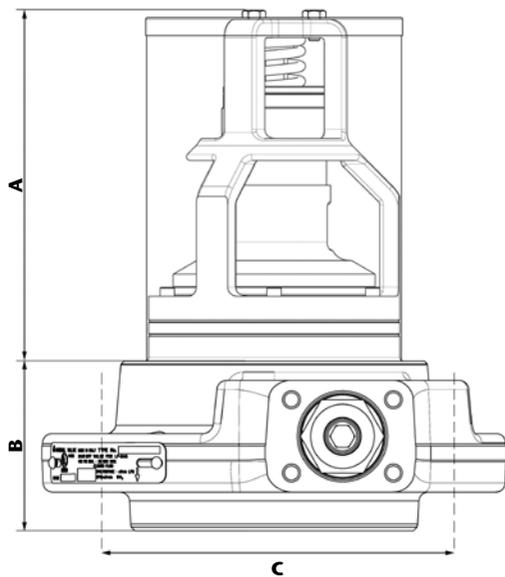


Flanged Valves specification:
 Pressure Rating: 400 PSIG (27.58 bar) WOG
 Temperature: Up to 150°F (66°C)
 Body: cast steel WCB
 Packing: PTFE
 Seat disk: Synthetic rubber
 Stub, Shaft & Stem: stainless steel
 Gaskets: Non asbestos spiral wound graphite

DIMENSIONS		
A Single	B Single	C Single
7.55" (192 mm)	3.66" (93 mm)	7.88" (200 mm)




Threaded and Flanged Internal Valve Accessories


3" Single Flanged Valve

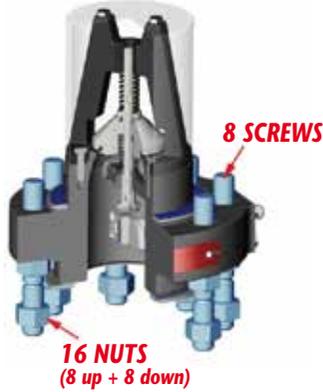


Product Code	Description
680390020	3/4"-10 UNC studs kit (8 pcs)
680390019	3/4"-10 UNC nuts kit (16 pcs)
0401105575	Upper spiral gasket (1 pcs)
0401105576	Lower spiral gasket (1 pcs)
680390021	M20x2,5 studs kit (8 pcs)
680390022	M20x2,5 nuts kit (16 pcs)

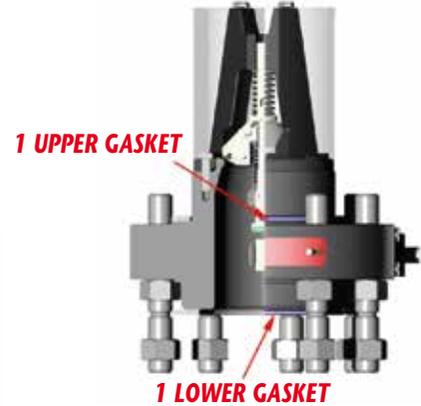


3" Double Flanged Valve

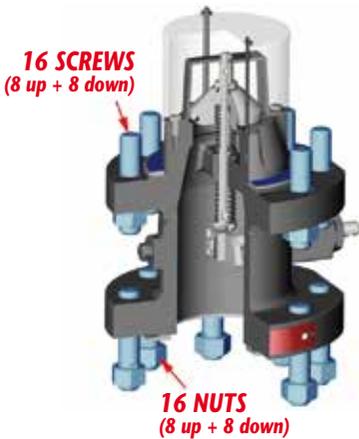


Product Code	Description
680390018	3/4"-10 UNC studs kit (16 pcs)
680390019	3/4"-10 UNC nuts kit (16 pcs)
0401105575	Upper spiral gasket (1 pcs)
0401105576	Lower spiral gasket (1 pcs)

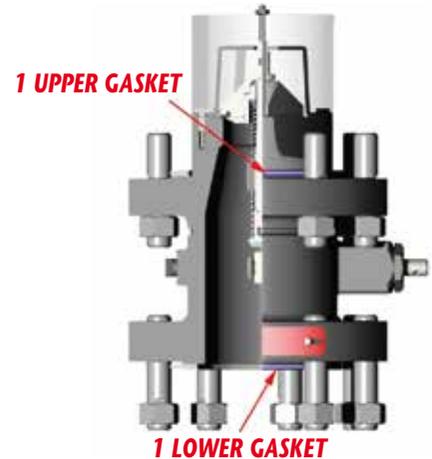


4" Single Flanged Valve

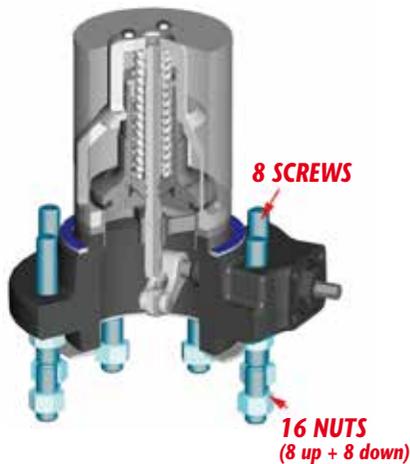

Product Code	Description
680390023	3/4"-10 UNC studs kit (8 pcs)
680390019	3/4"-10 UNC nuts kit (16 pcs)
0401105595	Upper spiral gasket (1 pcs)
0401105596	Lower spiral gasket (1 pcs)

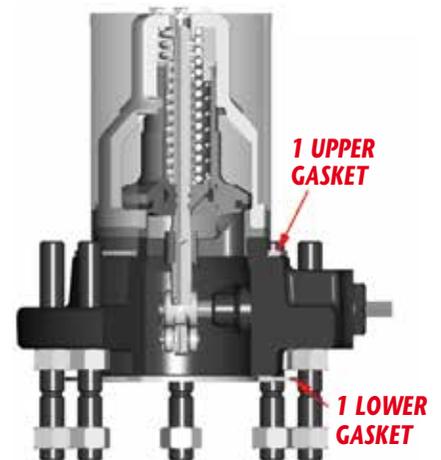



Threaded and Flanged Internal Valve Accessories

Spiral Gaskets



Product Code	Description
0401105575	Upper Spiral Gasket 3" Flanged Valve (Single and Double)
0401105576	Lower Spiral Gasket 3" Flanged Valve (Single and Double)
0401105595	Upper Spiral Gasket 4" Single Flanged Valve
0401105596	Lower Spiral Gasket 4" Single Flanged Valve

Studs and Nuts



Product Code	Description
6803900018	3/4"-10 UNC studs kit (16 pcs)
6803900019	3/4"-10 UNC nuts kit (16 pcs)
6803900020	3/4"-10 UNC studs kit (8 pcs)
6803900021	M20x2,5 studs kit (8 pcs)
6803900022	M20x2,5 nuts kit (16 pcs)
6803900023	3/4"-10 UNC studs kit (8 pcs)

Main Spindle Assembled Kit



Product Code	Description
6803900024	Dedicated for Internal Valve 1-1/4" and 1-1/2" - 1 pcs
6803900025	Dedicated for Internal Valve 2" (1 way and 2 ways) - 1 pcs
6803900026	Dedicated for Internal Valve 3" (1 way and 2 ways) - 1 pcs
6803900027	Dedicated for 3" Single Flanged Valve - 1 pcs
6803900028	Dedicated for 3" Double Flanged Valve - 1 pcs

Assembled Cone Kit



Product Code	Description
6803900029	Dedicated for Internal Valve 1-1/4" and 1-1/2" - 1 pcs
6803900030	Dedicated for Internal Valve 2" (1 way and 2 ways) - 1 pcs
6803900031	Dedicated for Internal Valve 3" (1 way and 2 ways) and 3" Flanged Valve (Single and Double) - 1 pcs

Assembled Opening System Kit



Product Code	Description
6803900032	Dedicated for Internal Valve 1-1/4" and 1-1/2" - 1 pcs
6803900033	Dedicated for Internal Valve 2" (1 way and 2 ways) - 1 pcs
6803900034	Dedicated for Internal Valve 3" (1 way and 2 ways) - 1 pcs
6803900035	Dedicated for 4" Single Flanged Valve - 1 pcs

FFKM soft sealings kit



Product Code	Description
6803900036	FFKM Kit for 2" Threaded Valve
6803900037	FFKM Kit for 3" Threaded Valve
6803900038	FFKM Kit for all 3" Flanged Valve
6803900039	FFKM kit for 4" Single Flanged Valve


Complete soft sealings kit (all the O-Rings and gaskets)

Product Code	Description
6803900040	Dedicated for Internal Valve 1-1/4" and 1-1/2" - 1 pcs
6803900041	Dedicated for Internal Valve 2" (1 way and 2 ways) - 1 pcs
6803900042	Dedicated for Internal Valve 3" (1 way and 2 ways) - 1 pcs
6803900043	Dedicated for 3" Single Flanged Valve - 1 pcs
6803900044	Dedicated for 3" Double Flanged Valve - 1 pcs
6803900045	Dedicated for 4" Single Flanged Valve - 1 pcs

Excess Flow Spring



Product Code	Description
6803900046	Dedicated for 30 GPM - Internal Valve 1-1/4" and 1-1/2"
6803900047	Dedicated for 50 GPM - Internal Valve 1-1/4" and 1-1/3"
6803900048	Dedicated for 80 GPM - Internal Valve 1-1/4" and 1-1/4"
6803900049	Dedicated for 100 GPM - Internal Valve 2"
6803900050	Dedicated for 150 GPM - Internal Valve 2"
6803900051	Dedicated for 250 GPM - Internal Valve 2"
6803900052	Dedicated for 150 GPM - Internal Valve 3" and 3" Flanged (Single and Double)
6803900053	Dedicated for 200 GPM - Internal Valve 3" and 3" Flanged (Single and Double)
6803900054	Dedicated for 250 GPM - Internal Valve 3" and 3" Flanged (Single and Double)
6803900055	Dedicated for 400 GPM - Internal Valve 3" and 3" Flanged (Single and Double)
6803900056	Dedicated for 500 GPM - Internal Valve 3" and 3" Flanged (Single and Double)
6803900057	Dedicated for 340 GPM - 4" Single Flanged Valve
6803900058	Dedicated for 440 GPM - 4" Single Flanged Valve
6803900059	Dedicated for 600 GPM - 4" Single Flanged Valve
6803900060	Dedicated for 800 GPM - 4" Single Flanged Valve
6803900061	Dedicated for 1000 GPM - 4" Single Flanged Valve



Rotary Cams Actuators

Actuators



Features:

- The actuator is preassembled and ready to install.
- Compared to current devices which require adjustments the installment is quick and easy (3 screws and 1 split pin).
- The actuator can be fitted to the valve in four separate positions allowing optimization of space on the vehicle.
- Direct drive design does not apply side load to internal valve stem packing for maximum valve life.
- The actuator uses an internal cam mechanism, which guarantees higher performance optimizing the opening torque.
- Torque moment: The return torque moment relies only on the spring and is independent from the supply pressure.
- Immediate and automatic closing in absence of air (no need for additional rapid discharge accessories).
- OPEN/CLOSE indicator.
- Compact design and lightweight.
- Aluminum body, components in stainless steel and aluminum.
- Valve anchoring bracket made in stainless steel.
- The actuator is self-lubricating with PTFE carbon-graphite seals.
- The actuator guarantees complete opening of the valve and is equipped with limit switch.
- Operating media: compressed filtered air, not necessarily lubricated.
- 500.000 opening cycles guaranteed.

Working condition




Temperature: from 0°C to +80°C; from -20°C to +80°C with dry air only. (Special versions: high temperature: -20°C +150°C; low temperature: -50°C +60°)

Air supply: 5,6 bar; maximum 8,4 bar.




Operating media: compressed filtered air, not necessarily lubricated.


In case of lubricated air, either non detergent oil or NBR compatible oil, must be used.

Actuator 1-1/4" and 1-1/2"



Actuator 2" and 3"

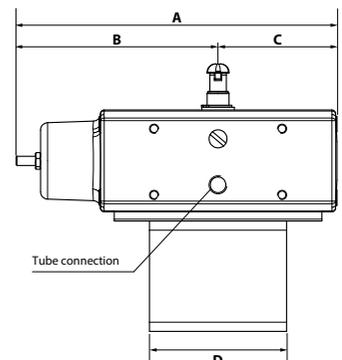
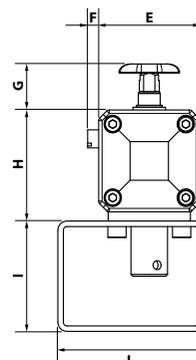
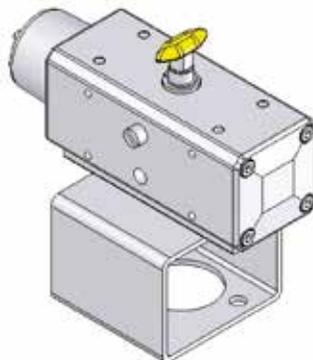







Rotary Cams Actuators

Actuators




Actuator 3" SINGLE FLANGED



Actuator 3" DOUBLE FLANGED

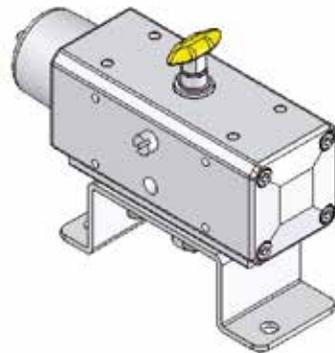


Actuator 4" SINGLE FLANGED

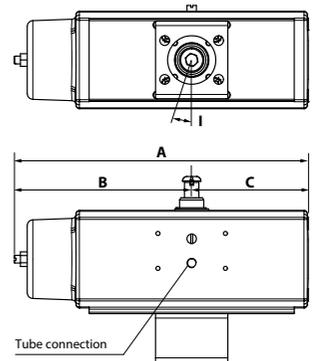

Rotary Cams Actuators Dimensions (Inches)													
	A	B	C	D	E	F	G	H	I	L	M	Tube Connection Ø	
3000900000	O-205 Actuator 1-1/4" and 1-1/2"	6-29/32	4-11/32	2-9/16	2-23/64	2-3/16	15/64	63/64	2-3/8	1-37/64	1-19/64	-	1/4"
3000900001	O-206 Actuator 2" and 3"	6-29/32	4-11/32	2-9/16	2-61/64	2-3/16	15/64	63/64	2-3/8	2-23/64	3-5/32	-	1/4"
3000900002	O-207 SF Actuator 3" Single Flanged	6-29/32	4-11/32	2-9/16	1-31/32	2-3/16	15/64	5-23/32	3-5/32	2-23/64	2-3/8	63/64	1/4"
3000900003	O-207 Actuator 3" Double Flanged	6-29/32	4-11/32	2-9/16	5-1/8	2-3/16	15/64	4-15/16	63/64	2-3/8	1-37/64	-	1/4"
3000900004	O-208 SF Actuator 4" Single Flanged	12-1/64	7-1/4	4-49/64	3-61/64	15/64	7-17/32	1-3/8	1-31/32	17,5°	-	-	1/4"
3000900014	O-205 Actuator 1-1/4" and 1-1/2" tube Ø6 mm	6-29/32	4-11/32	2-9/16	2-23/64	2-3/16	15/64	63/64	2-3/8	1-37/64	1-19/64	-	6 mm
3000900015	O-206 Actuator 2" and 3" tube Ø6 mm	6-29/32	4-11/32	2-9/16	2-61/64	2-3/16	15/64	63/64	2-3/8	2-23/64	3-5/32	-	6 mm
3000900016	O-207 SF Actuator 3" Single Flanged tube Ø6 mm	6-29/32	4-11/32	2-9/16	1-31/32	2-3/16	15/64	5-23/32	3-5/32	2-23/64	2-3/8	63/64	6 mm
3000900017	O-207 Actuator 3" Double Flanged tube Ø6 mm	6-29/32	4-11/32	2-9/16	5-1/8	2-3/16	15/64	4-15/16	63/64	2-3/8	1-37/64	-	6 mm
3000900018	O-208 SF Actuator 4" Single Flanged tube Ø6 mm	12-1/64	7-1/4	4-49/64	3-61/64	15/64	7-17/32	1-3/8	1-31/32	17,5°	-	-	6 mm
3000900019	O-205 Actuator 1-1/4" and 1-1/2" tube Ø8 mm	6-29/32	4-11/32	2-9/16	2-23/64	2-3/16	15/64	2-3/8	2-3/8	1-37/64	1-19/64	-	8 mm
3000900020	O-206 Actuator 2" and 3" tube Ø8 mm	6-29/32	4-11/32	2-9/16	2-61/64	2-3/16	15/64	2-3/8	2-3/8	2-23/64	3-5/32	-	8 mm
3000900021	O-207 SF Actuator 3" Single Flanged tube Ø8 mm	6-29/32	4-11/32	2-9/16	1-31/32	2-3/16	15/64	3-5/32	3-5/32	2-23/64	2-3/8	63/64	8 mm
3000900022	O-207 Actuator 3" Double Flanged tube Ø8 mm	6-29/32	4-11/32	2-9/16	5-1/8	2-3/16	15/64	63/64	63/64	2-3/8	1-37/64	-	8 mm
3000900023	O-208 SF Actuator 4" Single Flanged tube Ø8 mm	12-1/64	7-1/4	4-49/64	3-61/64	15/64	7-17/32	1-31/32	1-31/32	17,5°	-	-	8 mm

High Performance actuator available upon request



Latch/Remote Release Mechanisms

The Cavagna brand 1-1/4", 1-1/2", 2" and 3" Threaded Internal Valves can be fitted with a manual Latch/remote release mechanism. When the Internal Valve's operating lever is manually moved to the open position, the lever can be latched in the open position. The lever can be released from a remote location by pulling on the cable attached to a pull ring, thus closing the internal valve. A built-in fusible element in the latch release melts if exposed to fire allowing the operating lever to return to the closed position. (melting temperature 212°F/100°C)



1309500142



1309500143




1309500144



1309500147

Cod.	Description
1309500142	Fuse latch threaded Internal valve 2" and 3"
1309500143	Fuse latch threaded Internal valve 1-1/4" and 1-1/2"
1309500144	Dual Latch/ remote release for Internal valve 1-1/4" and 1-1/2"
1309500147	Manual lever and release on for 4"



Full Internal Relief Valves



Application:

Designed for use in mobile LPG & NH₃ containers as a primary pressure relief valve for bobtail and transport trailer installations. All working components are internal to the container connection preventing damage to the valve should a roll-over incident occur.

Features:

- Durable stainless steel body construction.
- All stainless steel internal components for maximum corrosion resistance.
- Available with Nitrile valve seals.
- Large seating surface for superior seal performance & reliability.
- Available with 250 & 265 PSI set pressures.

Part Number	STD / PSIG	Container Connection	Installation Hex	Service		Seat Material	Wrench (optional)
				LPG	NH ₃		
6602901295	250	2" MNPT	1-1/2"	Yes	Yes	Nitrile	3101100033
6602901300	265	2" MNPT	1-1/2"	Yes	Yes	Nitrile	
6602901296	250	3" MNPT	2-1/2"	Yes	Yes	Nitrile	3101100034
6602901301	265	3" MNPT	2-1/2"	Yes	Yes	Nitrile	



Flanged Full Internal Relief Valves



Application:


Designed for use in mobile LPG & NH₃ containers as a primary pressure relief valve for bobtail and transport trailer installations. All working components are internal to the container connection preventing damage to the valve should a roll-over incident occur. Our unique design incorporates a standard 3" - 300LB. raised face flange connection to assure a 100% leak free connection for rugged over the road applications. This eliminates problems associated with NPT threaded connections and/or tank coupling wear providing maximum tank and relief valve service life.

Features:

- Durable single piece stainless steel body construction.
- All stainless steel internal components for maximum corrosion resistance.
- Available with Nitrile.
- Large seating surface for superior seal performance & reliability.
- Available with 250 & 265 PSI set pressures.

Part Number	STD / PSIG	Container Connection	Installation Hex	Service		Seat Material
				LPG	NH ₃	
6602901325	250	3" 300 LB Flange	2-1/2"	Yes	Yes	Nitrile
6602901326	265	3" 300 LB Flange	2-1/2"	Yes	Yes	Nitrile





Accu-Max Float Gauges




Application:

Measure liquid levels within horizontal DOT and Stationary ASME Tanks with fluid capacities above 2,300 gallons. Suitable for use in bobtail, transport, railcar and bulk storage applications.

Features:

- All stainless steel construction for use with LPG & NH3 applications
- Welded tube to coupling design for maximum strength and durability
- Integral spring loaded shock absorber for arduous over-the-road application
- Exclusive easy to read "glow in the dark" dial face perfect for low light situations Dial face 100% sealed and argon filled to prevent moisture build-up & fogging Factory set and precision tuned for superb accuracy Dial face and mounting hardware universal with other industry standard gauges Mounts to all standard 8 bolt tank flange adapters

Tank Size	Model Number
Ø 66" (5.800L)	3001102740
Ø 72" (8.000L)	3001102741
Ø 81 1/2" (12.900L / 13.000L)	3001102742
Ø 88 1/2" (17.000L/18.000L/24.000L)	3001102744
Ø 79"	3001102748
Ø 80"	3001102749
Ø 84"	3001102750
Ø 88"	3001102751
Ø 90"	3001102752
Ø 2350 mm (Ø 92,5")	3001102720
Ø 2440 mm (Ø 96")	3001102721
Ø 98"	3001102723



Hose End Swivel Connectors

The hose end swivel connector allows the hose end valve to rotate 360° creating an easier connection to the tank filler valve while under pressure. It also promotes hose life by preventing twisting and kinking during reeling and unreeling from hose reel.

Hose End Swivel Connector Features

- All stainless steel construction for maximum durability and corrosion resistance
- Large bearing surface for increased strength and durability
- 360° rotation under maximum working pressure of 400 psig
- Straight through bore for unobstructed flow characteristics
- See low emission hose end valves for factory installed E-ZTurn



Part Number 1009500291

Hose End Fill Check Adapters

These adapters are intended to be attached to the LP-Gas delivery truck hose outlets. They feature minimal flow restriction which allows for fast delivery while providing an integral check valve to prevent further product loss if the tank fill valve fails to close. In the event the tank fill valve should fail, leave the fill adapter connected to the fill valve and disconnect the filler hose end valve. Then place the filler valve cap onto the fill adapter. The tank fill valve should be repaired immediately.

Hose End Fill Adapter Features

- Integral breakaway feature in the event of truck roll away leaving check intact on tank
- 1009500280 shortest overall height in the industry allowing adapters to fit inside tank hood
- 1009500281 has a floating internal seat design which allows check to swivel freely when installed on hose end valve




1009500280



1009500281

Part No.	Filler Valve F. Acme Connection	Hose End M. Acme Connection	Handle Style	Handle Material	Swivels	Factory Installed Vent Valve	Extended Version	Additional Keys
1009500280	1-3/4"	1-3/4"	Standard	Brass	No	No	No	-
1009500281	1-3/4"	1-3/4"	Standard	Brass	Yes*	No	No	-






Rotary Gauge System


Cavagna Group rotary gauges can be used on stationary or mobile tanks to visually indicate the amount of LP-Gas in the container. They are also used in filling the tank to the proper liquid level. On mobile applications and some large stationary storage tanks, hangers are recommended to support the horizontal length of the dip tube.

The gauge is operated by opening the small bleed orifice when the tube is in the vapor space of the tank. Moving the pointer on the dial causes the end of the tube to move until it contacts liquid in the container. At that point, discharge from the bleed orifice turns from vapor to liquid and the rotary gauges dial gives the volume percentage of liquid in the tank.

Gauges fit 1" coupling container connections. All gauges have stem and dip tubes with an extra large inside diameter. This assures that the correct liquid level can be obtained quickly.

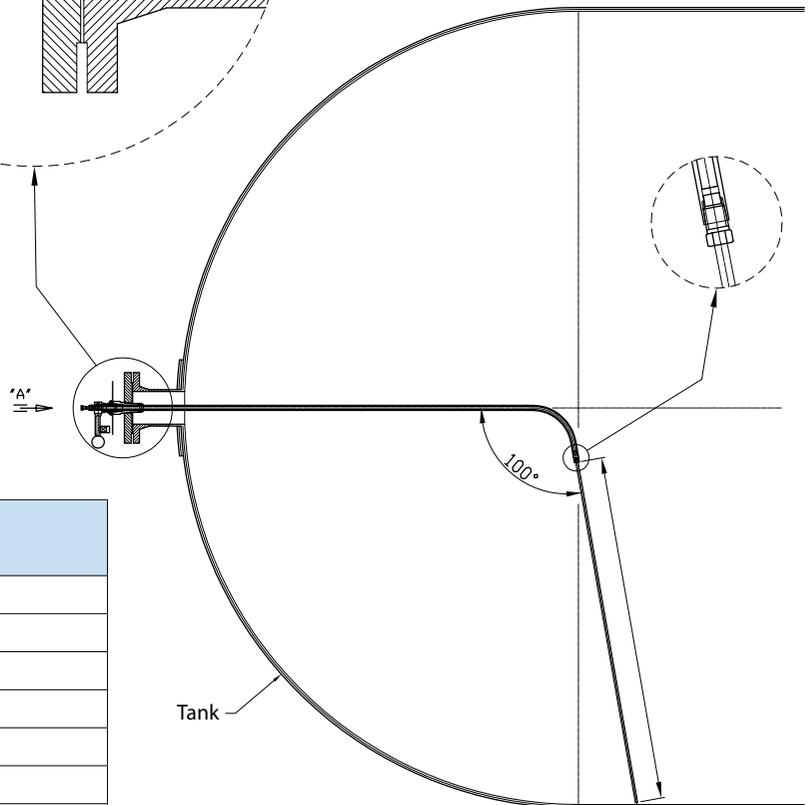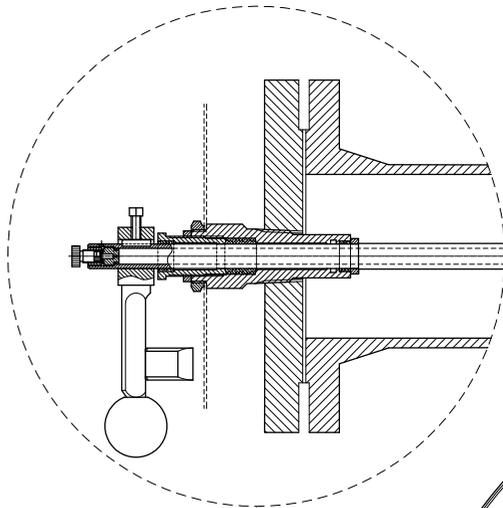

Length in Inches (Diameter of Tank)	Model Number
Ø 68"	6802900224
Ø 69"	6802900225
Ø 92"	6802900226
Ø 93"	6802900227
Ø 108"	6802900228
Ø 109"	6802900229
Ø 140"	6802900230



Excess Flow Valves for Liquid or Vapor

Valves are designed for Liquid or Vapor fill / withdrawal and for vapor equalization in containers or line applications. They are intended to close when the liquid or vapor passing through the hose or the piping system exceeds the prescribed flow rate. Valves are available in different sizes and body configurations.

VALVE'S FUNCTIONING.

Once the flow exceeds the valve's setting, the valve closes and will remain closed until the system equalizes. Once the pressure on both sides of the poppet is equal, a built in equalizing passage automatically opens the valve.



Part Number	Material	Inlet Connection	Outlet Connection	Wrench Hex Flats	Length	Approximate Closing Flows		
						Liquid (GPM Propane)	25 PSIG Inlet	100 PSIG Inlet
6902900127	Steel	1-1/4"	1-1/4"	2"	1-5/16"	30	5750	9800
6902900128	Steel	1-1/4"	1-1/4"	2"	1-5/16"	40	7500	13330
6902900129	Steel	1-1/4"	1-1/4"	2"	1-5/16"	50	8800	15970




Excess Flow Valves for Liquid or Vapor withdrawal

Valves are designed to be mounted on the bottom of customer storage tanks for liquid service. They may also be mounted on the top for vapour service.

Part Number	Material	Inlet Connection	Outlet Connection	Wrench Hex Flats	Approximate Closing Flows
					Liquid (GPM Propane)
6901900036	Steel	1-1/4"	1-1/4"	1 7/8"	55
6901900037	Steel	1-1/4"	1-1/4"	1 7/8"	70





Double Check Filler Valve for Delivery Truck Tanks and Large Storage Containers

Back pressure Valves




Technical features

Designed to provide fast filling of bobtails, transports and large bulk storage tanks.

- Double back check provides added system protection.
- Upper filler valve assembly can be easily replaced without evacuating the container.
- Both checks are spring actuated for quick, precise closure when flow into the valve stops or reverses.

Ordering Information

Part number	ACME Hose connection	Container connection	Wrench Hex Flats	Effective Length	Propane Liquid Capacity at Various Differential Pressures (GPM)				
					5 PSIG	10 PSIG	25 PSIG	50 PSIG	75 PSIG
6602901336	3/4"	3"	4"	6 1/2"	150	210	330	470	470



Multipurpose Valve for NH3 and LPG containers



Technical features

Designed for use as a manual valve or vapor equalizing valve on anhydrous ammonia applicator and nurse tanks. This valve incorporates an integral excess flow device. When product is required, the valve must completely open and backseated to allow the excess flow device to work properly.

Positive-acting excess flow valve opens for maximum flow at minimum pressure drop when filling -- regardless of the type of coupling in which the valve is installed. Excess flow seat is fully contained in the tank coupling for maximum protection in the event of external damage to the valve. Resilient seat disc assembly is fully contained on three sides for bubble-tight shut-off and long service life. "C"-ring spring-loaded stem seal design requires no repacking or field adjustment. Specially machined break-away groove beneath ACME threads will shear-off with excessive pull on the hose and leave the valve body intact. Plugged 1/4"-18 NPT boss accommodates vent valve or hydrostatic relief valve.

Ordering Information


Part number	Container connection	Filling connection	Approx. excess flow Closing flows Liquid phase (GPM)		Approx. excess flow Closing flows Vapour phase (SCFH)	
			LPG	NH3	LPG	NH3
6704901051	1 1/4-11.5 NPT	1 3/4-6 ACME-2G	49	44	15350	24000

Back Pressure Valves for Container or Line Applications



Valves are intended to prevent liquid discharge when the desired flow is directed into the vessel thereby allowing the flow in only one direction. When coupled with the appropriate single check filler valve, the combination forms a double check filler valve suitable for use in filling of bulk storage tanks.

Part Number	Material	Inlet Connection	Outlet Connection	Wrench Hex Flats	Length	Propane Liquid Capacity at different Δ Pressure		
						5 PSIG	10 PSIG	25 PSIG
7100900051	Steel	3/4" F NPT	3/4" M NPT	1 3/8"	1-15/16" (49,2 mm)	10,75	15,7	24,5
7100900050	Steel	1-1/4" F NPT	1-1/4" M NPT	2"	2-1/2" (63,5 mm)	27,5	39,2	61,75
7100900049	Steel	2" F NPT	2" M NPT	3"	3-3/8" (83,5 mm)	121,5	171,5	270,5
7100900111	Brass	1-1/4" F NPT	1-1/4" M NPT	2"	2-1/2" (63,5 mm)	27,5	39,2	61,75



ACME Adapters



1009500248



1009500247

Part No.	INLET	OUTLET (M.NPT)
1009500246	1-3/4" M. Acme	1-1/4"
1009500248	1-3/4" M. Acme	3/4"
1009500249	1-3/4" M. Acme	1"
1009500263	3-1/4" M. Acme	3"
1009500264	3-1/4" M. Acme	2"
1009500247	1-3/4" M. Acme	1-3/4" M. Acme

Filler and Vapor



1009500257



1009500253

Part No.	INLET	OUTLET (M.NPT)
1009500251	1-3/4" F. Acme	3/4" M.NPT
1009500252	1-3/4" F. Acme	1" M.NPT
1009500253	1-3/4" F. Acme	1/2" M.NPT
1009500257	2-1/4" F. Acme	1-1/4"

ACME Cap



1009500254




1009500258



1009500262

Part No.	F. Acme (cap)
1009500254	1-3/4" F. Acme Cap Plug with Knob
1009500258	2-1/4" F. Acme Cap Plug with Knob
1009500262	3-1/4" F. Acme Cap Plug with Knob



1009500277



1009500278



1009500279

Part No.	F. Acme (cap)
1009500277	1-3/4" F. Acme Cap Plug with Knob and metallic cable
1009500278	2-1/4" F. Acme Cap Plug with Knob and metallic cable
1009500279	3-1/4" F. Acme Cap Plug with Knob and metallic cable

ACME Adapters



1009500256





1009500259

Part No.	M. Acme	F.NPT	M.NPT
1009500255	1-1/4"	1/4"	1/2"
1009500256	1-1/4"	3/8"	3/4"
1009500259	2-1/4"	1"	1-1/2"
1009500260	2-1/4"	1-1/4"	2"
1009500261	2-1/4"	1-1/2"	2"

Autogas Equipment

Filler Valves	PG. 92
Service Valves	PG. 92
Safety Relief Valves	PG. 93
Fixed Liquid Level Gauges	PG. 93
Euro Filler	PG. 94
ACME / EURO Adapters	PG. 94
Euro Filler Accessories	PG. 95
Dual Check T-Connector	PG. 95
Multivalve	PG. 95

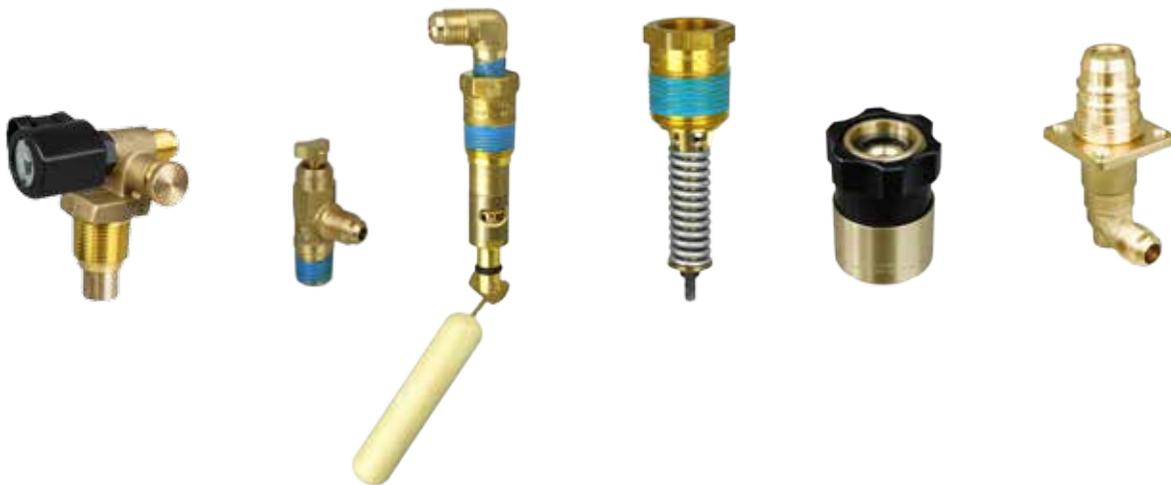



Filler Valves



66.1154
66.0.290.1154
Direct Filler valve with OPD for Automotive Application. Fitted with an OPD device 80% fill limiter. Pre-applied sealant on the container connection.



66.1157
66.0.290.1157
Remote Filler valve with OPD for Automotive Application. Incorporates standard 1 1/16" hex wrench flat that allows easy installation from the top with a socket wrench.



66.1292
66.0.290.1292
Allows the filling through the EN 12806 Euro connection.

Ordering Information

Part Number	Tank Connection	Filler Connection	Wrench Hex Flat	Inlet Connection	Specify tank diameter when ordering
66.1154	3/4" NPT	1-3/4" ACME	1-3/4"	/	*
66.1157	3/4" NPT	1/2" SAE	1-1/16"	/	*
66.1272	3/4" NPT	1/2" SAE	1-1/16"	/	*
66.1292	/	Ø30-EN12806	/	1/2" SAE FLARE	*

* Full Range of Remote filler valves with OPD available according to tank diameter. Please specify tank diameter when ordering.



Service Valves




73.0002
73.0.390.0002
Solenoid Service Valve: can be fitted to all tank sizes upon request. Pre-applied sealant on the container connection. Equipped with excess flow and manual shutoff device. Voltage: 12V



80.2146
80.0.390.2146
Manual Service Valve equipped with an excess flow device. Pre-applied sealant on the container connection.

Ordering Information

Part Number	Container Connection	Outlet Connection	Normal Application	Excess Flow Closing
73.0002	3/4" - 14 NPT	5/8" UNF (1/2" SAE FLARE)	RV - Automotive	1.4 GPM
80.2146	3/4" M.NGT	POL (CGA 510)	ASME Motor Fuel	2.6 GPM



Safety Relief Valves



66.1242
66.0.290.1242
Equipped with rain cap for protection against contamination.
Pre-applied sealant on the container connection.



66.1162
66.0.290.1162
Equipped with rain cap for protection against contamination.
Pre-applied sealant on the container connection.

Ordering Information

Part Number	Container Connection	Start to Discharge Setting PSIG	UL (at 120% of set pressure) Flow capacity SCFM/AIR	ASME (at 120% of set pressure) Flow capacity SCFM/AIR	Wrench Hex Flat
66.1242	1" NPT	312	1109	979	1-5/16"
66.1162	3/4" NPT	312	690	690	1-1/16"



Fixed Liquid Level Gauges

Pre-applied sealant on the container connection.
Special DT length can be ordered apart.
An optional instruction plate may be ordered for use with these valves.

66.1072
66.0.290.1072
Fixed Liquid Level Gauge




66.1161
66.0.290.1161
Remote Fixed Liquid Level Gauge



Ordering Information

Part Number	Container Connection	Outlet Connection	DT Length
66.1072	1/4" M NPT	-	12"
66.1116	1/4" M NPT	-	5.4"
66.1117	1/4" M NPT	-	6.6"
66.1118	1/4" M NPT	-	3.8"
66.1119	1/4" M NPT	-	4.1"
66.1120	1/4" M NPT	-	5.6"
66.1121	1/4" M NPT	-	6.9"
66.1204	1/4" M NPT	-	Without
66.1125	1/4" M NPT	-	5.2"
66.1161	1/4" NPTF	1/4" SAE Flare	Without





Euro Filler



66.1292
66.0.290.1292
Allows the filling through the EN 12806 Euro connection.



68.0065
68.0.390.0065
Allows the filling through the EN 12806 Euro connection.
Kit includes Black Housing, Cap and Euro Filler Valve



66.1359
66.0.290.1359
Bulkhead Mount Euro Valve
Allows the filling through the EN 12806 Euro connection.

Ordering Information

Part Number	Filler Connection	Inlet Connection	Specify tank diameter when ordering
66.1292	Ø30-EN12806	1/2" SAE FLARE	*
66.1359	Ø30-EN12806	1/2" SAE FLARE	*

ACME / EURO Adapters

The 16.0320 adapter converts the EN 12806 connection to ACME connection.
Once installed the adapter will prevent any disconnection caused by accidental rotations of the filling head.

The 16.0331 adapter converts the ACME connection to EN 12806 connection.




16.0320
16.0.950.0320



16.0331
16.0.950.0331

Ordering Information

Part Number	Female Thread	Male Thread
16.0.950.0320	M33 x 2	1 3/4 - 6 ACME
16.0.950.0331	1 3/4 - 6 ACME	EURO EN 12806



Euro Filler Accessories



10.0283
10.0.950.0283
Plastic Housing
with Flip Door



10.0287
10.0.950.0287
Plastic Housing
Assembly



10.5313
10.0.110.5313
Bulkhead Mount
Euro Valve
Protection Cap



10.0288
10.0.950.0288
Plastic Housing
Flip Door



16.0354
16.0.950.0354
Euro Filler Plate



04.5666
04.0.110.5666
Flip Door O-Ring

Dual Check T-Connector

Should two tank pressures become unequal, this connector will draw LPG from the tank with the higher pressure until both pressures equalize; LPG will then be drawn from both tanks.
Integrated Hydrostatic Pressure Relief Valve.




66.1313
66.0.290.1313

Ordering Information

Part Number	PRV - Setting to discharge setting (PSIG)	Working Temperature	Pipe Connection	Outlet Connection
66.0.290.1313	400	-40 °F to +130 °F	3/8" SAE Flare	3/8" SAE Flare

Multivalve

Complete range from 180 to 270 (toroidal version) and from 200 to 360 (cylindrical version)
Double safety due to the absence of transfer gears and plastic mechanisms.
Single solution for all engine capacities.

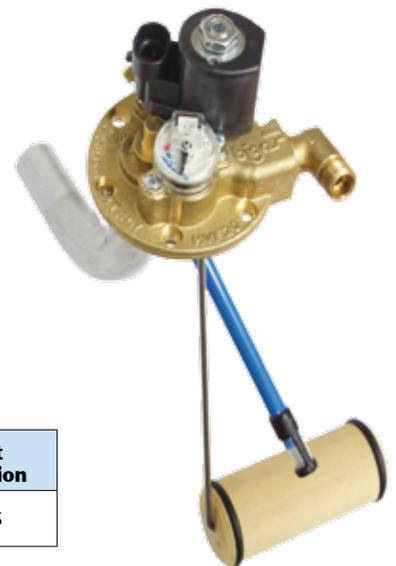

MV20

Ordering Information

Part Number	Max Working Pressure	Working Temperature	Inlet Connection	Outlet Connection
MV20	435 PSI	68 °F to +149 °F	M10 X 1 Pipe Diameter: 6mm Optional 8 mm Pipe Diameter Available	1/4 GAS





CAVAGNA group

Advanced solutions for gas control

Filling Heads

LPG Filling Heads	PG. 99
Filling Heads for Refrigerant Gases	PG. 99

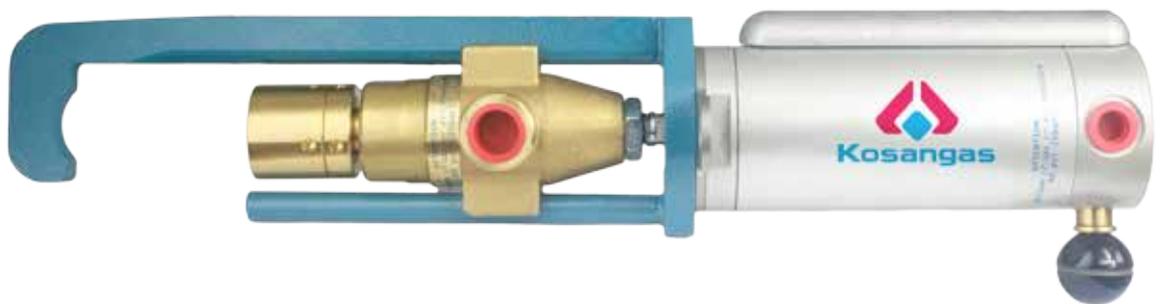



Kosan LPG Filling Heads



Materials and standards



The Filling Heads are made of corrosion-resistant materials such as stainless steel, brass, Aluminium and special polymers. The rubber materials are developed and manufactured according to the requirements of EN 549 as well as Kosan's own strict specifications. The Cavagna Group quality control system carries as minimum an ISO 9002 certification and is continuously assessed by QCB.

Color

The Filling Heads are supplied in the natural colors of the raw materials (brass and Aluminium) except for the clamping brace, which is painted blue to ensure full corrosion-resistance and longer durability.

Table of filling heads

Valves	Semi-Automatic	Manual
Standard Handwheel Valve Male Thread	129A001 LPG Filling Head	Not Applicable
Standard Handwheel Valve Male Thread	129A002 Refrigerant Gases Filling Head	Not Applicable
Standard Handwheel Valve POL Outlet	129A003 LPG Filling Head	Not Applicable
Omeca Coupling 66.o.290.1024	129A006 LPG Filling Head	Not Applicable
OPD Valves Type 1 ACME American Valves	129A009 LPG Filling Head	Not Applicable

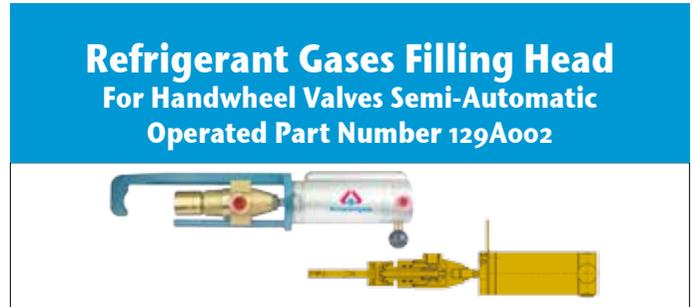

LPG Filling Head For Handwheel Valves Semi-Automatic Operated Part Number 129Aoo1

Refrigerant Gases Filling Head For Handwheel Valves Semi-Automatic Operated Part Number 129Aoo2

MATERIALS AND STANDARDS

The Filling Head is made of corrosion-resistant materials such as stainless steel, brass, aluminium and special polymers. The rubber materials used are developed and manufactured according to the requirements of EN 549.

FEATURES

1. Insignificant loss of product (1 cm³) when the gas flow is cut off and the filling head is released from the cylinder valve.
2. Balanced jig for easy suspension between filling operations.
3. Easy to manually connect and disconnect. Filling is initiated simultaneously with the connection to the valve.
4. Slim design makes it easy to handle and it fits easily inside any shroud.

Color

The Filling Head is supplied in the natural colors of the raw material (brass and aluminium) except for the clamping brace which is painted in a blue color to ensure full corrosion-resistance and longer durability.

Inlet connection:

LPG: 1/4" NPT - Pneumatic air: 3/8" NPT.

Outlet connection:

Connects to standard outlet male thread valves without SRV. Specify exact valve type when ordering.

Supply pressures:

The Filling Head is designed to operate within the normal supply pressures. Pneumatic supply: 6-10 bar. Liquid filling product: 1-15 bar. Filling time as per the present valve specification.

Marking:

The following information is marked on the Filling Head:

- Cavagna Group logo.
- Month and year of production.
- The code number of the Filling Head.

Packing:

The Filling Heads are individually packed in cardboard boxes with instructions.

Function and Maintenance:

The Filling Head is easy to operate. The clamping brace is placed around the neck of the cylinder valve. Once the Filling Head outlet is aligned with the cylinder valve outlet, the ball knob is pushed to allow the compressed air to fill the pneumatic cylinder. This forces the Filling Head outlet to attach the cylinder valve outlet thereby obtaining a leak tight connection and simultaneously opening the gas seal initiating the LPG flow. After completing the filling operation the handle on the side of the pneumatic cylinder is pushed and the air pressure is released thereby stopping the flow of gas and the outlet disconnects from the cylinder valve. All rubber seals inside the gas section as well as the complete pneumatic cylinder can be exchanged.

Suitable for:

A wide range of standard LPG handwheel valves without SRV.

ORDERING INFORMATION

Part Number	Inlet Connection	Outlet Connection
6882900042	LPG 1/4" AIR 3/8"	Standard Handwheel male outlet without SRV

MATERIALS AND STANDARDS

The Filling Head is made of corrosion-resistant materials such as stainless steel, brass, aluminium and special polymers. The rubber materials used are developed and manufactured according to the requirements of EN 549.

FEATURES

1. Insignificant loss of product when the gas flow is cut off and the filling head is released from the cylinder valve.
2. Includes anti-filling device opener.
3. Balanced jig for easy suspension between filling operations.
4. Easy to manually connect and disconnect. Filling is initiated simultaneously with the connection to the valve.
5. Slim design makes it easy to handle and it fits easily inside any shroud.

Color

The Filling Head is supplied in the natural colors of the raw material (brass and aluminium) except for the clamping brace which is painted in a blue color to ensure full corrosion-resistance and longer durability.

Inlet connection:

Refrigerant: 1/4" NPT - Pneumatic air: 3/8" NPT.

Outlet connection:

Connects to standard outlet male threads such as G1, G2, G4, G5, G6, G8, G11, G12 acc. to EN 12864. Valves with and without SRV.

Supply pressures:

The Filling Head is designed to operate within the normal supply pressures. Pneumatic supply: 6-10 bar. Liquid filling product: 1-20 bar. Filling time approx. 2 sec./Kg liquid at 7 bar differential pressure.

Marking:

The following information is marked on the Filling Head:

- Cavagna Group logo.
- Month and year of production.
- The code number of the Filling Head.

Packing:


The Filling Heads are individually packed in cardboard boxes with instructions.

Function and Maintenance:

The Filling Head is easy to operate. The clamping brace is placed around the neck of the cylinder valve. Once the Filling Head outlet is aligned with the Cylinder valve inlet, the ball knob is pushed to allow the compressed air to fill the pneumatic cylinder. This forces the Filling head outlet to attach the cylinder valve outlet thereby obtaining a leak tight connection and simultaneously opening the gas seal initiating the FREON flow. After completing the filling operation the handle on the side of the pneumatic cylinder is pushed and the air pressure is released thereby stopping the flow of gas and the outlet disconnects from the cylinder valve. All rubber seals inside the gas section as well as the complete pneumatic cylinder can be exchanged.

ORDERING INFORMATION

Part Number	INLET CONNECTION	OUTLET CONNECTION
6882900043	REFRIGERANT GAS 1/4" AIR 3/8"	Standard Handwheel male outlet with and without SRV



LPG Filling Head For Handwheel Valves, Pol Outlet Semi-Automatic Operated Part Number 129Aoo3



MATERIALS AND STANDARDS

The Filling Head is made of corrosion-resistant materials such as stainless steel, brass, aluminium and special polymers. The rubber materials used are developed and manufactured according to the requirements of EN 549.

FEATURES

1. Insignificant loss of product (1 cm³) when the gas flow is cut off and the filling head is released from the cylinder valve.
2. Balanced jig for easy suspension between filling operations.
3. Easy to manually connect and disconnect. Filling is initiated simultaneously with the connection to the valve.
4. Slim design makes it easy to handle and it fits easily inside any shroud.

Color

The Filling Head is supplied in the natural colors of the raw material (brass and aluminium) except for the clamping brace which is painted in a blue color to ensure full corrosion-resistance and longer durability.

Inlet connection:

LPG: 1/4" NPT Pneumatic air: 3/8" NPT.

Outlet connection:

Connect to POL - type valves with or without Pressure Relief Valves. Specify when ordering.

Supply pressures:

The Filling Head is designed to operate within the normal supply pressures. Pneumatic supply: 6-10 bar. Liquid filling product: 1-15 bar. Filling time as per the present valve specification.

Marking:

The following information is marked on the Filling Head:

- Cavagna Group logo.
- Month and year of production.
- The code number of the Filling Head.

Packing:

The Filling Heads are individually packed in cardboard boxes with instructions.

Function and Maintenance:

The Filling Head is easy to operate. The clamping brace is placed around the neck of the cylinder valve. Once the Filling Head outlet is aligned with the Cylinder valve outlet, the ball knob is pushed to allow the compressed air to fill the pneumatic cylinder. This forces the Filling head outlet to attach the cylinder valve outlet thereby obtaining a leak tight connection and simultaneously opening the gas seal initiating the LPG flow. After completing the filling operation the handle on the side of the pneumatic cylinder is pushed and the air pressure is released thereby stopping the flow of gas and the outlet disconnects from the cylinder valve. All rubber seals inside the gas section as well as the complete pneumatic cylinder can be exchanged.

Suitable for:

All different Handwheel POL type of valves. Specify valve type and outlet when ordering.

ORDERING INFORMATION

Part Number	INLET CONNECTION	OUTLET CONNECTION
6882900044	LPG 1/4" NPT AIR 3/8" NPT	Female POL thread valves with and without SRV
6882900133 (left hand version)	LPG 1/4" NPT AIR 3/8" NPT	Female POL thread valves with and without SRV

LPG Filling Head For Omeca Coupling 66-0-290-1024 Semi-Automatic Operated Part Number 129Aoo6



MATERIALS AND STANDARDS

The Filling Head is made of corrosion-resistant materials such as stainless steel, brass, aluminium and special polymers. The rubber materials used are developed and manufactured according to the requirements of EN 549.

FEATURES

1. Insignificant loss off product (1 cm³) when the gas flow is cut off and the filling head is released from the cylinder valve.
2. Balanced jig for easy suspension between filling operations.
3. Easy to manually connect and disconnect. Filling is initiated simultaneously with the connection to the valve.
4. Slim design makes it easy to handle and it fits easily inside any shroud.

COLOR

The Filling Head is supplied in the natural colors of the raw material (brass and aluminium) except for the clamping brace which is painted in a blue color to ensure full corrosion-resistance and longer durability.

Inlet connection:

LPG: 1/4" NPT. Pneumatic air: 3/8" NPT.

Outlet connection:

Connects to Omeca Coupling 66-0-290-1024

Supply pressures:

The Filling Head is designed to operate within the normal supply pressures. Pneumatic supply: 6-10 bar. Liquid filling product: 1-15 bar. Filling time as per present valve specification to which the coupling is connected.

Marking:

The following information is marked on the Filling Head:

- Cavagna Group logo.
- Month and year of production.
- The code no of the Filling Head.

Packing:

The Filling Heads are individually packed in cardboard boxes with instructions.

Function and Maintenance:


The Filling Head is easy to operate. The connector at the end of the clamping brace is placed around the neck of the coupling. Once the Filling Head outlet is aligned with the coupling outlet, the ball knob is pushed to allow the compressed air to fill the pneumatic cylinder. This forces the Filling head outlet to attach the coupling outlet thereby obtaining a leak tight connection and simultaneously opening the gas seals initiating the LPG flow. After completing the filling operation the handle on the side of the pneumatic cylinder is pushed and the air pressure is released thereby stopping the flow of gas and the outlet disconnects from the coupling. All rubber seals inside the gas sections as well as the complete pneumatic cylinder can be exchanged.

Suitable for:

Omeca valve 66-0-290-1024 (see illustration above).

ORDERING INFORMATION

Part Number	INLET CONNECTION	OUTLET CONNECTION
6882900047	LPG 1/4" NPT AIR 3/8" NPT	Omeca coupling 66.0.290.1024



**LPG Filling Head
For Handwheel Valves,
Opd-Type Semi-Automatic
Operated Part Number 129A009**

MATERIALS AND STANDARDS

The Filling Head is made of corrosion-resistant materials such as stainless steel, brass, aluminium and special polymers. The rubber materials used are developed and manufactured according to the requirements of EN 549.

FEATURES

1. Insignificant loss of product (1 cm³) when the gas flow is cut off and the filling head is released from the cylinder valve.
2. Balanced jig for easy suspension between filling operations.
3. Easy to manually connect and disconnect. Filling is initiated simultaneously with the connection to the valve.
4. Slim design makes it easy to handle and it fits easily inside any shroud.

COLOR

The Filling Head is supplied in the natural colors of the raw material (brass and aluminium) except for the clamping brace which is painted in a blue color to ensure full corrosion-resistance and longer durability.

Inlet connection:

LPG: 1/4" NPT - Pneumatic air: 3/8" NPT.

Outlet connection:

Connects to POL - type OPD valves with or without SRV.

Supply pressures:

The Filling Head is designed to operate within the normal supply pressures. Pneumatic supply: 6-10 bar. Liquid filling product: 1-15 bar. Filling time as per present valve specification.

Marking:

The following information is marked on the Filling Head:

- Cavagna Group logo.
- Month and year of production.
- The code number of the Filling Head.

Packing:

The Filling Heads are individually packed in cardboard boxes with instructions.

Function and Maintenance:

The Filling Head is easy to operate. The clamping brace is placed around the neck of the cylinder valve. Once the Filling Head outlet is aligned with the cylinder valve outlet, the ball knob is pushed to allow the compressed air to fill the pneumatic cylinder. This forces the Filling Head outlet to attach the cylinder valve outlet thereby obtaining a leak tight connection and simultaneously opening the gas seal initiating the LPG flow. After completing the filling operation the handle on the side of the pneumatic cylinder is pushed and the air pressure is released thereby stopping the flow of gas and the outlet disconnects from the cylinder valve. All rubber seals inside the gas section as well as the complete pneumatic cylinder can be exchanged.

Suitable for:

OPD valves with POL female outlet.

ORDERING INFORMATION

Part Number	INLET CONNECTION	OUTLET CONNECTION
6882900050	LPG 1/4" AIR 3/8"	OPD - female POL thread valve with check-lock with and without SRV



cavagna group

Advanced solutions for gas control



Quality Management System to ISO 9001:2008 standard

Quality: our prerogative!

Registration to ISO 9001 standards is for us not only a certificate. Our policy is to achieve the outmost customer satisfaction, through the effectiveness of our Quality Management Systems and through continuous improvement to suit the dynamic Customers' expectations.

Personnel involvement, training and motivation are few of the elements that we rely on to achieve quality from each person and from each process.

Quality: our "must"

Regulators Type Index

Part Number	Page
492 HP	28
493 HP	28
494 HP	28
495 HP	28
524 AC	15
524 AS	16
528 B	15
811 HP	27
812 HP	27
818 HP	27
924 N	15

Part Number	Page
942 HP	26
948 HP	26
984 HP	10
988 HP	10
988 LP	11
988 LP	12
988 TP	12
988 TP	13
988 TW	14
998 LP	11
998 LP <i>Guardian</i>	12

Part Number	Page
998 TP <i>Guardian</i>	12
998 TW	14
Type 90	18
Type 95	19
Type 96	20
Type 97	20
Type 98	20
Type 47	29
Type 468	30
Type 998	30
Type 698 Single Barb	36

Part Number	Page
Type 698 Dual Barb	36
Type 698 Single Barb - Kit	37
Type 698 Dual Barb - Kit	37
Type 758	38
Type 424	38
Type 756	39
Type 524AS	48
Type 914	50
Type 698	50

Valves Type Index

Part Number	Page
10.0203	63
10.0204	63
10.0205	63
10.5032	63
10.5033	63
10.5036	63
10.5037	63
10.5038	63
16.0320	94
16.0331	94
30.0273	72
30.0274	72
30.0276	72
66.0248	63
66.1023	64
66.1024	64
66.1027	64
66.1072	65
66.1093	62
66.1101	62
66.1106	62
66.1109	67
66.1115	62
66.1116	65
66.1117	65
66.1118	65
66.1119	65
66.1120	65
66.1121	65
66.1122	60
66.1125	65
66.1127	63
66.1128	63
66.1129	63
66.1130	63
66.1134	60
66.1135	63
66.1139	63
66.1140	63
66.1154	92
66.1157	92
66.1161	93
66.1162	93
66.1204	93
66.1206	61
66.1232	60
66.1242	63

Part Number	Page
66.1261	61
66.1262	61
66.1272	62
66.1292	92
66.1313	95
66.1327	61
67.0720	60
67.0805	56
67.0807	58
67.0808	56
67.0816	56
67.0821	56
67.1004	56
67.1020	59
67.1027	57
67.1033	56
67.1051	89
67.1052	56
68.0065	94
69.0010	58
69.0109	58
70.0073	63
73.0001	65
80.1199	68
80.2062	65
80.2063	65
80.2064	65
80.2146	65
80.3135	68
80.3144	68
80.3149	68
80.3190	68
80.3191	68
80.5016	68
80.5064	68
80.6032	68
80.8190	66
82.8017	69
82.8018	69
82.8019	69
0401105575	78
0401105576	78
0401105595	78
0401105596	78
1309500142	82
1309500143	82
1309500144	82

Part Number	Page
1309500147	82
401105575	78
401105576	78
401105595	78
401105596	78
51C1140001	71
5605030021	71
6602901295	83
6602901296	83
6602901300	83
6602901301	83
6602901336	88
6901900036	87
6803900018	78
6803900019	78
6803900020	78
6803900021	78
6803900022	78
6803900023	78
6901900037	87
6902900101	74
6902900102	74
6902900103	74
6902900104	74
6902900105	74
6902900106	74
6902900107	74
6902900108	74
6902900109	74
6902900110	74
6902900111	74
6902900112	74
6902900113	74
6902900114	74
6902900115	74
6902900116	74
6902900117	76
6902900118	76
6902900119	76
6902900120	76
6902900121	76
6902900122	76
6902900123	76
6902900124	76
6902900125	76
6902900126	76
6902900127	87

Part Number	Page
6902900128	87
6902900129	87
6902900130	74
6902900131	74
6902900132	74
6902900141	76
6902900142	76
6902900143	76
6902900144	76
6902900145	76
7100900049	89
7100900050	89
7100900051	89
129A001	99
129A002	99
129A003	100
129A006	100
129A009	101
MV20	95

Technical Information Conversion Table

POWER / ENERGY		
MULTIPLY	BY	TO OBTAIN
Kilowatt	860	Kcal/h
Kcal/h	0.001163	Kilowatt
Kilowatt Hour	3,412.7	B.T.U.
B.T.U.	0.0002930	Kilowatt Hour
Kg/h gas (propane)	47,600	B.T.U.
B.T.U.	0.000021	Kg/h gas (propane)
Kilocalorie	3.9683	B.T.U.
B.T.U.	0.25201	Kilocalorie
Nm ³ natural gas	35,838	B.T.U.
B.T.U.	0.0000279	Nm ³ natural gas

PRESSURE		
MULTIPLY	BY	TO OBTAIN
PSIG (pounds/sq.in)	0.068948	Bar
Bar	14.504	PSIG (pounds/sq.in)
Inch of water	0.0024909	Bar
Bar	401.462	Inch of water
Inch of water	0.036126	PSIG (pounds/sq.in)
PSIG (pounds/sq.in)	27.680	Inch of water

TEMPERATURE		
MULTIPLY	BY	TO OBTAIN
Degrees Celsius	$^{\circ}\text{F}=(9/5)^{\circ}\text{C} + 32$	Degrees Fahrenheit
Degrees Fahrenheit	$^{\circ}\text{C}=5/9 (^{\circ}\text{F} - 32)$	Degrees Celsius
Degrees Celsius	$^{\circ}\text{K}=(^{\circ}\text{C} + 273.16)$	Degrees Kelvin
Degrees Kelvin	$^{\circ}\text{C}=(^{\circ}\text{K} - 273.16)$	Degrees Celsius
Degrees Kelvin	1.8	Degrees Rankine
Degrees Rankine	0.55556	Degrees Kelvin

MASS - WEIGHT - VOLUME		
MULTIPLY	BY	TO OBTAIN
Pound	0.453592	Kilograms
Kilograms	2.2046	Pound
Gallon	3.785	Liters
Liters	0.2642	Gallon
Cubic foot	28.317	Liters
Liters	0.035315	Cubic foot

AVERAGE PROPERTIES OF PROPANE			
Properties		Properties	
Formula	C₃H₈	Megajoule per Kilograms of gas	50
Boiling Point F° (°C)	-44 (-42)	Kcalories per Kilograms of gas	12000
Specific Gravity of Gas (Air=1.00)	1.56	BTU per Gallon of gas	91508
Pound per Gallon of liquid at 60 °F (16 °C)	4.24	BTU per Pound of gas	21582

LPG 5 YEARS LIMITED WARRANTY

WARRANTOR. The Limited Warranty provided herein is given by only one of Cavagna Group S.p.A., Cavagna North America, Inc., Cemco Kosangas S.A., Cavagna Group UK, or Greengear Global, LTD, the entity that actually designed, manufactured and sold the Product (as defined herein) to which this Limited Warranty applies. The other entities are listed herein for convenience only, and are not sharing in any warranty obligations of the entity providing this Limited Warranty. The entity providing this Limited Warranty is referred to herein as "The Warrantor".

COVERAGE. Each new product purchased directly from The Warrantor (referred to herein as "The Product") will be free from defects in original material and workmanship for a period of:

- Twenty four (24) months for high pressure and compressed natural gas products,
- Sixty (60) months for LPG brass valves and accessories,
- Twelve (12) months for Greengear appliances or
- One hundred and twenty (120) months for Cozen plus domestic regulators.
- All other regulators sixty (60) months

from the date of sale of The Product, as shown on the invoice for that particular Product, to the entity to which Warrantor first sold The Product (hereinafter referred to as "The Purchaser"). The Purchaser informs any third party purchasers of The Product of the specifications and the necessary warnings and instructions for the correct use of The Product and/or any different or larger item or system in which The Product is installed. The sole and exclusive remedy of The Purchaser under this Limited Warranty for alleged defects in a Product shall be the repair or replacement, in Warrantor's sole discretion, of the defective Product, or a part or component of The Product.

NOT COVERED. This Limited Warranty does not apply to, and Warrantor shall have no liability or responsibility in respect of, damages or expenses relating to defects caused by or arising out of:

- the failure to properly store, use, install or maintain The Product as, for example, as specified in the warranty booklet, service booklet, drawings, manuals or other literature supplied by Warrantor, including but not limited to Warrantor's website or advertising brochures or in accordance with any applicable laws, regulators or standards;
- the failure of The Purchaser to inform any third party purchasers of The Product of the specifications and the necessary warnings and instructions for the correct use of The Product and/or any different or larger item or system in which The Product is installed.
- improper installation of The Product as a component in a different or larger item or system;
- improper specification or application of The Product as a component in a different or larger item or system;
- Any Product purchased from any entity other than Warrantor;
- alteration, change, or modification of The Product, including its subcomponents, parts or assemblies;
- the cost to locate, remove, disassemble, reinstall or dispose of components of a different or larger item or system that require removal to access The Product;
- accidents, misuse, abuse, abnormal use, improper use, negligent use, wilful misconduct, lack of reasonable or proper maintenance, repairs improperly performed or replacement parts or accessories not conforming to Warrantor's specifications, use exceeding the recommended and permitted limits of The Product, and/or normal wear or deterioration occasioned by the use of The Product;
- cosmetic issues, such as scratches, dents, fading of colors or discoloration;
- any representation or implication relating to estimated performance characteristics of The

Product, including but not limited to representations made in Warrantor's product literature, on Warrantor's website, marketing materials, advertisements and technical specifications;

- any defect or non-conformity that has not been timely and promptly communicated in writing to Warrantor as provided herein, and in all cases, no more than thirty (30) days from the discovery thereof;
- any damage, cost or expense caused by Act of God; or
- loss of time, loss of use, loss of revenue, lost profits, loss of opportunity, inconvenience, costs related to procuring any substitute product, any incidental or consequential damages arising out of the non-use of the Product, or compensation for inconvenience or loss of use of a different or larger item or system while the Product is being repaired or otherwise not available, or other matters not specifically covered hereunder.

PROCEDURE. To obtain warranty service for The Product, under this Limited Warranty, The Purchaser's specific and detailed claim must be reported to WARRANTOR within thirty (30) days from the date The Purchaser had notice of or should have had knowledge of notice of the alleged defect to The Purchaser and within the applicable warranty period.

For all Warranty claims accepted by The Warrantor, the Warrantor shall, within a reasonable time:

- Repair The Product or any subcomponent thereof;
- Supply ex works to The Purchaser a replacement product of the same type, kind and/or quality as The Product; or
- Refund to The Purchaser the actual purchase price of The Product for which The Warranty claim was made, such refund being provided in the form of a credit towards a future order placed by The Purchaser within The Warrantor.

Warrantor must approve, in advance and in writing, all repairs or replacements covered under or performed pursuant to this Limited Warranty. Any warranty repairs or service must be performed exclusively by Warrantor or other authorized representative of Warrantor or by another servicing facility pre-approved in writing by Warrantor. The Purchaser is responsible for all expenses associated with locating The Product(s) in the market, transporting the product(s) and/or defective part(s) to and from the service location. Acceptance of any Limited Warranty claim is not an admission that any Product or any of its component parts are defective. The Warrantor will not accept any Warranty claims directly from any third party to whom/ which Purchaser may have sold The Product. The Purchaser forfeits any rights it may have under this Limited Warranty if The Purchaser does not return The Product to Warrantor, at the Purchaser's expense, within five (5) days of The Warrantor's request, or otherwise follow the procedure described herein. In the event that Purchaser submits a warranty claim that, in the sole reasonable discretion of The Warrantor, is unfounded, The Purchaser shall reimburse The Warrantor all reasonable costs incurred by The Warrantor in evaluating The Warranty claim (i.e. travel, lodging, expert evaluations, etc.).

LIMITATION OF DAMAGES. Except as expressly provided by this Limited Warranty, WARRANTOR SHALL NOT BE RESPONSIBLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES ASSOCIATED WITH THE USE OR NON-USE OF THE PRODUCT OR A CLAIM UNDER THIS AGREEMENT, WHETHER THE CLAIM IS BASED ON CONTRACT, TORT OR OTHERWISE. The foregoing statements of warranty are exclusive and in lieu of all other remedies or damages. Some states do not allow the exclusion or limitation of incidental or consequential damages, so this limitation or exclusion may not apply to you. This Agreement shall be the sole and exclusive remedy available to The Purchaser or any third party with respect to This Product. In the event of any alleged breach of any warranty or any legal action brought by The Purchaser or any third party, based on breach of warranty alleged negligence or other tortious conduct by

Warrantor, The Purchaser's or third party's sole and exclusive remedy will be the repair or replacement of any defective Product as stated herein. In no event shall the liability of The Warrantor exceed the purchase price of The Product.

DISCLAIMER. ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND ALL IMPLIED WARRANTIES ARISING FROM A COURSE OF DEALING, USAGE OF TRADE, BY STATUTE OR OTHERWISE, IS HEREBY STRICTLY LIMITED TO THE TERMS OF THIS WRITTEN WARRANTY. No dealer and no other agent, representative or employee of Warrantor is authorized to modify, extend or enlarge this Limited Warranty.

TRANSFER OF THE PRODUCT OR LIMITED WARRANTY. If Purchaser sells The Product, either individually or incorporated in a different or larger assembly to a third party, a warranty claim can only be filed with The Warrantor by The Purchaser. The Purchaser shall provide a separate and distinct warranty to any third party for the larger assembly.

APPLICABLE LAW. Any and all claims or disputes of whatever nature arising out of or otherwise relating to this Limited Warranty shall be governed by and construed in accordance with the laws of the State of New Jersey only, and the parties expressly acknowledge and irrevocably agree that the sole and exclusive venue for and jurisdiction over any such claim or dispute shall be the courts of Brescia, Italy to the exclusion of the jurisdiction of the courts of any other place, without giving effect to choice of law principles and without giving effect to the United Nations Convention regarding contracts for the International Sale of Goods (which the parties expressly exclude).

OTHER RIGHTS. Your acceptance of delivery of The Product constitutes your acceptance of the terms of this Limited Warranty. This Limited Warranty gives you specific legal rights, and you may also have other rights which vary from state to state. If any term or provision of this Limited Warranty is invalid or unenforceable under any local, state, or federal law, statute, judicial decision, regulation, ordinance, executive order or other rule of law, such term shall be deemed reformed or deleted, but only to the extent necessary to comply with such statute, regulation, ordinance, order or rule and the remaining provisions of this Limited Warranty shall remain in full force and effect.

ENTIRE AGREEMENT. This document contains the entire Limited Warranty given by Warrantor in respect of The Product and there are no terms, promises, conditions or warranties regarding The Product other than those contained herein. Warrantor specifically does not authorize any person to extend the time, scope, terms or conditions of this Limited Warranty or to create or assume for Warrantor any other obligation or liability with respect to the Product or other products designed, manufactured or sold by Warrantor. All terms of this Limited Warranty are contractual and not mere recitals, and constitute material terms of this Limited Warranty.

SERVICE LIFE: The Service Life of The Product will vary depending on conditions of use, environment of use, application of The Product, and other factors outside of the control of The Warrantor. The Product must be replaced before the expiration of The Product's Service Life. See the applicable owners' manual or Warrantor's website for additional details on Service Life.

Our Global Product Brands



CAVAGNA group

Advanced solutions for gas control



The Cavagna Group logo is a registered trademark of Cavagna Group SPA.

All other marks are the property of their respective owners.

RECA, KOSAN +, KOSANGAS, CEMCO KOSANGAS, O.A.R.A., OMECA, N.P. and BIGAS, are marks of the Cavagna Group of Companies LPG Division.

Manufacturing Facilities



reca O.A.R.A. **cavimatic**
ITALY ITALY



pergola
ITALY



cori
ITALY



Kosan
INTERNATIONAL
ITALY



omeca
ITALY



n.p.
ITALY



bigas
ITALY



MESURA
FRANCE



MESURA
TUNISIA



cavagna group

Advanced solutions for gas control

Kosangas
PORTUGAL



MESURA Nimal
Gas Control
INDIA



Zhongshan cavagna
CHINA



cavagna group sudamericana ltda
COLOMBIA



cavagna group asia
THAILAND



cemco kosangas
CHILE



CONGRIF
VENEZUELA



Cavagna's LPG stocking distributors



Cavagna North America East

50 Napoleon Court Somerset, NJ 08873

Cavagna North America West

1393 Dodson Way-A Riverside, CA 92507

info@cavagna.com - www.cavagnagroup.com

CUSTOMER SERVICE

PH. 732.469.2100

Fax 732.469.3344