

# cps®



**PROFESSIONAL AIR CONDITIONING  
& REFRIGERATION PRODUCTS**





CPS Products is a world leader in the design and manufacture of tools and test equipment used in the Automotive and HVACR industries. Founded in 1975, CPS has grown from a single employee and a single product to over 200 employees and 1200 products. CPS maintains 5 fully staffed subsidiary locations strategically located around the world. These global locations provide the loyal CPS customer base with unsurpassed service of our expansive product line. The success of CPS can be attributed to a basic philosophy of providing our customers with the very best our industry has to offer. This includes the best service, the best products and most importantly the best overall quality.

Supported by state-of-the-art mechanical and electronic manufacturing facilities, CPS is able to actively develop, maintain and continually improve our respected product lines in our wholly owned facilities. This ability is quite unique in today's rapidly changing manufacturing community providing CPS with a decisive edge when developing new innovative products that solve our customer's service needs. When one of our products becomes a trusted tool that a service professional will recommend to their friends, then our job is complete.


After all, we make our living by manufacturing the tools you rely on to make yours!

## Worldwide Locations



### ***ELECTRONIC LEAK DETECTION***

**1 - 3**



### ***UV LEAK DETECTION***

**4 - 6**



### ***CHARGING & RECOVERY SCALES/ CHARGING STATIONS***

**7 - 9**



### ***ELECTRICAL TEST & MEASURING INSTRUMENTS***

**10 - 11**




### ***TEMPERATURE MEASUREMENT INSTRUMENTS***

**12 - 14**



### ***VACUUM GAUGES & SPECIALTY METERS***

**15 - 16**



### ***PRO-SET<sup>®</sup> VACUUM PUMPS***

**17- 18**



### ***PORTABLE RECOVERY / RECYCLING EQUIPMENT***

**19 - 22**






## TABLE OF CONTENTS

***SERVICE MANIFOLDS & GAUGES***

**23 - 30**




***GAS PRESSURE TEST KITS***

**31**




***VACUUM / CHARGING HOSES***

**32 - 34**



***HOSE ADAPTERS / BALL VALVES /  
ANTI-BLOWBACK VALVES***

**35 - 36**



***VALVE CORE TOOLS***

**37**




***ACCESS FITTINGS***

**38**



***TUBING TOOLS***

**39 - 42**



***SPECIALTY HAND TOOLS***

**43 - 45**





### ***AUTOMOTIVE SECTION***



***SERVICE MANIFOLDS & GAUGES***

**46 - 47**



***CHARGING HOSES***

**48**




***R-134a COUPLERS / BALL VALVES  
& ADAPTERS***

**49**



***SPECIALTY HAND TOOLS***

**50 - 52**



***UV LEAK DETECTION***

**53 - 55**



***ELECTRONIC TEST & MEASURING  
INSTRUMENTS***

**56**



***MOBILE RECOVERY / RECYCLING /  
RECHARGING EQUIPMENT***

**57 - 61**





## ELECTRONIC REFRIGERANT LEAK DETECTION

### THE ELIMINATOR™ LS3000B - Electronic Refrigerant Leak Detector



LS3000B

Fully automatic electronic refrigerant leak detector for all HFC, HCFC, CFC, SF6 gases & blends. Exclusive POWERSHIFT software automatically monitors, controls & adjusts all critical instrument settings to ensure maximum leak search results under any job environment. Two separate visual LED displays enable user to pinpoint the exact location of leak source & the approximate size of that leak.

SENSOR TYPE:	Cold Cathode Diode: Patented design allows fast, accurate detection of refrigerant leaks maintaining maximum sensitivity throughout the life of the sensor. Highly resistant to background contaminants including heavy condensation, oils, leak solutions, brake oils, radiator coolants, washer fluids, etc.
SENSITIVITY:	Fully automatic selection better than 0.10oz/yr (3g/yr) leak rate of HFC.
LEAK INDICATION:	Audible Alarms: Two user-selectable audible alarm options (HIGH and LOW intensity)
TACHOMETER DISPLAY:	Visual tachometer-like bar graph display: Eight high intensity LEDs
GEARSHIFT VISUAL DISPLAY:	Arranged in a gearshift pattern, 7 LEDs indicate the current sensitivity range of the unit and subsequent leak size
FLEX PROBE:	14" / 35.6cm long, 0.25"/6.4mm diameter
OPERATING TEMPERATURE:	0 to 140°F / -18 to 60°C
POWER:	75 hours battery life using three size "C" alkaline batteries. Auto OFF after 10 minutes of inactivity.
LOW BATTERY INDICATOR:	Right most LED on Tachometer display illuminates to indicate low battery condition.
WEIGHT:	1lb 2oz / 500g
WARRANTY:	2 years excluding sensors and batteries



A/C&R Application



Automotive Application

#### EXCLUSIVE POWERSHIFT™

Automatically controls all sensitivity related settings, eliminating guesswork and maximizing unit performance.

#### HIGHLY RESISTANT TO BACKGROUND CONTAMINANTS

Including heavy condensation, oils, leak solutions, brake fluid, radiator coolants, washer fluids, etc.

#### 8 LED TACHOMETER DISPLAY

Enables user to pinpoint exact location of leak

#### EASY ONE BUTTON OPERATION

Depress once to turn unit ON.  
Depress again to CLEAR the unit.  
Double-click to change sensitivity.  
Depress and hold to turn unit OFF.

#### STATE-OF-THE-ART COLD CATHODE DIODE (CCD) SENSOR TECHNOLOGY

Delivers quick response to leaks and maintains maximum sensitivity throughout the life of the sensor.

#### HIGH OUTPUT ALARM SPEAKER

Delivers clear crisp alarm tones

#### UNIQUE "GEARSHIFT" LED DISPLAY for LEAK SIZING

allows user to determine the approximate size of a leak.  
Neutral - Unit is ready for operation  
Leak Size: Small, Medium, Large



F-Gas Compliant  
(EN 14624:2005)





## ELECTRONIC REFRIGERANT LEAK DETECTION

### LEAK SEEKER® - LS780B / LS790B Electronic Refrigerant Leak Detectors



#### LS790B

Combines the most advanced microcomputer circuitry with field proven Ion-pump® sensor technology creating a highly sensitive, accurate electronic refrigerant leak detector. Over 100 computer generated tones and a high intensity bar graph display quickly alerts the user to varying halogen concentrations. Patented automatic calibration design eliminates the need for manual balance or tick rate adjustments while the user selectable 10 sensitivity ranges enables the **LS790B** to detect leaks of all refrigerants.

#### Specifications for the LS780B and LS790B

SENSOR TYPE:	Patented Ion-Pump® sensor with built-in selective filter housing
SENSITIVITY:	Better than 0.25oz/yr (7g/yr) leak rate of HFC.
AUDIBLE ALARMS:	Over 100 computer generated tones varying in intensity with leak size
VISUAL DISPLAY:	10 high intensity bar graph display (LS790B) / High intensity LED display (LS780B)
LOCK-OUT MODE:	Unique feature enables quick & easy locating of refrigerant leaks in highly contaminated search zones. In this mode, the unit will automatically & systematically store the recorded concentration levels of background refrigerant while initiating leak search, alarming only in the area of the highest recorded concentration level, the actual leak source. (LS790B only).
FLEX PROBE:	18" / 45.7cm long metal cable probe
OPERATING TEMP:	0 to 140F / -18 to 60C
POWER:	40 hours battery life using 4 "AA" alkaline batteries. Auto OFF after 15 minutes of inactivity.
LO BATT INDICATOR:	5th LED constantly illuminates dimly indicating low battery condition.
WEIGHT:	1lb 2oz / 500g
WARRANTY:	2 years (LS790B). 1 year (LS780B). Excludes sensors and batteries



#### LS780B

A rugged, three position slide switch is used to turn the instrument on & select either LO or HI sensitivity ranges. Visual indication of the leak size is provided by a high intensity LED varying in brightness with the concentration of the refrigerant detected.



#### Spare Parts for LEAK SEEKERS®

1= LS780A

2 = LS780B

3=LS790A

4=LS790B

5 = LS3000



LSXS3



LSXBMK



LSXS

ITEM	PRODUCT	DESCRIPTION
LSXB	1,2,3,4	Battery compartment cover
LSXBMK	2,4	Maintenance Kit: (1)LSXS + (1)LSXSF
LSXC	1,2,3,4	Leather carrying case
LSXC3	5	Storage case LS3000
LSXE	1,2,3,4	Earphone
LSXMK	1,3	Maintenance kit • 2 pcs/St. LSXS + 2 pcs/St. LSXVF
LSXS3	5	Sensor for LS3000
LSXS	1,2,3,4	Ion-pump sensor
LSXSF	2,4	Selective filter/housing
LSXSH	1,3	Aluminum Sensor housing
LSXVF	1,3	Water vapor filter



## ELECTRONIC REFRIGERANT LEAK DETECTION

### Refrigerant Monitor



RM



Compact, highly reliable, yet economical refrigerant leak monitoring systems. Designed to monitor a single refrigerant in a single zone providing early warning of costly and environmentally damaging refrigerant leakage. Adjustable sensitivity settings between 100 to 1000PPM with an auxiliary 1/2 HP N.O. and N.C dry contact control function for operating an additional alarm or other safety device. Replacement sensors are interchangeable enabling the replacement of a failed sensor directly in the field without recalibration, minimizing "downtime."

Item No.	Refrigerant Type	Replacement Sensor
RM12	R-12	RMX12
RM134	R-134	RMX12
RMX11	R-22	RMX12
RM404	R-404A	RMX12
RM407	R-407	RMX11
RM410	R-410A	RMX12
RM502	R-502	RMX12
RM507	R-507	RMX12
Replacement Sensors		
RMX11	Replacement Sensor for Refrigerant Monitor	
RMX12	Replacement Sensor for Refrigerant Monitor	

SENSITIVITY:	100 to 1,000 ppm
ACCURACY:	± 3% of the setting or ± 25 ppm
VISUAL ALARMS:	High intensity LED display
AUDIBLE ALARM:	85 db at 1 foot
OPERATING TEMPERATURE:	-20 to 150 F / -28 to 65 C
SENSOR MODULE:	Relative Humidity 10 to 95% non-condensing
CONTROL MODULE:	32 to 150 F / 0 to 65 C
POWER:	AC or DC control voltages.
SENSOR FAILURE INDICATOR:	LED constantly illuminates
WEIGHT:	1lb 2oz / 500g
WARRANTY:	1 year

### GAS SEEKER® GS30 - Portable Combustible Gas Detector

The **GS30** is a low maintenance, easy-to-use portable combustible gas leak detector engineered to pinpoint leaks in residential, commercial and industrial appliances. Advanced semiconductor sensor and electronic control package enables detection of gases commonly found in service applications including; Carbon Monoxide, Natural Gas, Propane, Ammonia, Methane, Acetone, Hydrogen and Iso-Butane, with a virtually instantaneous alarm response period. Measuring just over 7" long and 0.72" in diameter its compact tubular shape enables testing in limited access areas and conveniently fits into a serviceman's pocket. Applications include the inspection of furnaces, valves, regulators, pipelines, meters and other devices associated with combustible gases.



GS30

#### Gases Detected

Carbon Monoxide, Natural Gas, Propane, Ammonia, Methane, Acetone, Hydrogen, Iso-Butane, Acetylene, Benzene, Butane, Ethanol, Ethylene Oxide, Gasoline, Hexane, Industrial Solvents, Paint Thinners, and Naptha.

**WARNING: THE GS30 IS NOT INTRINSICALLY SAFE IN CLASS 1 (EXPLOSIVE) TYPE ATMOSPHERES AND IS NOT SUITABLE FOR THE DETERMINATION OF HUMAN SAFETY OR HABITABILITY CONDITIONS.**

Detecting Range	0 - 100% LEL referenced to Methane.
Alarm Indication	Both visual and audible (>40db) alarm indicators
Low Level Alarm	Preset at 10% LEL.
High Level Alarm	Preset at 30% LEL
Operating Conditions	0°F to 104°F / -20°C to +40°C at less than 98% RH (non-condensing)
Power	Working voltage is 3VDC using two 1.5V AA batteries.
Battery Life/Indicator	5 hrs continuous use. Orange LED constantly illuminates when battery is low
Sampling	Natural diffusion
Dimensions	7.2 x 0.71in / 183 x 18mm
Weight	5.3oz / 150g (including battery)





## UV REFRIGERANT LEAK DETECTION

### UVPRO UV Flashlight & Enhancing Glasses




Actual Size

#### UVPRO

*Don't forget the "UV" when selecting your next UV light.*


Ultra Violet (UV) dye additives are specially formulated to fluoresce in the presence of UV light rays. Hence the common industry names for the two major components used with this technology, "UV" dye and "UV" lights. Referring to the light spectrum chart below you can see that true "UV" light is invisible to the human eye, with the closest visible light colors being purple and blue respectively. The overall intensity of UV light diminishes as you move from the invisible UV light range to purple, then to blue and so on down the chart. Take care not to confuse a lamp that emits high intensity visible blue light as superior to a lamp tuned more efficiently to emit true UV light.

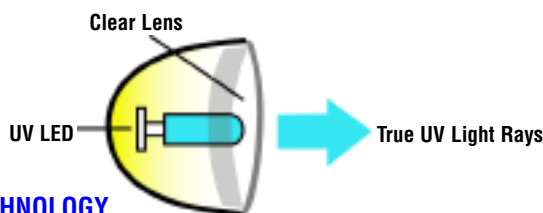

#### UV LED TECHNOLOGY


UV LED's produce only true and efficient UV Light. The CPS® UVPRO provides UV-A (Long wave UV) 325-375nm. Instant on LED provides the fastest leak inspection of any light available.

Light spectrum wavelengths in nanometers

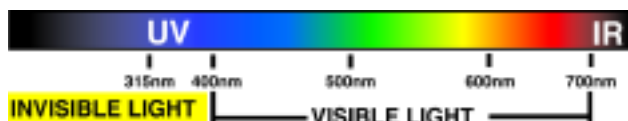

#### Why BLUE is NOT Necessarily Cool

A correctly tuned Ultra Violet (UV) lamp should predominantly emit invisible UV light waves with only a trace of visible "purple" or "blue" light. The small amount of visible light is required to direct the user's eyes to the leak search area, while the invisible UV light rays actually illuminate the leaking dye. Lamps that emit large amounts of visible blue light have been marketed heavily as being more powerful and more effective at fluorescing leaks, backed by the obvious high output of visible light. Knowing that UV dye additives requires invisible true UV light rays to effectively fluoresce dispels this claim altogether. In fact, special "blue blocking" glasses are required for use with these high output blue lamps in order to remove the nuisance blue light from the vision of the user during the leak search process. Otherwise, the high output of light will mask the actual leak or illuminating dye additive.



### UVPRO - UV LED Light/Glasses Kit



#### UVPRO

The new and improved UVPRO light is the most compact and efficient UV light we have ever designed. The nine high intensity true UV LED's are specifically engineered to maximize the fluorescing capabilities of today's most commonly used dyes while greatly reducing the amount of "nuisance" background blue light emitted. Its rugged anodized aluminum body and o-ring sealed battery compartment allows it to handle harsh field conditions while small enough to conveniently fit in your pocket.

- 9 True UV emitting LED technology
- Rugged anodized aluminum body
- Works with all common dye additives
- Ultra Compact and lightweight
- Instant "ON" with no heat produced
- Operates on (3) AAA batteries (included)



## UV REFRIGERANT LEAK DETECTION

### UV55 LED Refrigerant Leak Detection Kit



**UV55 Includes:** UVPRO LED flashlight, squeeze gun injector w/ hose, R-134a 90° low coupler, safety glasses, UVS2 dye cartridge and carrying case.



#### UV55

- UVPRO True UV emitting LED light technology
- Compact & Rugged anodized aluminum body
- Mess-free and easy to use Squeeze Gun™ injector
- 1 UVS2 universal OEM approved dye cartridge
- Includes 90° low side snap coupler
- Operates 8 continuous hours on (3) AAA batteries (included)

### UV Dichroic Refrigeration Leak Detection Kits



#### UV150

50W 12VDC dichroic filter lamp with 90° swivel head, rechargeable battery pack, 110V charger, Flow-thru injector, 1 oz universal dye, enhancing glasses and case

**UV152:** same as above w/220V Charger

**UV152UN:** includes UVSTICK2 injector/dye system instead of flow-thru type

**UV200:** same as listed above except with 8oz bottle of dye instead of 1 oz



#### UV250

50W 12VDC dichroic filter lamp with 90° swivel head, rechargeable battery pack, 110V charger, Squeeze Gun™ injector, 6 universal dye cartridges, enhancing glasses and case

**UV252:** same as above w/220V Charger

### UV Dichroic Filter Lamps

#### UVCL



#### UVCL100



Powerful 50W Bulb  
Instant On Technology

90° Swivel Head

Use with UVXB (not included)

Powerful 100W Bulb

Instant On Technology

45° Handle for Comfortable Grip

Use with UVXB (not included)

### ACCESSORIES

UVXB	Rechargeable Battery Pack
UVXBC	Battery Carrying Case
UVXC	100V Battery Charger
UVXBLB	50W Bulb - UVAL/UVCL
UVXBLB100	100W Bulb- UVAM/UVCL100
UVXBLBPRO	Replacement Bulb for UVPRO before 2007
UVXC	110V Battery Charger
UVXCE	220-240v Battery Charger
UVXCN	Battery Connectors

UVXG	Safety/Enhancing Glasses
UVXLNS	50W Replacement Dichroic Lens
UVXLNS100	100W Replacement Dichroic Lens
UVXSGA	Hose Assembly for Squeeze-Gun Injector
UVXSH	Hose Assembly for UVSTICK1
UVXSHA	Hose Assembly for UVSTICK2 and Lo Coupler
UVXSTA	3/8" FM X LO side Auto Adapter for UVSTICK














## UV REFRIGERANT LEAK DETECTION

### Prefilled/Disposable Refrigerant Dye Capsules & Cartridges

- Universal OEM approved dye formula
- Cleanest, easiest & fastest method of injection
- No refrigerant required to inject dye
- 4 sizes to match capacity of system
- Eliminates air entering system
- Eliminates over-injection of dye



all dyes include I.D. labels...

SYSTEM TYPE	REFRIGERANT CHARGE	REFRIGERANT OIL	DYE CAPSULE STICK qty.6	SQUEEZE CARTRIDGES qty.6
 <b>SMALL</b> Ice machines, window A/C units, autos, refrigerators	Up to 2.9 lbs. Up to 1.3 kg	Up to 15 fl. oz. Up to .44 liter	UV101 	UVS101 
<b>MEDIUM</b> Residential Systems	3 to 4.9 lbs. 1.4 to 2.2 kg	16 fl. oz. to 1.6 qt. .45 to 1.8 liters	UV1 	UVS1 
<b>MEDIUM-LARGE</b> Light commercial and large residential systems	5 to 9.9 lbs. 2.3 to 4.5 kg	1.7 qt. to 3.2 qt. 1.9 to 3.7 liters	UV2 	UVS2 
<b>LARGE</b> Commercial and light industrial, including all split systems	10 to 25 lbs. 4.6 to 11.4 kg	3.3 qt. to 2 gal. 3.8 to 9.1 liters	UV3 	UVS3 

In-line capsules are only for use with Spectronics® & Tracer® products' dye injection kits, bleed valves and universal connect sets

### Bottled Refrigerant Dyes



#### UVUD6

- 8oz/237ml Universal dye bottles (6per case)
- Universal - works with PAG, Ester and mineral oils
- Lowest cost per application
- Excellent for large systems

#### APPLICATIONS

Automotive: 1/4oz / 7.5ml per vehicle (32 vehicles per bottle)  
A/C&R: 1/4oz / 7.5ml per 20oz/591ml of systems lubricants

All MOONSHINE™ dye meets SAE J2297 standard. Spectronics™ & Tracer are all registered trademarks of the respective company



#### UVUDS

- 1oz/ 30ml Universal dye bottles (6 per case)
- Universal - works with PAG, Ester and mineral oils

#### Applications:

Automotive: 1/4oz / 7.5ml per vehicle (4 vehicles per bottle)

### Refillable Expandable - 1/4oz. / 7.5ml to 2oz. / 60ml Capacity



In-Line AC&R 1/4"  
1/4 to 1/2oz. - 7.5 to 14ml


#### UVNJ



#### TLJ2

TLJ2 R-12 1/4" SAE Oil Dye Injector

TLJ4 R-134a 1/2" Acme Oil Dye Injector

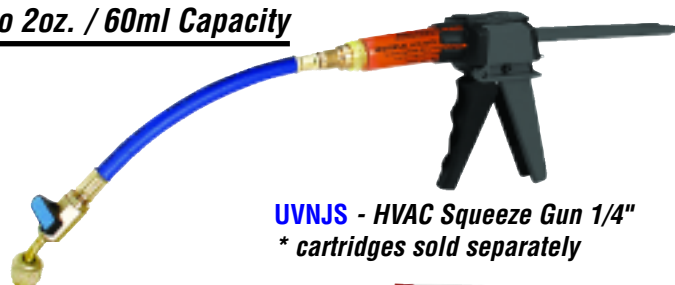

UVNJS - HVAC Squeeze Gun 1/4"  
\* cartridges sold separately

#### STEP 1: LOAD CARTRIDGE



#### STEP 2: ATTACH HOSE



#### STEP 3: CONNECT & INJECT



#### STEP 4: CLEAN PORT & DISCARD EMPTY CARTRIDGE



#### UVCLNR

32oz./946ml. dye cleaner



## REFRIGERANT CHARGING / RECOVERY SCALES

### CC220 COMPUTE-A-CHARGE® High Capacity Charging Scale



CC220

**CARRYING CASE**  
10 3/4" X 13 1/2" X 2 1/2"

High capacity 220lb/100kg Compute-A-Charge® refrigerant charging/recovery scale, calibrated to strict NIST standards. Fully enclosed and removable metal scale platform enables use of product in or out of the protective case. Large, highly visible 1 1/2" x 2"/37mm x 48mm high resolution LCD readout displays either Imperial or Metric measurements in .25oz / 10g increments. The ergonomic hand held remote incorporates 6ft coil cord, a hanging hook and is backed with a magnet for attaching to metal surfaces. Full mechanical and visual overload protection. Operates 60 continuous hours on two 9V alkaline batteries. Includes automatic off feature.

#### CERTIFIED

CALIBRATED TO STANDARDS TRACEABLE TO THE NATIONAL  
INSTITUTE OF STANDARDS AND TECHNOLOGY (N.I.S.T.)



CAPACITY	220LB /100Kg
ACCURACY	.015% of Reading
RESOLUTION	±1/4oz /±10g
PLATFORM SIZE	8 3/4" x 8 3/4" 223 x 223mm Removable
WEIGHT	5.6 lb/2.55 kg
POWER	(2) 9V battery included. Operates 60 cont. hours
READOUT	Imperial /Metric
OPERATING TEMP	-4°F - 156°F / -10°C to 50°C
PROGRAMMABLE	No

#### REMOVABLE PLATFORM



#### CHARGING



EXTRA LARGE  
CAPACITY

#### HEATER BLANKET



**CHARGE FASTER  
IN COLD WEATHER!**

CCXHB - 110 VAC / 340W / 150°F  
CCXHBV - 220 VAC / 340W / 65°C

#### RECOVERY







## REFRIGERANT CHARGING / RECOVERY SCALES

### Programmable High Capacity Charging Scale



CC800A

Programmable high capacity 220lb/100kg Compute-A-Charge® refrigerant charging/recovery scale, calibrated to strict NIST standards. Operating exclusively on two 9V alkaline batteries, the CC800A is the only fully automatic refrigerant scale that does not require line voltage and is R-410A compatible. Using the keypad controls, simply program the CC800A to transfer or recover a pre-set amount of refrigerant, hit "go" and walk away. The scale's advanced microcomputer circuitry will constantly monitor the progress of the job, shutting off the refrigerant flow when the pre-set amount is reached and audibly alert the user. A large, highly visible 1 1/2" x 2" / 37mm x 48mm high resolution LCD readout displays either Imperial or Metric measurements in .25oz / 10g increments. The ergonomic hand held remote incorporates a 6ft coil cord, a hanging hook and is backed with a magnet for attachment to metal surfaces. Full mechanical and visual overload protection. Operates 30 continuous hours on two 9V alkaline batteries. Automatic off feature.



CAPACITY:	220LB /100Kg
ACCURACY:	.015% of Reading
RESOLUTION:	±1/4oz /±10g
PLATFORM SIZE:	8 3/4" x 8 3/4" 223 x 223mm Stationary

WEIGHT:	8.5 lb/3.9 kg
POWER:	(2) 9V batteries included
READOUT:	Imperial /Metric
OPERATING TEMP:	-4°F - 156°F / -10°C to 50°C
PROGRAMMABLE:	Yes

### Legal For Trade Charging Scale



CCLT

Certified by NMI to meet or exceed OIML standards. Adjustable feet and bubble level ensure accurate weight measurements. The ergonomic hand held remote incorporates a 6ft coil cord, a hanging hook and is backed with a magnet for attaching to metal surfaces. Full mechanical and visual overload protection. Operates 60 continuous hours on two 9V alkaline batteries.

CAPACITY:	50 Kg
ACCURACY:	Class III
RESOLUTION:	20 g
PLATFORM SIZE:	8 3/4" x 8 3/4" 223 x 223mm Removable
WEIGHT:	5.6 lb/2.55 kg
POWER:	(2) 9V battery included
READOUT:	Metric Only
OPERATING TEMP:	-4°F - 156°F / -10°C to 50°C
PROGRAMMABLE:	No




### REMOVABLE PLATFORM



Bubble Level

**Bubble Level**  
ensures accurate  
weight measurements

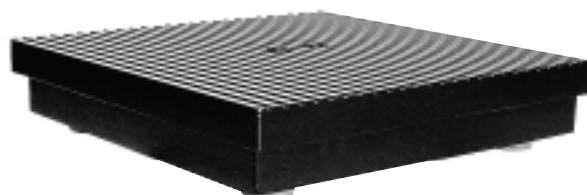

# cps®

# PRO-SET®


## REFRIGERANT CHARGING / RECOVERY SCALES

### PRO-SET® Portable Vacuum/Charging Stations

***“Ideal for both new installations  
and existing service work.”***

PRO-SET® charging stations combine all the necessary tools required to perform a full system evacuation and subsequent charging in a single, compact, mobile unit. Each station includes a Vortech or BlackMax service manifold, a PRO-SET® vacuum pump, a Compute-A-Charge® refrigerant scale and premium charging hoses. The lightweight tubular steel frame incorporates rear wheels for easy transport to and from the jobsite with integrated storage areas for all components.

- Unsurpassed Charging Accuracy of  $\pm 0.015\%$  of reading
- Hanging ports and hooks for hose storage
- Rear wheels on Frame for Ease of Mobility
- Contains all Tools Needed for Charging / Evacuation
- All Components Store Easily on Cart

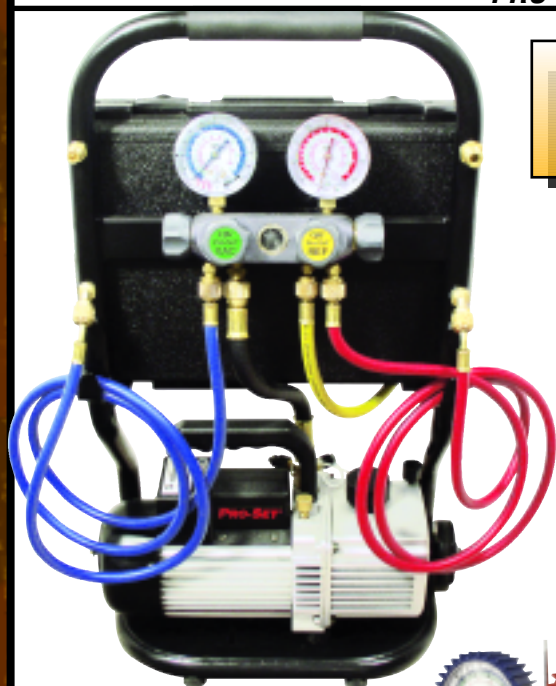

CS12DMV4TP6Q



MV4T



HP6




VP2D




CC220



Hard mounted manifolds



Rear wheels on Frame for  
Ease of Mobility



All Components Store  
Easily on Cart

Item	Application	Manifold Type	Refrig. Scales	Press. / Temp. Scales	Hoses	Vacuum Pump	Scale
CS12SMBDS5E	Appliance / Light Refrigeration	BlackMax™ 2 valve Manifold (MBD)	R22, R134a, R404A (2.5" / 68mm)	PSI / °F	3-pk of 5ft / 150cm Std. BV Hoses	Single Stage 2 CFM Pump (100 microns)	220lb Compute-A-Charge Scale
CS12SMBHP5E	Air Conditioning	BlackMax™ 2 valve Manifold (MBH)	R410A, R22, R404A (3.5" / 80mm)	PSI / °F	3-pk of 5ft / 150cm Prem. BV Hoses	Single Stage 2 CFM Pump (100 microns)	220lb Compute-A-Charge Scale
CS12DMV4H2P5E	Air Conditioning / Refrigeration	Vortech™ 4 valve Manifold (MV4H2)	R22, R410A, R404A, R134a (3.5" / 80mm)	PSI / °F	3-pk of 5ft / 150cm Prem. BV Hoses	Two Stage 2 CFM Pump (15 microns)	220lb Compute-A-Charge Scale
CS16DMV4H2P5E	Air Conditioning / Refrigeration	Vortech™ 4 valve Manifold (MV4H2)	R22, R410A, R404A, R134a (3.5" / 80mm)	PSI / °F	3-pk of 5ft / 150cm Prem. BV Hoses	Two Stage 6 CFM Pump (15 microns)	220lb Compute-A-Charge Scale
CS16DMV5D2P5E	Refrigeration	Vortech™ 5 valve Manifold (MV5D2)	R22, R134a, R404A (3.5" / 80mm)	PSI / °F	3-pk of 5ft / 150cm Prem. BV Hoses	Two Stage 6 CFM Pump (15 microns)	220lb Compute-A-Charge Scale
CS12DMV4TP6Q	Air Conditioning / Refrigeration	Vortech™ 4 valve Manifold (MV4T)	R22, R134a, R404A (2.5" / 68mm)	kPa / PSI / °C	3-pk of 6ft / 180cm Prem. Hoses & Cplrs.	Two Stage 2 CFM Pump (15 microns)	100kg Compute-A-Charge Scale



### True RMS Digital Clamp-On Meter - CAT III 600V



AC650

- Display: 4 digit large character LCD
- Versatile for testing AC/DC voltage, AC/DC current, resistance and frequency
- True RMS AC measurement
- Data hold
- Max./Min. value measurement
- Clamp light and LCD backlight
- Auto zero key for DCA measurement
- Auto/Manual range, auto power off
- Secondary injection molded case, safety as per IEC1010 CAT.III 600V
- 40Hz - 100kHz (from test leads), +/- 0.1%
- 40Hz - 400Hz (from clamp jaw), +/- 0.1%
- DCV: 4 / 40 / 400  $\pm 0.8\%$  1000V  $\pm 1\%$
- ACV: 4/40 / 400/ 700V, +/- 1.2%
- DCA: 400 /600 / 1000A  $\pm 3\%$
- ACA: 400 / 600 /  $\pm 2.5\%$ , 600/1000A  $\pm 3\%$
- OHM: 400 /4k / 40k / 400k/4M $\Omega$  / 40M $\Omega$   $\pm 2\%$
- Audible continuity and diode test
- Clamp size: 42mm (max.)
- Battery: 3 x 1.5V AAA
- Dimensions and weight: 225 x 86 x 33mm, 320g
- Accessories: Test Leads and Carrying Pouch



#### AC650 Replacement Parts

DMXTL 1000V Cat 3 Test Leads



### Open-Jaw Digital Electrical Meter - CAT III 600V



AC450

- Display: 4 digit large character LCD
- Auto/manual range
- Relative, data hold, backlight
- Auto power off
- DCV: 4 /40 /400V  $\pm 0.7\%$  100V  $\pm 0.8\%$
- ACV: 4 /40 / 400V  $\pm 0.8\%$  700V  $\pm 1.0\%$
- ACA: 200A  $\pm 3.0\%$  (50Hz to 1000Hz)
- 400 /4k / 40k / 400k /4M  $\Omega$   $\pm 1.2\%$
- 40M  $\pm 2.0\%$
- CAP: 40n/400n/4 $\mu$ F  $\pm 4.0\%$
- Frequency: 10Hz to 100kHz  $\pm 2.0\%$
- Duty Cycle: 0.1% to 99.9%
- Continuity test - audible
- Diode test
- IEC1010 standard
- Accessories: Test Leads and Carrying Pouch
- Battery: 9V (1)

#### AC450 Replacement Parts

DMXTL 1000V Cat 3 Test Leads





## TEMPERATURE MEASUREMENT INSTRUMENTS

### TEMP-SEEKER® Humidity/Temperature/Wet Bulb Diagnostic Analyzer

The TM350 is a professional grade thermo-psychrometer adaptable to accommodate all your temperature, humidity, dry/wet bulb and dew point measurements. The unit incorporates 4 discrete temperature ports all capable of min/max and memory functions including temperature differential between any 2 of the 4 available ports. Press the SCAN key and the display will alternate between all 4 ports in three second intervals providing continuous monitoring of multiple probe points during critical system diagnosis. A dedicated special purpose port accommodates an optional state of the art silicon humidity transducer probe for fast and accurate measurements during superheat calculations. Designed in a rugged polyethylene case the TM350 is engineered to provide laboratory accuracy in rough field conditions. A generous probe storage area is provided for housing all your job specific probes directly in the unit itself.

#### Features:

- Ideal for critical superheat calculations
- High accuracy silicon humidity transducer probe humidity probe port
- Large easy-to-read backlight display
- Min / Max and memory functions
- Temperature differential between any 2 ports
- Direct relative humidity and wet bulb measurements
- Auto-off after 15 minutes of non-use or continuous ON mode
- Integrated battery eliminator jack
- Rugged polyethylene carrying case w/ large probe storage area
- Large probe storage area
- Switchable °F/°C
- 1 year warranty

#### Instrument Specifications:

- Calibrated to NIST traceable standards
- Operating temperature range:  
15°F to 120°F (-10°C to +50°C)  
at 95% RH non condensing
- Accuracy: ±0.4°F (14°F to 158°F)  
±0.2°C (10°C to 70°C)
- Resolution: ±0.1 degree from -40 to 99.9,  
±1.0 degree from 100 to 300
- Auto power off after 10 minutes of non-use or selectable continuous ON mode
- 30 hrs battery life on (1) 9V alkaline
- Optional AC adaptor for 100 to 240 VAC mains, 2.1 mm center positive

#### Accessory Probes (15ft / 4.5m Leads)

##### TMX2A

AIR PROBE  
-40 to 221°F / -40 to 105°C

##### TMX2C

PIPE CLAMP-ON PROBE  
-40 to 221°F / -40 to 105°C

##### TMX2G

GENERAL PURPOSE PROBE  
-40 to 257°F / -40 to 125°C

##### TMX2P

PUNCTURE PROBE  
-40 to 257°F / -40 to 125°C

##### TMX2RH

RH/DP Probe TM250  
-40 to 194°F / -40 to 90°C

##### TMX3RH

RH/WB/DP Probe TM350  
-40 to 194°F / -40 to 90°C  
RH range: 0 to 100%

##### TMX2S

VELCRO STRAP PIPE PROBE  
-40 to 257°F / -40 to 125°C

##### TMX2FP

FLEXIBLE TOUCH PROBE  
-40 to 221°F / -40 to 105°C

##### TMX2GA

GENERAL PURPOSE AIR PROBE  
-40 to 257°F / -40 to 125°C



TM350 

TM350 includes (1) TMX2A, (1) TMX2S, (1) TMX2G  
TM350A includes (1) TMX2C, (1) TMX2GA, (1) TMX2FP  
TM350C includes (1) TMX2C, (1) TMX2S, (1) TMX2A



### TEMP-SEEKER® Non-Contact Infrared Thermometer



The **TMINI12** infrared thermometer provides instant temperature measurement over a wide range of applications. The unit offers simple one-handed operation, laser point sighting, a backlit display, °C/°F select ability and an automatic power off feature. Use the TMINI12 to quickly measure temperatures of registers, ductwork, furnaces, evaporators, condensers, compressors, relays, manifolds, radiators, exhaust systems, thermostats, bearings and more. Leather carrying case and 9V alkaline battery are included.

TEMPERATURE RANGE:	-76°F to 932°F or -60°C to 500°C
D:S (Distance to Spot Size):	12:1
EMISSIONITY:	Emmisivity pre-set at 0.95 - adjustable
ACCURACY:	±2°C (±4°F) or ±2% of reading
DISPLAY:	Digital Backlit LCD
RESOLUTION:	1°C/°F
BATTERIES/LIFE:	(2) AAA batteries and auto power off




The unit offers simple one-handed operation, laser point sighting, a backlit display, °C/°F select ability and an automatic power off feature.

### Digital and Analog Pocket Thermometers



**TMDP**

Digital pocket thermometer with stainless steel probe and pocket clip.  
Range: -58° to 302°F / -50° to 150°C

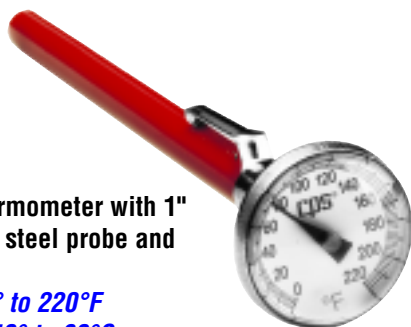


**TMAP**


Analog pocket thermometer with 1" dial and Stainless steel probe and pocket clip

**TMAP:** Range: 0° to 220°F  
**TMAPC:** Range: -40° to 80°C

A step above the standard pocket thermometer the **TM50** is packed full of features, including a user selectable temperature alarm, a countdown timer, Min/Max, °F/°C selectable and memory functions. The unit incorporates a highly accurate stainless steel 96mm puncture probe with a 4ft/122cm cord. Temperature range is -58° to 500°F / -50° to 260°C. The TM50 operates on a single AAA alkaline battery with 25 hours of battery life and a low battery indicator.

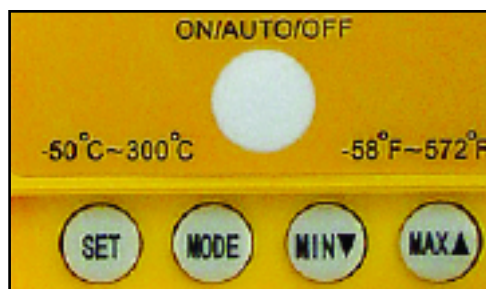

**TM50**

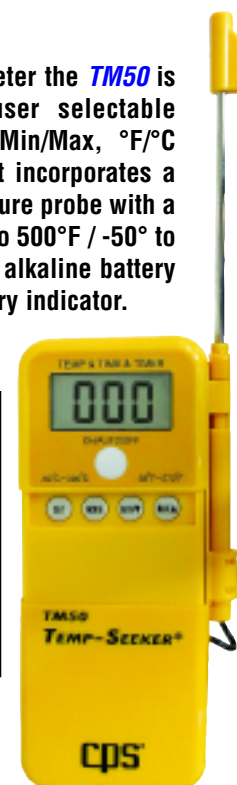


### K-TYPE TEMPERATURE PROBES



**TMXSK90**  
Max Temp: 752°F (400°C)

The **TMXSK90** is the fastest and most accurate handheld K-type surface probe providing accurate readings in less than 5 seconds. The sensor is made from flat-spring ribbons of thermocouple material for contact on uneven surfaces. An angled head for measuring hard to reach surfaces and a 3 foot coiled lead for durability and long reach. The exposed junction provides for fast response and is compatible with any other instrument with a **K-Type** input.



Coiled Lead




Flat-Spring Ribbons



Angled Head

The **TMXSK** is the fastest and most accurate handheld K-type surface probe providing accurate readings in less than 5 seconds. The sensor is made from flat-spring ribbons of thermocouple material for contact on uneven surfaces. A ribbed handle for grip and a 3 foot coiled lead for durability and long reach. The exposed junction provides for fast response and is compatible with any other instrument with a **K-Type** input.

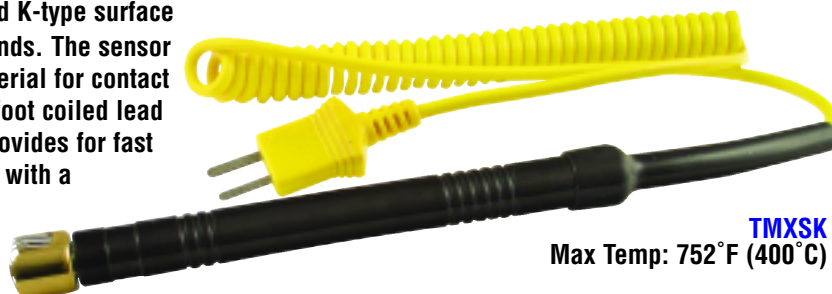


**TMXSK**  
Max Temp: 752°F (400°C)

Used as seen above on the **CPS TMINI12** and is compatible with any other instrument with a **K Type** input.



**TMINI12**

**TMXSK**




Coiled Lead




Flat-Spring Ribbons




Ribbed Handle



Bead



Covered Lead



Exposed Junction

The **TMXKBEAD** is a standard K-type bead probe ideally suited for getting fast results when measuring temperature in a variety of media. This 36" long (1 meter) probe provides accurate readings in less than 5 seconds over the range of -58°F to 400 °F (-50 °C to 204 °C).



**TMXKBEAD**  
Max Temp: 400°F (204°C)  
Min Temp: -58°F (-50°C)



### VELOCITOR™ Air Velocity Meter



AM50



#### RANGE/ACCURACY OF WIND VELOCITY

UNITS	RANGE	ACCURACY
Ft/Min	0-8800	±3% or 0.1
M/S	0-45	±3% or 0.1
km/Hr	0-140	±3% or 0.1
knots	0-88	±3% or 0.1

Precision vane type anemometer provides fast, accurate air velocity measurements for use in balancing HVAC systems or determining CFM calculations. A convenient TYPE K thermocouple is built-in to the remote vane providing quick measurement of grille/duct outflow temperatures from 32 to 122 F / 0 to 50 C. Included, is an easy-to-read laminated conversion chart that allows the user to quickly convert air velocity measurements into CFM calculations at a glance. Shipped with a rugged carrying case and is CE approved.

CFM CHART (Grill Size)																																TS-653RA																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
Grill Size	100	125	150	175	200	225	250	275	300	325	350	375	400	425	450	475	500	525	550	575	600	625	650	675	700	725	750	775	800	825	850	875	900	925	950	975	1000																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
300x12	2.66	180	305	500	670	836	1005	1173	1340	1508	1676	1843	2010	2178	2345	2512	2680	2847	3014	3181	3348	3515	3682	3849	4016	4183	4350	4517	4684	4851	5018	5185	5352	5519	5686	5853	6020	6187	6354	6521	6688	6855	7022	7189	7356	7523	7690	7857	8024	8191	8358	8525	8692	8859	9026	9193	9360	9527	9694	9861	10028	10195	10362	10529	10696	10863	11030	11197	11364	11531	11698	11865	12032	12199	12366	12533	12700	12867	13034	13201	13368	13535	13702	13869	14036	14203	14370	14537	14704	14871	15038	15205	15372	15539	15706	15873	16040	16207	16374	16541	16708	16875	17042	17209	17376	17543	17710	17877	18044	18211	18378	18545	18712	18879	19046	19213	19380	19547	19714	19881	20048	20215	20382	20549	20716	20883	21050	21217	21384	21551	21718	21885	22052	22219	22386	22553	22720	22887	23054	23221	23388	23555	23722	23889	24056	24223	24390	24557	24724	24891	25058	25225	25392	25559	25726	25893	26060	26227	26394	26561	26728	26895	27062	27229	27396	27563	27730	27897	28064	28231	28398	28565	28732	28899	29066	29233	29400	29567	29734	29901	30068	30235	30402	30569	30736	30903	31070	31237	31404	31571	31738	31905	32072	32239	32406	32573	32740	32907	33074	33241	33408	33575	33742	33909	34076	34243	34410	34577	34744	34911	35078	35245	35412	35579	35746	35913	36080	36247	36414	36581	36748	36915	37082	37249	37416	37583	37750	37917	38084	38251	38418	38585	38752	38919	39086	39253	39420	39587	39754	39921	40088	40255	40422	40589	40756	40923	41090	41257	41424	41591	41758	41925	42092	42259	42426	42593	42760	42927	43094	43261	43428	43595	43762	43929	44096	44263	44430	44597	44764	44931	45098	45265	45432	45599	45766	45933	46100	46267	46434	46601	46768	46935	47102	47269	47436	47603	47770	47937	48104	48271	48438	48605	48772	48939	49106	49273	49440	49607	49774	49941	50108	50275	50442	50609	50776	50943	51110	51277	51444	51611	51778	51945	52112	52279	52446	52613	52780	52947	53114	53281	53448	53615	53782	53949	54116	54283	54450	54617	54784	54951	55118	55285	55452	55619	55786	55953	56120	56287	56454	56621	56788	56955	57122	57289	57456	57623	57790	57957	58124	58291	58458	58625	58792	58959	59126	59293	59460	59627	59794	59961	60128	60295	60462	60629	60796	60963	61130	61297	61464	61631	61798	61965	62132	62299	62466	62633	62800	62967	63134	63301	63468	63635	63802	63969	64136	64303	64470	64637	64804	64971	65138	65305	65472	65639	65806	65973	66140	66307	66474	66641	66808	66975	67142	67309	67476	67643	67810	67977	68144	68311	68478	68645	68812	68979	69146	69313	69480	69647	69814	69981	70148	70315	70482	70649	70816	70983	71150	71317	71484	71651	71818	71985	72152	72319	72486	72653	72820	72987	73154	73321	73488	73655	73822	73989	74156	74323	74490	74657	74824	74991	75158	75325	75492	75659	75826	75993	76160	76327	76494	76661	76828	76995	77162	77329	77496	77663	77830	77997	78164	78331	78498	78665	78832	78999	79166	79333	79500	79667	79834	80001	80168	80335	80502	80669	80836	81003	81170	81337	81504	81671	81838	82005	82172	82339	82506	82673	82840	83007	83174	83341	83508	83675	83842	84009	84176	84343	84510	84677	84844	85011	85178	85345	85512	85679	85846	86013	86180	86347	86514	86681	86848	87015	87182	87349	87516	87683	87850	88017	88184	88351	88518	88685	88852	89019	89186	89353	89520	89687	89854	90021	90188	90355	90522	90689	90856	91023	91190	91357	91524	91691	91858	92025	92192	92359	92526	92693	92860	93027	93194	93361	93528	93695	93862	94029	94196	94363	94530	94697	94864	95031	95198	95365	95532	95699	95866	96033	96200	96367	96534	96701	96868	97035	97202	97369	97536	97703	97870	98037	98204	98371	98538	98705	98872	99039	99206	99373	99540	99707	99874	100041	100208	100375	100542	100709	100876	101043	101210	101377	101544	101711	101878	102045	102212	102379	102546	102713	102880	103047	103214	103381	103548	103715	103882	104049	104216	104383	104550	104717	104884	105051	105218	105385	105552	105719	105886	106053	106220	106387	106554	106721	106888	107055	107222	107389	107556	107723	107890	108057	108224	108391	108558	108725	108892	109059	109226	109393	109560	109727	109894	110061	110228	110395	110562	110729	110896	111063	111230	111397	111564	111731	111898	112065	112232	112399	112566	112733	112900	113067	113234	113401	113568	113735	113902	114069	114236	114403	114570	114737	114904	115071	115238	115405	115572	115739	115906	116073	116240	116407	116574	116741	116908	117075	117242	117409	117576	117743	117910	118077	118244	118411	118578	118745	118912	119079	119246	119413	119580	119747	119914	120081	120248	120415	120582	120749	120916	121083	121250	121417	121584	121751	121918	122085	122252	122419	122586	122753	122920	123087	123254	123421	123588	123755	123922	124089	124256	124423	124590	124757	124924	125091	125258	125425	125592	125759	125926	126093	126260	126427	126594	126761	126928	127095	127262	127429	127596	127763	127930	128097	128264	128431	128598	128765	128932	129099	129266	129433	129600	129767	129934	130101	130268	130435	130602	130769	130936	131103	131270	131437	131604	131771	131938	132105	132272	132439	132606	132773	132940	133107	133274	133441	133608	133775	133942	134109	134276	134443	134610	134777	134944	135111	135278	135445	135612	135779	135946	136113	136280	136447	136614	136781	136948	137115	137282	137449	137616	137783	137950	138117	138284	138451	138618	138785	138952	139119	139286	139453	139620	139787	139954	140121	140288	140455	140622	140789	140956	141123	141290	141457	141624	141791	141958	142125	142292	142459	142626	142793	142960	143127	143294	143461	143628	143795	143962	144129	144296	144463	144630	144797	144964	145131	145298	145465	145632	145799	145966	146133	146300	146467	146634	146801	146968	147135	147302	147469	147636	147803	147970	148137	148304	148471	148638	148805	148972	149139	149306	149473	149640	149807	150074	150241	150408	150575	150742	150909	151076	151243	151410	151577	151744	151911	152078	152245	152412	152579	152746	152913	153080	153247	153414	153581	153748	153915	154082	154249	154416	154583	154750	154917	155084	155251	155418	155585	155752	155919	156086	156253	156420	156587	156754	156921	157088	157255	157422	157589	157756	157923	158090	158257	158424	158591	158758	158925	159092	159259	159426	159593	159760	159927	160094	160261	160428	160595	160762	160929	161096	161263	161430	161597	161764	161931	162098	162265	162432	162599	162766	162933	163100	163267	163434	163601	163768	163935	164102	164269	164436	164603	164770	164937	165104	165271	165438	165605	165772	165939	166106	166273	166440	166607	166774	166941	167108	167275	167442	167609	167776	167943	168110	168277	168444	168611	168778	168945	169112	169279	169446	169613	169780	169947	170114	170281	170448	170615	170782	170949	171116	171283	171450	171617	171784	171951	172118	172285	172452	172619	172786	172953	173120	173287	173454	173621	173788	173955	174122	174289	174456	174623	174790	174957	175124	175291	175458	175625	175792	175959	176126	176293	176460	176627	176794	176961	177128	177295	177462	177629	177796	177963	178130	178297	178464	178631	178798	178965	179132	179299	179466	179633	179800	180067	180234	180401	180568	180735	180902	181069	181236	181403	181570	181737	181904	182071	182238	182405	182572	182739	182906	183073	183240	183407	183574	183741	183908	184075	184242	184409	184576	184743	184910	185077	185244	185411	185578	185745	185912	186079	186246	186413	186580	186747	186914	187081	187248	187415	187582	187749	187916	188083	188250	188417	188584	188751	188918	189085	189252	189419	189586	189753	189920	190087	190254	190421	190588	190755	190922	191089	191256	191423	191590	191757

### Sound Level Meter



SM150



Professional grade sound level indicator designed to measure noise levels from 35 to 130dB. The unit incorporates a large LCD, maximum hold function, Over and Under range indicator, peak and average response settings and A-C weighing for checking compliance with standard safety regulations. Applications include the monitoring of HVAC/R compressors, blowers, health and safety requirements, environmental quality issues, offices, factory machinery, airports, auditoriums and studio acoustics. Unit is CE approved and includes carrying case.

#### Chart of sound levels L and corresponding sound pressure and sound intensity

EXAMPLES	SOUND PRESSURE LEVEL dB SPL	SOUND PRESSURE N/m <sup>2</sup> = Pa	SOUND INTENSITY / watts/m <sup>2</sup>
Jet aircraft, 50 m away	140	200	100
Threshold of pain	130	63.2	10
Threshold of discomfort	120	20	1
Chainsaw, 1m distance	110	6.3	0.1
Disco, 1 m from speaker	100	2	0.01
Diesel truck, 10m away	90	0.63	0.001
Curbside of busy road, 5m	80	0.2	0.0001
Vacuum cleaner, distance 1m	70	0.063	0.00001
Conversational speech, 1m	60	0.02	0.000001
Average home	50	0.0063	0.0000001
Quiet library	40	0.002	0.00000001
Quiet bedroom at night	30	0.00063	0.000000001
Background in TV studio	20	0.0002	0.0000000001
Rustling leaf	10	0.000063	0.00000000001
Threshold of hearing	0	0.00002	0.000000000001

### VACROMETER™ Digital Vacuum Gauge



VG200

AVT45

Advanced measurement instrument providing continual digital readout of evacuation process on large 5 digit LCD. Measurement units are user selectable to read in Microns, Torr, in/hg or mBar at the touch of a key. Advanced surface mount technology automatically compensates for ambient changes in the environment ensuring accuracy and consistency in performance. Advanced field-cleanable sensor is able to withstand 400 PSI of positive pressure. Unit operates 30 hours on 9V alkaline battery with low battery indicator and auto off feature. Includes carrying case, hanging hook, AVT45, 9V battery and is CE approved.

**VG201 = VG200 + 1/8" NPT Thread Connection**



#### SENSOR:

TYPE	Self - heated thermistor bridge with integral temperature compensation from 0 to 50 °C (32 to 122 °F).
OPERATING PRESSURE RANGE	Atmospheric pressure to 0 microns Maximum Working pressure: 400 PSIG
BURST PRESSURE	3000 PSIG
OPERATING RANGE	VG200- Atmospheric to 0 microns / VG100A- Atmospheric to 25 Microns
ACCURACY	+/- 10% of Reading.
OPERATING TEMPERATURE RANGE	Compensated (accuracy as stated): 0°C TO 50°C (32°F TO 122°F) Non-compensated (add +/- 0.5% error for every °C outside compensated range): 0 to 50°C (-22 to 158°F)
OPERATING & STORAGE HUMIDITY	0-95%, non-condensing.
STORAGE TEMPERATURE	- 40 to 185°F / - 40 to 85°C
POWER SOURCE	One 9 volt alkaline battery (ANSI 1604AC – IEC 6LR61)
BATTERY LIFE	20 hours of continuous use. Instrument shuts itself off after 5 minutes of operation.
WEIGHT	5.5 oz. / 153 g. excluding the battery.
DIMENSIONS	68 mm. diameter by 40 mm. deep by 124 mm. overall height (2.7" dia. by 1.6" deep by 5" overall height).
MECHANICAL CONNECTION	Standard 1/4" female SAE refrigerant hose type with core depressor.
BATTERY INDICATOR	Battery symbol with 3 segment Power Level Bar Graph. (VG200). LED Low Battery Indicator (VG100)

### VACROMETER™ Vacuum Gauge



VG100A

AVT45

1/4" SAE Female x  
1/4" SAE Male

Compact self-contained instrument designed to provide constant indication and monitoring of the evacuation process from start to finish. Nine discrete high intensity LED's are preset to illuminate upon achieving industry standards for proper system evacuations. Advanced surface mount technology automatically compensates for ambient changes in the environment ensuring accuracy and consistency in performance. Advanced field-cleanable sensor is able to withstand 400 PSI of positive pressure. Unit operates 25 hours on 9V alkaline battery with low battery indicator and auto-off feature. Includes carrying case.



#### Spare parts & Accessories for VG100A / VG200

ITEM	DESCRIPTION
VGXC	Carrying case VG100A/ VG200
VGXH	Hanging Hook
AVT87	Adapter for VG100A/VG200. 1/4" SAE male to 1/2"-20 male to 1/2" -20 swivel female tee
AVT48	Adapter for VG100A/VG200. 1/4" SAE male to 1/2" ACME male to 1/4" SAE swivel female tee
AVT45	Adapter for VG100A/VG200. 1/4" SAE male to 1/4" SAE male to 1/4" SAE swivel female tee



## Dual Voltage Two Stage Vacuum Pumps

**DUAL  
VOLTAGE**



*Universal IEC plug  
All units/dual voltage 115V & 230V*

Dual voltage design vacuum pump operates on 115 VAC or 230 VAC (50 or 60Hz). Advanced two-stage design pulls deep vacuum fast to 15 microns.

Model	VP2D	VP3D	VP6D
Free Air Displacement	1.9 CFM @ 60HZ 45 l/m @ 50Hz	3.15 CFM @ 60HZ 75 l/m @ 50Hz	6.25 CFM @ 60HZ 148 l/m @ 50Hz
Horse Power RPM (50/60Hz)	1/4 HP 1440/1720	1/3 HP 1440/1720	1/2 HP 2880/3440
Ultimate Vacuum	15 microns		
Inlet Ports (male flare)	1/4", 3/8" SAE Male & 1/2" ACME Male		
Oil Capacity	12oz./350 ml	15oz./450ml	15oz./ 450ml
Dimensions	13" x 5.3" x 10"	13.7" x 5.6" x 10.4"	13.7" x 5.6" x 10.4"
Shipping Weight	21.66lb/9.8kg	25.42 lb/11.5kg	25.42lb/11.5kg

*For Australia: VP2DA, VP3DA, VP6DA all Single Voltage 240VAC/50Hz.*

Model	VP8D	VP10D	VP12D
Free Air Displacement	7.9 CFM @ 60HZ 186 l/m @ 50Hz	10.0 CFM @ 60HZ 236 l/m @ 50Hz	11.8 CFM @ 60HZ 278 l/m @ 50Hz
Horse Power RPM (50/60Hz)	2/3 HP 2880/3440	2/3 HP 2880/3440	3/4 HP 2880/3440
Ultimate Vacuum	15 microns		
Inlet Ports (male flare)	1/4", 3/8" SAE Male & 1/2" SAE Male		
Oil Capacity	13.5 oz./400ml	14 oz./425ml	15 oz./450ml
Dimensions	15" x 6.2" x 11.2"		
Shipping Weight	32.95lb/14.5kg	34.26lb/15.5kg	36.47lb/16.5kg

## Dual Voltage Single Stage Vacuum Pumps

**DUAL  
VOLTAGE**




**LARGE  
OIL SIGHTGLASS**




Model	VP2S	VP3S	VP6S
Free Air Displacement	1.9 CFM @ 60HZ 45 l/m @ 50Hz	3.15 CFM @ 60HZ 75 l/m @ 50Hz	5.85 CFM @ 60HZ 138 l/m @ 50Hz
Horse Power RPM (50/60Hz)	1/5 HP 1440/1720	1/4 HP 1440/1720	1/3 HP 1440/1720
Ultimate Vacuum	100 microns		
Inlet Ports (male flare)	1/4", 3/8" SAE Male & 1/2" ACME Male		
Oil Capacity	13.5 oz./400 ml	13 oz./380 ml	17 oz./ 500 ml
Dimensions	13" x 5.3" x 10"	13" x 5.3" x 10"	13.7" x 5.6" x 10.4"
Shipping Weight	18.11lb/8.2kg	19.44lb/8.8kg	24.75lb/11.2kg

**VPXJ220**  
220 VAC jumper power cord  
for locations where 110  
voltage is not available.



**VPXOMP**  
Oil mist preventer  
exhaust port.



## Vacuum Pump Replacement Parts

ITEM	DESCRIPTION
VPXB2	Rubber Base-Medium VP6S/VP6D
VPXB3	Rubber Base- Large VP8D/VP10D/VP12D
VPXC100	Capacitor 100ufd VP6S/VP6DVP8D/VP10D/VP12D
VPXCS2	Centrifugal motor start switch (PCB) VP6S/VP6D
VPXCS3	Centrifugal motor start switch (PCB) VP8D/VP10D/VP12D
VPXEB2	End Bell w/Sightglass (Medium) VP6S/VP6D
VPXEB3	End Bell w/Sightglass (Large) VP8D/VP10D/VP12D
VPXEB02	End Bell O-ring (Medium) VP6S/VP6D
VPXEB03	End Bell O-ring (Large) VP8D/VP10D/VP12D
VPXEH	Plastic Electric Housing- VP6S/VP6DVP8D/VP10D/VP12D
VPXEP1	Electrical Panel VP6S/VP6D
VPXEP2	Electrical Panel VP8D/VP10D/VP12D

ITEM	DESCRIPTION
VPXF15	Fuse T15A VP8D/VP10D/VP12D
VPXFB2	Fan Blade- Medium VP6S/VP6D
VPXFB3	Fan Blade- Large VP8D/VP10D/VP12D
VPXFG2	Fan Grill- Medium VP6S/VP6D
VPXIP3	Port Kit 8-12 CFM VP8D/VP10D/VP12D
VPXODP	Oil Drain Plug w/O-ring VP6S/VP6D/VP8D/VP10D/VP12D
VPXOEP	Exhaust/Oil Fill Port VP6S/VP6D/VP8D/VP10D/VP12D
VPXOL2	Overload B120-110 DRB4 VP6S
VPXOL3	Overload DF690-KB DRB3
VPXH	Handle VP6S/ VP6D VP8D/VP10D/VP12D
VPXIP2	Port Kit 2-6 CFM VP6D

## Anti-Siphon Valve Kits



VPAS4 - 1/4" SAE Female Knurl Nut  
 VPAS8 - 3/8" SAE Female Knurl Nut  
 VPASU - 1/4" SAE, 3/8" SAE, 1/2"-20 UNF Female Knurl Nut

The CPS anti-siphon valve is an essential accessory to any vacuum pump application. The anti-siphon valve prevents the cross-contamination of vacuum pump oil and the compressor oil in the A/C or refrigeration system being serviced. Mixing of vacuum pump oil and compressor oil can cause premature failure in the A/C or refrigeration system. CPS makes three models that fit all CPS and other brands of vacuum pumps. *Add to any brand of vacuum pump to prevent the cross-contamination of vacuum pump oil and the compressor oil of the system being serviced.*



## Premium Vacuum Pump Oils



PRO-SET® Premium Vacuum Pump Oil is an extremely high quality, severely hydrotreated vacuum pump oil. The oil is compatible for use in pumps made by most manufacturers. PRO-SET® Premium Vacuum Pump Oil should always be clean and free of contaminants such as moisture, acids, vapors, dirt etc. It is strongly recommended that the vacuum pump oil be changed after each use to improve service and the life of the pump.

ITEM	DESCRIPTION
VPOG6	(6) one gallon bottles
VPOQ12	(12) one quart bottles
VPOP12	(12) one pint bottles

## Vacuum Pump Brass Cap Kit





# cps<sup>®</sup> **PRO-SET<sup>®</sup>** REFRIGERANT RECOVERY MACHINES


*PRO-SET<sup>®</sup> Oil-Less Refrigerant Recovery Machine*

## **CYCLONE 1HP**



### CR700

- Fastest overall ARI certified recovery rates in its class
- Powerful 1HP oil-less reciprocating recovery compressor
- Exceptional compressor, condensing & cooling systems allow fast recovery in high temperature environments
- Automatic Low Pressure shut-off feature turns unit off when recovery is completed
- Rugged high density double walled plastic housing with easy view top mounted controls
- R-410A ready with 550psi high pressure shut-off switch
- Ergonomic well balanced design for easy transport including shoulder strap - weighs 36 lbs/16.2kg
- Built-in suction filter located under suction port
- Worldwide patents pending

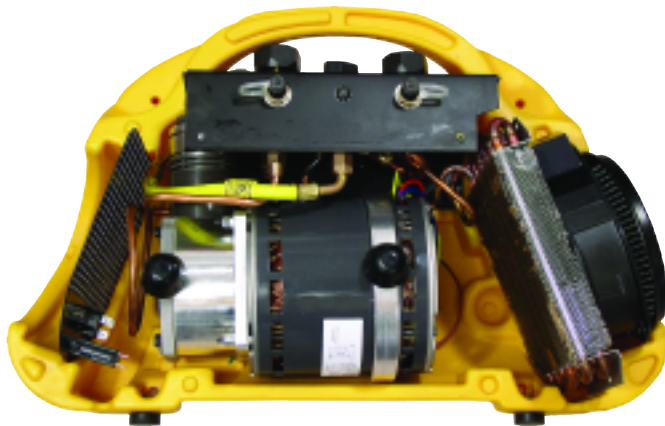


- Compact modular design with easy access 4 bolt latching system
- Complete compressor rebuilt in minutes
- Externally serviceable valves and gauges
- Integrated component moorings for quiet operation
- Fewer components equals more reliability




Oversized Piston



Larger discharge port

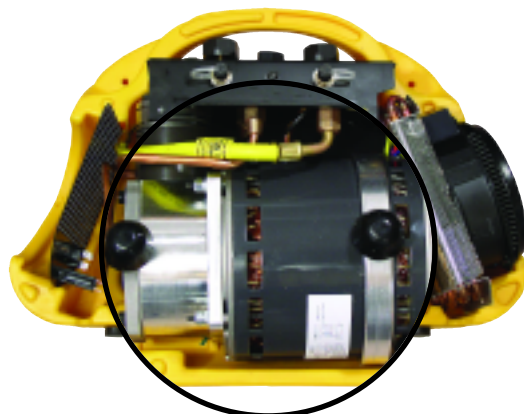

- Powerful 1HP oil-less reciprocating recovery compressor
- Oversized piston head & cylinder combined with a larger discharge port
- No suction valve eliminates failures caused by liquid slugs
- Heavy duty components with special long-lasting composite seals

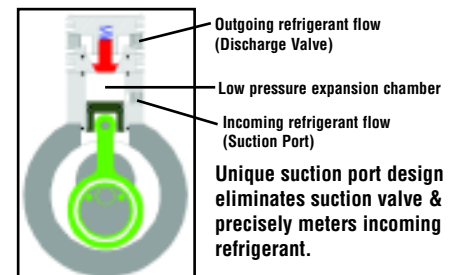

# CPS<sup>®</sup> **PRO-SET<sup>®</sup>** REFRIGERANT RECOVERY MACHINES

## PRO-SET<sup>®</sup> Oil-Less Refrigerant Recovery Machine

UL CERTIFIED		
meets or exceed EPA Regulations per ARI Standard 740-98		
CR700 Series		
Item	Voltage	Gauges
CR700	115V	psig/kgcm <sup>2</sup>
CR700E	220-240V	BAR/kPa
CR700S	230V	psig/kgcm <sup>2</sup>
CR700J	100 V	MPa

CR710 (CR700 with safety overfill cord)

Replacement Parts	
CRXCR1	Compressor Rebuild Kit for CR600 (all)
CRXCR2	Compressor Rebuild Kit for CR500 (115V)
CRXCR3	Compressor Rebuild Kit for CR500 (230V)
CRXCR8	Compressor Rebuild Kit for CR700 (all)
CRXTOS2	CR Overfill Sensor Cord Kit 115V
CRXTOS2	CR Overfill Sensor Cord Kit 230V
CRXF2	(6) Suction Filters for CR300, 400, 500, 600
CRXF3	(6) Suction Filters for CR700

	CR700	CR700J	CR700E	CR700S
Compressor Type	1 HP oil-less reciprocating compressor			
Dimensions	20cm (8") wide x 37cm (14.5") long x 30.5cm (12") high			
Weight	15.3kg (34lbs.)			
Oprtg. Temp. Range	0°C (32°F) to 49°C (120°)			
Power Source	115V 50/60Hz 1 HP	100V 50/60Hz 1 HP	220-240V 50/60 Hz 1 HP	230V 50/60 Hz 1 HP
Power Consumption	850 W			
Filtration	Cleanable 100-mesh screen integrated into Suction Port			
Shut-off valves	Both Suction and Discharge piston manifold valves			
Overload Protection	15 amp		8 amp	

## Competitive Comparison Recovery Rates

		Test Conditions at 75 F Degrees			104 F Degrees	NRTL Ratings
	Refrigerant	Liquid (kg/m)	Push / Pull (kg/m)	Vapor (kg/m)	High Temp Vapor (kg/m)	
CPS CR700	R410A	2.95	6.97	0.23		(UL) QVBC SA12068
Appion G5	R410A	1.58	4.63	0.30		(UL) QVBC SA13136
Yellow Jkt 95760	R410a	0.76	5.54	0.22		(UL) QVBC SA12038
Promax RG5410EX	R410A	2.33	6.39	0.20		(UL) QVBC SA12994
Promax RG5410A	R410A	1.85	4.91	0.16		(UL) QVBC SA12994
Inficon Vortex AC	R410A	1.66	5.15	0.08		(UL) QVBC SA12798
Stinger 2000-3300	R410A	1.37	6.63	0.10		(AR) RRRE-05040-1Q
CPS CR700	R22	3.11	7.17	0.22	0.242	(UL) QVBC SA12068
Appion G5	R22	2.82	7.54	0.28	0.19	(UL) QVBC SA13136
Yellow Jkt 95760	R22	0.90	6.12	0.15	0.15	(UL) QVBC SA12038
Promax RG5410EX	R22	1.90	6.58	0.18	0.14	(UL) QVBC SA12994
Promax RG5410A	R22	1.81	4.32	0.15	0.13	(UL) QVBC SA12994
Inficon Vortex AC	R22	1.35	2.50	0.11	0.13	(UL) QVBC SA12798
Stinger 2000-3300	R22	1.60	5.58	0.13	0.13	(AR) RRRE-05040-1Q
CPS CR700	R134	2.15	6.30	0.15		(UL) QVBC SA12068
Appion G5	R134	1.97	5.03	0.19		(UL) QVBC SA13136
Yellow Jkt 95760	R134	1.13	6.12	0.10		(UL) QVBC SA12038
Promax RG5410EX	R134	1.09	5.30	0.14		(UL) QVBC SA12994
Promax RG5410A	R134	1.57	3.63	0.11		(UL) QVBC SA12994
Inficon Vortex AC	R134	1.13	3.44	0.10		(UL) QVBC SA12798
Stinger 2000-3300	R134	1.21	4.98	0.10		(AR) RRRE-05040-1Q

Rates on this table @ 60Hz, for 50Hz reduce by 15%

Copyright © 2008 Underwriters Laboratories Inc.®

Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc.

Above information derived from independent test results viewable at <http://www.ul.com> and <http://www.ari.org>  
 Ritchie, ATP, Inficon/VORTEX, BACHARACH/STINGER, RefTec/MicroVAC are all registered trademarks of their respective companies



# CPS® **PRO-SET®** REFRIGERANT RECOVERY MACHINES

## PRO-SET® Oil-Filled Refrigerant Recovery Machine



**CR300**

### ALL PRO-SET® MACHINES HAVE:

- On the fly self-clearing valve (except CR300)
- Integrated manifold block system
- Built-in suction filter located under suction port
- Indestructible high-density polyethylene case
- Comfortable integrated carrying handle
- Worldwide approvals CSA/CE/TUV-GS
- UL certified to meet or exceed EPA regulations per ARI standard 740-95

### CR300

- Economical Recovery Workhorse
- Heavy-duty oil filled compressor
- Simple easy-to-use design
- Built-in Suction filter

**CR300A** - 230V, kPa gauges

**CR310** (w/ overfill sensor cord)



**BUILT-IN 100 MESH PARTICLE FILTER**  
Located Under The Suction Port of All PRO-SET® RECOVERY MACHINES


### CR400

- Fully automatic liquid or vapor recovery
- Advanced rifled tube lance fin condenser
- Extremely quiet operation
- 550 PSI high pressure cut-off switch

**CR400E** - 230V, BAR/kPa

**CR400S** - 230V, psi/kgcm<sup>2</sup>

**CR410** (w/ overfill sensor cord)



### UL CERTIFIED

to meet or exceed EPA Regulations per ARI Standard 740-95

	CR300A/CR300S	CR300/CR400	CR400E/CR400S
Direct Vapor	0.22lbs/min (6kg/hr)	0.22lbs/min (6kg/hr)	0.22lbs/min (6kg/hr)
Direct Liquid	0.73lbs/min (19.8kg/hr)	0.73lbs/min (19.8kg/hr)	0.73lbs/min (19.8kg/hr)
Push-Pull Liquid	10.38lbs/min (282kg/hr)	10.38lbs/min (282kg/hr)	10.38lbs/min (282kg/hr)
Applications	Appliances, small A/C units, automobiles	Appliances, small A/C units, automobiles	Appliances, small A/C units, automobiles
Compressor	1/6 HP Hermetic	1/6 HP Hermetic	1/6 HP Hermetic
Voltage	230 VAC 50-60hz	115 VAC 50-60hz	230 VAC 50-60hz
Weight	28lbs/12.6kg	28lbs/12.6kg	28lbs/12.6kg
Approvals	CE	*UL/CE	CE/TUV-GS



**CR500/CR600**

### CR500

- Lightest machine in its class, weighs less than 20lbs./8.8kg
- Advanced rifled tube lance fin condenser
- Fast recovery of liquid or vapor
- 550 PSI high pressure cut-off switch

**CR500E** - 230V, BAR/kPa

**CR500S** - 230V, psi/kgcm<sup>2</sup>

**CR510** (w/ overfill sensor cord)


### CR600E

- Advanced high efficiency condensor
- "Super Cool" dual fan cooling system
- 550 PSI high pressure cut-off switch


**CR600E** - 230V, BAR/kPa

**CR600S** - 230V, psi/kgcm<sup>2</sup>

**R-410A**



**SUPER COOL DUAL FAN SYSTEM**  
**CR600 MODELS ONLY!**  
Unit Operates in 140°F/60°C Desert Heat!



### UL CERTIFIED

to meet or exceed EPA Regulations per ARI Standard 740-95

	CR500	CR500E/CR500S	CR600E	CR600S
Direct Vapor	0.38lbs/min (10.3kg/hr)	0.38lbs/min (10.3kg/hr)	0.38lbs/min (10.3kg/hr)	0.38lbs/min (10.3kg/hr)
Direct Liquid	3.03lbs/min (82.3kg/hr)	3.03lbs/min (82.3kg/hr)	2.60lbs/min (70.6kg/hr)	2.60lbs/min (70.6kg/hr)
Push-Pull Liquid	12.22lbs/min (332kg/hr)	12.22lbs/min (332kg/hr)	11.66lbs/min (317kg/hr)	11.66lbs/min (317kg/hr)
Applications	Residential A/C, Commercial	Residential A/C, Commercial	Residential A/C, Commercial	Residential A/C, Commercial
Compressor	1/3 HP Oil-less	1/3 HP Oil-less	1/2 HP Oil-Less	1/2 HP Oil-Less
Voltage	115VAC 50-60hz	230 VAC 50-60hz	220 VAC 50-60hz	230 VAC 50-60hz
Weight	20lbs/9.0kg	20lbs/9.0kg	29lbs/13.1kg	29lbs/13.1kg
Approvals	*CSA/UL/CE	CE/TUV-GS	CE/TUV-GS	CE

# cps<sup>®</sup> **PRO-SET<sup>®</sup>** REFRIGERANT RECOVERY MACHINES

## Refrigerant Recycling Module



### FEATURES:

- Easy access one bolt cover with 42 cubic inch solid core drier.
- High efficiency coalescent oil separator to remove oil and other contaminants from refrigerant.
- Ball Valves on the hoses for easy hook up and safe disconnection.
- Built in manifold with self clearing valve. Prepares the unit for the next refrigerant.
- Manifold utilizes CPS exclusive Triple Seal piston valves.
- Suction and discharge gauges for monitoring operation.
- 1/4" SAE Male flare oil drain port to remove recovered oil and contaminants.
- Light weight (15lbs) and ergonomically designed handle for portability.
- Heavy duty powder coated aluminum chassis surrounded by a tough high-density polyethylene case.
- 1/4" SAE Male flare fittings.

## Refrigerant Recovery Tanks

ITEM	DESCRIPTION	Water Capacity	DOT Specification	Service Pressure
ARX134T	Automotive 50lb tank with 1/2" ACME M fitting	47.7lb / 21.7kg	DOT04BA-400	400 PSIG
ARX134TS	Automotive 50lb tank with 1/2" ACME M fitting and overfill sensor	47.7lb / 21.7kg	DOT04BA-400	400 PSIG
CRX390T	90lb tank with 1/4" SAE M fitting on tank. 1/4" SAE FM x 1/2" ACME M adapter fitting included	92 lb / 41.7kg	DOT04BW-400	400 PSIG
CRX390TS	90lb tank with 1/4" SAE M fitting on tank and overfill sensor. 1/4" SAE FM x 1/2" ACME M adapter fitting included	92 lb / 41.7kg	DOT04BW-400	400 PSIG
CRX400T	50lb tank with 1/4" SAE M fitting	47.7lb / 21.7kg	DOT04BA-400	400 PSIG
CRX400TS	50lb tank with 1/4" SAE M fitting and overfill sensor	47.7lb / 21.7kg	DOT04BA-400	400 PSIG
CRX430T	30lb tank with 1/4" SAE M fitting	26.2lb / 11.9kg	DOT04BA-400	400 PSIG
CRX430TS	30lb tank with 1/4" SAE M fitting and overfill sensor	26.2lb / 11.9kg	DOT04BA-400	400 PSIG



**CRX430T**  
1/4" SAE tank  
**CRX430TS**  
1/4" SAE tank  
with float



**ARX134T**  
1/2" ACME (AR300/400)  
U.S. Automotive  
**ARX134TS**  
1/2" ACME with float  
(AR500)



**CRX400T**  
1/4" SAE tank  
**CRX400TS**  
1/4" SAE tank  
with float



**CRX390T**  
1/4" SAE & 1/2" ACME  
tank adapter  
**CRX390TS**  
1/4" SAE with float



# cps®

## PRO-SET®

### VORTECH SERIES

## VORTECH VALVE SYSTEM™

PATENT PENDING

- Advanced VVS diaphragm valve system
- Certified 15 micron vacuum rating
- Red & blue protective gauge boots
- New 45° fittings for easy hose storage (2 valve series only)
- Anodized aircraft aluminum block body
- Precision flutter-free metal cased gauges
- Heavy duty plastic valve handles
- Oversized refrigerant sight glass



- Advanced diaphragm valve design
- Superior refrigerant metering capabilities
- Certified 5 year trouble-free valve life
- Maximum unrestricted refrigerant flow
- Light touch valve operation



### 1 VALVE SERIES



MV1CH

R-12 R-22 R-502

### 2 VALVE SERIES



MV2D

R-134a R-22 R-404A

### 4 VALVE SERIES



MV4D

R-134a R-22 R-404A

### 5 VALVE SERIES



MV5M

R-12 R-22 R-502

### VORTECH™ 1/4" SAE Fittings On Anodized Black Body

All Gauges have Protective Rubber Boots Except for Oil Filled Type

REGION		North America	North America	North America	North America	South America / Asia	Australia / South America	Australia / South America	Australia / South America
Gauge Description	Refrigerant Scales	R-12, R22, R502	R22, R134a, R404A	R22, R134a, R404A	R22, R134a, R404A	R12, R134a, R22	R134a, R22, R404A	R22, R134a, R404A	R407C, R22
	Gauge Size/ Type	2.5" / 68mm Dry	2.5" / 68mm Dry	3 1/8" / 80mm Dry	3 1/8" / 80mm Oil Filled	2.5" / 68mm Dry	2.5" / 68mm Dry	3 1/8" / 80mm Dry	2.5" / 68mm Dry
	Pressure Scales	PSI	PSI	PSI	PSI	PSI / kg/cm	PSI / Kpa	PSI / Kpa	PSI / Kpa
	Temperature Scales	°F	°F	°F	°F	°F / °C	°C	°C	°C
One Valve Manifolds	Low Side	MV1CL	MV1DL	N/A	N/A	MV1ZL	MV1TL	MV1PL	MV1YL
	High Side	MV1CH	MV1DH	N/A	N/A	MV1ZH	MV1TH	MV1PH	MV1YH
Two Valve Manifolds	Manifold & Gauges Only	MV2C	MV2D	MV2D2	MV2D3	MV2Z	MV2T	MV2P	MV2Y
	3ft / 90cm Hoses	MV2CS3	MV2DP3	MV2D2P3	MV2D3P3	MV2ZP3	MV2TP3	MV2PP3	MV2YP3
	5ft / 150cm Hoses	MV2CS5	MV2DP5	MV2D2P5	MV2D3P5	MV2ZP5	MV2TP5	MV2PP5	MV2YP5
	5ft / 150cm AB Hoses	MV2CS5A	MV2DP5A	MV2D2P5A	MV2D3P5A	MV2ZP5A	MV2TP5A	MV2PP5A	MV2YP5A
	5ft / 150cm BV Hoses	MV2CS5E	MV2DP5E	MV2D2P5E	MV2D3P5E	MV2ZP5E	MV2TP5E	MV2PP5E	MV2YP5E
Four Valve Manifolds	Manifold & Gauges	MV4C	MV4D	MV4D2	MV4D3	MV4Z	MV4T	MV4P	MV4Y
	5ft / 150cm Hoses	MV4CS5	MV4DP5	MV4D2P5	MV4D3P5	MV4ZP5	MV4TP5	MV4PP5	MV4YP5
	*5ft / 150cm AB Hoses	MV4CS5A	MV4DP5A	MV4D2P5A	MV4D3P5A	MV4ZP5A	MV4TP5A	MV4PP5A	MV4YP5A
	*5ft / 150cm BV Hoses	MV4CS5E	MV4DP5E	MV4D2P5E	MV4D3P5E	MV4ZP5E	MV4TP5E	MV4PP5E	MV4YP5E
Five Valve Manifolds (All Include Carrying Case)	Manifold, Gauges & Analog Vacuum Gauge	MV5C	N/A	MV5D2	MV5D3	N/A	MV5T	MV5P	MV5Y
	Mnflid, Gauges & Digital Vac.Gauge	MV5CD	N/A	MV5D2D	MV5D3D	N/A	MV5TD	MV5PD	MV5YD
	*5ft/150cm BV Hoses w/Analog Vac. Gauge	MV5CP5EC	N/A	MV5D2P5EC	MV5D3P5EC	N/A	MV5TP5EC	MV5PP5EC	MV5YP5EC
	*5ft/150cm BV Hoses w/Digital Vac. Gauge	MV5CP5ECD	N/A	MV5D2P5ECD	MV5D3P5ECD	N/A	MV5TP5ECD	MV5PP5ECD	MV5YP5ECD
Replacement Gauges	Low Side	RGCLB	RGDLB	RGD2LB	*RGD3L	RGZLB	RGTLB	RGPLB	RGYLB
	High Side	RGCHB	RGDHB	RGD2HB	*RGD3H	RGZHB	RGTHB	RGPHB	RGYHB

RGD3L and RGD3H do not include protective rubber boots.



## VORTECH™ Anodized Pink Body For R-410A

All Gauges have Protective Rubber Boots Except for Oil Filled Type

- Advanced VVS diaphragm valve system
- Red & blue protective gauge boots
- New 45° fittings for easy hose storage (2 valve series only)
- Anodized aircraft aluminum block body
- Precision flutter-free metal cased gauges
- Heavy duty metal valve handles
- Oversized refrigerant sight glass
- Advanced one-piece diaphragm valve design
- Superior refrigerant metering capabilities
- Vacuum rated to 15 microns or better
- Certified 5 year trouble-free valve life
- Maximum unrestricted refrigerant flow
- Light touch valve operation



**MV13R  
R-410A**



**MV3R  
R-410A**



**MV3R  
R-410A**


Gauge Description	REGION	North America 1/4" SAE Fittings on manifold and hoses					Australia 1/2-20 UNF Fittings on manifold and hoses	
		North America	North America	North America	North America	North America	Australia / South America	Australia / South America
Refrigerant Scales		R410A	R410A, R22, R404A	R410A, R22, R404A, R134A	R410A, R22, R404A, R134A	R410A	R410A	R410A
Gauge Size/ Type		2.5" / 68mm Dry	2.5" / 68mm Dry	3 1/8" / 80mm Dry	3 1/8" / 80mm Oil-Filled	3 1/8" / 80mm Oil-Filled	3 1/8" / 80mm Oil-Filled	2.5" / 68mm Dry
Pressure Scales		PSI / Kpa	PSI	PSI	PSI	PSI / Kpa	PSI / Kpa	PSI / Kpa
Temperature Scales		°F / °C	°F	°F	°F	°F / °C	°F / °C	°F / °C
Fittings	Manifold and Hose Fittings	1/4" SAE	1/4" SAE	1/4" SAE	1/4" SAE	1/4" SAE	1/2"-20 UNF	1/2"-20 UNF
Two Valve Manifolds	Manifold & Gauges Only	MV3B	MV3H	MV3H2	MV3H3	MV3R	MV11R	MV11B
	5ft / 150cm Hoses	MV3BP5	MV3HP5	MV3H2P5	MV3H3P5	MV3RP5	MV11RJ5	MV11BJ5
	5ft / 150cm AB Hoses	MV3BP5A	MV3HP5A	MV3H2P5A	MV3H3P5A	MV3RP5A	MV11RJ5A	MV11BJ5A
	5ft / 150cm BV Hoses	MV3BP5E	MV3HP5E	MV3H2P5E	MV3H3P5E	MV3RP5E	MV11RJ5E	MV11BJ5E
Four Valve Manifolds	Manifold & Gauges	MV13B	MV13H	MV13H2	MV13H3	MV13R	MV12R	MV12B
	5ft / 150cm Hoses	MV13BP5	MV13HP5	MV13H2P5	MV13H3P5	MV13RP5	MV12RJ5	MV12BJ5
	5ft / 150cm AB Hoses	MV13BP5A	MV13HP5A	MV13H2P5A	MV13H3P5A	MV13RP5A	MV12RJ5A	MV12BJ5A
	5ft / 150cm BV Hoses	MV13BP5E	MV13HP5E	MV13H2P5E	MV13H3P5E	MV13RP5A	MV12RJ5E	MV12BJ5E
Replacement Gauges	Low Side	RGBLB	RGHLB	RGH2LB	*RGH3L	*RGRL	*RGRL	RGBLB
	High Side	RGBHB	RGHHB	RGH2HB	*RGH3H	*RGRH	*RGRH	RGBHB

\* Do not include protective rubber boots.



## SERVICE MANIFOLD & GAUGES

### BLACKMAX™ 2-Valve Piston Valve Manifolds With 1/4" SAE Fittings

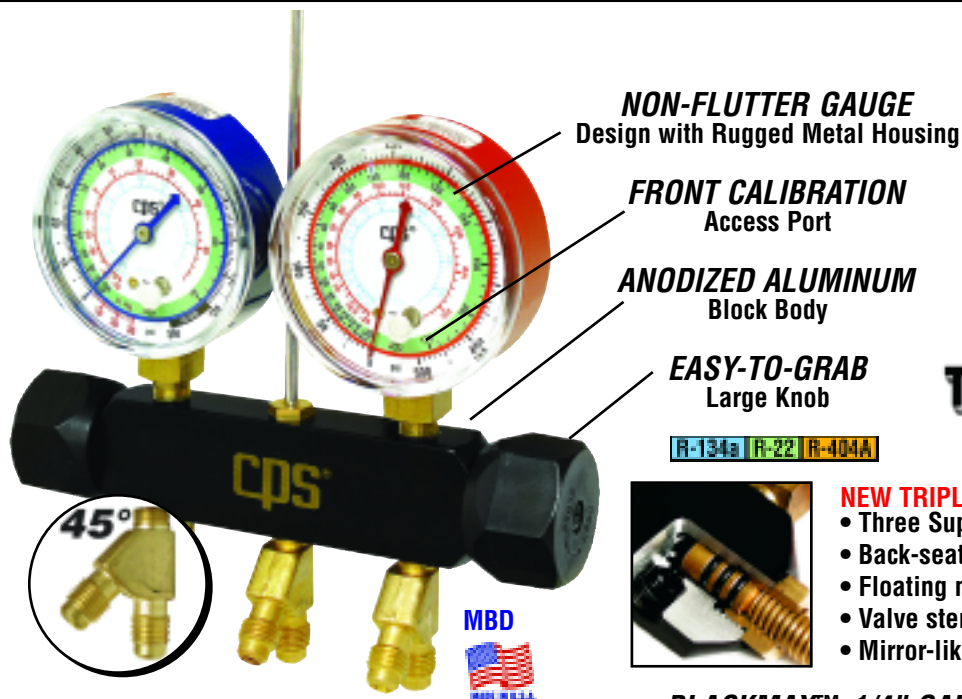

**NON-FLUTTER GAUGE**  
Design with Rugged Metal Housing


**FRONT CALIBRATION**  
Access Port

**ANODIZED ALUMINUM**  
Block Body

**EASY-TO-GRAB**  
Large Knob

R-134a R-22 R-404A

MBD

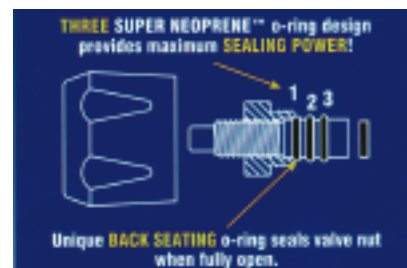

### TRIPLE SEAL™ VALVES

#### NEW TRIPLE-SEAL™ PISTON VALVE SYSTEM

- Three Super Neoprene o-ring design
- Back-seating o-ring seals valve nut when fully open
- Floating nylon sealing disk
- Valve stems retract fully to provide maximum flow
- Mirror-like port finish for smooth valve movement



### BLACKMAX™ 1/4" SAE ON ANODIZED BLACK BODY



MBZS3

R-12 R-134a R-22

(South America/Asia)



MBTP3

R-134a R-22 R-404A

(Australia)

Gauge Description	REGION	North America	North America	South America /Asia	Australia / South America	Australia / South America
	Refrigerant Scales	R12, R22, R502	R134a, R22, R404A	R12, R134a, R22	R134a, R22, R404A	R407C, R22
	Gauge Size/ Type	2.5" / 68mm Dry	2.5" / 68mm Dry	2.5" / 68mm Dry	2.5" / 68mm Dry	2.5" / 68mm Dry
	Pressure Scales	PSI	PSI	PSI / Kpa	PSI / Kpa	PSI / Kpa
	Temperature Scales	°F	°F	°F / °C	°C	°C
Fittings	Manifold and Hose Fittings	1/4" SAE	1/4" SAE	1/4" SAE	1/4" SAE	1/4" SAE
Two Valve Manifolds	Manifold & Gauges Only	MBC	MBD	MBZ	MBT	MBY
	3ft / 90cm Hoses	MBCS3	MBDP3	MBZP3	MBTP3	MBYP3
	5ft / 150cm Hoses	MBCS5	MBDP5	MBZP5	MBTP5	MBYP5
	5ft / 150cm AB Hoses	MBCS5A	MBDP5A	MBZP5A	MBTP5A	MBYP5A
	5ft / 150cm BV Hoses	MBCS5E	MBDP5E	MBZP5E	MBTP5E	MBYP5E
Replacement Gauges	Low Side	RGCL	RGDL	RGZL	RGTL	RGYL
	High Side	RGCH	RGDH	RGZH	RGTH	RGYH



### BLACKMAX™ Manifold For R-410A



MEB

**NON-FLUTTER GAUGE**  
Design with Rugged Metal Housing

**FRONT CALIBRATION**  
Access Port

**ANODIZED ALUMINUM**  
Block Body

**EASY-TO-GRAB**  
Large Knob



MBHP5E

- Exclusive TripleSeal™ valve system
- Valve stems retract fully for maximum flow
- Back seating o-ring seals valve nut when fully open

- No flutter gauges with rugged Metal housings
- Aluminum block
- Additional Schraeder® valve "T" port
- Large easy-to-grip knobs

		Pink Body	Pink Body	Black Body	Pink Body
	REGION	North America	North America	North America	Australia / South America
Gauge Description	Refrigerant Scales	R-410A	R410A, R22, R404A	R410A, R22, R404A	R-410A
	Gauge Size/ Type	2.5" / 68mm Dry	2.5" / 68mm Dry	2.5" / 68mm Dry	2.5" / 68mm Dry
	Pressure Scales	PSI	PSI	PSI	PSI / Kpa
	Temperature Scales	°F / °C	°F	°F	°F / °C

Fittings	Manifold and Hose Fittings	1/4" SAE	1/4" SAE	1/4" SAE	1/2"-20 UNF
----------	----------------------------	----------	----------	----------	-------------

Two Valve Manifolds	Manifold & Gauges Only	MEB	MEH	MBH	MCB
	5ft / 150cm Hoses	MEBP5	MEHP5	MBHP5	MCBJ5
	5ft / 150cm AB Hoses	MEBP5A	MEHP5A	MBHP5A	MCBJ5A
	5ft / 150cm BV Hoses	MEBP5E	N/A	MBHP5E	MCBJ5E

Replacement Gauges	Low Side	RGBL	RGHL	RGHL	RGBL
	High Side	RGBH	RGHH	RGHH	RGBH

### TRIPLE SEAL™ VALVES

- Three Super Neoprene o-ring design
- Back-seating o-ring seals valve nut when fully open
- Floating nylon sealing disk
- Valve stems retract fully to provide maximum flow
- Mirror-like port finish for smooth valve movement



### R-22 to R-410A Adapters




**AD87**  
1/4 "SAE Male x  
Female 1/2 "SAE



**AD78**  
1/4 "SAE Female x  
Male 1/2 "SAE

### 2-Valve Brass Manifolds With 1/4" SAE Fittings

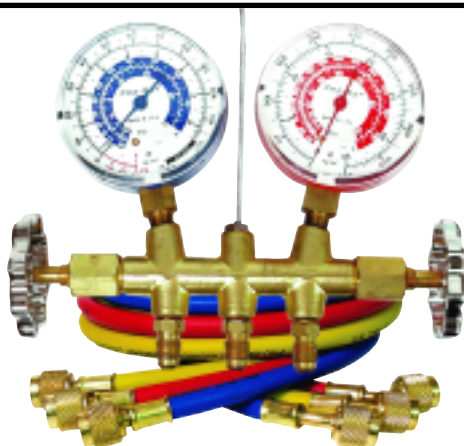


#### Brass Manifolds

- Quality forged brass body
- Sliding double o-ring piston valve system
- Full sized porting for maximum flow
- No flutter gauges with rugged Metal housings
- Large easy-to-grip knobs

Gauge Description	REGION	North America	North America	South America /Asia	South America	South America
	Refrigerant Scales	R12, R22, R502	R134a, R22, R404A	R12, R134a, R22	R134a, R22, R404A	R407C, R22
	Gauge Size/ Type	2.5" / 68mm Dry	2.5" / 68mm Dry	2.5" / 68mm Dry	2.5" / 68mm Dry	2.5" / 68mm Dry
	Pressure Scales	PSI	PSI	PSI / Kpa	PSI / Kpa	PSI / Kpa
Fittings	Temperature Scales	°F	°F	°F / °C	°C	°C
	Manifold and Hose Fittings	1/4" SAE	1/4" SAE	1/4" SAE	1/4" SAE	1/4" SAE
Two Valve Manifolds	Manifold & Gauges Only	M6C	M6D	M6Z	M6T	M6Y
	3ft / 90cm Hoses	M6CS3	M6DP3	M6ZP3	M6TP3	M6YP3
	5ft / 150cm Hoses	M6CS5	M6DP5	M6ZP5	M6TP5	M6YP5
Replacement Gauges	Low Side	RGCL	RGDL	RGZL	RGTL	RGYL
	High Side	RGCH	RGDH	RGZH	RGTH	RGYH

### Manifold Accessories


M2XHA	2-way hose anchor bracket for Vortech & diaphragm
M2XRK	Diaphragm valve repair kit: services 2 valves
M4XHA	4-way hose anchor bracket for Vortech & diaphragm
M4XRK	Diaphragm valve repair kit: services 4 valves
M5XRK	Diaphragm valve repair kit: services 5 valves
MV2XRK	Vortech valve repair kit: services 2 valves
MV4XRK	Vortech valve repair kit: services 4 valves
MV5XRK	Vortech valve repair kit: services 5 valves
MVXK	Replacement valve handle w/ plugs for Vortech manifolds
MXBK	Replacement valve handle for brass manifold
MXC	Plastic carrying case for manifolds
MXK	Replacement valve handle w/ labels for diaphragm manifolds
MXMH	Hanging hook for all manifolds
MXPK	Replacement valve handle w/ labels for BLACKMAX manifolds
MPV	Complete BLACKMAX piston valve assembly
MPVO	BLACKMAX piston valve seals repair kit: services 2 valves

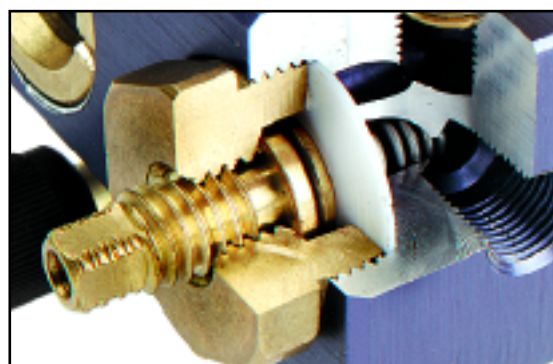



**NEW!**

### PRO-SET® 2 1/2" 68mm Pressure Gauges

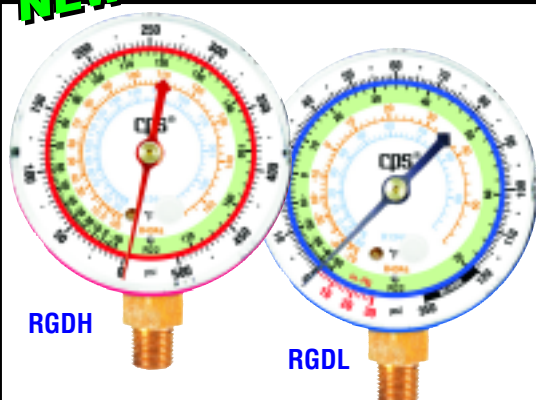


- No-flutter gauge design
- Easy to read color coded dials
- Durable metal casing
- Front calibration access port
- High impact pop-in lexan lens
- 1/8" NPT brass connection

**R-134a R-22 R-404A**



Calibration access port


### PRO-SET® 3 1/8" /80mm Pressure Gauges

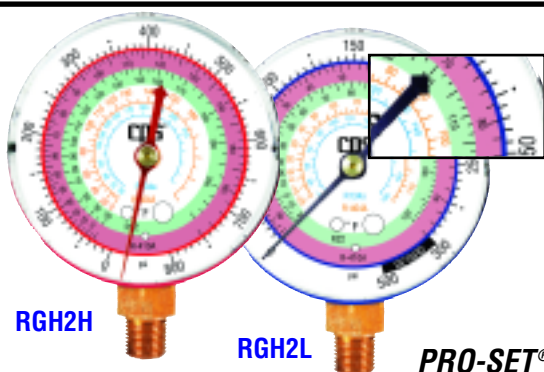

- Extra large easy to read scales
- No-flutter gauge design
- Durable metal casing
- Front calibration access port
- High impact pop-in lexan lens
- 1/8" NPT brass connection

**R-134a R-22 R-404A R-410A**

### PRO-SET® 3 1/8" /80mm Oil-Filled Pressure Gauges

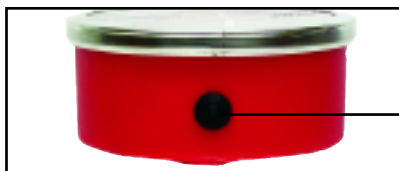



Fill Port

- Extra large scales
- No-flutter gauge design
- Rear calibration access port
- 1/8" NPT brass connection

**R-410A**

### Protective Rubber Gauge Boots

**FITS MOST MANUFACTURERS MODELS**

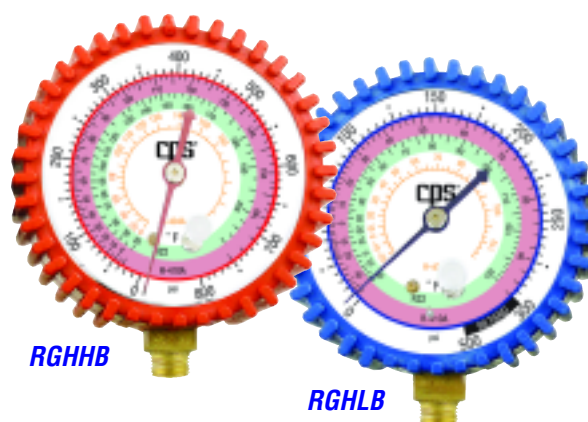

Gauge Boots	Red	Blue
68mm Rubber Boots	RGX68RB	RGX68BB
80mm Rubber Boots	RGX80RB	RGX80BB

### PRO-SET® 2 1/2" / 68mm Pressure Gauges

REGION		North America Australia	North America	North America	North America	South America / Asia	Australia / South America	Australia / South America
Gauge Description	Refrigerant Scales	R410A	R12, R22, R502	R22, R134a, R404A	R410A, R22, R404A	R12, R134a, R22	R134a, R22, R404A	R407C, R22
	Gauge Size/ Type	2.5" / 68mm Dry	2.5" / 68mm Dry	2.5" / 68mm Dry	2.5" / 68mm Dry	2.5" / 68mm Dry	2.5" / 68mm Dry	2.5" / 68mm Dry
	Pressure Scales	PSI / Kpa	PSI	PSI	PSI	PSI / kg/cm	PSI / Kpa	PSI / Kpa
	Temperature Scales	°F / °C	°F	°F	°F	°F / °C	°C	°C
Gauge Only	Low Side	RGBL	RGCL	RGDL	RGHL	RGZL	RGTL	RGYL
	High Side	RGBH	RGCH	RGDH	RGHH	RGZH	RGTH	RGYH
Gauge & Rubber Boot	Low Side	RGBLB	RGCLB	RGDLB	RGHLB	RGZLB	RGTLB	RGYLB
	High Side	RGBHB	RGCHB	RGDHB	RGHHB	RGZHB	RGTHB	RGYHB

RGX68L : Replacement lens for 2.5" / 68mm gauges listed above

RGX68BB : Protective rubber boot for 2.5" / 68mm gauges listed above

RGX68RB : Protective rubber boot for 2.5" / 68mm gauges listed above

### PRO-SET® 3 1/8" / 80mm Pressure Gauges

### Brass Gauge Adapter

REGION		North America	North America	North America	North America	North America	North America Australia	Australia / South America
Gauge Description	Refrigerant Scales	R22, R134a, R404A	R22, R134a, R404A	R12, R22, R502	R410A, R22, R404A, R134A	R410A, R22, R404A, R134A	R410A	R22, R134a, R404A
	Gauge Size/ Type	3 1/8" / 80mm Dry	3 1/8" / 80mm Oil Filled	3 1/8" / 80mm Oil Filled	3 1/8" / 80mm Dry	3 1/8" / 80mm Oil Filled	3 1/8" / 80mm Oil Filled	3 1/8" / 80mm Dry
	Pressure Scales	PSI	PSI	PSI	PSI	PSI	PSI / Kpa	PSI / Kpa
	Temperature Scales	°F	°F	°F	°F	°F	°F / °C	°C
Gauge Only	Low Side	RGD2L	RGD3L	RGML	RGH2L	RGH3L	RGRL	RGPL
	High Side	RGD2H	RGD3H	RGMH	RGH2H	RGH3H	RGRH	RGPH
Gauge & Rubber Boot	Low Side	RGD2B	N/A	N/A	RGH2LB	N/A	N/A	RGPLB
	High Side	RGD2B	N/A	N/A	RGH2HB	N/A	N/A	RGPHB



**ABG18**

**1/4" SAE FM Anti-blowback  
x 1/8" NPT Female  
see page 37**

RGX80L : Replacement lens for 3 1/8" / 80mm gauges listed above

RGX80BB : Protective rubber boot for 3 1/8" / 80mm gauges listed above

RGX80RB : Protective rubber boot for 3 1/8" / 80mm gauges listed above

\* 80mm Boots Do Not Fit Oil-Filled Gauges





## Gas Test Gauge / Fuel Oil Test Kit

### Gas Pressure Test Assemblies

The **GT1** and **GT2** are designed to test the integrity of new installations for pressure leaks. Available with either a 3/4" or 1" FPT brass bell. Simply connect the test assembly, pressurize the system using the supplied access port and monitor the easy-to-read 3 1/2" / 80mm gauge for potential pressure drops that would indicate a leak.



#### **GT1**

##### **GAS TEST GAUGE**

- Large 3 1/8" gauge - easy to read
- 0-30 PSIG (0-2 BAR) pressure scale
- 1 PSIG increments
- 3/4" FPT hex style brass bell
- Access valve



#### **GT2**

##### **GAS TEST GAUGE**

- Large 3 1/8" gauge - easy to read
- 0-100 PSIG (0-7 BAR) pressure scale
- 2 PSIG increments
- 3/4" FPT hex style brass bell
- Access valve

### Fuel Oil Test Kit

The **GT3** is a comprehensive test kit which includes the components necessary to test oil fuel pump performance while diagnosing related burner efficiency issues such as cleaner light-offs and coasting stops.



#### **GT3**



Carrying case included with kit

#### **FUEL OIL TEST KIT**

##### **Includes:**


- 2 1/2" gauge, scale 30", 0-150 lbs.
- 2 1/2" gauge, scale 30", 0-300 lbs
- 12" hose 1/4" Fem swivel x 1/4" Fem 45° swivel
- 1/8 NPT x 1/4 Male SAE adapter
- 1/8 NPT x 1/4 Male SAE 90° adapter
- 1/4 NPT x 1/4 Male SAE adapter
- 1/4 NPT x 1/4 Male SAE 90° adapter
- Carrying Case



## STANDARD CHARGING HOSES

### STANDARD

- All-weather flexibility and strength
- Extra deep knurling on nuts for easy grip
- 750 psi working pressure; 3000 psi burst
- 1/4" SAE fittings with 45° bend on one end
- Available with MicroSeal™ or ball valve fittings
- Leak-proof eight-sided crimp
- Blow-off grooves channel refrigerant to prevent spray back

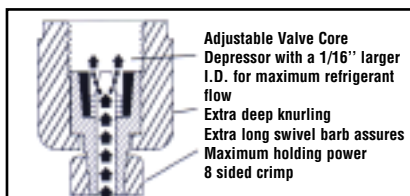


### PREMIUM

- R-410A Compatible
- 800 psi working pressure; 4000 psi burst
- Environment friendly Nylon Permeation Barrier meets SAE J2196
- Compatible with CFC, HCFC and HFC refrigerants & blends
- Available with MicroSeal™ or ball valve fittings

Adjustable valve core depressor opens all out of tolerance Schraeder® valves.

### 1/4" Standard Hoses

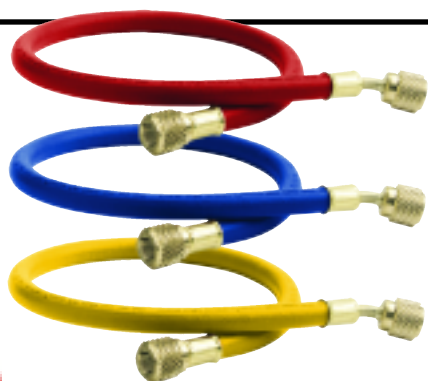

LENGTH	YELLOW	BLUE	RED	3-PACK
3' - 90cm	HS3Y	HS3B	HS3R	HS3
4' - 120cm	HS4Y	HS4B	HS4R	HS4
5' - 150cm	HS5Y	HS5B	HS5R	HS5
6' - 180cm	HS6Y	HS6B	HS6R	HS6
8' - 240cm	HS8Y	HS8B	HS8R	HS8
10' - 300cm	HS10Y	HS10B	HS10R	HS10

HXG - Replacements 1/4" Gaskets (10)

HXD - Replacements Depressors (10)

### 1/4" Standard Hoses With 45° Ball Valve On End


LENGTH	YELLOW	BLUE	RED	3-PACK
3' - 90cm	HS3YE	HS3BE	HS3RE	HS3E
5' - 150cm	HS5YE	HS5BE	HS5RE	HS5E
6' - 180cm	HS6YE	HS6BE	HS6RE	HS6E
8' - 240cm	HS8YE	HS8BE	HS8RE	HS8E

HXG - Replacements 1/4" Gaskets (10)

HXD - Replacements Depressors (10)



### 1/4" Standard Hoses With MICROSEAL™ Anti-Blowback Valve On One End

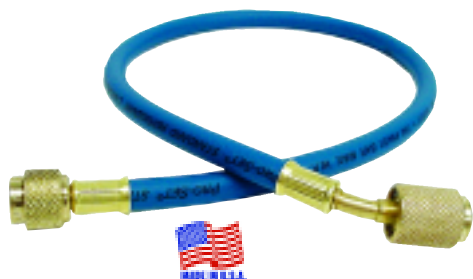

Super compact design (.75" x 1", 19mm x 25mm) enables access to service ports in tight quarters

LENGTH	YELLOW	BLUE	RED	3-PACK
3' - 90cm	HS3YA	HS3BA	HS3RA	HS3A
5' - 150cm	HS5YA	HS5BA	HS5RA	HS5A
6' - 180cm	HS6YA	HS6BA	HS6RA	HS6A
8' - 240cm	HS8YA	HS8BA	HS8RA	HS8A

HXG - Replacements 1/4" Gaskets (10)


HXD - Replacements Depressors (10)

### 1/4" Standard In-Line Ball Valve Hoses

LENGTH	YELLOW	BLUE	RED	3-PACK
3' - 90cm	HS3YL	HS3BL	HS3RL	HS3L
5' - 150cm	HS5YL	HS5BL	HS5RL	HS5L
6' - 180cm	HS6YL	HS6BL	HS6RL	HS6L
8' - 240cm	HS8YL	HS8BL	HS8RL	HS8L

HXG - Replacements 1/4" Gaskets (10)

HXD - Replacements Depressors (10)

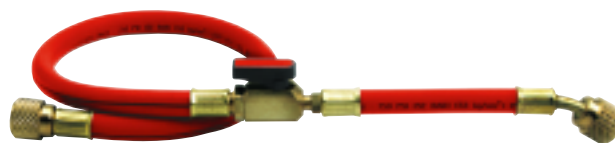






## PREMIUM CHARGING HOSES

### 1/4" Premium Hoses For All Refrigerants


LENGTH	YELLOW	BLUE	RED	3-PACK
3' - 90cm	HP3Y	HP3B	HP3R	HP3
5' - 150cm	HP5Y	HP5B	HP5R	HP5
6' - 180cm	HP6Y	HP6B	HP6R	HP6

HXG - Replacement 1/4" Gaskets (10)

HXD - Replacement Depressors (10)

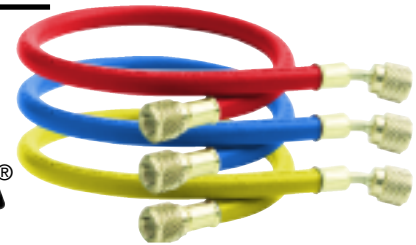

### 1/4" Premium Hoses With 45° Ball Valve On End

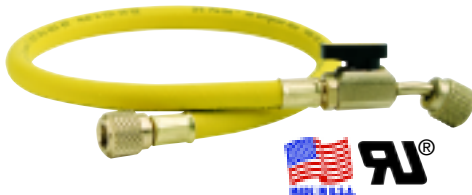

LENGTH	YELLOW	BLUE	RED	3-PACK
3' - 90cm	HP3YE	HP3BE	HP3RE	HP3E
5' - 150cm	HP5YE	HP5BE	HP5RE	HP5E
6' - 180cm	HP6YE	HP6BE	HP6RE	HP6E

HXG - Replacement 1/4" Gaskets (10)

HXD - Replacement Depressors (10)


### 1/4" Premium Hoses With MICROSEAL™ Anti-Blowback Valve On One End

LENGTH	YELLOW	BLUE	RED	3-PACK
3' - 90cm	HP3YA	HP3BA	HP3RA	HP3A
5' - 150cm	HP5YA	HP5BA	HP5RA	HP5A
6' - 180cm	HP6YA	HP6BA	HP6RA	HP6A


HXGA - Replacements Gaskets (6)



Super compact design (.75" x 1", 19mm x 25mm) enables access to service ports in tight quarters

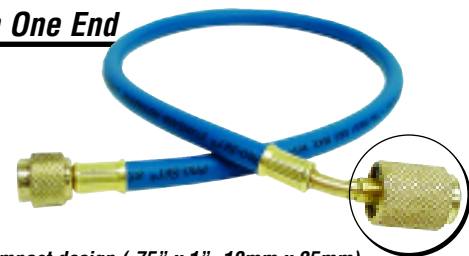

### 1/4" Premium In-Line Ball Valve Hoses

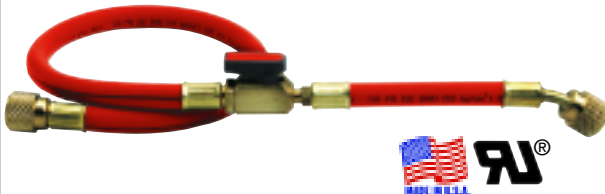

LENGTH	YELLOW	BLUE	RED	3-PACK
3' - 90cm	HP3YL	HP3BL	HP3RL	HP3L
5' - 150cm	HP5YL	HP5BL	HP5RL	HP5L
6' - 180cm	HP6YL	HP6BL	HP6RL	HP6L

HXG - Replacement 1/4" Gaskets (10)

HXD - Replacement Depressors (10)

### R-410A Premium Hose w/ Special 1/2"-20 UNF Fittings

**R-410A**

LENGTH	YELLOW	BLUE	RED	3-PACK
3' - 90cm	HJ3Y	HJ3B	HJ3R	HJ3
5' - 150cm	HJ5Y	HJ5B	HJ5R	HJ5

WITH 45° BALL VALVE FITTING IN ONE END				
3' - 90cm	HJ3YE	HJ3BE	HJ3RE	HJ3E
5' - 150cm	HJ5YE	HJ5BE	HJ5RE	HJ5E

HXG2 - Gaskets (10) (1/2" ACME) & (1/2" - 20 UNF)

HXTG2 - Teflon Gaskets (10) (1/2" ACME) & (1/2" - 20 UNF)

HXD - Replacement Depressors (10)

### 6" - 12" Ball Valve Hose Extensions



LENGTH	FITTINGS	YELLOW	BLUE	RED	3 - PACK
6"	1/4 SAE	HTYE	HTBE	HTRE	HTE
12"	1/4 SAE	HT1YE	HT1BE	HT1RE	HT1E
6"	1/2-20 UNF	HT410YEJ	HT410BEJ	HT410REJ	HT410EJ



**PRO-SET®****SPECIALTY HOSES, REPLACEMENT GASKETS & DEPRESSORS*****Premium Pressure Control Hoses***

- Replaces Standard Copper Capillary Tubing
- 1/4" SAE Hex Style Fittings
- Do not exceed 203°F (95°C) for long term use

LENGTH	90° x 90°	Straight x 90°
2' - 60cm	HHC2	HHC2S
3' - 90cm	HHC3	HHC3S
4' - 120cm	HHC4	HHC4S

***Premium 3/8" Vacuum/Charging Hoses***

- 5/16" I.D. heavy-duty hose
- Permeation resistant barrier
- 460 psi working pressure; 2300 psi burst



HOSE P/N	LENGTH
WITHOUT BALL VALVE	
HV3	3' - 90cm
HV5	5' - 150cm
HV6	6' - 180cm
HV8	8' - 240cm

HOSE P/N	LENGTH
WITH IN-LINE BALL VALVE	
HV5E	5' - 150cm

HX38G - Replacement 3/8" Gaskets (10)


see page 51  
Automotive  
Section

QCH14

high side

QCL14


low side

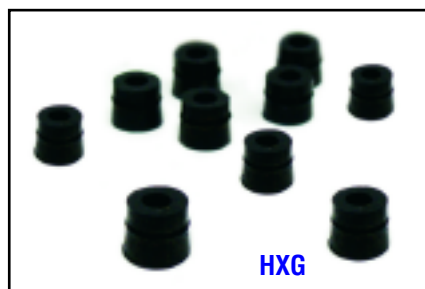***Replacement Hose Gaskets, Depressors & O-Rings***

HXG



HXGD

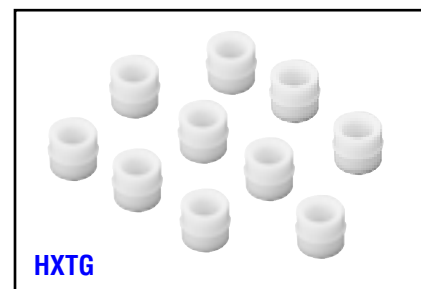

HXTG



HXGD2



HXD

ITEM	PARTS DESCRIPTION
HXGD2	1/2"-20 UNF 1/2" ACME Hose Gaskets w/ Core Depressor
HX3G	3/16" Hose Gasket (10)
HX14R	14mm Hose Rings (10)
HX38G	3/8" Hose Gaskets (10)
HXG2	1/2" UNF 1/2" ACME Hose Gaskets (10)
HXD	1/4" SAE Hose Core Depressors (10)

ITEM	PARTS DESCRIPTION
HXGA	Microseal™ Antiblowback gaskets (10)
HXGA410	1/2"-20 UNF Microseal™ Antiblowback gaskets (10)
HXTG	1/4" SAE Teflon hose gasket (10)
HXTG2	1/2"-20 UNF & 1/2" ACME Teflon hose gasket (10)



### PRO-SET® Ball Valves

## PRO-SET®

- Add to existing hose to eliminate refrigerant loss and comply with EPA regulations
- Easy 1/4 turn open/close with rugged plastic composite color-coded handles
- Oversized chrome ball for smooth operation and non-restrictive flow
- Individual valves include all three color-coded handle inserts

#### MALE x MALE FULL FLOW BALL VALVE




#### BVM

1/4" SAE Male, x 1/4" SAE Male



#### 90° SWIVEL ELBOW x MALE FLOW FLOW BALL VALVE



#### BV90

1/4" SAE Female, x 1/4" SAE Male



#### 45° SWIVEL ELBOW x MALE FULL FLOW BALL VALVE



#### BV45

1/4" SAE Female, x 1/4" SAE Male



#### SWIVEL NUT STRAIGHT x MALE FULL FLOW BALL VALVE



#### BV

1/4" SAE Female, x 1/4" SAE Male



Item	Qty / Pk	Female	Female	Other
BV	1	1/4" SAE	1/4" SAE	Straight
BV3	3	1/4" SAE	1/4" SAE	Straight
BV38	1	3/8" SAE	3/8" SAE	Straight
BV410	1	1/2" - 20 UNF	1/2" - 20 UNF	Straight
BV41018	1		1/2" 20 UNF x 1/8" MNPT	Straight
BV4103	3	1/2" - 20 UNF	1/2" - 20 UNF	Straight
BV41090A	1	1/2" - 20 UNF 90°	1/4" SAE	90° FM
BV410A	1	1/2" - 20 UNF	1/4" SAE	Straight
BV45	1	1/4" SAE 45°	1/4" SAE	45° FM
BV453	3	1/4" SAE 45°	1/4" SAE	45° FM
BV90	1	1/4" SAE 90°	1/4" SAE	90° FM
BV903	3	1/4" SAE 90°	1/4" SAE	90° FM
BVAD38	1	3/8" SAE	1/4" SAE	Straight
BVBH	1		1/4" SAE x 1/16" MNPT	Bulkhead
BVM	1		1/4" SAE x 1/4" SAE	Straight
BVM3	3		1/4" SAE x 1/4" SAE	Straight
BVXH	3	Replacement Ball Valve Handle w/1 ea (Yellow, Blue, Red) inserts		

### Brass Gauge Adapter



#### ABG18

1/4" SAE FM Anti-blowback  
x 1/8" NPT Female



### MICROSEAL™ Anti-Blowback Valves

- Advanced automatic sealing valve eliminates refrigerant loss and blowback
- New micro valve technology enables use on systems with limited access to service ports
- Add to existing hose to eliminate refrigerant loss and comply with EPA regulations
- Deep easy grip knurling and non-restrictive porting for maximum refrigerant flow
- Up to 25% smaller O.D. than similar competitive models

Item	Qty / Pk	Female	Male	Other
AB	1	1/4" SAE	1/4" SAE	Straight
AB12	1	1/2" ACME	1/2" ACME	Straight
AB3	3	1/4" SAE	1/4" SAE	Straight
AB410	1	1/2" - 20 UNF	1/2" - 20 UNF	Straight
AB4103	3	1/2" - 20 UNF	1/2" - 20 UNF	Straight
AB41090A	1	1/2" - 20 UNF	1/4" SAE	90° FM
AB410A	1	1/2" - 20 UNF	1/4" SAE	Straight
AB90	1	1/4" SAE 90°	1/4" SAE	90° FM
AB903	3	1/4" SAE 90°	1/4" SAE	90° FM
ABG18	1	1/4" SAE x 1/8" FNPT		1/8" FNPT is not an AB

\*HXGA - Replacement O Rings (6)



#### AB90



#### AB

### HVAC/R ADAPTERS



AD12



AD41/AD61/AD81



AD47



AVC4



AD44



AD68



AD78/AD87

ITEM	QTY	FEMALE	MALE	OTHER	APPLICATION
AD12		1/2" ACME	LO-side R-134a	Bulk	R-134a automotive tanks
AD12B	100	1/2" ACME	LO-side R-134a	Bulk	R-134a automotive tanks
AD14	-	-	14mm x 1/4" SAE		R-134a automotive couplers
AD14B	100	-	14mm x 1/4" SAE	Bulk	R-134a automotive couplers
AD18C	-	1/4" SAE	1/8" SAE	w/ valve core	Manifolds, Compressors
AD24	6	-	1/4" SAE x 1/8" MNPT	w/cap & valve core	Manifolds, Compressors
AD24B	100	-	1/4" SAE x 1/8" MNPT	Bulk	1/4" Service Manifolds
AD36	1	3/16" SAE	1/4" SAE	w/ valve core	TLVC Valve Core Tool for R-12 Auto. HI-side
AD36C	-	3/16" SAE	1/4" SAE	w/ valve core	-
AD41	1	3/4" -14	1/4" SAE	-	Large 125 lb cylinders
AD41B	100	3/4" -14	1/4" SAE	Bulk	Large 125 lb cylinders
AD61	1	3/4" -14	3/8" SAE		Large 125 lb cylinders
AD61B	100	3/4" -14	3/8" SAE	Bulk	Large 125 lb cylinders
AD44	6	-	1/4" SAE x 1/4" MNPT	w/cap & valve core	Vacuum Pumps, Compressors
AD44B	100	-	1/4" SAE x 1/4" MNPT	Bulk	Vacuum Pumps, Compressors
AD47	1	-	1/4" SAE X 1/4" SAE	-	1/4" Hose Union
AD47B	100	-	1/4" SAE X 1/4" SAE	Bulk	1/4" Hose Union
AD48	3	1/4" SAE	1/2" ACME	-	Vacuum Pumps/Manifolds/Recovery/Tanks
AD48B	50	1/4" SAE	1/2" ACME	Bulk	Vacuum Pumps/Manifolds/Recovery/Tanks
AD48C	300	1/4" SAE	1/2" ACME	no valve core	Vacuum Pumps/Manifolds/Recovery/Tanks
AD68	3	1/4" SAE	3/8" SAE	-	Vacuum Pumps
AD68V	-	1/2" ACME	3/8" SAE	male adapter	Vacuum Pumps
AD78	1	1/4" SAE	1/2"-20 UNF	w/core & Depressor	R-410A International
AD78B	100	1/4" SAE	1/2"-20 UNF	w/core & Depressor Bulk	R-410A International
AD81	1	3/4" -14	1/2" ACME	-	Large 125 lb cylinder
AD81B	100	3/4" -14	1/2" ACME	Bulk	Large 125 lb cylinder
AD84	3	1/2" ACME	1/4" SAE	-	Vacuum Pumps/Manifolds/Recovery/Tanks
AD84B	100	1/2" ACME	1/4" SAE	Bulk	Vacuum Pumps/Manifolds/Recovery/Tanks
AD84C	3	1/2" ACME	1/4" SAE	w/Core	Vacuum Pumps/Manifolds/Recovery/Tanks
AD87	1	1/2"-20 UNF	1/4" SAE	w/core & Depressor	R-410A International
AD87S	1	1/2"-20 UNF SWVL	1/4" 55° SAE	w/core & Depressor	R-410A International
AD149C	1	1/4" SAE	1/4" 90°SAE	adapter w/ valve core	-
AD369C	1	3/16" SAE	1/4" 90°SAE	adapter w/ valve core	-
AD849C	3	1/2" ACME 90°	1/4" SAE	w/Core	Vacuum Pumps/Manifolds/Recovery/Tanks
ADGM	R-12 GM POSI-SEAL ADAPTER				
ADK12	DELUXE PRO-SET R-12 ADAPTER KIT				

see page 50 for automotive adapters



### Quick Seal O-Ring Caps & Valve Cores

ITEM	Qty./Pk.	Description
AVC134C	2	1/2" ACME Brass Caps w/Chain
AVC134CB	100	1/2" ACME Brass Caps w/Chain (BULK)
AVC134H	10	R-134a HI Side Caps
AVC134HB	100	R-134a HI Side Caps
AVC134L	10	R-134a LO Side Caps
AVC134LB	100	R-134a LO Side Caps
AVC134PS	2	1/2" ACME Plastic Cap w/ Straps
AVC134PSB	100	1/2" ACME Plastic Cap w/ Straps
AVC2	10	1/4" Aluminum Term Caps
AVC3	10	3/16" Aluminum Term Caps
AVC3P	10	3/16" Plastic Caps
AVC3PB	10	3/16" Plastic Caps
AVC410	10	1/2"-20 UNF SAE Brass Caps
AVC410B	100	1/2"-20 UNF SAE Brass Caps
AVC410C	2	1/2" -20 UNF SAE Brass Caps w/ Chain
AVC410CB	100	1/2" -20 UNF SAE Brass Caps w/ Chain (BULK)
AVC4	10	1/4" SAE Brass Caps
AVC425	25	1/4" SAE Brass Caps
AVC4B	100	1/4" SAE Brass Caps Bulk
AVC4C	2	1/4" SAE Brass Caps w/ Chain
AVC4CB	100	1/4" SAE Brass Caps w/ Chain (BULK)
AVC4P	6	1/4" SAE Plastic Caps
AVC4PB	100	1/4" SAE Plastic Caps
AVC6C	2	3/8" SAE Brass Caps w/ Chain
AVC6CB	100	3/8" SAE Brass Caps w/ Chain (BULK)

ITEM	Qty./Pk.	Description
AVC8C	2	1/2" SAE Brass Caps w/ Chain
AVC8BC	100	1/2" SAE Brass Caps w/ Chain (BULK)
AVC4PS	6	1/4" SAE Plastic Caps w/ Straps
AVC4R	6	1/4" SAE Brass Caps w/ Core Remover
AVC4RB	100	1/4" SAE Brass Caps w/ Core Remover Bulk
AVC6P	3	3/8" SAE Plastic Caps
AVLP	1	Univ. Line Tap Valve 3/16" - 3/8" O.D.
AVS1	10	Valve Cores
AVS1V	6	Valve Cores- 6pk. w/ 1 Brass Cap in Vial
AVS125	25	Valve Cores
AVS1B	100	Valve Cores Bulk
AVS1BC	1000	Valve Cores Bulk
AVS2	10	GM Large Bore Valve Core
AVS3	10	JRA 6mm Valve Cores

**NEW!**



**AVS1V - VALVE CORE KIT**  
Handy pocket sized kit includes a valve core remover/installer and 6 premium 1/4" valve cores all packaged in a small clear plastic tube.




### Valve Core Tool Accessories

ITEM	DESCRIPTION
TLVC	1/4" SAE Remover & Installer
TLVCS	1/4" SAE valve core remover & installer w/side port
TLVC1	Standard Valve Core w/3 cores
TLVC2	Dual Valve Core Standard & Large Bore Remover/Installer
TLVC2B	Dual valve core tool (Bulk 100pk)
TLVC4	Valve Core Remover/Installer with Port Rethreader
TLVC6	JRA 6mm Valve Core Remover/Installer
TLVC134	R-134a Valve Core Remover & Installer
TLVC410	1/2"-20 UNF Remover/Installer
TLVCS410	1/2"-20 UNF Valve Core Remover/Installer w/side port
TLVC810	EATON 8 & 10mm Valve Core Remover/Installer
TLXVCBC	Broken Schrader Extractor Tool for TLVC/TLVCS
TLXVCRT	Schrader Rethreading Tool for TLVC/TLVCS
TLXVCT	Digital Thermometer Accessory for TLVC/TLVCS
TLXVC410BC	Broken Schrader Extractor Tool for TLVC410/TLVCS410
TLXVC410RT	Schrader Rethreading Tool for TLVC410/TLVCS410



**TLXVCT**  
Digital Thermometer Accessory

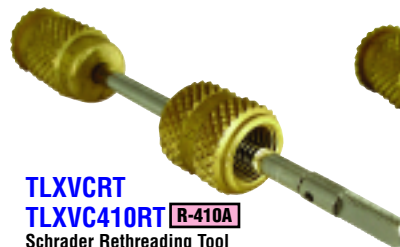

**TLXVCRT**  
**TLXVC410RT** [R-410A]  
Schrader Rethreading Tool



**TLXVCBC**  
**TLXVC410BC** [R-410A]  
Broken Schrader Extractor Tool



**TLVCS**  
**TLVCS410** [R-410A]  
Remover & Installer w/ side port



**TLVC1**  
Standard Valve Core  
w/ 3 cores



**TLVC**  
**TLVC410** [R-410A]  
Valve Core Remover & Installer

### HVAC/R Access Fittings



- Includes Wrench Cap
- For Use with all Refrigerants
- Valves Meet ARI Standard 720-97

- Extension length approx. 2"
- Material is CDA 360 Brass & Standard Refrigeration Tubing

Standard Cap		Description	Wrench Cap	
6pk	100pk		6pk	100pk
AV2	AV2B	1/8" O.D. x 1/16" I.D.	AV2R	AV2RB
AV2P	AV2PB	1/8" MPT x 1/4" I.D.	N/A	N/A
AV3	AV3B	3/16" O.D. x 1/8" I.D.	AV3R	AV3RB
AV4	AV4B	1/4" O.D. x 3/16" I.D.	AV4R	AV4RB
	AV4BU	1/4" O.D. x 3/16" I.D. UNASSMBLD	N/A	N/A
AV4L	AV4LB	1/4" O.D. x 3/16" I.D. W/4" COP-TB EXT	AV4LR	AV4LRB
AV4P	AV4PB	1/4" MPT x 1/4" I.D. SOL	N/A	N/A
AV5	AV5B	5/16" O.D. x 1/4" I.D.	AV5R	AV5RB
AV6	AV6B	3/8" O.D. x 5/16" I.D.	AV6R	AV6RB
AV6MM	AV6MB	6mm O.D. x 5mm I.D.	AV6MR	AV6MRB
AV4410	AV4410B	1/2"-20 ACCES, 1/4" O.D. X 3/16" I.D.	N/A	N/A
AV46M	AV46MB	6mm O.D. x 1/4" O.D.	N/A	N/A

### 1/4" SAE Brass Bodies /Multi-Step Access Valves

**AVB34 - 6PK**  
**AVB34B - 100PK**  
3/16" ID x 1/4" OD



**AVB346 - 6PK**  
**AVB346B - 100PK**  
**AVB346BU - 100PK unassbld**  
**AVB346RB - 100PK cap w/core tool**  
3/16" ID x 1/4" OD x 3/8" OD



**AVB46 - 6PK**  
**AVB46B - 100PK**  
1/4" ID x 3/8" OD



**AVB456 - 6PK**  
**AVB456B - 100PK**  
1/8" ID x 3/16", 1/4", 5/16"



**AVB6 - 6PK**  
**AVB6B - 100PK**  
**AVB6BC - 100PK w/o caps**  
6-8-10mm OD Solder



### 1/4" SAE Tee Connectors




Item	Qty/pk	Description
AVT2P	3	1/4" Male w/Cap & Valve Core x 1/4" Male x 1/8" MNPT
AVT4	3	1/4" Male w/Cap & Valve Core x 1/8" MNPT x 1/4" Male
AVT4B	100	1/4" Male w/Cap & Valve Core x 1/8" MNPT x 1/4" Male
AVT4P	3	1/4" Male w/Cap & Valve Core x 1/4" Male x 1/4" MNPT
AVT4M	3	1/4" Male x 1/8" MNPT x 1/4" Male w/Core
AVT44	3	1/4" Female Hex x 1/4" SAE male x 1/4" male w/Cap & Valve Core

Item	Qty/pk	Description
AVT45	3	1/4" Male x 1/4" Female Knurl x 1/4" Male
AVT48	1	1/4" Male x 1/4" Female Knurl x 1/2" Acme Male
AVT64	3	1/4" Male w/Cap & Valve Core x 1/4" Male x 1/4" Female Hex
AVT64B	100	1/4" Male w/Cap & Valve Core x 1/4" Male x 1/4" Female Hex
AVT87	1	1/4" Male x 1/2"-20 UNF Female x 1/2"-20 UNF Male (R-410A)

### 1/4" SAE Access Valve With Copper Tube On Branch

Item	Qty./Pk.	Description
AVCT4	3	1/4" SAE x 1/4" O.D.F
AVCT4B	100	1/4" SAE x 1/4" O.D.F
AVCT5	3	1/4" SAE x 5/16" O.D.F
AVCT6	3	1/4" SAE x 3/8" O.D.F
AVCT8	3	1/4" SAE x 1/2" O.D.F

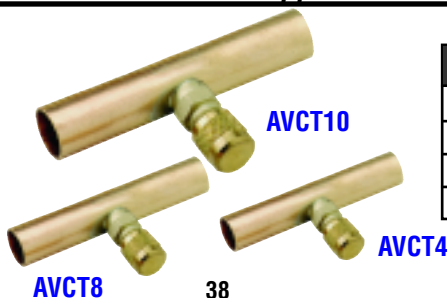

Item	Qty/pk	Description
AVCT10	1	1/4" SAE x 5/8" O.D.F
AVCT12	1	1/4" SAE x 3/4" O.D.F
AVCT14	1	1/4" SAE x 7/8" O.D.F
AVCT18	1	1/4" SAE x 1-1/8" O.D.F



### PRO-SET® Tube Cutters

#### Premium ratchet feedtube cutter



#### Premium tube cutter




#### Heavy duty tube cutter



#### Big mini tube cutter



#### Clearance

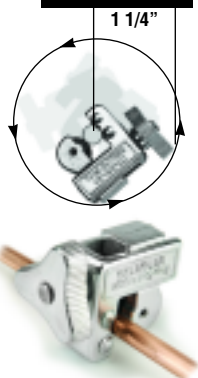

#### Mini tube cutter



#### TCSET



### PRO-SET® Tube Cutters

#### Capillary tube cutter



#### Tube cutter



ITEM	DESCRIPTION
TC127	Mini Tube Cutter - 1/8" - 5/8", 4 - 15 mm
TC174	Big Mini Tube Cutter 3/8" - 1 1/8", 9.5 - 28 mm
TCX7C	TC127 Cutting Wheel- (10 PK)
TCX7S	TC127 Cutting Wheel Screw- (10 PK)
TC274	Tube Cutter 1/8" - 1 1/8", 4 - 28 mm
TC312	Heavy Duty Tube Cutter 1/4" to 1 5/8", 7 to 41 mm
TCX4C	TC274 / 312 Cutting Wheel- (10 PK)
TCX4R	TC274 / TC312 Reamer Blade
TCX4RS	TC274 / TC312 Reamer Blade Screw
TCX4S	TC274 / TC312 Cutting Wheel Screw- (10 PK)
TCAP	Capillary Tube Cutter
TCSET	TC127 / TC274 Tubing Cutter Set
TC100	Tube Cutter - 1/4" - 7/8". 6 - 23mm
TCX4CS	Cutting Wheel and Screw for TC274 / TC312
TCX7CS	Cutting Wheel and Screw for TC127
TCX100CS	Cutting Wheel and Screw for TC100
TCX4CTS	Titanium Cutting Wheel and Screw for TCTC174/274/312
TCX6CTS	Titanium Cutting Wheel and Screw for TC206
TCX7CTS	Titanium Cutting Wheel and Screw for TC127

### PRO-SET® Tube Benders



#### TB250

Universal ratchet tube bender for soft copper, aluminum, and light wall hydraulic tubing from 3/8" to 7/8"  
 Sizes: 1/4", 3/8", 1/2", 5/8", 3/4", 7/8" (6, 8, 10, 12, 16, 19, 22mm)



TC274



REAMER INCLUDED

ITEM	DESCRIPTION
TB04	1/4" Tube Bender
TB05	5/16" - 8 mm Tube Bender
TB06	3/8" Tube Bender
TB08	1/2" Tube Bender
TB10	3/4" Tube Bender
TB12	5/8" Tube Bender
TB14	7/8" Tube Bender
TB250	Universal Tube Bender, TC274, Reamer
TB368	Universal Tube Bender 1/4"-5/16"-3/8" 6-8-10 mm
TB6MM	6 mm Tube Bender
TB10MM	10 mm Tube Bender
TB12MM	12 mm Tube Bender
TB15MM	15 mm Tube Bender
TB16MM	16 mm Tube Bender
TB10XH	TB10 Replacement Hook with Screw
TB12XH	TB12 Replacement Hook with Screw
TBS04	1/4" Spring Tube Bender
TBS05	5/16" Spring Tube Bender
TBS06	3/8" Spring Tube Bender
TBS08	1/2" Spring Tube Bender
TBS10	5/8" Spring Tube Bender
TBS12	3/4" Spring Tube Bender

ITEM	REPLACEMENT ACCESSORIES
TBXB1	Small Bending Bar
TBX2	Large Bending Bar
TBXM10	Mandrel 3/8" / 10MM
TBXM14	Mandrel 1/2" / 14MM
TBXM16	Mandrel 5/8" / 16MM
TBXM19	Mandrel 3/4" / 19MM
TBXM22	Mandrel 7/8" / 22MM
TBXM6	Mandrel 1/4" / 6MM
TBXM8	Mandrel 5/16" / 8MM
TBXR	Ratchet Mechanism



**MULTIPLE BENDING CHANNELS**  
 Compact and Durable Tool With Multiple Bending Capabilities

**TB368**  
 Universal Tube Bender




**TB10**  
 5/8" Tube Bender



**TB08**  
 1/2" Tube Bender



**TB04**  
 1/4" Tube Bender

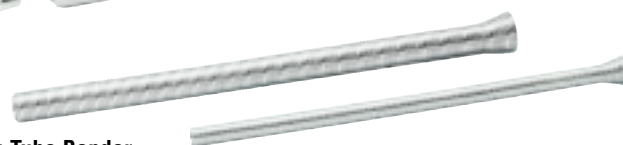

**TBS04**  
 1/4" Spring Tube Bender  
**TBS10**  
 5/8" Spring Tube Bender



## PRO-SET® Flaring & Swaging Tools



**FT500**

### FEATURES OF THE FT500

- Slot in yoke is used for tube height gauge.
- Sliding dies with lever clamping action.
- Yoke slips over top of bar, then locks into position with slight turn.




**FT525**  
Universal/ Adjustable Flaring Tool  
3/16" to 5/8" (5mm to 16mm)



**FT195**  
45° Flaring Tool  
3/16" to 5/8"

**FT203**  
Flaring Tool  
5/8", 3/4", 7/8",  
& 1 1/8" O.D.

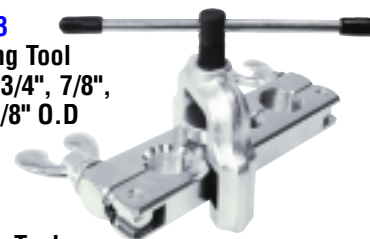


**FT800FN**

**PRO-SET®**

**FT800FN R-410A**

- Engineered specifically to create stronger flare joints for higher pressure R-410A systems.
- Unique clutch driven feed screw and eccentrically mounted cone produces uniform, clean flare walls without galling.
- Exclusive 3/8"sq drive incorporated directly in yoke handle for use with ratchet (included).
- Rugged polyethylene storage case included.

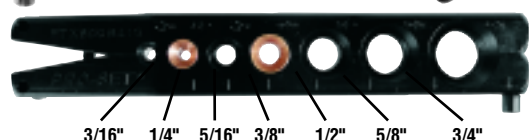

3/16" 1/4" 5/16" 3/8" 1/2" 5/8" 3/4"

Also Available FT806A / FT806M



**FS275**  
45° Flaring & Swaging Kit  
1/8" - 3/4"

## PRO-SET® Flaring Tools, Kits, Replacement Parts

*\*All flaring tools listed are recommended for softer thin-walled materials such as copper, aluminum, and brass*

ITEM	DESCRIPTION
FS226	Tube Cutting/Double Flaring Set 1/8" - 3/4"
FS226M	Metric Tube Cutting/Double Flaring Set 4.75, 6, 8, 10mm
FS275	45° Flaring & Swaging Kit 1/8" - 3/4"
FS275M	45° Flaring & Swaging Kit Metric
FSX501	FS275 Bar 7/16", 1/4", 1/8", 3/16", 5/16", 3/8"
FSX502	FS275 Short Bar 1/2", 5/8", 3/4" O.D.
FSX503	FS275 5/16" Swaging Adapter
FSX504	FS275 3/16" Swaging Adapter
FSX505	FS275 1/2" Swaging Adapter
FSX506	FS275 5/8" Swaging Adapter
FSX507	FS275M 8, 12, 14, 16, 22 MM Swaging Adapter
FSX508	FS275 3/4" Swaging Adapter
FSX509	FS275 Yoke Assembly
FSX511	FS275M 15, 16mm Flaring Bar Metric
FSX512	FS275M 4, 18, 22mm Flaring Bar Metric
FSX513	FS275 Compressor Cone
FT195	45° Flaring Tool 3/16" to 5/8"
FT500	45° Flaring/Burning Tool Metric 3/16" TO 5/8"
FT500M	45° Flaring/Burning Tool Metric 6mm to 16mm
FT525	Adjustable Flaring Tool 3/16" to 5/8" / 5 to 16mm

ITEM	DESCRIPTION
FT800FN	R-410A Imperial Concentric Flaring Tool w/Ratchet 3/16", 1/4", 5/16" 3/8", 1/2", 5/8", 3/4"
FT806A	Imperial Eccentric Flaring Tool w/Ratchet 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4"
FT806M	Metric Eccentric Flaring Tool w/Ratchet 6, 8, 10, 12, 15, 16, 18mm
FTX500	FT195 Yoke Assembly
FTX501	FT195 Flaring Bar 5/16", 3/8", 7/16"
FTX509	FT195 Compressor Cone
FTX510	FT195 Wing Nut
FTX513	FT500 Yoke Assembly
FTX514	FT500 Die Holder Assembly
FTX515	FT500M Die Holder Assembly
FTX516	FT525 Yoke Assembly
FTX517	FT525 Tube Holding Assembly
FTX518	FS275 Yoke Assembly
FTX800B410	FT800FN R410A Imperial Flaring Bar
FTX800BA	FT806A Imperial Flaring Bar
FTX800BM	FT806M Metric Flaring Bar
FTX800R	Ratchet for FT800FN/FT806A/FT806M
FTX800Y	Yoke Assembly FT800FN/FT806A/FT806M

### PRO-SET® Tube Expander/Swaging Set



TLE6/TLE6M (metric)

- Create professional grade one seam pipe unions in the field.
- Multi-faceted interchangeable heads ensure equal linear expansion of tubing and uniformed wall thickness.
- Extended handle length provides added leverage for ease of operation.
- Re-round deformed tubing and fabricate couplings.
- Components are heat treated for durability.
- Ideal for copper, aluminum and soft steel tubing.
- Includes storage case for long-term protection.

Accessory Heads	
Imperial	
Model	Size
TLE6	Tube expander set with 6 heads 3/8", 1/2", 5/8", 3/4", 7/8", 1 1/8"
TLE6M	Tube expander set with case includes: 10, 12, 15, 18, 22, 28mm
TLE601	Expander tool only
TLH06	3/8" Expander Head (Standard in TLE6)
TLH08	1/2" Expander Head (Standard in TLE6)
TLH10	5/8" Expander Head (Standard in TLE6)
TLH12	3/4" Expander Head (Standard in TLE6)
TLH14	7/8" Expander Head (Standard in TLE6)
TLH16	1" Expander Head
TLH18	1 1/8" Expander Head (Standard in TLE6)
TLH22	1 3/8" Expander Head
TLH26	1 5/8" Expander Head
Metric	
Model	Size
TLHM10	10mm Expander Head (Standard in TLE6M)
TLHM12	12mm Expander Head (Standard in TLE6M)
TLHM15	15mm Expander Head (Standard in TLE6M)
TLHM16	16mm Expander Head
TLHM18	18mm Expander Head (Standard in TLE6M)
TLHM20	20mm Expander Head
TLHM22	22mm Expander Head (Standard in TLE6M)
TLHM28	28mm Expander Head (Standard in TLE6M)
TLHM35	35mm Expander Head
TLHM42	42mm Expander Head



### PRO-SET® Metric Torque Wrench Set



TLTWSM


Professional interchangeable jaw torque wrench set ensures compliance with OEM torque settings for high pressure **R-410A** systems.

- Interchangeable 17, 22, 24, 26, 27 & 29mm jaw sizes.
- Corresponding settings clearly marked on torque wrench in Newton Meters (10-75Nm).
- Provides consistently accurate readings and rugged, trouble free performance.
- Includes storage case for long-term protection.
- 1 year product warranty.

### PRO-SET® Deburring Tools /Universal Reamer Tool



TLDB2 - Pocket Deburring Tool

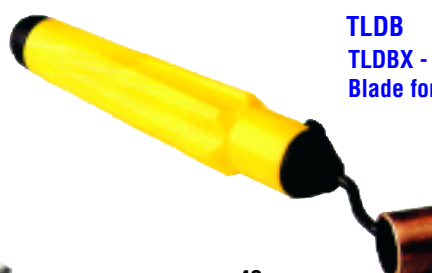

TLDB  
TLDBX - Replacement Blade for TLDB



TLRM




## PRO-SET® 6-in-1 Auto-Loading Screwdriver



### TLSD1

- Patented auto loading bit design
- 6 replaceable industrial grade 1/4" hex bits
- Includes standard valve core tool bit
- Magnetic head holds fastener in place
- Ergonomic high impact housing design
- Standard 1/4" hex drive



Pull handle back to return bit to storage chamber



Rotate handle to select bit



Push handle forward to load bit



## PRO-SET® Specialty Hex Key Wrench Sets



### TLSWH

Inch Hex Key Set:  
3/32", 7/64", 1/8",  
9/64", 5/32", 3/16",  
7/32" and 1/4"  
(Nickel Plated Finish)

\*TLSWHB Two Piece Set:  
Includes TLSWH and TLSWB



### TLSWB

Inch Ball Point Key Set:  
3/32", 7/64", 1/8", 9/64",  
5/32", 3/16", 7/32"  
and 1/4"  
(Nickel Plated Finish)

\*TLSWHB Two Piece Set:  
Includes TLSWH and TLSWB



### TLSWHM

Metric Hex Key Set:  
1.5, 2, 2.5, 3, 4,  
5, 6, 8mm  
(Nickel Plated Finish)



### TLSTW

Torx Wrench Set

## PRO-SET® Swaging / Pinch-Off Tools



### TLPORR

Pinch-Off tool & rerounds tubing on  
1/4", 5/16", 3/8", and 1/2"  
Copper and tubing



### TLPK

Swage Punch Tool



### TLMSP

Multi Swage Punch Tool  
6 sizes- 3/16" to 5/8"

## PRO-SET® Service Pliers



### TLPO

Pinch-Off Pliers



### TLPP

Tube Piercing Pliers 1/4"



### TLPPX

Replacement tip for TLPP

## PRO-SET® Service Wrenches

127 Offset Wrench  
3/8" - 5/16" x 1/4"  
- 3/16" Sq.

### TLSTO



127 Service Wrench  
3/8" - 5/16" x 1/4"  
- 3/16" Sq.

### TLSWS



124 Service Wrench  
1/4" - 3/16" SQ x 9/16"  
1/2" HEX

### TLSWL




### Fin Straightening Tools





**TLFC1**  
Metal Fin  
Straightening Tool



**TLFC2**  
Fin Straightener  
with large handle



**TLFC6**  
Universal 6 Sided  
Fin Straightening Tool  
Repair bent condenser fins  
with the TLFC6 Universal 6  
sided fin comb straightening  
tool.

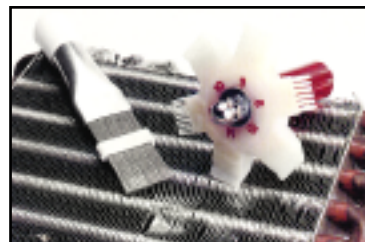

### PRO-SET® Inspection Mirrors



**TLMIR1**

**TLMIR2**

**TLMIR3**

**TLMIR4**

ITEM	DESCRIPTION
TLMIR1	Circular Telescoping Pocket Mirror ø 1.25"
TLMIR2	Circular Telescoping Mirror ø 2.24"
TLMIR3	Rectangular Telescoping Mirror 3.5 x 2.12"
TLMIR4	Oval Pocket Mirror 2 x .98"
TLXMIR1	Replacement Mirror Head for TLMIR1
TLXMIR2	Replacement Mirror Head for TLMIR2
TLXMIR3	Replacement Mirror Head for TLMIR3
TLXMIR4	Replacement Mirror Head for TLMIR4


### Solenoid Magnet

The **TLMKC18** is designed to manually open solenoid valves by magnetically lifting the stem assembly and plunger. Simply slide the TLMKC18 over the valve's enclosing tube and the industrial grade magnets incorporated inside the rugged ABS plastic housing does the rest. It is an ideal tool for trouble shooting/servicing both direct connected or pilot operated 2-way solenoid, 3-way reclaim or 4-way reversing valves.

\* 0.75"/18mm opening fits all common manufactured valves



**TLMKC18**

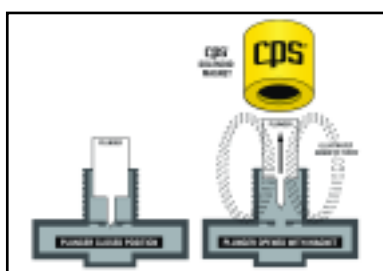

### Compact Magnetizer/Demagnetizer

Use the **TLMAG1** to magnetize tools in order to keep small screws and nuts in position, especially helpful when working in confined spaces, or demagnetize tools when working on or near electronic circuit boards. Simply insert a screwdriver or nut driver into the (+) opening, slowly draw it out and it's magnetized. Leave the magnetizer on the tool for extra strength. To demagnetize, slowly draw the tool through the smallest area of the (-) opening. The TLMAG1 is an essential tool for the professional and do-it-yourselfer alike.

- Instantly Magnetize or Demagnetize Steel Tools & Parts
- Incorporates Two C5 Industrial Strength Magnets
- Impact Resistant ABS Molded Plastic
- No Batteries or Electricity Required
- Compact Design: 2" x 2" x 1"



**TLMAG1**





### Composite Handle Adjustable Wrench

***Super-strong tool that exceeds ANSI specifications providing years of service.***



- Patented Light Weight Composite Handle Design
- Ergonomic, Comfortable Grip Reduces Fatigue
- Wide Jaw Opening With 45% More Torque
- Precision Machined for Smooth Operation
- Durable and Environment-Resistant
- One Year Warranty

### Duct Knives

Used to fabricate fiberglass duct board. Stainless steel double edge resharpenable blade facilitates easy piercing for inside cuts. The double edge is also ideal for tapping into and trimming flex duct. Available with either ergonomic cushioned or a comfortable walnut wooden handle.

A double edge also ideal for tapping into and trimming flex duct.



**TLDKRH**  
6" (152 mm.)

**TLDKWH**  
6" (152 mm.)  
Net Weight: 5 oz. (142 g.)



### Rechargeable Anodized Aluminum LED Work Light

Simply the best work light you will ever own, the **TLWL53A** is precision machined from aircraft grade aluminum and anodized for long life. Fifty three proprietary high output LEDs are incorporated in the work light segment with a 1W Luxeon LED integrated in the top. A powerful 2500mAh Ni-Mh rechargeable battery keeps the lights burning for hours; 7-8 hours for Luxeon spot, 4-5 hours for 53 white LEDs. The professional quality and intense output of the TLWL53A outperforms many competitive units incorporating 70 or more standard LEDs. Ideal for air conditioning contractors municipalities, law enforcement, fire fighters, automotive technicians, and wherever else a high performance, professional, durable work light is needed.

# MOONLIGHT™


- Rugged Anodized Aluminum Body
- Super Bright 1W Luxeon Spot
- 53 Proprietary High Lumen Output LEDs
- Integrated 2500mAh 3.5V Rechargeable Battery
- Strong magnetic base for attaching to metal surfaces
- Universal UL/CUL Electronic Wall and Car Chargers Included
- Superior Durability and Shock Resistance
- High Quality Reflector Lens
- One Year Warranty
- Wall and Car charger Included



**TLWL53A**



**Super Bright 1W Luxeon Spot**



**53 Proprietary High Lumen Output LEDs**



**Strong magnetic base for attaching to metal surfaces**