

Refrigeration Products

Condensed Catalog



Table of Contents

Reach-In Unit Coolers

Model TA Thin Profile Air Defrost.....	3
Model TL Thin Profile Electric Defrost	3
Model C High Profile Air Defrost.....	3
Model VA V-Profile Air Defrost	4
Models BBM, BBL Back Bar	4
Model KMK Standard Mullion.....	4
Model RAMK Reverse Air Mullion.....	5
Model BTO Twin Flow	5
Model U Dual Aire®	5
Models LTA, LTL Extended Thin Profile Unit Cooler.....	6

Walk-In Unit Coolers

Model LCA6 Compak Air Defrost	6
Models LCE6, LCE4 Compak Electric Defrost.....	7
Model LCH6, LCH4 Compak Hot Gas Defrost	7
Model LFA Lo Flow Low Velocity Air Defrost	8
Model LFAE Lo Flow Low Velocity Electric Defrost.....	8
Model LFAH Lo Flow Low Velocity Hot Gas Defrost.....	8
Model LWA Low Velocity Center Mount Air Defrost	9
Model LWE Low Velocity Center Mount Electric Defrost.....	9
Model LWG Low Velocity Center Mount Hot Gas Defrost.....	9
Model ACM Center Mount Air Defrost.....	10
Model ECM Center Mount Electric Defrost	10
Model MMT6 Medium Profile Air Defrost.....	10
Models MLT6, MLT4 Medium Profile Electric Defrost	11
Models MLG6, MLG4 Medium Profile Hot Gas Defrost	11

Warehouse Unit Coolers

Model LHA6, LHA8 Large Unit Coolers Air Defrost	12
Models LHE6, LHL4 Large Unit Coolers Electric Defrost.....	12
Models LHG6, LHF4 Large Unit Coolers Hot Gas Defrost... 13	

Packaged Refrigeration Systems

Models PTT, PTN PRO ³ Top Mount	14
Model PST PRO ³ Side Mount	15

Condensing Units

Model LH 1/2-5 HP Hermetic Indoor/Outdoor	16
Model LZ 2-6 HP Scroll® Indoor/Outdoor	17
Model LS 1/2-5 HP Semi-Hermetic Indoor/Outdoor	17
Model LD, LZ 3-22 HP Discus®/ Scroll® Outdoor.....	18
Model LDV 12-40 HP Outdoor	19
Model LDD 24-80 HP Dual Compressor Outdoor	20
Model HWN 1/2-5 HP Hermetic Indoor Water-Cooled	21
Model ZWN 3-6 HP Scroll® Indoor Water-Cooled	21
Model SWN 3/4-20 HP Indoor Water-Cooled	22
Model SRN 3/4-20 HP Remote Indoor	23

Air-Cooled Condensers

Model FCB 1-26 Ton Direct-Drive	24
Model LNE Solus™ Series	25
Models LNQ, LNX Altus™ Series.....	26
Models LNL Altus™, LNH 1140 Series	27

Fluid Coolers

Model PFG Direct-Drive	28
Model RF6 Direct-Drive.....	28

Refrigeration Controls and Technology

Beacon II™ Electronic Control Board.....	29
Beacon II™ Smart Controller	29
Beacon II™ Smart Defrost.....	29
Beacon II™ Smart Software	29
Smart Defrost Kit™	29

Additional Products from Larkin

Mohave™ Hot Gas Defrost	30
FlexPack™	30

Engineered Solutions

Air Handlers	31
Indoor and Outdoor Racks	31
Customer Specific Orders	31



E Solutions™ branded products and options are designed to exceed current energy and environmental standards. We have made a conscious commitment to developing environmentally innovative products that allow our customers to make energy efficient, eco-conscious choices. Products included in the **E Solutions** portfolio reduce costs, improve bottom lines, and enhance both equipment performance and service life.

Look for this mark throughout the catalog for products with features and options available to reduce energy consumption and environmental impact. Visit www.heatcraftprd.com/esolutions for more information.

Reach-in Unit Coolers

Thin Profile Air Defrost Unit Coolers

Model TA is a thin unit that mounts in the top of a refrigerator, making the entire top shelf area usable. The attractive low silhouette makes this reach-in evaporator particularly desirable for display-type refrigerators. It can also be used in back bars, under counter cabinets or wherever space is at a premium.

Drain fitting at 45°F angle so drain can be run through the back or bottom of the refrigerator. Room for expansion valve inside so that it is out of sight. Model TA is available with an optional protective coil coating for corrosion protection (use model designation TAK). Also features sweat inlet connection to reduce leaks.



TA (K) Model	Capacity (BTUH) 10°F TD +25 SST	Fan		Motor (Total FLA)		Dimensions (in.)			Connections (in.)			Approx. Net Wt. (lbs.)
		Qty.	CFM	Shaded Pole		L	H	D	Liquid OD	Suction ID	Drain OD	
				115/1/60	208-230/1/60							
TA10	1,000	1	120	0.8	0.4	16-1/2	4-1/2	13-1/2	3/8	3/8	1/2	10
TA13	1,300	2	170	1.6	0.8	20-1/2	4-1/2	13-1/2	3/8	3/8	1/2	13
TA17	1,700	2	210	1.6	0.8	24	4-1/2	14-1/2	3/8	3/8	1/2	17
TA23	2,300	3	330	2.4	1.2	31-5/8	4-1/2	14-1/2	3/8	3/8	1/2	23
TA30	3,000	3	360	2.4	1.2	40	4-1/2	14-1/2	3/8	1/2	1/2	26
TA43*	4,300	4	540	3.2	1.6	53-3/8	4-1/2	14-1/2	1/2	5/8	1/2	36
TA55*	5,500	5	650	4.0	2.0	53-3/8	6-3/4	14-1/2	1/2	5/8	1/2	45

* These models use external equalized expansion valve

Thin Profile Electric Defrost Unit Coolers

Model TL low temperature unit cooler has an automatic defrost system. Mounted in the top of a refrigerator, its extremely compact cabinet makes it possible to utilize the entire top shelf area for storage. With a normal operating range of 15°F to -20°F, this unit is ideally suited for such applications as commercial freezers, ice cream boxes, bakery freezers and dual-temp reach-in boxes. Defrosting is accomplished with Larkin's unique electric defrost system. Mechanical contact is provided between the heater elements and the drain pan, ensuring a warm pan during the defrost cycle. Sufficient space is provided to mount the expansion valve within the cabinet. Systems for both 115 volt and 208-230 volt operation are available. Also features sweat inlet connection to reduce leaks. Some models available with EC motors, contact your sales representative for availability.



TL Model	Capacity (BTUH) 10°F TD -10°F SST	Fan		Motor (Total FLA)		Defrost Heater			Dimensions (in.)			Connections (in.)			Approx. Net Wt. (lbs.)
		Qty.	CFM	Shaded Pole		Watts	115/1/60	230/1/60	L	H	D	Liquid OD	Suction ID	Drain OD	
				115/1/60	208-230/1/60		Amps	Amps							
TL09	900	1	110	0.8	0.4	475	4.1	2.1	16-1/2	4-1/2	13-1/2	3/8	3/8	1/2	10
TL12	1,200	2	210	1.6	0.8	600	5.2	2.6	20-1/2	4-1/2	13-1/2	3/8	1/2	1/2	15
TL16	1,600	2	210	1.6	0.8	700	6.1	3.0	24	4-1/2	14-1/2	3/8	1/2	1/2	19
TL21	2,100	1	240	1.0	0.5	1,100	9.6	4.8	24	6-3/4	16-1/2	3/8	1/2	1/2	19
TL28	2,800	3	335	-	1.2	1,430	-	5.7	31-5/8	6-3/4	14-1/2	3/8	1/2	1/2	22
TL35*	3,500	2	420	-	1.0	1,600	-	7.0	38-3/8	6-3/4	16-1/2	1/2	5/8	1/2	31
TL53*	5,300	3	595	-	1.5	1,950	-	8.5	49-1/8	6-3/4	16-1/2	1/2	7/8	1/2	45

* These models use external equalized expansion valve

High Profile Air Defrost Unit Coolers

Model C unit coolers are ideal for refrigerated reach-ins. It mounts to the top of the refrigerator and discharges cold air against the back wall. With this air flow pattern, the air is not blasted on the product, but is diffused along the back wall and then gently drawn across the product as it returns to the unit; thus, uniform temperatures are maintained throughout the refrigerator. In addition, door sweating and refrigeration loss due to door opening is greatly reduced because the air is not discharged against the doors. Mounting is easy with aluminum hangers that automatically space the unit the correct distance from the back wall. The expansion valve fits inside, out of sight. Model C is available with an optional protective coil coating (designated as model CK) for corrosion protection. Also features sweat inlet connection to reduce leaks. Some models available with EC motors, contact your sales representative for availability.




C (K) Model	Capacity (BTUH) 10°F TD +25 SST	Fan		Motor (Total FLA)		Dimensions (in.)			Connections (in.)			Approx. Net Wt. (lbs.)
		Qty.	CFM	Shaded Pole		L	H	D	Liquid OD	Suction ID	Drain OD	
				115/1/60	208-230/1/60							
C13	1,300	1	235	1.0	0.5	14-1/4	8-7/8	13-3/4	3/8	3/8	1/2	12
C17	1,700	1	250	1.0	0.5	17-1/4	8-7/8	13-3/4	3/8	1/2	1/2	12
C23	2,300	1	265	1.0	0.5	22-3/4	8-7/8	13-3/4	3/8	1/2	1/2	17
C30	3,000	2	480	2.0	1.0	27-3/4	8-7/8	13-3/4	3/8	1/2	1/2	21
C43*	4,300	2	520	2.0	1.0	38	8-7/8	13-3/4	1/2	1/2	1/2	33

* Size 43 uses external equalized expansion valve

Reach-in Unit Coolers

V-Profile Air Defrost Unit Coolers

Model VA is a deluxe unit designed for use in small reach-ins, back bar and under counter refrigerators, and many other applications where a small, compact unit is required. The thermal expansion valve mounts inside of the unit. The unit can be mounted from the ceiling or off the back or end walls, or can be used in mullion application. VA is available with an optional protective coil coating for corrosion protection (use model designation VAK). Also features sweat inlet connection to reduce leaks. Some models available with EC motors, contact your sales representative for availability.

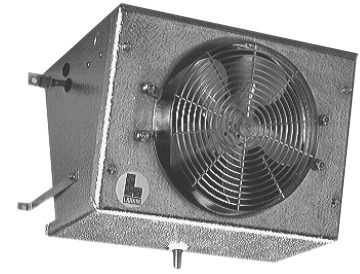


VA (K) Model	Capacity (BTUH) 10°F TD +25 SST	Fan		Motor (Total FLA)		Dimensions (in.)			Connections (in.)			Approx. Net Wt. (lbs.)
		Qty.	CFM	Shaded Pole		L	H	D	Liquid OD	Suction ID	Drain OD	
				115/1/60	208-230/1/60							
VA06	600	1	135	0.8	0.4	12-1/2	6-7/8	8-1/8	3/8	3/8	1/2	7
VA08	800	1	130	0.8	0.4	12-1/4	6-7/8	8-1/8	3/8	3/8	1/2	7
VA12	1,200	2	265	1.6	0.8	18	8	8-1/8	3/8	3/8	1/2	12
VA17	1,700	1	245	1.0	0.5	14	9-3/4	10-1/2	3/8	3/8	1/2	9



Back Bar Unit Coolers

Model BB is available in either air or electric defrost. These compact, wall-mounted units are suitable for 35°F to 40°F (BBM medium temp models) and 0°F to -10°F (BBL low temp models) under-counter reach-in fixtures. Motors are thermally protected and lifetime lubricated. Fan blades and guards are molded from corrosion-proof Lexan®. Housing is made of grained aluminum for long life and easy cleaning. Also features sweat inlet connection to reduce leaks.

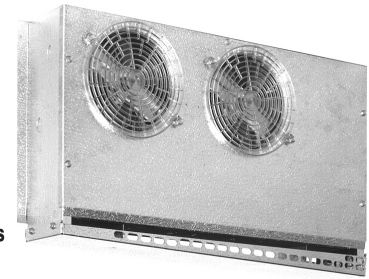

BB Model	Capacity (BTUH) 10°F TD +25 SST	Fan		Motor (Total FLA)			Heater			Dimensions (in.)			Connections (in.)			Approx. Net Wt. (lbs.)
		Qty.	CFM	HP	Shaded Pole		Watts	115/1/60 Amps	208-230/1/60 Amps	L	H	D	Liquid OD	Suction ID	Drain OD	
					115/1/60	208-230/1/60										
BBL10	1,000	1	90	1/150	0.8	0.4	275	2.7	1.4	19-3/4	14	5-1/2	1/2	3/8	1/2	13
BBM11	1,100	1	90	1/150	0.8	0.4	-	-	-	19-3/4	14	5-1/2	1/2	3/8	1/2	12
BBL15	1,500	2	180	1/150	1.6	0.8	350	3.5	1.7	26-1/4	14	5-1/2	1/2	3/8	1/2	15
BBM16	1,600	2	180	1/150	1.6	0.8	-	-	-	26-1/4	14	5-1/2	1/2	3/8	1/2	14

Standard Mullion Unit Coolers

Model KMK is ideal for use in under-counter reach-in refrigeration. The thin-line design allows the unit to be mounted behind a mullion with sufficient clearance for the installation of tray slides. KMK has a unique fan arrangement that allows air to be drawn into the top of the unit, pulling return air from both sides of the mullion.

The versatile design of the compact mullion is also adaptable for mounting on the back wall or ends of a beverage cooler. The finned coil of KMK is protected by special coating as standard. Also features sweat inlet connection to reduce leaks.



KMK Model	Capacity (BTUH) 10°F TD +25 SST	Fan		Motor (Total FLA)		Dimensions (in.)			Connections (in.)			Approx. Net Wt. (lbs.)
		Qty.	CFM	Shaded Pole		L	H	D	Liquid OD	Suction ID	Drain OD	
				115/1/60	208-230/1/60							
KMK13	1,300	2	180	1.6	0.8	15-5/8	17-3/4	5-5/8	3/8	3/8	5/8	15
KMK17	1,700	2	170	1.6	0.8	15-5/8	19-3/4	5-5/8	3/8	3/8	5/8	17
KMK23	2,300	3	255	2.4	1.2	22	19-3/4	5-5/8	3/8	1/2	5/8	23

Reach-in Unit Coolers

Reverse Air Mullion Unit Coolers

Model RAMK is ideal for use in under-counter reach-in refrigeration. The thin-line design allows the unit to be mounted behind a mullion with sufficient clearance for the installation of tray slides. RAMK or Reverse Air Mullion draws air through the coil at the bottom and discharges the cooled air out the top. This arrangement allows the coldest air to be in contact with drop-in trays.


The versatile design of the compact mullion is also adaptable for mounting on the back wall or ends of a beverage cooler. The finned coil of RAMK is protected by special coating as standard. Also features sweat inlet connection to reduce leaks.



RAMK Model	Capacity (BTUH) 10°F TD +25 SST	Fan		Motor (Total FLA)		Dimensions (in.)			Connections (in.)			Approx. Net Wt. (lbs.)
		Qty.	CFM	Shaded Pole		L	H	D	Liquid OD	Suction ID	Drain OD	
				115/1/60	208-230/1/60							
RAMK13	1,300	2	180	1.6	0.8	15-5/8	17-3/4	5-5/8	3/8	3/8	5/8	15
RAMK17	1,700	2	170	1.6	0.8	15-5/8	19-3/4	5-5/8	3/8	3/8	5/8	17
RAMK23	2,300	3	255	2.4	1.2	22	19-3/4	5-5/8	3/8	1/2	5/8	23

Twin-Flow Unit Coolers

Model BTO is a compact design with medium velocity airflow. The unit is mounted flush to the ceiling and draws air in through the fan and discharges out both sides. The air pattern reduces air loss when doors are opened and the medium velocity reduces product drying. Twin-Flow units are for applications of 35°F and higher. Box temperatures are kept more constant throughout and fresh products last longer. Seven sizes are available with BTUH from 900 to 5,500 at 10°TD. The BTO is available with an optional coated coil for corrosion protection (use model designation BTOK). Also features sweat inlet connection to reduce leaks. Some models available with EC motors, contact your sales representative for availability.

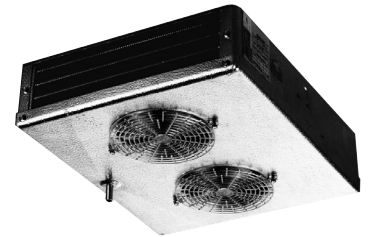

BTO (K) Model	Capacity (BTUH) 10°F TD +25 SST	Fan		Motor (Total FLA)		Dimensions (in.)			Connections (in.)			Approx. Net Wt. (lbs.)
		Qty.	CFM	Shaded Pole		L	H	D	Inlet OD	Suction ID	Drain OD	
				115/1/60	208-230/1/60							
BTO09	900	1	130	0.8	0.4	19-1/8	4-7/8	16-1/8	1/2	1/2	1/2	9
BTO13	1,300	2	240	1.6	0.8	19-1/8	5-3/4	16-1/8	1/2	1/2	1/2	11
BTO18	1,800	1	255	1.0	0.5	19-1/8	5-3/4	16-1/8	1/2	1/2	1/2	12
BTO25*	2,500	2	460	2.0	1.0	26-1/8	6-3/4	18-1/8	1/2	1/2	1/2	19
BTO35*	3,500	2	425	2.0	1.0	26-1/8	6-3/4	18-1/8	1/2	1/2	1/2	20
BTO45*	4,500	2	550	2.0	1.0	29-1/8	9-1/4	21-1/8	1/2	1/2	5/8	29
BTO55*	5,500	1	730	2.1	1.1	29-1/8	8-1/2	21-1/8	1/2	1/2	5/8	29




* These models use external equalized expansion valves

Dual Air Unit Coolers

Model U is used wherever a small, compact unit is required, such as salad boxes, back bars and direct-draw boxes. It can be mounted on the ceiling or wall. The Model U unit draws air in through the front and discharges it out both sides to ensure proper distribution of cool air and maintain a uniform box temperature. Also features flare connections. This is the original dual air flow unit!

U is available with an optional coated coil for corrosion protection (use model designation UK).




U (K) Model	Capacity (BTUH) 10°F TD +25 SST	Fan		Motor (Total FLA)		Dimensions (in.)			Connections (in.)			Approx. Net Wt. (lbs.)
		Qty.	CFM	Shaded Pole		L	H	D	Liquid FN	Suction ID	Drain OD	
				115/1/60	208-230/1/60							
U09	850	1	190	0.45	0.55	11-1/2	8-1/2	8-7/8	1/2	3/8	1/2	8
U12	1,150	1	250	0.45	0.55	17-1/2	8-1/2	8-7/8	1/2	3/8	1/2	8
U15	1,500	1	310	1.10	0.55	17-1/2	9-1/2	10-7/8	1/2	3/8	1/2	12

Reach-in Unit Coolers

Extended Thin Profile Unit Cooler

Models LTA/LTL unit coolers are the most compact designed units for reach-in display cases. The unit's low height design allows the unit to 'hide' at the top of the cooler, giving the case a cleaner look and allows for more room for shelves and product. These units have front-access end panels for easy access to refrigerant and electrical compartments, along with modular front-access panels that make it easy to access the motors. Internally enhanced tube design provides increased unit performance.

Better performance, easy installation, servicing and the quality of Larkin makes this unit the perfect fit for your display case needs.



LTA/LTL Model	Capacity (BTUH)	Fan		Motor (Total FLA)			Defrost Heater		Dimensions (in.)			Connections (in.)				Approx. Net Wt. (lbs.)
	10°F TD*	Qty.	CFM	HP	Shaded Pole		208-230/1/60		L	H	D	Coil Inlet OD	Suction ID	External Equalizer OD	Drain MPT	
					115/1/60	208-230/1/60	Watts	Amps								
LTA Air Defrost																
LTA053	5,300	2	850	1/20	3.6	2.0	-	-	49-3/8	8-7/8	18-1/8	1/2	5/8	1/4	3/4	48
LTA079	7,900	3	1,350	1/20	5.4	3.0	-	-	69-1/8	8-7/8	18-1/8	1/2	5/8	1/4	3/4	69
LTA102	10,200	4	1,800	1/20	7.2	4.0	-	-	88-7/8	8-7/8	18-1/8	1/2	7/8	1/4	3/4	85
LTA134	13,400	5	2,250	1/20	9.0	5.0	-	-	108-5/8	8-7/8	18-1/8	1/2	7/8	1/4	3/4	108
LTA172	17,200	6	2,550	1/20	10.8	6.0	-	-	128-3/8	8-7/8	18-1/8	1/2	1-1/8	1/4	3/4	124
LTL Electric Defrost																
LTL046BA	4,600	2	850	1/20	-	2.0	1,100	4.8	49.50	8-7/8	18-1/8	1/2	5/8	1/4	3/4	48
LTL068BA	6,800	3	1,300	1/20	-	3.0	1,650	7.2	69.25	8-7/8	18-1/8	1/2	5/8	1/4	3/4	69
LTL093BA	9,300	4	1,700	1/20	-	4.0	2,200	9.6	89.00	8-7/8	18-1/8	1/2	7/8	1/4	3/4	85
LTL115BA	11,500	5	2,100	1/20	-	5.0	2,750	12.0	108.75	8-7/8	18-1/8	1/2	7/8	1/4	3/4	108
LTL133BA	13,300	6	2,550	1/20	-	6.0	3,300	14.4	128.50	8-7/8	18-1/8	1/2	1-1/8	1/4	3/4	124

*+25 SST Air, -10 SST Electric

Walk-in Unit Coolers

Low Profile Air Defrost Unit Coolers

Model LCA6 low profile, air defrost unit coolers are designed for maximum capacity with minimum headroom, space and energy. These units are suitable for use with R-22, R-507, or R-404A. The units are only 15" high and are designed to mount flush with top of the cooler. The LCA6 cabinet design features easy front access to electrical and refrigeration components. LCA6 units also feature extended model and capacity offering to better match with Larkin condensing units. Advancements include standard plastic fan guard design with optional wire guards; front-facing electric board for easy access and optimized space in end panels. Improved drain pan design. Motor harness and solenoid harness are easier to access from the bottom of the coil. Solenoid harness come standard. Available with PSC or EC motor option.



ALSO CLASSIFIED AS A COMPONENT IN ACCORDANCE WITH NSF 7-1999



LCA6 Model	Capacity (BTUH)	Fan		Motor (Total FLA)							Dimensions ¹ (in.)			Connections (in.)		Approx. Net Wt. (lbs.)
	10°F TD +25 SST	Qty.	CFM	Shaded Pole		PSC, PSC-TE			EC		L	H	D	Inlet OD	Suction ID	
				115/1/60	208-230/1/60	115/1/60	208-230/1/60	460/1/60	115/1/60	208-230/1/60						
LCA640	4,000	1	730	1.8	1.0	1.0	0.5	0.4	1.1	0.6	29-1/2	15	15	1/2	5/8	28
LCA651	5,100	1	700	1.8	1.0	1.0	0.5	0.4	1.1	0.6	29-1/2	15	15	1/2	5/8	31
LCA662	6,200	1	650	1.8	1.0	1.0	0.5	0.4	1.1	0.6	29-1/2	15	15	1/2	7/8	34
LCA672	7,200	2	1,460	3.6	2.0	2.0	1.0	0.8	2.0	1.1	45-1/2	15	15	1/2	7/8	45
LCA690	9,000	2	1,400	3.6	2.0	2.0	1.0	0.8	2.0	1.1	45-1/2	15	15	1/2	7/8	49
LCA6110	11,000	2	1,300	3.6	2.0	2.0	1.0	0.8	2.0	1.1	45-1/2	15	15	1/2	7/8	51
LCA6135	13,500	3	2,100	5.4	3.0	3.0	1.5	1.2	2.9	1.6	61-1/2	15	15	1/2	7/8	67
LCA6160	16,000	3	1,950	5.4	3.0	3.0	1.5	1.2	2.9	1.6	61-1/2	15	15	1/2	7/8	69
LCA6185	18,500	4	2,800	7.2	4.0	4.0	2.0	1.6	3.8	2.1	77-1/2	15	15	1/2	1-1/8	82
LCA6215	21,500	4	2,600	7.2	4.0	4.0	2.0	1.6	3.8	2.1	77-1/2	15	15	1/2	1-1/8	84
LCA6260	26,000	5	3,250	9.0	5.0	5.0	2.5	2.0	4.7	2.6	93-1/2	15	15	1/2	1-1/8	103
LCA6310	31,000	6	3,900	10.8	6.0	6.0	3.0	2.4	5.6	3.1	109-1/2	15	15	1/2	1-1/8	124
LCA6350	35,000	6	3,900	10.8	6.0	6.0	3.0	2.4	5.6	3.1	109-1/2	15	15	1/2	1-3/8	127

¹ Drain MPT 3/4" for all air defrost models

Walk-in Unit Coolers

Low Profile Electric Defrost Unit Coolers

Models LCE6/LCE4 low profile, electric defrost unit coolers offer the same features as the air defrost models and are available in 6 or 4 fins per inch models. Available with PSC or EC motor option.



LCE6/ LCE4 Model	Capacity (BTUH) 10°F TD -20 SST	Fan		Motor (Total FLA)				Defrost Heater (amps)			Dimensions ¹ (in.)			Connections (in.)		Approx. Net Wt. (lbs.)
		Qty.	CFM	Shaded Pole 208- 230/1/60	PSC, PSC-TE		EC 208- 230/1/60	230/1	230/3	460/1	L	H	D	Inlet OD	Suction ID	
					208- 230/1/60	460/1/60										
LCE6 Models 6 Fins Per Inch																
LCE635	3,500	1	700	1.0	0.5	0.4	0.6	3.9	2.3	2.0	29-1/2	15	15	1/2	5/8	24
LCE643	4,300	1	650	1.0	0.5	0.4	0.6	3.9	2.3	2.0	29-1/2	15	15	1/2	5/8	29
LCE665	6,500	2	1,400	2.0	1.0	0.8	1.1	7.8	4.5	3.9	45-1/2	15	15	1/2	5/8	43
LCE676	7,600	2	1,300	2.0	1.0	0.8	1.1	7.8	4.5	3.9	45-1/2	15	15	1/2	7/8	45
LCE694	9,400	2	1,300	2.0	1.0	0.8	1.1	7.8	4.5	3.9	45-1/2	15	15	1/2	7/8	48
LCE6120	12,000	3	2,100	3.0	1.5	1.2	1.6	11.7	6.8	5.9	45-1/2	15	15	1/2	7/8	60
LCE6140	14,000	3	1,950	3.0	1.5	1.2	1.6	11.7	6.8	5.9	61-1/2	15	15	1/2	7/8	62
LCE6160	16,000	4	2,600	4.0	2.0	1.6	2.1	15.7	9.0	7.8	77-1/2	15	15	1/2	1-1/8	81
LCE6180	18,000	4	2,600	4.0	2.0	1.6	2.1	15.7	9.0	7.8	77-1/2	15	15	1/2	1-1/8	84
LCE6200	20,000	5	3,250	5.0	2.5	2.0	2.6	19.6	11.3	9.8	93-1/2	15	15	1/2	1-1/8	101
LCE6240	24,000	6	3,900	6.0	3.0	2.4	3.1	23.5	13.6	11.7	109-1/2	15	15	1/2	1-1/8	121
LCE6270	27,000	6	3,900	6.0	3.0	2.4	3.1	23.5	13.6	11.7	109-1/2	15	15	1/2	1-1/8	124
LCE4 Models 4 Fins Per Inch																
LCE441	4,100	1	690	1.0	0.5	0.4	0.6	3.9	2.3	2.0	29-1/2	15	15	1/2	5/8	28
LCE457	5,700	2	1,440	2.0	1.0	0.8	1.1	7.8	4.5	3.9	45-1/2	15	15	1/2	7/8	42
LCE467	6,700	2	1,380	2.0	1.0	0.8	1.1	7.8	4.5	3.9	45-1/2	15	15	1/2	7/8	44
LCE482	8,200	2	1,380	2.0	1.0	0.8	1.1	7.8	4.5	3.9	45-1/2	15	15	1/2	7/8	47
LCE4105	10,500	3	2,170	3.0	1.5	1.2	1.6	11.7	6.8	5.9	45-1/2	15	15	1/2	7/8	59
LCE4139	13,900	4	2,760	4.0	2.0	1.6	2.1	15.7	9.0	7.8	77-1/2	15	15	1/2	1-1/8	80
LCE4174	17,400	5	3,450	5.0	2.5	2.0	2.6	19.6	11.3	9.8	93-1/2	15	15	1/2	1-1/8	100
LCE4208	20,800	6	4,140	6.0	3.0	2.4	3.1	23.5	13.6	11.7	109-1/2	15	15	1/2	1-1/8	120
LCE4235	23,500	6	4,140	6.0	3.0	2.4	3.1	23.5	13.6	11.7	109-1/2	15	15	1/2	1-1/8	123

Low Profile Hot Gas Defrost Unit Coolers

Model LCH6/LCH4 low profile, hot gas defrost unit coolers offer the same features as the air defrost models and are available in 6 or 4 fins per inch models. Available with PSC or EC motor option.



LCH6/ LCH4 Model	Capacity (BTUH) 10°F TD -20 SST	Fan		Motor (Total FLA)						Dimensions ¹ (in.)			Connections (in.)		Approx. Net Wt. (lbs.)	
		Qty.	CFM	Shaded Pole		PSC, PSC-TE		EC		L	H	D	Inlet OD	Suction ID		
				115/1/60	208- 230/1/60	115/1/60	208- 230/1/60	460/1/60	115/1/60							208- 230/1/60
LCH6 Models 6 Fins Per Inch																
LCH635	3,500	1	700	1.8	1.0	1.0	0.5	0.4	1.1	0.6	29-1/2	15	15	5/8	5/8	26
LCH643	4,300	1	650	1.8	1.0	1.0	0.5	0.4	1.1	0.6	29-1/2	15	15	5/8	5/8	31
LCH665	6,500	2	1,400	3.6	2.0	2.0	1.0	0.8	2.0	1.1	45-1/2	15	15	5/8	5/8	45
LCH676	7,600	2	1,300	3.6	2.0	2.0	1.0	0.8	2.0	1.1	45-1/2	15	15	5/8	7/8	47
LCH694	9,400	2	1,300	3.6	2.0	2.0	1.0	0.8	2.0	1.1	45-1/2	15	15	7/8	7/8	50
LCH6120	12,000	3	2,100	5.4	3.0	3.0	1.5	1.2	2.9	1.6	61-1/2	15	15	7/8	7/8	62
LCH6140	14,000	3	1,950	5.4	3.0	3.0	1.5	1.2	2.9	1.6	61-1/2	15	15	7/8	7/8	64
LCH6160	16,000	4	2,600	7.2	4.0	4.0	2.0	1.6	3.8	2.1	77-1/2	15	15	7/8	1-1/8	83
LCH6180	18,000	4	2,600	7.2	4.0	4.0	2.0	1.6	3.8	2.1	77-1/2	15	15	1-1/8	1-1/8	86
LCH6200	20,000	5	3,250	9.0	5.0	5.0	2.5	2.0	4.7	2.6	93-1/2	15	15	1-1/8	1-1/8	103
LCH6240	24,000	6	3,900	10.8	6.0	6.0	3.0	2.4	5.6	3.1	109-1/2	15	15	1-1/8	1-1/8	123
LCH6270	27,000	6	3,900	10.8	6.0	6.0	3.0	2.4	5.6	3.1	109-1/2	15	15	1-1/8	1-1/8	126
LCH4 Models 4 Fins Per Inch																
LCH441	4,100	1	690	1.8	1.0	1.0	0.5	0.4	1.1	0.6	29-1/2	15	15	5/8	5/8	30
LCH457	5,700	2	1,440	3.6	2.0	2.0	1.0	0.8	2.0	1.1	45-1/2	15	15	5/8	7/8	44
LCH467	6,700	2	1,380	3.6	2.0	2.0	1.0	0.8	2.0	1.1	45-1/2	15	15	5/8	7/8	46
LCH482	8,200	2	1,380	3.6	2.0	2.0	1.0	0.8	2.0	1.1	45-1/2	15	15	5/8	7/8	49
LCH4105	10,500	3	2,170	5.4	3.0	3.0	1.5	1.2	2.9	1.6	61-1/2	15	15	7/8	7/8	61
LCH4139	13,900	4	2,760	7.2	4.0	4.0	2.0	1.6	3.8	2.1	77-1/2	15	15	7/8	1-1/8	82
LCH4174	17,400	5	3,450	9.0	5.0	5.0	2.5	2.0	4.7	2.6	93-1/2	15	15	7/8	1-1/8	102
LCH4208	20,800	6	4,140	10.8	6.0	6.0	3.0	2.4	5.6	3.1	109-1/2	15	15	7/8	1-1/8	122
LCH4235	23,500	6	4,140	10.8	6.0	6.0	3.0	2.4	5.6	3.1	109-1/2	15	15	1-1/8	1-1/8	125


¹ Drain MPT 3/4" for all electric and hot gas defrost models. Side Port OD 3/8" and Hot Gas Pan Connection 5/8" for all hot gas defrost models.

Walk-in Unit Coolers

Lo Flo Low Velocity Air Defrost Unit Coolers

Model LFA are ideal for meat storage and preparation rooms, floral coolers, dough retarding and many other applications requiring low air velocities and low sound levels. With low velocity unit coolers, high humidities can be maintained to minimize product shrinkage and dehydration. These units are ideal for any type of workroom where human comfort is important.

With a low, narrow construction and strong aluminum hanger bars, Lo Flow Low Velocity is perfect for use in between rail beams in meat storage and aging rooms and is easy to install. Model LFA has been designed for the attractive appearance and easy cleaning necessary in food processing. A double drain pan system eliminates sweating problems, and the rust-free, all-aluminum white case ensures the long-lasting professional look needed in customer areas or work rooms. Available with PSC and EC motor options.

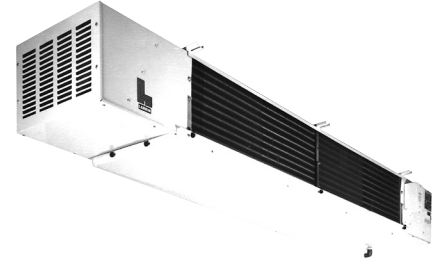

LFA Model	Capacity (BTUH)*		Fan		Motor (Total FLA)						Dimensions (in.)			Connections (in.)			Approx. Net Wt. (lbs.)	
	10°F TD	15°F TD	Qty.	CFM	Shaded Pole		PSC		EC		L	H	D	Liq. OD	Suct. OD	Drain NPS		
					115/1/60	208-230/1/60	115/1/60	208-230/1/60	460/1/60	115/1/60								208-230/1/60
LFA070	7,000	10,500	2	1,200	3.6	2.4	1.24	0.82	-	1.8	1.0	83	14	23-1/4	1/2	7/8	3/4	178
LFA087	8,700	13,050	2	1,200	3.6	2.4	1.24	0.82	-	1.8	1.0	83	14	23-1/4	1/2	7/8	3/4	189
LFA120	11,800	17,700	2	1,300	3.6	2.4	1.24	0.82	-	1.8	1.0	111	14-1/2	23-1/4	1/2	7/8	3/4	262
LFA135	12,500	18,750	2	1,300	3.6	2.4	1.24	0.82	-	1.8	1.0	111	14-1/2	23-1/4	1/2	7/8	3/4	264
LFA150	15,000	22,500	2	1,900	3.6	2.4	1.24	0.82	-	1.8	1.0	114	16	23-1/4	1/2	1-1/8	3/4	280
LFA170	16,500	24,750	2	1,900	3.6	2.4	1.24	0.82	-	1.8	1.0	114	16	23-1/4	1/2	1-1/8	3/4	285
LFA190	18,900	28,350	2	2,400	-	-	2.80	1.40	0.8	4.8	2.4	134	16-1/2	23-1/4	1/2	1-1/8	3/4	298
LFA230	22,500	33,750	2	2,700	-	-	2.80	1.40	0.8	4.8	2.4	153	16-1/2	23-1/4	1/2	1-1/8	3/4	366
LFA270	26,600	39,900	2	3,200	-	-	2.80	1.40	0.8	4.8	2.4	158	20	28-1/4	1/2	1-3/8	3/4	405

Lo Flo Low Velocity Electric Defrost Unit Coolers

Model LFAE offers the same features as air defrost models and are designed for use from 28°F to 34°F. The high efficiency, fast electric defrost allows the LFAE to maintain room temperature and minimize incidence of sliming and the formation of bacterial growth.



LFAE Model	Capacity (BTUH)*		Fan		Motor (Total FLA)				Defrost Heater		Dimensions (in.)			Connections (in.)			Approx. Net Wt. (lbs.)		
	10°F TD	15°F TD	Qty.	CFM	Shaded Pole		PSC		EC		Watts	230/1/60 Amps	L	H	D	Liq. OD		Suct. OD	Drain NPS
					208-230/1/60	208-230/1/60	460/1/60	208-230/1/60											
LFAE070	7,000	10,500	2	1,200	2.4	0.82	-	1.0	2,650	11.5	83	14	23-1/4	1/2	7/8	3/4	178		
LFAE087	8,700	13,050	2	1,200	2.4	0.82	-	1.0	2,650	11.5	83	14	23-1/4	1/2	7/8	3/4	189		
LFAE120	11,800	17,700	2	1,300	2.4	0.82	-	1.0	3,850	16.7	111	14-1/2	23-1/4	1/2	7/8	3/4	262		
LFAE135	12,500	18,750	2	1,300	2.4	0.82	-	1.0	3,850	16.7	111	14-1/2	23-1/4	1/2	7/8	3/4	264		
LFAE150	15,000	22,500	2	1,900	2.4	0.82	-	1.0	3,850	16.7	114	16	23-1/4	1/2	1-1/8	3/4	280		
LFAE170	16,500	24,750	2	1,900	2.4	0.82	-	1.0	3,850	16.7	114	16	23-1/4	1/2	1-1/8	3/4	285		
LFAE190	18,900	28,350	2	2,400	-	1.40	0.8	4.8	4,770	20.7	134	16-1/2	23-1/4	1/2	1-1/8	3/4	298		
LFAE230	22,500	33,750	2	2,700	-	1.40	0.8	4.8	5,700	24.8	153	16-1/2	23-1/4	1/2	1-1/8	3/4	366		
LFAE270	26,600	39,900	2	3,200	-	1.40	0.8	4.8	5,700	24.8	158	20	28-1/4	1/2	1-3/8	3/4	405		

Lo Flo Low Velocity Hot Gas Defrost Unit Coolers

Model LFAH offers the same features as air defrost models and are designed for use from 28°F to 34°F. The hot gas defrost is available factory-installed or as a field installed kit.



LFAH Model	Capacity (BTUH)*		Fan		Motor (Total FLA)						Dimensions (in.)			Connections (in.)				Approx. Net Wt. (lbs.)	
	10°F TD	15°F TD	Qty.	CFM	Shaded Pole		PSC		EC		L	H	D	Liq. OD	Suct. OD	Hot Gas OD	Drain NPS		
					115/1/60	208-230/1/60	115/1/60	208-230/1/60	460/1/60	115/1/60									208-230/1/60
LFAH070	7,000	10,500	2	1,200	3.6	2.4	1.24	1.0	-	1.8	1.0	83	14	23-1/4	7/8	7/8	1/2	3/4	178
LFAH087	8,700	13,050	2	1,200	3.6	2.4	1.24	1.0	-	1.8	1.0	83	14	23-1/4	7/8	7/8	1/2	3/4	189
LFAH120	11,800	17,700	2	1,300	3.6	2.4	1.24	1.0	-	1.8	1.0	111	14-1/2	23-1/4	7/8	7/8	1/2	3/4	262
LFAH135	12,500	18,750	2	1,300	3.6	2.4	1.24	1.0	-	1.8	1.0	111	14-1/2	23-1/4	7/8	7/8	1/2	3/4	264
LFAH150	15,000	22,500	2	1,900	3.6	2.4	1.24	1.0	-	1.8	1.0	114	16	23-1/4	7/8	1-1/8	1/2	3/4	280
LFAH170	16,500	24,750	2	1,900	3.6	2.4	1.24	1.0	-	1.8	1.0	114	16	23-1/4	7/8	1-1/8	1/2	3/4	285
LFAH190	18,900	28,350	2	2,400	-	-	2.80	1.4	.08	4.8	2.4	134	16-1/2	23-1/4	7/8	1-1/8	1/2	3/4	298
LFAH230	22,500	33,750	2	2,700	-	-	2.80	1.4	.08	4.8	2.4	153	16-1/2	23-1/4	7/8	1-1/8	1/2	3/4	366
LFAH270	26,600	39,900	2	3,200	-	-	2.80	1.4	.08	4.8	2.4	158	20	28-1/4	7/8	1-3/8	5/8	3/4	405


* +25 SST

Walk-in Unit Coolers

Low Velocity Center Mount Air Defrost Unit Coolers

Model LWA is ideal for floral storage, fresh fruit and vegetables, dough retarding, fresh meat storage and preparation and many other applications of 35° F and above. The low air flow and quiet fans are classically suited for work-room applications.

The generous coil surface combined with close TD system balance provides high humidity characteristics to minimize product shrinkage and drying. Available with PSC and EC motor options.

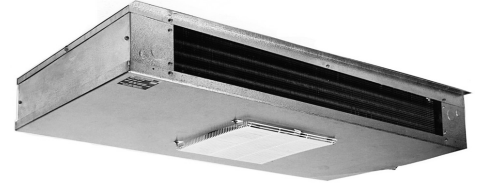

LWA Model	Capacity (BTUH)*		Fan		Motor (Total FLA)						Dimensions (in.)			Connections (in.)			App. Net Wt. (lbs.)
	10°F TD	15°F TD	Qty.	CFM	Shaded Pole		PSC		EC		L	H	D	Liquid OD	Suction OD	Drain FPT	
					115/1/60	230/1/60	115/1/60	230/1/60	115/1/60	230/1/60							
LWA050	5,000	7,500	1	725	2.1	1.1	0.9	0.5	0.9	0.5	53-1/2	8-7/8	26-5/8	1/2	7/8	3/4	70
LWA075	7,500	11,250	1	730	2.1	1.1	0.9	0.5	0.9	0.5	75-1/2	8-7/8	26-5/8	1/2	7/8	3/4	103
LWA100	10,000	15,000	2	1,450	4.2	2.2	1.8	1.0	1.8	1.0	75-1/2	11-3/8	26-5/8	1/2	7/8	3/4	106
LWA130	13,000	19,500	2	1,470	4.2	2.2	1.8	1.0	1.8	1.0	75-1/2	15-1/8	26-5/8	1-1/8	1-1/8	3/4	145
LWA155	15,500	23,250	2	1,460	4.2	2.2	1.8	1.0	1.8	1.0	75-1/2	15-1/8	26-5/8	1-1/8	1-1/8	3/4	149
LWA180	18,000	27,000	3	2,130	6.3	3.3	2.7	1.5	2.7	1.5	75-1/2	15-1/8	26-5/8	1-1/8	1-1/8	3/4	160
LWA210	21,000	31,500	4	2,840	8.4	4.4	3.6	2.0	3.6	2.0	97-1/2	15-1/8	26-5/8	1-1/8	1-1/8	3/4	193
LWA270	27,000	40,500	4	2,800	8.4	4.4	3.6	2.0	3.6	2.0	97-1/2	15-1/8	26-5/8	1-3/8	1-3/8	3/4	200
LWA340	34,000	51,000	5	3,500	10.5	5.5	4.5	2.5	4.5	2.5	119-1/2	15-1/8	26-5/8	1-3/8	1-3/8	3/4	242

Low Velocity Center Mount Electric Defrost Unit Coolers

Model LWE offers the same benefits as the air defrost models above and is ideal for applications of 24° F and above.



LWE Model	Capacity (BTUH)*		Fan		Motor (Total FLA)			Defrost Heater		Dimensions (in.)			Connections (in.)			App. Net Wt. (lbs.)	
	10°F TD	15°F TD	Qty.	CFM	Shaded Pole		PSC	EC	Watts	230/1/60 Amps	L	H	D	Liquid OD	Suction OD		Drain FPT
					230/1/60	230/1/60	230/1/60										
LWE050	5,000	7,500	1	725	1.1	0.5	0.5	2,000	8.7	53-1/2	8-7/8	26-5/8	1/2	7/8	3/4	75	
LWE075	7,500	11,250	1	730	1.1	0.5	0.5	2,400	10.5	75-1/2	8-7/8	26-5/8	1/2	7/8	3/4	108	
LWE100	10,000	15,000	2	1,450	2.2	1.0	1.0	2,800	12.2	75-1/2	11-3/8	26-5/8	1/2	7/8	3/4	111	
LWE130	13,000	19,500	2	1,470	2.2	1.0	1.0	4,000	17.4	75-1/2	15-1/8	26-5/8	1-1/8	1-1/8	3/4	150	
LWE155	15,500	23,250	2	1,460	2.2	1.0	1.0	4,000	17.4	75-1/2	15-1/8	26-5/8	1-1/8	1-1/8	3/4	154	
LWE180	18,000	27,000	3	2,130	3.3	1.5	1.5	4,000	17.4	75-1/2	15-1/8	26-5/8	1-1/8	1-1/8	3/4	157	
LWE210	21,000	31,500	4	2,840	4.4	2.0	2.0	5,200	22.6	97-1/2	15-1/8	26-5/8	1-1/8	1-1/8	3/4	203	
LWE270	27,000	40,500	4	2,800	4.4	2.0	2.0	5,200	22.6	97-1/2	15-1/8	26-5/8	1-3/8	1-3/8	3/4	208	
LWE340	34,000	51,000	5	3,500	5.5	2.5	2.5	7,000	30.4	119-1/2	15-1/8	26-5/8	1-3/8	1-3/8	3/4	250	

Low Velocity Center Mount Hot Gas Defrost Unit Coolers

Model LWG offers the same benefits as the air defrost models above and is ideal for applications of 24° F and above.



LWG Model	Capacity (BTUH)*		Fan		Motor (Total FLA)						Drain Pan Heater		Dimensions (in.)			Connections (in.) ¹			App. Net Wt. (lbs.)	
	10°F TD	15°F TD	Qty.	CFM	Shaded Pole		PSC		EC		Watts	115/1/230/1 Amps	L	H	D	Liq. OD	Suct. OD	Side Port		
					115/1/60	230/1/60	115/1/60	208-230/1/60	115/1/60	208-230/1/60										
LWG100	10,000	15,000	2	1,450	4.2	2.2	1.8	1.0	1.8	1.0	350	3.0	1.5	75-1/2	11-3/8	26-5/8	1/2	7/8	1/2	131
LWG130	13,000	19,500	2	1,470	4.2	2.2	1.8	1.0	1.8	1.0	500	4.4	2.2	75-1/2	15-1/8	26-5/8	1-1/8	1-1/8	5/8	170
LWG155	15,500	23,250	2	1,460	4.2	2.2	1.8	1.0	1.8	1.0	500	4.4	2.2	75-1/2	15-1/8	26-5/8	1-1/8	1-1/8	5/8	174
LWG180	18,000	27,000	3	2,130	6.3	3.3	2.7	1.5	2.7	1.5	500	4.4	2.2	75-1/2	15-1/8	26-5/8	1-1/8	1-1/8	5/8	185
LWG210	21,000	31,500	4	2,840	8.4	4.4	3.6	2.0	3.6	2.0	650	5.7	2.8	97-1/2	15-1/8	26-5/8	1-1/8	1-1/8	5/8	223
LWG270	27,000	40,500	4	2,800	8.4	4.4	3.6	2.0	3.6	2.0	650	5.7	2.8	97-1/2	15-1/8	26-5/8	1-1/8	1-3/8	7/8	228
LWG340	34,000	51,000	5	3,500	10.5	5.5	4.5	2.5	4.5	2.5	875	7.6	3.8	119-1/2	15-1/8	26-5/8	1-1/8	1-3/8	7/8	270

* +25 SST

¹ Drain FPT 3/4" for all models


Walk-in Unit Coolers

Center Mount Air Defrost Unit Coolers

Model ACM units are compact, medium velocity coolers designed for use in 35°F and above rooms. The low height gives more head room and allows product to be stacked higher. The center ceiling mount with dual air flow allows shelving and storage of product around all walls.

Equipped with dual drain pans to prevent sweating, the ACM units have a heavy gauge grained-aluminum cabinet that cleans easily and looks attractive. The stainless steel screws prevent rust streaks and PVC coated fan guards won't rust or rattle.

Ease of installation and service are also part of the design. End panels can be removed quickly to access refrigerant components and electrical terminal block, without the need to drop the fan panel/drain pan. A quick-disconnect, waterproof plug and receptacle is supplied with each motor. Available with PSC and EC motor options.

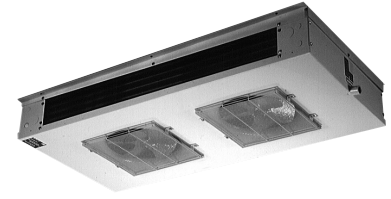

ACM Model	Capacity (BTUH) 10°F TD +25 SST	Fan		Motor (Total FLA)						Dimensions (in.)			Connections ¹ (in.)		Approx. Net Wt. (lbs.)
		Qty.	CFM	Shaded Pole		PSC		EC		L	H	D	Liquid OD	Suction OD	
				115/1/60	230/1/60	115/1/60	208-230/1/60	115/1/60	208-230/1/60						
ACM052	5,200	1	610	2.1	1.1	0.9	0.5	0.9	0.5	31-1/2	8-5/8	28-13/16	1/2	7/8	42
ACM076	7,600	2	1,300	4.2	2.2	1.8	1.0	1.8	1.0	53-1/2	8-5/8	28-13/16	1/2	7/8	64
ACM090	9,000	2	1,260	4.2	2.2	1.8	1.0	1.8	1.0	53-1/2	8-5/8	28-13/16	1/2	7/8	70
ACM102	10,200	2	1,220	4.2	2.2	1.8	1.0	1.8	1.0	53-1/2	8-5/8	28-13/16	1/2	7/8	83
ACM108	10,800	3	1,950	6.3	3.3	2.7	1.5	2.7	1.5	75-1/2	8-5/8	28-13/16	1/2	7/8	105
ACM134	13,400	3	1,890	6.3	3.3	2.7	1.5	2.7	1.5	75-1/2	8-5/8	28-13/16	1/2	7/8	117
ACM156	15,600	3	1,830	6.3	3.3	2.7	1.5	2.7	1.5	75-1/2	8-5/8	28-13/16	1/2	7/8	123
ACM179	17,900	4	2,520	8.4	4.4	3.6	2.0	3.6	2.0	97-1/2	8-5/8	28-13/16	1/2	7/8	149
ACM208	20,800	4	2,440	8.4	4.4	3.6	2.0	3.6	2.0	97-1/2	8-5/8	28-13/16	1/2	1-1/8	164
ACM249	24,900	5	3,050	10.5	5.5	4.5	2.5	4.5	2.5	119-1/2	8-5/8	28-13/16	1/2	1-1/8	206

Center Mount Electric Defrost Unit Coolers


Model ECM units offer the same great benefits as air defrost, but have defrost controls mounted and wired to a terminal board and are designed for -20° F to 34° F applications.



ECM Model	Capacity (BTUH)		Fan		Motor (Total FLA)			Defrost Heater		Dimensions (in.)			Connections ¹ (in.)		Approx. Net Wt. (lbs.)
	10°F TD -20 SST	12°F TD	Qty.	CFM	Shaded Pole	PSC	EC	Watts	Amps	L	H	D	Inlet OD	Suction OD	
					208-230/1	208-230/1/60	208-230/1/60								
ECM040	4,000	4,800	1	610	1.1	0.5	0.5	1,200	5.3	31-1/2	8-5/8	28-13/16	1/2	7/8	90
ECM054	5,400	6,480	2	1,300	2.2	1.0	1.0	2,000	8.7	53-1/2	8-5/8	28-13/16	1/2	7/8	120
ECM065	6,500	7,800	2	1,260	2.2	1.0	1.0	2,000	8.7	53-1/2	8-5/8	28-13/16	1/2	7/8	120
ECM090	9,000	10,800	3	1,950	3.3	1.5	1.5	2,400	10.5	75-1/2	8-5/8	28-13/16	1/2	7/8	160
ECM130	13,000	15,600	3	1,830	3.3	1.5	1.5	3,600	15.7	75-1/2	8-5/8	28-13/16	1/2	7/8	174
ECM174	17,400	20,880	4	2,440	4.4	2.0	2.0	4,800	20.9	97-1/2	8-5/8	28-13/16	1/2	1-1/8	218

Medium Profile Air Defrost Unit Coolers

Models MMT6 is designed with superior quality and dependable performance. With features like the innovative **Thermo-Flex™** coil design which carries a five-year limited warranty against refrigerant leaks, internal grooved tubing for greater heat transfer efficiency and motors that plug into the wiring harness for easier accessibility, these units provide long life and dependability to your refrigeration application. Having a modular design that is only 25 inches high, these unit coolers serve a variety of commercial and industrial applications Air defrost models range in size from 13,000 to 71,000 BTUH. PSC motor standard, EC motor options available

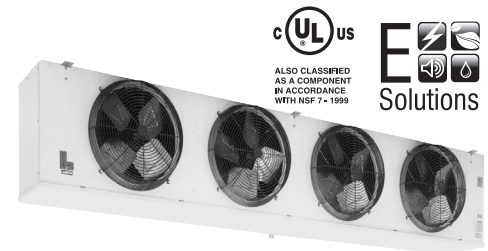

MMT6 Model	Capacity (BTUH) 10°F TD +25 SST	Fan		Motor (Total FLA)						Dimensions (in.)			Connections ¹ (in.)		App. Net Wt. (lbs.)
		Qty.	CFM	PSC			EC			L	H	D	Inlet ODF	Suct. ODF	
				115/1/60	230/1/60	460/1660	575/1/60	115/1/60	208-230/1/60						
MMT6130	13,000	1	2,300	4.0	1.8	1.0	0.75	2.8	1.4	39-5/16	25	22-7/8	1/2	7/8	115
MMT6155	15,500	1	2,200	4.0	1.8	1.0	0.75	2.8	1.4	39-5/16	25	22-7/8	1/2	1-1/8	123
MMT6245	24,500	2	4,600	8.0	3.6	2.0	1.5	5.6	2.8	67-5/16	25	22-7/8	7/8	1-1/8	134
MMT6300	30,000	2	4,400	8.0	3.6	2.0	1.5	5.6	2.8	67-5/16	25	22-7/8	7/8	1-1/8	148
MMT6365	36,500	3	6,900	12.0	5.4	3.0	2.25	8.4	4.2	95-5/16	25	22-7/8	7/8	1-3/8	200
MMT6450	45,000	3	6,600	12.0	5.4	3.0	2.25	8.4	4.2	95-5/16	25	22-7/8	1-1/8 [†]	1-3/8	227
MMT6510	51,000	4	9,200	16.0	7.2	4.0	3.0	11.2	5.6	123-5/16	25	22-7/8	1-1/8 [†]	1-5/8	230
MMT6600	60,000	4	8,800	16.0	7.2	4.0	3.0	11.2	5.6	123-5/16	25	22-7/8	1-1/8 [†]	1-5/8	255
MMT6710	71,000	5	10,500	-	9.0	5.0	3.75	14.0	7.0	138-13/16	25	22-7/8	1-1/8 [†]	1-5/8	285

[†] All MMT6 coils have 1/4" OD external equalizer and 3/4" Drain FPT connections. [†] Supplied with adapter to 7/8 ODF.

Walk-in Unit Coolers

Medium Profile Electric Defrost Unit Coolers

Models **MLT6/MLT4** offer the same great features as air defrost models and are available in 6 or 4 fins per inch ranging in size from 10,000 to 62,000 BTUH.



MLT6/ MLT4 Model	Capacity (BTUH)		Fan		Motor (Total FLA)				Defrost Heater (amps)				Dimensions (in.)			Connections ¹ (in.)		App. Net Wt. (lbs.)
	10°F TD -20 SST	Qty.	CFM	PSC			EC	Watts	208-230/1/60	208-230/3/60	460/1/60	460/3/60	L	H	D	Inlet ODF	Suct. ODF	
				208-230/1/60	460/1/60	575/1/60	208-230/1/60											
MLT6 Models 6 Fins Per Inch																		
MLT6101	10,100	1	2,350	1.8	1.0	0.75	1.4	2,730	11.9	8.2	5.9	4.1	39-5/16	24	22-3/4	1/2	7/8	118
MLT6140	14,000	1	2,250	1.8	1.0	0.75	1.4	2,730	11.9	8.2	5.9	4.1	39-5/16	24	22-3/4	1/2	7/8	126
MLT6190	19,000	2	4,700	3.6	2.0	1.50	2.8	5,350	23.3	16.0	11.6	8.3	67-5/16	24	22-3/4	7/8	1-1/8	138
MLT6260	26,000	2	4,500	3.6	2.0	1.50	2.8	5,350	23.3	16.0	11.6	8.3	67-5/16	24	22-3/4	1-1/8†	1-3/8	153
MLT6310	31,000	3	7,050	5.4	3.0	2.25	4.2	7,750	33.7	23.2	16.8	12.0	95-5/16	24	22-3/4	1-1/8†	1-3/8	210
MLT6390	39,000	3	6,750	5.4	3.0	2.25	4.2	7,750	33.7	23.2	16.8	12.0	95-5/16	24	22-3/4	1-1/8†	1-3/8	237
MLT6430	43,000	4	8,800	7.2	4.0	3.00	5.6	10,200	-	30.5	22.2	15.8	123-5/16	24	22-3/4	1-1/8†	1-5/8	267
MLT6520	52,000	4	8,400	7.2	4.0	3.00	5.6	10,200	-	30.5	22.2	15.8	123-5/16	24	22-3/4	1-1/8†	1-5/8	300
MLT6620	62,000	5	10,000	9.0	5.0	3.75	7.0	11,600	-	34.7	25.2	18.1	138-5/16	24	22-3/4	1-1/8†	1-5/8	338
MLT4 Models 4 Fins Per Inch																		
MLT4100	10,000	1	2,350	1.8	1.0	0.75	1.4	2,730	11.9	8.2	5.9	4.1	39-13/16	24	22-3/4	1/2	7/8	125
MLT4165	16,500	2	4,900	3.6	2.0	0.75	2.8	5,350	23.3	16.0	11.6	8.3	67-13/16	24	22-3/4	7/8	1-1/8	136
MLT4220	22,000	2	4,650	3.6	2.0	1.50	2.8	5,350	23.3	16.0	11.6	8.3	67-13/16	24	22-3/4	1-1/8†	1-3/8	151
MLT4250	25,000	3	7,350	5.4	3.0	1.50	4.2	7,750	33.7	23.2	16.8	12.0	95-13/16	24	22-3/4	1-1/8†	1-3/8	207
MLT4330	33,000	3	6,975	5.5	3.0	2.25	4.2	7,750	33.7	23.2	16.8	12.0	95-13/16	24	22-3/4	1-1/8†	1-3/8	234
MLT4370	37,000	4	9,100	7.2	4.0	2.25	5.6	10,200	-	30.5	22.2	15.8	123-13/16	24	22-3/4	1-1/8†	1-5/8	262
MLT4440	44,000	4	8,700	7.2	4.0	3.00	5.6	10,200	-	30.5	22.2	15.8	123-13/16	24	22-3/4	1-1/8†	1-5/8	295
MLT4530	53,000	5	10,350	9.0	5.0	3.00	7.0	11,600	-	34.7	25.2	18.1	138-13/16	24	22-3/4	1-1/8†	1-5/8	332

Medium Profile Hot Gas Defrost Unit Coolers

Models **MLG6/MLG4** offer the same great features as air defrost models and are available in 6 or 4 fins per inch ranging in size from 16,500 to 52,000 BTUH.



MLG6/ MLG4 Model	Capacity (BTUH)		Fan		Motor (Total FLA)				Defrost Heater (amps)				Dimensions (in.)			Connections ¹ (in.)		App. Net Wt. (lbs.)	
	10°F TD -20 SST	Qty.	CFM	PSC			EC	Watts	115/1/60	208-230/1/60	460/1/60	L	H	D	Inlet ODF	Suct. ODF			
				115/1/60	230/1/60	460/1/60	575/1/60										115/1/60		208-230/1/60
MLG6 Models 6 Fins Per Inch																			
MLG6190	19,000	2	4,700	8.0	3.6	2.0	0.75	5.6	2.8	950	8.3	4.1	2.1	67-5/16	24	22-3/4	1-1/8†	1-1/8	175
MLG6260	26,000	2	4,500	8.0	3.6	2.0	0.75	5.6	2.8	950	8.3	4.1	2.1	67-5/16	24	22-3/4	1-1/8†	1-3/8	190
MLG6310	31,000	3	7,050	12.0	5.4	3.0	1.50	8.4	4.2	1,350	11.7	5.9	2.9	95-5/16	24	22-3/4	1-1/8†	1-3/8	210
MLG6390	39,000	3	6,750	12.0	5.4	3.0	1.50	8.4	4.2	1,350	11.7	5.9	2.9	95-5/16	24	22-3/4	1-1/8†	1-3/8	237
MLG6430	43,000	4	8,800	16.0	7.2	4.0	2.25	11.2	5.6	1,800	15.7	7.8	3.9	123-5/16	24	22-3/4	1-1/8†	1-5/8	267
MLG6520	52,000	4	8,400	16.0	7.2	4.0	2.25	11.2	5.6	1,800	15.7	7.8	3.9	123-5/16	24	22-3/4	1-1/8†	1-5/8	300
MLG4 Models 4 Fins Per Inch																			
MLG4165	16,500	2	4,900	8.0	3.6	2.0	0.75	5.6	2.8	950	8.3	4.1	2.1	67-13/16	24	22-3/4	1-1/8†	1-1/8	173
MLG4220	22,000	2	4,650	8.0	3.6	2.0	0.75	5.6	2.8	950	8.3	4.1	2.1	67-13/16	24	22-3/4	1-1/8†	1-3/8	188
MLG4250	25,000	3	7,350	12.0	5.4	3.0	1.50	8.4	4.2	1,350	11.7	5.9	2.9	95-13/16	24	22-3/4	1-1/8†	1-3/8	207
MLG4330	33,000	3	6,975	12.0	5.4	3.0	1.50	8.4	4.2	1,350	11.7	5.9	2.9	95-13/16	24	22-3/4	1-1/8†	1-3/8	234
MLG4370	37,000	4	9,100	16.0	7.2	4.0	2.25	11.2	5.6	1,800	15.7	7.8	3.9	123-13/16	24	22-3/4	1-1/8†	1-5/8	262
MLG4440	44,000	4	8,700	16.0	7.2	4.0	2.25	11.2	5.6	1,800	15.7	7.8	3.9	123-13/16	24	22-3/4	1-1/8†	1-5/8	295

¹ All MLT6, MLT4, MLG6 and MLG4 models have 1/4" OD external equalizer and 3/4" Drain FPT connections.
All MLG4 and MLG6 models have 5/8" Side Port ODF and 7/8" Hot Gas Pan ODF connections.


† Supplied with adapter to 7/8 ODF

Warehouse Unit Coolers

Large Unit Coolers Air Defrost

Model LHA6/LHA8 large air defrost unit coolers are ideal for warehouse cooler applications. With a wide capacity range and the patented **Thermo-Flex™** coil design, these large unit coolers provide efficient, reliable operation. Features include a mill finish aluminum cabinet, 850 RPM motors for low noise and high reliability, liquid line solenoid wiring harness for faster installation, Schrader fitting for easier suction temperature measurement. Also, the large unit coolers have captive fasteners on access panels for easy servicing — no fumbling with loose bolts and nuts. The LH Series also has a standardized terminal board for easier field wiring.

Options include high CFM motor and fan combinations, totally enclosed motors, low temp motors for blast cooling, long air throw collars for large Warehouse/Industrial applications and insulated drain pans. PSC motors come standard to help you save energy.

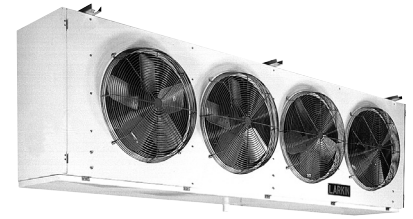

LHA6/ LHA8 Model	Capacity (BTUH) 10°F TD +25 SST	Fan			PSC Motor (Total FLA)						Dimensions (in.)			Connections (in.) ¹			Approx. Net Wt. (lbs.)	
		Qty.	CFM	Dia. (in.)	208-230/1/60		208- 230/3/60	460/1/60		460/ 3/60	575/ 3/60	L	H	D	Coil Inlet ODF	Suction ODF		Ext. Equal. ODF
Wired 1 ph.	Wired 3 ph.	Wired 1 ph.	Wired 3 ph.	L	H	D												
LHA6 Models 6 Fins Per Inch																		
LHA6520	52,000	2	9,000	24	6.4	-	5.2	3.4	-	2.6	1.8	83-3/32	40-11/32	29-1/2	1-1/8	1-5/8	1/4	270
LHA6630	63,000	2	9,000	24	6.4	-	5.2	3.4	-	2.6	1.8	83-3/32	40-11/32	29-1/2	1-1/8	1-5/8	1/4	300
LHA6750	75,000	3	12,600	24	9.6	5.5	7.8	-	3.0	3.9	2.7	105-5/32	40-11/32	29-1/2	1-3/8	2-1/8	1/4	390
LHA6850	85,000	3	12,600	24	9.6	5.5	7.8	-	3.0	3.9	2.7	105-5/32	40-11/32	29-1/2	1-3/8	2-1/8	1/4	430
LHA6930	93,000	4	16,800	24	12.8	8.7	10.4	-	4.7	5.2	3.6	135-7/32	40-11/32	29-1/2	1-3/8	2-1/8	1/4	515
LHA61100	110,000	4	16,800	24	12.8	8.7	10.4	-	4.7	5.2	3.6	135-7/32	40-11/32	29-1/2	1-3/8	2-1/8	1/4	565
LHA61170	117,000	3	20,700	30	-	-	13.8	-	-	6.9	7.8	135-13/32	50-5/16	41-3/32	1-3/8	2-1/8	1/4	738
LHA61400	140,000	3	20,700	30	-	-	13.8	-	-	6.9	7.8	135-13/32	50-5/16	41-3/32	1-5/8	2-1/8	1/4	800
LHA61610	161,000	3	24,300	30	-	-	19.8	-	-	9.9	7.8	135-13/32	55-13/16	41-3/32	1-3/8 [†]	2-1/8 [†]	1/4 [†]	850
LHA61900	190,000	3	26,550	30	-	-	21.0	-	-	10.5	8.4	142-1/2	55-13/16	41-3/32	1-3/8	2-5/8	1/4	1,160
LHA62200	220,000	4	30,400	30	-	-	26.4	-	-	13.2	10.4	185-1/2	50-5/16	41-3/32	1-3/8	2-5/8	1/4	1,500
LHA62440	244,000	4	35,400	30	-	-	28.0	-	-	14.0	11.2	185-1/2	56-1/4	41-3/32	1-5/8	2-5/8	1/4	1,600
LHA8 Models 8 Fins Per Inch																		
LHA82160	216,000	3	25,950	30	-	-	21.0	-	-	10.5	8.4	142-1/2	55-13/16	41-3/32	1-3/8	2-5/8	1/4	1,160
LHA82500	250,000	4	29,600	30	-	-	26.4	-	-	13.2	10.4	185-1/2	50-5/16	41-3/32	1-3/8	2-5/8	1/4	1,500
LHA82780	278,000	4	34,600	30	-	-	28.0	-	-	14.0	11.2	185-1/2	56-1/4	41-3/32	1-3/8	2-5/8	1/4	1,600

Large Unit Coolers Electric Defrost

Models LHE6/LHL4 offer the same benefits as air defrost and are ideal for warehouse cooler/freezer applications.



LHE6/ LHL4 Model	Capacity (BTUH) 10°F TD -20 SST	Fan			PSC Motor (Total FLA)						Dimensions (in.)			Connections (in.) ¹			Approx. Net Wt. (lbs.)	
		Qty.	CFM	Dia. (in.)	208-230/60		208- 230/3/60	460/1/60		460/ 3/60	575/ 3/60	L	H	D	Coil Inlet ODF	Suction ODF		Ext. Equal. ODF
Wired 1 ph.	Wired 3 ph.	Wired 1 ph.	Wired 3 ph.	L	H	D												
LHE6 Models 6 Fins Per Inch																		
LHE6450	45,000	2	9,000	24	6.4	-	5.2	3.4	-	2.6	1.8	83-3/32	40-11/32	29-1/2	1-1/8	1-5/8	1/4	280
LHE6550	55,000	2	9,000	24	6.4	-	5.2	3.4	-	2.6	1.8	83-3/32	40-11/32	29-1/2	1-1/8	1-5/8	1/4	310
LHE6640	64,000	3	12,600	24	-	5.5	7.8	-	3.0	3.9	2.7	105-5/32	40-11/32	29-1/2	1-3/8	2-1/8	1/4	405
LHE6740	74,000	3	12,600	24	-	5.5	7.8	-	3.0	3.9	2.7	105-5/32	40-11/32	29-1/2	1-3/8	2-1/8	1/4	445
LHE6810	81,000	4	16,800	24	-	8.7	10.4	-	4.7	5.2	3.6	135-7/32	40-11/32	29-1/2	1-3/8	2-1/8	1/4	535
LHE6950	95,000	4	16,800	24	-	8.7	10.4	-	4.7	5.2	3.6	135-7/32	40-11/32	29-1/2	1-3/8	2-1/8	1/4	585
LHE61020	102,000	3	20,700	30	-	-	13.8	-	-	6.9	7.8	135-13/32	50-5/16	41-3/32	1-3/8	2-1/8	1/4	753
LHE61200	120,000	3	20,700	30	-	-	13.8	-	-	6.9	7.8	135-13/32	50-5/16	41-3/32	1-5/8	2-1/8	1/4	815
LHE61390	139,000	3	24,300	30	-	-	19.8	-	-	9.9	7.8	135-13/32	55-13/16	41-3/32	1-3/8 [†]	2-1/8 [†]	1/4 [†]	865
LHE61650	165,000	3	26,550	30	-	-	21.0	-	-	10.5	8.4	142-1/2	55-13/16	41-3/32	1-3/8	2-5/8	1/4	1,175
LHE62120	212,000	4	35,400	30	-	-	28.0	-	-	14.0	11.2	185-1/2	56-1/4	41-3/32	1-5/8	2-5/8	1/4	1,620
LHL4 Models 4 Fins Per Inch																		
LHL4400	40,000	2	9,400	24	6.4	-	5.2	3.4	-	2.6	1.8	83-3/32	40-11/32	29-1/2	1-1/8	1-5/8	1/4	277
LHL4480	48,000	2	9,400	24	6.4	-	5.2	3.4	-	2.6	1.8	83-3/32	40-11/32	29-1/2	1-1/8	1-5/8	1/4	306
LHL4560	56,000	3	13,200	24	-	5.5	7.8	-	3.0	3.9	2.7	105-5/32	40-11/32	29-1/2	1-3/8	2-1/8	1/4	400
LHL4650	65,000	3	13,200	24	-	5.5	7.8	-	3.0	3.9	2.7	105-5/32	40-11/32	29-1/2	1-3/8	2-1/8	1/4	440
LHL4710	71,000	4	17,600	24	-	8.7	10.4	-	4.7	5.2	3.6	135-7/32	40-11/32	29-1/2	1-3/8	2-1/8	1/4	528
LHL4840	84,000	4	17,600	24	-	8.7	10.4	-	4.7	5.2	3.6	135-7/32	40-11/32	29-1/2	1-3/8	2-1/8	1/4	578
LHL4890	89,000	3	21,600	30	-	-	13.8	-	-	6.9	7.8	135-13/32	50-5/16	41-3/32	1-3/8	2-1/8	1/4	744
LHL41050	105,000	3	21,600	30	-	-	13.8	-	-	6.9	7.8	135-13/32	50-5/16	41-3/32	1-5/8	2-1/8	1/4	805
LHL41220	122,000	3	25,200	30	-	-	19.8	-	-	9.9	7.8	135-13/32	55-13/16	41-3/32	1-3/8 [†]	2-1/8 [†]	1/4 [†]	854
LHL41440	144,000	3	27,600	30	-	-	21.0	-	-	10.5	8.4	142-1/2	55-13/16	41-3/32	1-3/8	2-5/8	1/4	1,160
LHL41860	186,000	4	36,800	30	-	-	28.0	-	-	14.0	11.2	185-1/2	56-1/4	41-3/32	1-5/8	2-5/8	1/4	1,600

¹ Drain FPT is 1-1/4" for all models. [†] (2) connections required.

Warehouse Unit Coolers

Large Unit Coolers Hot Gas Defrost

Models LHG6/LHF4 offer the same benefits as air defrost and are ideal for warehouse cooler/freezer applications. Also, optional field or factory-installed hot gas kits are available.



LHG6/ LHF4 Model	Capacity (BTUH)	Fan			PSC Motor (Total FLA)						Dimensions (in.)			Connections (in.) ¹					App. Net Wt. (lbs.)	
	10°F TD -20 SST	Qty.	CFM	Dia. (in.)	208- 230/1/60		208- 230/3/60	460/1/60		460/ 3/60	575/ 3/60	L	H	D	Coil Inlet ODF	Suct. ODF	Ext. Equal. ODF	Hot Gas Side Port		Hot Gas Drain Pan Ref Conn
					Wired 1 ph.	Wired 3 ph.		Wired 1 ph.	Wired 3 ph.											
LHG6 Models 6 Fins Per Inch																				
LHG6450	45,000	2	9,000	24	6.4	-	5.2	3.4	-	2.6	1.8	83-3/32	40-11/32	29-1/2	1-1/8	1-5/8	1/4	5/8	1-1/8	280
LHG6550	55,000	2	9,000	24	6.4	-	5.2	3.4	-	2.6	1.8	83-3/32	40-11/32	29-1/2	1-1/8	1-5/8	1/4	5/8	1-1/8	310
LHG6640	64,000	3	12,600	24	-	5.5	7.8	-	3.0	3.9	2.7	105-5/32	40-11/32	29-1/2	1-3/8	2-1/8	1/4	7/8	1-1/8	405
LHG6740	74,000	3	12,600	24	-	5.5	7.8	-	3.0	3.9	2.7	105-5/32	40-11/32	29-1/2	1-3/8	2-1/8	1/4	7/8	1-1/8	445
LHG6810	81,000	4	16,800	24	-	8.7	10.4	-	4.7	5.2	3.6	135-7/32	40-11/32	29-1/2	1-3/8	2-1/8	1/4	7/8	1-1/8	535
LHG6950	95,000	4	16,800	24	-	8.7	10.4	-	4.7	5.2	3.6	135-7/32	40-11/32	29-1/2	1-3/8	2-1/8	1/4	7/8	1-1/8	585
LHG61020	102,000	3	20,700	30	-	-	13.8	-	-	6.9	7.8	135-13/32	50-5/16	41-3/32	1-3/8	2-1/8	1/4	7/8	1-3/8	753
LHG61200	120,000	3	20,700	30	-	-	13.8	-	-	6.9	7.8	135-13/32	50-5/16	41-3/32	1-5/8	2-1/8	1/4	1-1/8	1-3/8	815
LHG61390	139,000	3	24,300	30	-	-	19.8	-	-	9.9	7.8	135-13/32	55-13/16	41-3/32	1-3/8 [†]	2-1/8 [†]	1/4 [†]	7/8 [†]	1-3/8	865
LHG61650	165,000	3	26,550	30	-	-	21.0	-	-	10.5	8.4	142-1/2	55-13/16	41-3/32	1-3/8 [†]	2-5/8 [†]	1/4 [†]	7/8 [†]	1-5/8	1,175
LHG62120	212,000	4	35,400	30	-	-	28.0	-	-	14.0	11.2	185-1/2	56-1/4	41-3/32	1-3/8 [†]	2-5/8 [†]	1/4 [†]	7/8 [†]	1-5/8	1,620
LHF4 Models 4 Fins Per Inch																				
LHF4400	40,000	2	9,400	24	6.4	-	5.2	3.4	-	2.6	1.8	83-3/32	40-11/32	29-1/2	1-1/8	1-5/8	1/4	5/8	1-1/8	277
LHF4480	48,000	2	9,400	24	6.4	-	5.2	3.4	-	2.6	1.8	83-3/32	40-11/32	29-1/2	1-1/8	1-5/8	1/4	5/8	1-1/8	306
LHF4560	56,000	3	13,200	24	-	5.5	7.8	-	3.0	3.9	2.7	105-5/32	40-11/32	29-1/2	1-3/8	2-1/8	1/4	7/8	1-1/8	400
LHF4650	65,000	3	13,200	24	-	5.5	7.8	-	3.0	3.9	2.7	105-5/32	40-11/32	29-1/2	1-3/8	2-1/8	1/4	7/8	1-1/8	440
LHF4710	71,000	4	17,600	24	-	8.7	10.4	-	4.7	5.2	3.6	135-7/32	40-11/32	29-1/2	1-3/8	2-1/8	1/4	7/8	1-1/8	528
LHF4840	84,000	4	17,600	24	-	8.7	10.4	-	4.7	5.2	3.6	135-7/32	40-11/32	29-1/2	1-3/8	2-1/8	1/4	7/8	1-1/8	578
LHF4890	89,000	3	21,600	30	-	-	13.8	-	-	6.9	7.8	135-13/32	50-5/16	41-3/32	1-3/8	2-1/8	1/4	7/8	1-3/8	744
LHF41050	105,000	3	21,600	30	-	-	13.8	-	-	6.9	7.8	135-13/32	50-5/16	41-3/32	1-5/8	2-1/8	1/4	1-1/8	1-3/8	805
LHF41220	122,000	3	25,200	30	-	-	19.8	-	-	9.9	7.8	135-13/32	55-13/16	41-3/32	1-3/8 [†]	2-1/8 [†]	1/4 [†]	7/8 [†]	1-3/8	854
LHF41440	144,000	3	27,600	30	-	-	21.0	-	-	10.5	8.4	142-1/2	55-13/16	41-3/32	1-3/8 [†]	2-5/8 [†]	1/4 [†]	7/8 [†]	1-5/8	1,160
LHF41860	186,000	4	36,800	30	-	-	28.0	-	-	14.0	11.2	185-1/2	56-1/4	41-3/32	1-3/8 [†]	2-5/8 [†]	1/4 [†]	7/8 [†]	1-5/8	1,600

¹ Drain FPT is 1-1/4" for all models.

[†] (2) connections required.

What is Thermo-Flex™ coil design?

Larkin's innovative coil design utilizes a new and unique approach to coil expansion that virtually eliminates the possibility of leaks at tube sheets and coil supports. Our engineers conceived the design after intense analysis of the cause of common coil failures. Through the use of accelerated test procedures and computer simulation, our engineers pinpointed the primary stress points of a coil during its operation.

The **Thermo-Flex™** coil design for the evaporator (U.S. Patent No. 5,584,340) allows the coil to 'flex' during periods of defrost which result in expansion of the coil surface. By eliminating the possibility of wear at critical stress areas, the integrity and longevity of the unit are dramatically increased.


The result is a product which greatly enhances overall system reliability and reduces risk of costly refrigerant loss. To prove our claim, Larkin offers a five-year limited guarantee against leaks at tube sheets and center supports for all medium profile and large unit cooler models.

Packaged Refrigeration Systems

PRO³ Top Mount Packaged Refrigeration Systems

Models PTN/PTT are an evaporator and condensing unit all in one package. This unit is designed to maximize storage area inside a cooler or freezer and is ideal for small- to medium-sized restaurant and convenience store application where holding temperature is the primary goal.

Shaded Pole motors standard for both condensing unit and evaporator section, PSC motors optional for both condensing unit and evaporator section, EC motors available for evaporator section only.



EASE OF INSTALLATION AND SERVICE

- Installation takes a fraction of the time required for a split system: no piping or loose components to install, refrigerant is pre-charged at factory and a field superheat adjustment is not required (see installation manual for more information)
- No drain line required for indoor units. Indoor models come with a condensate evaporation pan
- Flexible design allows for multiple installation methods: optimized for indoor use, but outdoor models available with weatherhood installed. Outdoor models also come with: crankcase heater, drain line heater and fan-cycling for head pressure control
- Maximizes storage area in a cooler or freezer: evaporator grill mounts flush on a standard 4 or a recessed in a 5-1/2" ceiling panel

EASE OF USE

- System is factory-assembled, evacuated, charged, run-tested and wired; no additional components or refrigerant charging required; most models come with a 26 power cord ready to plug-in
- Controls preset for typical applications: +35° F for coolers, -10° F, for freezers and are easy to adjust (019L6 set for 0° F)

ENERGY EFFICIENT | ENVIRONMENTALLY FRIENDLY

- Energy Solutions[®] energy-efficient motors from InterLink[™] Commercial Refrigeration Parts:
 - PSC motors standard in both condensing unit and evaporator section
 - EC motors optional, but may be required in certain installations (evaporator section only)
- Reduced refrigerant charge: system uses as little as 10 percent* of refrigerant required for a comparable split system

RELIABLE | DURABLE

- System is fully-assembled and quality-tested at the factory
- Electronic control provides accurate temperature control
- Liquid-line filter drier (medium and large cabinet only)
- Two-year parts warranty

* Results may vary. Estimate based on a typical 25-foot refrigerant line.

Performance Data

Coolers - Air Defrost System

Model	90° F Ambient	
	35° F	38° F
PTN024H2	2,630	2,740
PTN029H2	3,170	3,290
PTN040H2	4,380	4,500
PT*047H2	5,150	5,480
PT*063H2	6,910	7,340
PT*072H2	7,890	8,330
PT*099H2	10,850	11,730
PT*128H2	14,030	15,010

Freezers - Electric Defrost Systems

Model	90° F Ambient		
	0° F	-10° F	-20° F
PTN019L6	2,640	–	–
PT*021L6	2,860	2,300	1,430
PT*031L6	4,500	3,400	2,200
PT*044L6	6,260	4,830	3,630
PT*052L6	7,470	5,720	4,170
PT*069L6	9,670	7,850	5,600



Electrical Data

Model	Voltage	MCA	MOPD	Unit Amps	Evaporator CFM	Plug Supplied	Matching NEMA Receptacle	Cabinet Size ²	Approx. Net Weight (lbs.)
PTN024H2A [^]	115/1/60	10.2	15	10.2	340	Yes	5-20R	Small	88
PTN029H2A [^]	115/1/60	10.6	15	10.6	340	Yes	5-20R	Small	90
PTN040H2A [^]	115/1/60	11.7	15	11.7	340	Yes	5-20R	Small	92
PT*047H2A [^]	115/1/60	16.9	20	14.2	350	Yes	5-20R	Medium	192
PT*047H2B [^]	208-230/1/60	8.6	15	7.3	350	Yes ¹	6-15R	Medium	192
PT*063H2B [^]	208-230/1/60	11.6	15	9.9	550	Yes ¹	6-15R	Medium	207
PT*072H2B [^]	208-230/1/60	10.9	15	9.3	500	Yes ¹	6-15R	Medium	211
PT*099H2B [^]	208-230/1/60	17.1	20	14.7	875	Yes ¹	6-20R	Large	270
PT*099H2C [^]	208-230/3/60	15.4	20	13.3	875	No	–	Large	265
PT*128H2B [^]	208-230/1/60	20.3	30	17.2	825	No	–	Large	290
PT*128H2C [^]	208-230/3/60	14.8	20	12.8	825	No	–	Large	285
PTN019L6A [^]	115/1/60	13.0	20	13.0	340	Yes	5-20R	Small	101
PT*021L6A [^]	115/1/60	14.5	20	12.3	350	Yes	5-20R	Medium	213
PT*021L6B [^]	208-230/1/60	7.6	15	6.5	350	Yes ¹	6-15R	Medium	213
PT*031L6B [^]	208-230/1/60	13.8	15	11.6	550	Yes ¹	6-15R	Medium	221
PT*044L6B [^]	208-230/1/60	15.9	20	13.3	520	Yes ¹	6-20R	Medium	225
PT*052L6B [^]	208-230/1/60	18.1	20	15.3	900	Yes ¹	6-20R	Large	275
PT*052L6C [^]	208-230/3/60	12.2	15	13.0	900	No	–	Large	270
PT*069L6B [^]	208-230/1/60	23.8	30	20.0	875	No	–	Large	280
PT*069L6C [^]	208-230/3/60	15.9	20	14.2	875	No	–	Large	275

*T For Outdoor, N for Indoor.

[^] H for PSC, E for EC motor on evaporator section only.

¹ Plug Supplied on Indoor models only.

² See technical bulletin for dimensions.

Packaged Refrigeration Systems

PRO³ Side Mount Packaged Refrigeration Systems

Model PST is an evaporator and condensing unit all in one package. This unit is optimized for outdoor applications and is ideal for small- to medium-sized restaurant and convenience store applications where maximum airflow is essential for pulling down the temperature of foods or beverages. The Side Mount PRO³ is also available with electric defrost medium temperature models, ensuring maximum performance in storage applications slightly above freezing.

PSC motors standard for both condensing unit and evaporator section, EC motors available for evaporator section only.



EASE OF INSTALLATION AND SERVICE

- **Installation takes a fraction of the time required for a split system:** refrigerant is pre-charged at factory, superheat adjustment is not required and unit slides into slots in standard walk-in panel (see installation manual for more information)
- **Designed for simple serviceability:** the condensing unit section's cabinet door can be quickly removed; in addition, the electrical box is located outside the cabinet for easy access
- **Flexible design allows for multiple installation methods:** Optimized for outdoor use, but can be used indoors as well (with drain connection)
- Lifting lugs and hanging brackets in evaporating section allow for easy installation

EASE OF USE

- System is factory-assembled, evacuated, charged, run-tested and wired; no additional components required
- Controls preset for typical applications: +38° F for high temp. coolers, +35° F for medium temp. coolers, -10° F for freezers and are easy to adjust

PERFORMANCE

- Maximized airflow: evaporator placement in walk-in box with pull-through fans
 - Suitable for temperature pull-down and holding temperature
- Increased condenser capacity, by avoiding compressor heat across the coil
 - Improved tolerance in high-ambient conditions

- Electric defrost standard for medium temperature models, allowing for maximum performance in storage applications just above 32°F
- Fan-cycling for head pressure control
- Crankcase heater
- Drain line heater

RELIABLE | DURABLE

- System is fully-assembled and quality-tested at the factory
- Electronic microprocessor control provides accurate temperature control
- Liquid-line filter drier
- Two-year parts warranty

ENVIRONMENTALLY FRIENDLY

- **Energy Solutions® energy-efficient motors from InterLink™ Commercial Refrigeration Parts:**
 - PSC motors standard in both condensing unit and evaporator section
 - EC motors optional, but may be required in certain installations (evaporator section only)
- **Reduced refrigerant charge:** the PRO³ Side Mount packaged refrigeration system can use as little as 10-15 percent* of refrigerant required for a comparable split system

*Results may vary. Estimate based on a typical a typical 100-foot refrigerant line length.



Performance Data

Coolers - Air Defrost System

Model	90° F Ambient	
	35° F	38° F
PST070H6B [^]	6,860	7,198
PST090H6B [^]	8,928	9,363
PST131H6B [^]	12,859	13,540
PST147H6B [^]	14,545	15,245

Coolers - Electric Defrost System

Model	90° F Ambient
	35° F
PST066M6B [^]	6,860
PST086M6B [^]	8,928
PST124M6B [^]	12,859
PST141M6B [^]	14,545

Freezers - Electric Defrost System

Model	90° F Ambient		
	0° F	-10° F	-20° F
PST034L6B [^]	5,031	3,651	2,395
PST051L6B [^]	6,922	5,428	3,943
PST057L6B [^]	7,994	6,079	4,153
PST077L6B [^]	10,602	8,179	6,030

Electrical Data

Model	Voltage	MCA	MOPD	Evaporator CFM	Cabinet Size ¹	Approx. Net Weight (lbs.)
PST070H6B [^]	208-230/1/60	15.0	20.0	625	Small	260
PST090H6B [^]	208-230/1/60	15.0	20.0	625	Small	265
PST131H6B [^]	208-230/1/60	15.0	20.0	1,350	Large	320
PST147H6B [^]	208-230/1/60	15.0	20.0	1,350	Large	325
PST066M6B [^]	208-230/1/60	15.0	20.0	625	Small	260
PST086M6B [^]	208-230/1/60	15.0	20.0	625	Small	265
PST124M6B [^]	208-230/1/60	15.0	20.0	1,350	Large	320
PST141M6B [^]	208-230/1/60	15.0	20.0	1,350	Large	325
PST034L6B [^]	208-230/1/60	15.0	20.0	625	Small	260
PST051L6B [^]	208-230/1/60	15.0	20.0	625	Small	265
PST057L6B [^]	208-230/1/60	15.0	20.0	1,350	Large	320
PST077L6B [^]	208-230/1/60	20.7	35.0	1,350	Large	325

[^] H for PSC, E for EC motor on evaporator section only.

¹ See technical bulletin for dimensions.

Condensing Units

1/2 - 5 HP Indoor/Outdoor Condensing Units with Hermetic Compressors

Model LH condensing units are ideal for convenience store, restaurant and other commercial applications. The LH model condensing units feature a hermetic refrigeration compressor with oversized **HyperCore™** microchannel condenser. Also, the LH Series condensing units have a shut off valve in the discharge line of the hermetic compressor. PSC motors come standard to help you save energy. UL listed for US and Canada. Available with factory installed **Smart Defrost Kit™** (SDK) system and Variable Speed EC (VSEC) motor with **Orbus™** Controller.



HyperCore™
microchannel coil technology



Variable Speed EC (VSEC) motors with Orbus™ Controller by InterLink™

VSEC motors by InterLink™ with the proprietary Orbus™ Controller are available as an option on 1/2-6 HP air-cooled condensing units from Larkin. Choosing this option saves energy and reduces costs for the end user by controlling the speed of motors in response to loads.

To achieve an optimal system that is both energy efficient and environmentally friendly, choose the following options for your unit:

VSEC motors with Orbus™ Controller, factory-installed **Smart Defrost Kit™** and a variety of compressor options, including efficient **scroll**, **hermetic** and **semi-hermetic compressor**.

These options provide unmatched energy efficiency — the perfect solution for applications where energy savings is essential for success.

Orbus™
Controller



LH Series Indoor or Outdoor Installation, Hermetic Compressors (1/2 - 5 HP)

LH Model	Compressor	Refrigerant	Suction Temp.	Capacity (BTUH)			Connections (ID)			Unit MCA ¹			Dimensions (in.)			Approx. Net Wt. (lbs.)
				95° F Ambient	Liquid	Suction	208-230/1	208-230/3	460/3	L	H	D				
LH*005H6	RST45C1E	High Temp R-404A/507	35°F	7,790	3/8	1/2	15.0	-	-	23-3/4	17-1/4	28-1/4	135			
LH*009H6	RST64C1E			11,080	3/8	5/8	15.0	-	-	23-3/4	17-1/4	28-1/4	144			
LH*010H6†	RS70C1E			11,960	3/8	5/8	15.0	15.0	-	23-3/4	17-1/4	28-1/4	138			
LH*015H6	CS10K6E			18,400	3/8	5/8	15.0	15.0	-	37-3/4	17-1/4	28-1/4	193			
LH*025H6	CS14K6E			23,030	3/8	7/8	20.0	15.0	-	37-3/4	17-1/4	28-1/4	208			
LH*032H6	CS20K6E			37,110	1/2	7/8	25.9	20.2	-	42-1/2	29-3/4	30-1/4	275			
LH*040H6	CS27K6E ²			45,670	1/2	1-1/8	33.1	21.1	-	42-1/2	29-3/4	30-1/4	281			
LH*050H6	CS33K6E ²			50,060	1/2	1-1/8	41.2	24.2	-	42-1/2	29-3/4	30-1/4	313			
LH*005X6	RST45C1E	Extended Temp R-404A/507	25°F	5,970	3/8	1/2	15.0	-	-	23-3/4	17-1/2	28-1/4	135			
LH*008X6	RST55C1E			7,070	3/8	1/2	15.0	-	-	23-3/4	17-1/2	28-1/4	135			
LH*009X6	RST64C1E			8,420	3/8	5/8	15.0	-	-	23-3/4	17-1/2	28-1/4	144			
LH*010X6†	RS70C1E			8,850	3/8	5/8	15.0	15.0	-	23-3/4	17-1/4	28-1/4	138			
LH*015X6	CS10K6E			13,960	3/8	5/8	15.0	15.0	-	37-3/4	17-1/4	28-1/4	193			
LH*020X6	CS12K6E			16,000	3/8	7/8	15.0	15.0	-	37-3/4	17-1/4	28-1/4	203			
LH*025X6	CS14K6E			17,490	3/8	7/8	15.0	15.0	15.0	37-3/4	17-1/4	28-1/4	208			
LH*030X6	CS18K6E			25,490	1/2	7/8	21.0	15.0	15.0	42-1/2	29-3/4	30-1/4	290			
LH*032X6	CS20K6E			27,890	1/2	7/8	24.0	20.0	15.0	42-1/2	29-3/4	30-1/4	275			
LH*040X6	CS27K6E			37,270	1/2	1-1/8	30.3	20.7	15.0	42-1/2	29-3/4	30-1/4	281			
LH*050X6	CS33K6E	41,000	1/2	1-1/8	38.0	24.5	15.0	42-1/2	29-3/4	30-1/4	313					
LH*011L6	CF04K6E	Low Temp R-404A/507	-10°F	4,920	3/8	5/8	15.0	15.0	-	23-3/4	17-1/4	28-1/4	139			
LH*014L6	CF06K6E			7,750	3/8	5/8	15.0	15.0	-	23-3/4	17-1/4	28-1/4	170			
LH*019L6	CF06K6E			8,750	3/8	5/8	15.0	15.0	-	37-3/4	17-1/4	28-1/4	200			
LH*025L6	CF09K6E			12,000	3/8	7/8	20.0	15.0	-	37-3/4	17-1/4	28-1/4	222			
LH*031L6	CF12K6E			14,360	1/2	7/8	22.3	15.0	15.0	37-3/4	19-3/4	28-1/4	223			
LH*005H2	ART82C1	Medium & High Temp R-22	25°F	4,870	3/8	1/2	15.0	-	-	23-3/4	17-1/4	28-1/4	135			
LH*008H2	RS64C2			7,740	3/8	1/2	15.0	-	-	23-3/4	17-1/4	28-1/4	141			
LH*010H2	RS70C1			8,150	3/8	5/8	15.0	15.0	-	23-3/4	17-1/4	28-1/4	136			
LH*015H2	CR18KQ			12,210	3/8	5/8	15.0	15.0	15.0	37-3/4	17-1/4	28-1/4	189			
LH*020H2	CR24KQ			16,910	3/8	7/8	20.0	15.0	15.0	37-3/4	17-1/4	28-1/4	193			
LH*029M2	CR37KQ			22,780	1/2	7/8	21.8	15.0	15.0	37-3/4	19-1/4	28-1/4	214			
LH*030H2	CR37KQ			28,090	1/2	7/8	24.3	30.0	15.0	42-1/2	29-3/4	30-1/4	281			
LH*040H2	CR53KQ			38,840	1/2	1-1/8	36.0	23.9	15.0	42-1/2	29-3/4	30-1/4	299			
LH*050H2	CRN-0500			44,050	1/2	1-1/8	42.0	28.0	15.0	42-1/2	29-3/4	30-1/4	310			

* = T for Outdoor, N for Indoor, S for Beacon II™

† = RS compressor not suitable for R-507

¹ Minimum Circuit Amps - Air Defrost Type Unit

² 230 Volt only

Condensing Units

2 - 6 HP Indoor/Outdoor Condensing Units with Scroll® Compressors

Model LZ features a complete line of Copeland's Scroll® compressors. These condensing units have an oversized HyperCore™ microchannel condenser which allows units to operate in high ambient for 40° F suction temperature and below. PSC motors come standard to help you save energy. UL listed for US and Canada. Available with factory installed Smart Defrost Kit™(SDK) system and Variable Speed EC (VSEC) motor with Orbus™ Controller.



LZ Series Indoor or Outdoor Installation, Scroll® Compressors (2-6 HP)

LZ Model	Compressor	Refrigerant	Suction Temp.	Capacity (BTUH)			Connections (in.)			Unit MCA ¹			Dimensions (in.)			Approx. Net Wt. (lbs.)
				95°F Ambient	Liquid IDS	Suction IDS	208-230/1	208-230/3	460/3	L	H	D				
LZ*020M6	ZS15K4E	Medium Temp. R-404A/507	25°F	18,930	1/2	7/8	20	15	15	37-3/4	19-3/4	28-1/4	209			
LZ*025M6	ZS19K4E			22,490	1/2	7/8	20	15	15	37-3/4	19-3/4	28-1/4	218			
LZ*030M6	ZS21K4E			27,270	1/2	7/8	22	20	15	42-1/2	29-3/4	30-1/4	287			
LZ*035M6	ZS26K4E			32,820	1/2	7/8	27	20	15	42-1/2	29-3/4	30-1/4	290			
LZ*045M6	ZS30K4E			38,230	1/2	1-1/8	34	20	15	42-1/2	29-3/4	30-1/4	317			
LZ*055M6	ZS38K4E			45,160	1/2	1-1/8	40	28	15	42-1/2	29-3/4	30-1/4	317			
LZ*060M6	ZS45K4E			52,340	1/2	1-1/8	-	30	15	42-1/2	29-3/4	30-1/4	317			
LZ*020L6	ZF06K4E	Low Temp. R-404A/507	-10°F	9,540	1/2	7/8	20	15	15	37-3/4	19-3/4	28-1/4	209			
LZ*025L6	ZF08K4E			11,850	1/2	7/8	20	15	15	37-3/4	19-3/4	28-1/4	218			
LZ*030L6	ZF09K4E			13,200	1/2	7/8	20	15	15	37-3/4	19-3/4	28-1/4	218			
LZ*035L6	ZF11K4E			15,860	1/2	7/8	24	20	15	37-3/4	19-3/4	28-1/4	217			
LZ*045L6	ZF13K4E			19,490	1/2	1-1/8	34	20	15	42-1/2	29-3/4	30-1/4	307			
LZ*055L6	ZF15K4E			23,820	1/2	1-1/8	40	28	15	42-1/2	29-3/4	30-1/4	313			
LZ*060L6	ZF18K4E			28,970	1/2	1-1/8	-	30	15	42-1/2	29-3/4	30-1/4	317			

NOTE: The ZF compressor comes with liquid injection.

For R-22 model capacity information, see product bulletin.

1/2 - 5 HP Indoor/Outdoor Condensing Units with Semi-Hermetic Compressors

Model LS condensing units are ideal for convenience store, restaurant and other commercial applications. The units feature a semi-hermetic refrigeration compressor, which is spring-mounted with vibration eliminators on all 1-1/2 to 6 HP (1/2 to 1 HP compressors are rigid mounted and have a discharge loop). Also, these condensing units come standard with an oversized HyperCore™ microchannel coil technology condenser that works in high ambients, encapsulated auto-reset high pressure controls to eliminate leaks, pre-painted steel cabinet for superior strength and corrosion protection, and suction and discharge service valves. PSC motors come standard to help you save energy. UL listed for US and Canada. Available with factory installed Smart Defrost Kit™(SDK) system and Variable Speed EC (VSEC) motor with Orbus™ Controller.



LS Series Indoor or Outdoor Installation, Semi-Hermetic Compressors (1/2-5 HP)

LS Model	Compressor	Refrigerant	Suction Temp.	Capacity (BTUH)			Connections (in.)			Unit MCA ¹			Dimensions (in.)			Approx. Net Wt. (lbs.)
				95° F Ambient	Liquid (IDS)	Suction (IDS)	208-230/1	208-230/3	460/3	L	H	D				
LS*005H2	HAG-0050	Medium & High Temp R-22	25°F	4,280	3/8	1/2	15	15	-	23-3/4	17-1/4	28-1/4	161			
LS*008H2	KAN-0075			6,630	3/8	5/8	15	15	-	23-3/4	17-1/4	28-1/4	180			
LS*008M2	KAE-0075			7,510	3/8	5/8	15	15	-	23-3/4	17-1/4	28-1/4	180			
LS*010H2	KAR-0100			9,260	3/8	5/8	15	15	-	23-3/4	17-1/4	28-1/4	175			
LS*010M2	KAM-0100			9,580	3/8	5/8	15	15	-	23-3/4	17-1/4	28-1/4	178			
LS*015H2	KAG-0150			12,230	3/8	7/8	15	15	15	37-3/4	17-1/4	28-1/4	221			
LS*020H2	ERA-0200			13,700	3/8	7/8	15 [†]	15	15	37-3/4	17-1/4	28-1/4	293			
LS*020M2	KAK-0200			16,530	3/8	7/8	15	15	-	37-3/4	17-1/4	28-1/4	189			
LS*021M2	ERC-0200			17,640	3/8	7/8	15 [†]	15	15	37-3/4	17-1/4	28-1/4	301			
LS*029M2	ERF-0310			24,720	1/2	7/8	21 [†]	15	15	37-3/4	19-3/4	28-1/4	391			
LS*030H2	ERF-0310			26,800	1/2	7/8	23 [†]	20	15	42-1/2	29-3/4	30-1/4	385			
LS*040H2	NRB-0400			37,830	1/2	1-1/8	-	28	15	42-1/2	29-3/4	30-1/4	460			
LS*050H2	NRA-0500			43,310	1/2	1-1/8	-	25	15	42-1/2	29-3/4	30-1/4	462			
LS*050M2	NRM-0500			51,590	1/2	1-1/8	-	31	15	42-1/2	29-3/4	30-1/4	462			
LS*005M6	HAG-005E	Medium Temp R-404A/507	25°F	5,210	3/8	1/2	15	-	-	23-3/4	17-1/4	28-1/4	161			
LS*010M6	KAR-010E			9,140	3/8	5/8	15	15	-	23-3/4	17-1/4	28-1/4	178			
LS*020M6	KAK-020E			16,240	3/8	7/8	15	15	-	37-3/4	17-1/4	28-1/4	189			
LS*021M6	ERC-021E			18,850	3/8	7/8	-	15	15	37-3/4	17-1/4	28-1/4	301			
LS*030M6	ERF-031E			29,690	1/2	7/8	23 [†]	20	15	42-1/2	29-3/4	30-1/4	397			
LS*040M6	NRB-040E			39,240	1/2	1-1/8	-	28	15	42-1/2	29-3/4	30-1/4	460			
LS*005L6	KAN-005E	Low Temp R-404A/507	-10°F	2,580	3/8	1/2	15	15	-	23-3/4	17-1/4	28-1/4	172			
LS*008L6	KAM-007E			4,320	3/8	5/8	15	15	-	23-3/4	17-1/4	28-1/4	172			
LS*010L6	KAJ-010E			5,790	3/8	5/8	15	15	-	23-3/4	17-1/4	28-1/4	178			
LS*015L6	KAL-015E			8,920	3/8	7/8	15	15	-	37-3/4	17-1/4	28-1/4	225			
LS*020L6	EAD-020E			9,870	3/8	7/8	15 [†]	15	-	37-3/4	17-1/4	28-1/4	291			
LS*021L6	EAV-021E			11,280	3/8	7/8	20	15	15	37-3/4	17-1/4	28-1/4	301			
LS*030L6	LAH-032E			16,930	1/2	7/8	20 [†]	20	15	37-3/4	19-3/4	28-1/4	357			
LS*030E6	LAC-032E			15,700 ^{††}	1/2	7/8	20 [†]	15	15	37-3/4	19-3/4	28-1/4	391			
LS*040L6	NRD-040E ^{^^} NRD-032E ^{^^}			22,530	1/2	1-1/8	35 [†]	22	15	42-1/2	29-3/4	30-1/4	457			

* = T for Outdoor, N for Indoor, S for Beacon II™

^^ NRD1-040E Compressor is Single Phase & uses R-404A only.

^^ Uses R-404A & 507 in 3 phase model.

¹ Minimum Circuit Amps - Air Defrost Type Unit

[†] Units are 230 volt

^{††} Rated at -20° F

Condensing Units

3 - 22 HP Indoor or Outdoor Condensing Units with Discus® or Scroll® Compressors

Model LD/LZ condensing unit's enhanced grill design gives up to 40% more free-air area than before and its vertical receiver needs less refrigerant to ensure a solid column of liquid reaches the expansion valve. Fan motors and serviceable components are accessible through the front grill for quick service and the sight glass is conveniently placed so that charging is quick, easy and accurate. Thorough cleaning of the coil is easier because the unit's top is one piece and lighter for easy removal. A liquid base valve and suction service tap is placed on the outside of the cabinet for easy pump-downs and quick diagnosis. The footprint is smaller for easy jobsite placement. These condensing units utilize the **Floating Tube™** coil design, which eliminates tube-sheet leaks, allowing Larkin to offer you a 5-year warranty (including labor and refrigerant) against tube-sheet leaks. PSC motors come standard to help you save energy.



LDT/LDN/LDS Standard Discus® Models

LD Model	Compressor	Refrigerant	Suction Temp	BTUH 95°F Amb.	Air Defrost Min. Circuit Amp		Connections (in.)		Dimensions (in.)			Approx. Net Wt. (lbs.)
					208-230/3/60	460/3/60	Liquid	Suction	L	H	D	
LD*0500H2 LD*0501H2	2DC3R53KE 2DD3R63KE	Medium & High Temp R-22	25°F	43,380 49,380	27.7 27.7	15.0 15.0	1/2 1/2	1-1/8 1-1/8	36-3/4 36-3/4	39-1/4 39-1/4	51-3/4 51-3/4	751 751
LD*0750H2 LD*0751H2 LD*0800H2	2DL3R78KE 2DA3R89KE 3DA3R10ME			61,860 71,930 88,450	38.1 41.3 51.4	20.0 20.0 26.2	1/2 5/8 5/8	1-1/8 1-3/8 1-3/8	36-3/4 36-3/4 36-3/4	39-1/4 39-1/4 39-1/4	51-3/4 63-3/4 63-3/4	761 985 1,020
LD*1000H2 LD*1200H2 LD*1500H2	3DB3R12ME 3DF3R15ME 3DS3R17ME			103,250 115,210 134,780	54.3 59.4 75.7	26.2 30.2 36.9	5/8 5/8 7/8	1-3/8 1-3/8 1-5/8	36-3/4 36-3/4 41-3/4	39-1/4 39-1/4 48-3/4	63-3/4 63-3/4 75-1/8	1,045 1,065 1,182
LD*0500M6 LD*0501M6	2DC3R53KE 2DD3R63KE			39,280 45,530	27.7 27.7	15.0 15.0	1/2 1/2	1-1/8 1-1/8	36-3/4 36-3/4	39-1/4 39-1/4	51-3/4 51-3/4	751 751
LD*0750M6 LD*0751M6 LD*0800M6	2DL3R78KE 2DA3R89KE 3DA3R10ME			56,000 68,060 80,170	38.1 41.3 51.4	20.0 20.0 26.2	1/2 5/8 5/8	1-1/8 1-3/8 1-3/8	36-3/4 36-3/4 36-3/4	39-1/4 39-1/4 39-1/4	51-3/4 63-3/4 63-3/4	761 985 1,020
LD*1000M6 LD*1200M6 LD*1500M6	3DB3R12ME 3DF3R15ME 3DS3R17ME			93,930 111,940 128,610	54.3 59.4 75.7	26.2 30.2 36.9	5/8 5/8 7/8	1-3/8 1-3/8 1-5/8	36-3/4 36-3/4 41-3/4	39-1/4 39-1/4 48-3/4	63-3/4 63-3/4 75-1/8	1,045 1,065 1,182
LD*0300L6 LD*0400L6	2DF3F16KE 2DL3F20KE	Low Temp R-404A/R-507	-10°F	25,320 29,620	20.6 32.2	15.0 15.0	1/2 1/2	1-1/8 1-1/8	36-3/4 36-3/4	39-1/4 39-1/4	51-3/4 51-3/4	737 741
LD*0600L6 LD*0601L6 LD*0750L6	2DB3F25KE 3DA3F28KE 3DB3F33KE			35,160 38,920 45,630	34.4 32.7 37.2	20.0 20.0 20.0	1/2 1/2 1/2	1-1/8 1-1/8 1-1/8	36-3/4 36-3/4 36-3/4	39-1/4 39-1/4 39-1/4	51-3/4 51-3/4 51-3/4	751 781 805
LD*0900L6 LD*1000L6 LD*1200L6 LD*1500L6 LD*2200L6	3DF3F40KE 3DS3F46KE 4DA3F47KE 4DL3F63KE 4DT3F76KE			59,280 64,870 70,880 89,380 103,010	46.9 51.9 59.9 67.8 80.9	22.6 24.6 30.0 33.9 40.5	5/8 5/8 7/8 7/8 7/8	1-3/8 1-3/8 1-5/8 1-5/8 1-5/8	36-3/4 36-3/4 41-3/4 41-3/4 41-3/4	39-1/4 39-1/4 48-3/4 48-3/4 48-3/4	63-3/4 63-3/4 75-1/8 75-1/8 75-1/8	1,030 1,035 1,199 1,234 1,224
LD*0300L2 LD*0400L2	2DF3F16KE 2DL3F20KE			22,160 25,870	20.6 32.2	15.0 15.0	1/2 1/2	1-1/8 1-1/8	36-3/4 36-3/4	39-1/4 39-1/4	51-3/4 51-3/4	737 741
LD*0600L2 LD*0601L2 LD*0750L2	2DB3F25KE 3DA3F28KE 3DB3F33KE			31,180 34,760 42,060	34.4 32.7 37.2	20.0 20.0 20.0	1/2 1/2 1/2	1-1/8 1-1/8 1-1/8	36-3/4 36-3/4 36-3/4	39-1/4 39-1/4 39-1/4	51-3/4 51-3/4 51-3/4	751 781 805
LD*0900L2 LD*1000L2 LD*1200L2 LD*1500L2 LD*2200L2	3DF3F40KE 3DS3F46KE 4DA3F47KE 4DL3F63KE 4DT3F76KE			53,290 57,230 63,600 79,760 92,430	46.9 51.9 59.9 67.8 80.9	22.6 24.6 30.0 33.9 40.5	5/8 5/8 7/8 7/8 7/8	1-3/8 1-3/8 1-5/8 1-5/8 1-5/8	36-3/4 36-3/4 41-3/4 41-3/4 41-3/4	39-1/4 39-1/4 48-3/4 48-3/4 48-3/4	63-3/4 63-3/4 75-1/8 75-1/8 75-1/8	1,030 1,035 1,199 1,234 1,224

LZT/LZN/LZS Scroll® Models


LZ Model	Compressor	Refrigerant	Suction Temp	BTUH 95°F Amb.	Air Defrost Min. Circuit Amp		Connections (in.)		Dimensions (in.)			Approx. Net Wt. (lbs.)
					208-230/3/60	460/3/60	Liquid	Suction	L	H	D	
LZ*0650M6 LZ*0700M6	ZB50KCE ZB58KCE	High Temp R-404A	25°F	58,130 69,460	34.8 39.9	18.7 22.2	1/2 5/8	1-1/8 1-3/8	36-3/4 36-3/4	39-1/4 39-1/4	51-3/4 63-3/4	574 800
LZ*0750M6 LZ*0860M6	ZB66KCE ZB76KCE			80,250 90,090	39.1 51.9	23.4 23.4	5/8 5/8	1-3/8 1-3/8	36-3/4 36-3/4	39-1/4 39-1/4	63-3/4 63-3/4	813 818
LZ*1000M6 LZ*1401M6	ZS92K4E ZS11M4E			108,200 128,920	64.7 76.1	31.8 36.0	5/8 7/8	1-3/8 1-5/8	36-3/4 41-3/4	39-1/4 48-3/4	63-3/4 75-1/8	908 1235
LZ*0750L6 LZ*1000L6	ZF24K4E ZF33K4E			32,650 45,630	36.4 51.6	19.5 25.5	1/2 1/2	1-1/8 1-1/8	36-3/4 36-3/4	39-1/4 39-1/4	51-3/4 51-3/4	671 671
LZ*1300L6 LZ*1500L6	ZF40K4E ZF48K4E	Low Temp R-404A/R-507	-10°F	57,900 65,370	64.7 67.1	33.4 31.0	5/8 5/8	1-3/8 1-3/8	36-3/4 36-3/4	39-1/4 39-1/4	63-3/4 63-3/4	910 891
LZ*0750L2 LZ*1000L2	ZF24K4E ZF33K4E			Low Temp R-22	-10°F	30,610 42,940	36.4 51.6	19.5 25.5	1/2 1/2	1-1/8 1-1/8	36-3/4 36-3/4	39-1/4 39-1/4
LZ*1300L2 LZ*1500L2	ZF40K4E ZF48K4E	53,530 60,860	64.7 67.1			33.4 31.0	5/8 5/8	1-3/8 1-3/8	36-3/4 36-3/4	39-1/4 39-1/4	63-3/4 63-3/4	910 891

*= T for Outdoors, N for Indoors, S for Beacon II™
See Technical Bulletin for 575V information.

Condensing Units

12 - 40 HP Outdoor Condensing Units

Model LDV outdoor condensing unit offers models from 12 - 40 Horsepower. The LDV features a new leak resistant design which includes the **Floating Tube™** coil design. Other features include high efficiency Copeland Discus® compressors with POE oil and convenient access panels for easy servicing of 5 internal components. LDV models are available with oversized condensers.

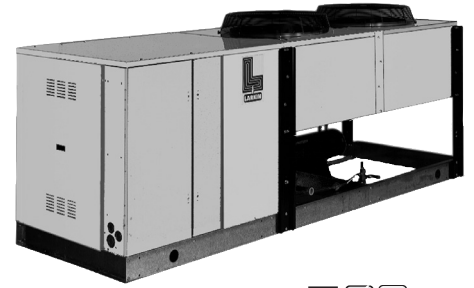

LDV - 12 - 40 HP Outdoor Condensing Unit

LDV Model	Compressor	Refrig.	Suction Temp.	BTUH 95°F Amb.	Air Defrost Min. Circuit Amp		Connections (in.)		Dimensions (in.)			Approx. Net Wt. (lbs.)
					230/60/3	460/60/3	Liquid	Suction	L	H	D	
LDV1500H2	3DS3R17ME	Medium Temp. R-22	25°F	133,500	74.9	36.5	7/8	1-5/8	154	47	63	1,580
LDV2000H2	4DA3R18ME			139,900	82.7	41.3	7/8	1-5/8	154	47	63	1,580
LDV2500H2	4DH3R22ME			182,900	100.1	50.1	1-1/8	2-1/8	154	47	63	1,630
LDV2600H2	4DH3R22ME			186,800	106.1	53.1	1-1/8	2-1/8	182	47	63	1,770
LDV3000H2	4DJ3R28ME			219,900	119.4	59.7	1-1/8	2-1/8	182	47	63	1,860
LDV3500H2	6DH3R35ME			281,600	141.2	70.6	1-1/8	2-1/8	236	47	63	2,260
LDV3505H2	6DG3R37ME			295,000	161.2	80.6	1-1/8	2-1/8	236	47	63	2,260
LDV4000H2	6DJ3R40ME	326,300	179.7	89.8	1-1/8	2-1/8	236	47	63	2,360		
LDV1500M6	3DS3R17ME	Medium Temp. R-404A/507	25°F	141,400	74.9	36.5	7/8	1-5/8	154	47	63	1,580
LDV2000M6	4DA3R18ME			147,800	82.7	41.3	7/8	1-5/8	154	47	63	1,580
LDV2500M6	4DH3R22ME			185,400	100.1	50.1	1-1/8	2-1/8	154	47	63	1,630
LDV2600M6	4DH3R22ME			190,800	106.1	53.1	1-1/8	2-1/8	182	47	63	1,770
LDV3000M6	4DJ3R28ME			229,900	119.4	59.7	1-1/8	2-1/8	182	47	63	1,860
LDV3500M6	6DH3R35ME			292,600	141.2	70.6	1-1/8	2-1/8	236	47	63	2,260
LDV4000M6	6DJ3R40ME			338,600	179.7	89.8	1-1/8	2-1/8	236	47	63	2,360
LDV1200L6	4DA3R12ME	Low Temp. R-404A/507	-10°F	69,500	59.1	29.6	7/8	1-5/8	154	47	63	1,500
LDV1500L6	4DL3F63KE			88,100	67.0	33.5	7/8	1-5/8	154	47	63	1,500
LDV2200L6	4DT3F76KE			104,300	80.1	40.1	7/8	2-1/8	154	47	63	1,500
LDV2700L6	6DL3F93KE			130,900	98.5	49.3	1-1/8	2-1/8	154	47	63	1,670
LDV3000L6	6DT3F11ME			147,200	121.2	60.2	1-1/8	2-1/8	182	47	63	1,870
LDV1500C6	3DS3R17ME	Comm. Temp. R-404A/507	10°F	109,200	74.9	36.5	7/8	1-5/8	154	47	63	1,580
LDV2000C6	4DA3R18ME			111,700	82.7	41.3	7/8	1-5/8	154	47	63	1,580
LDV2500C6	4DH3R22ME			141,000	100.1	50.1	1-1/8	2-1/8	154	47	63	1,630
LDV2600C6	4DH3R22ME			146,500	106.1	53.1	1-1/8	2-1/8	182	47	63	1,770
LDV3000C6	4DJ3R28ME			175,500	119.4	59.7	1-1/8	2-1/8	182	47	63	1,860
LDV3500C6	6DH3R35ME			223,900	141.2	70.6	1-1/8	2-1/8	236	47	63	2,260
LDV4000C6	6DJ3R40ME			261,100	179.7	89.8	1-1/8	2-1/8	236	47	63	2,360
High Efficiency												
LDV1501H6	3DS3R17ME	High Temp. R-404A/507	25°F	149,600	80.9	39.5	7/8	1-5/8	182	47	63	1,680
LDV2001H6	4DA3R18ME			159,600	88.7	44.3	7/8	1-5/8	182	47	63	1,760
LDV2501H6	4DH3R22ME			201,000	113.1	56.6	1-1/8	2-1/8	236	47	63	1,750
LDV3001H6	4DJ3R28ME			243,000	126.4	63.2	1-1/8	2-1/8	236	47	63	2,160
LDV3501H6	6DH3R35ME			307,900	148.2	74.1	1-1/8	2-1/8	281	47	63	2,770
LDV4001H6	6DJ3R40ME			353,000	186.7	93.3	1-1/8	2-1/8	281	47	63	2,870
LDV1201L6	4DA3R12ME	Low Temp. R-404A/507	-10°F	71,800	59.1	29.6	7/8	1-5/8	154	47	63	1,600
LDV1501L6	4DL3F63KE			91,100	67.0	33.5	7/8	1-5/8	154	47	63	1,750
LDV2201L6	4DT3F76KE			108,200	80.1	40.1	7/8	2-1/8	154	47	63	1,780
LDV2701L6	6DL3F93KE			137,800	104.5	49.3	1-1/8	2-1/8	182	47	63	1,970
LDV3001L6	6DT3F11ME			152,400	121.2	60.6	1-1/8	2-1/8	182	47	63	2,070
LDV1501C6	3DS3R17ME	Comm. Temp. R-404A/507	10°F	114,000	80.9	39.5	7/8	1-5/8	182	47	63	1,680
LDV2001C6	4DA3R18ME			119,200	88.7	44.3	7/8	1-5/8	182	47	63	1,760
LDV2501C6	4DH3R22ME			151,100	113.1	56.6	1-1/8	2-1/8	236	47	63	1,750
LDV3001C6	4DJ3R28ME			183,500	126.4	63.2	1-1/8	2-1/8	236	47	63	2,160
LDV3501C6	6DH3R35ME			233,800	148.2	74.1	1-1/8	2-1/8	281	47	63	2,770
LDV4001C6	6DJ3R40ME			270,000	186.7	93.3	1-1/8	2-1/8	281	47	63	2,870

NOTE: 575V Available

Condensing Units

24-80 HP Dual-Compressor Outdoor Condensing Units

Models LDD condensing units are designed for use in commercial refrigerated warehouse and light industrial applications. The units utilize the **Floating Tube™** coil design, offering reliability against tube sheet and center support leaks. The LDD consists of two independent refrigeration circuits in a single housing, which can reduce space requirements as well as installation and rigging costs. Standard models are available in even horsepower configurations from 24 to 80 horsepower; however, unequal horsepower and other customer features can be designed to suit the application.



Design Features

- Configurable with adjustable head pressure control systems
- Generous amount of clearance under the condenser section of the unit allows for ease of service
- Highly customizable to meet your needs
- All common serviceable controls are located in a separate electrical compartment from the main electrical box; no need to disconnect power supply
- Parallel piped models are also available preconfigured with additional standard features



LDD - 24 - 80 HP Dual Compressor Outdoor Condensing Units


LDD Model	Compressor	Refrig.	Suction Temp.	BTUH 95°F Amb.	Air Defrost Min. Circuit Amp*		Connections (in.)		Dimensions (in.)			Approx. Net Wt. (lbs.)		
					230/60/3	460/60/3	Liquid	Suction	L	H	D			
LDD3000H2	3DS3R17ME	High Temp. R-22	25°F	267,000	136.4	66.6	7/8	1-5/8	151	61	88	3,160		
LDD4000H2	4DA3R18ME			279,800	150.4	75.2	7/8	1-5/8	151	61	88	3,160		
LDD5000H2	4DH3R22ME			365,800	181.9	90.9	1-1/8	2-1/8	151	61	88	3,230		
LDD5200H2	4DH3R22ME			373,600	193.9	96.9	1-1/8	2-1/8	179	61	88	3,520		
LDD6000H2	4DJ3R28ME			439,800	217.8	108.9	1-1/8	2-1/8	179	61	88	3,720		
LDD7000H2	6DH3R35ME			563,200	258.3	129.2	1-1/8	2-1/8	233	61	88	4,320		
LDD7010H2	6DG3R37ME			590,800	294.4	147.2	1-1/8	2-1/8	233	61	88	4,320		
LDD8000H2	6DJ3R40ME			652,600	327.6	163.8	1-1/8	2-1/8	233	61	88	4,760		
LDD3000M6	3DS3R17ME	Medium Temp. R-404A/ 507	25°F	282,800	136.4	66.6	7/8	1-5/8	151	61	88	3,160		
LDD4000M6	4DA3R18ME			295,600	150.4	75.2	7/8	1-5/8	151	61	88	3,160		
LDD5000M6	4DH3R22ME			370,800	181.9	90.9	1-1/8	2-1/8	151	61	88	3,230		
LDD5200M6	4DH3R22ME			381,600	193.9	96.9	1-1/8	2-1/8	179	61	88	3,520		
LDD6000M6	4DJ3R28ME			459,800	217.8	108.9	1-1/8	2-1/8	179	61	88	3,720		
LDD7000M6	6DH3R35ME			585,200	258.3	129.2	1-1/8	2-1/8	233	61	88	4,320		
LDD8000M6	6DJ3R40ME			677,200	327.6	163.8	1-1/8	2-1/8	233	61	88	4,760		
LDD3000C6	3DS3R17ME			Comm. Temp. R-404A/ 507	10°F	218,400	136.4	66.6	7/8	1-5/8	151	61	88	3,160
LDD4000C6	4DA3R18ME	223,400	150.4			75.2	7/8	1-5/8	151	61	88	3,160		
LDD5000C6	4DH3R22ME	282,000	181.9			90.9	1-1/8	2-1/8	151	61	88	3,230		
LDD6000C6	4DJ3R28ME	351,000	217.8			108.9	1-1/8	2-1/8	179	61	88	3,720		
LDD7000C6	6DH3R35ME	447,800	258.3			129.2	1-1/8	2-1/8	233	61	88	4,320		
LDD8000C6	6DJ3R40ME	522,200	327.6			163.8	1-1/8	2-1/8	233	61	88	4,760		
LDD2400L6	4DA3F47KE	Low Temp. R-404A/ 507	-10°F			139,000	108.0	54.0	7/8	1-5/8	151	61	88	3,000
LDD3000L6	4DL3F63KE					176,200	122.2	61.1	7/8	1-5/8	151	61	88	3,000
LDD4400L6	4DT3F76KE			208,600	145.8	72.9	7/8	2-1/8	151	61	88	3,000		
LDD5400L6	6DL3F93KE			261,800	179.0	89.5	1-1/8	2-1/8	151	61	88	3,340		
LDD6000L6	6DT3F11ME	294,400	221.0	110.5	1-1/8	2-1/8	179	61	88	3,770				
LDD2400L6 ¹	4DA3F47KE	Low Temp. R-22	-10°F	125,000	108.0	54.0	7/8	1-5/8	151	61	88	3,000		
LDD3000L6 ¹	4DL3F63KE			158,400	122.2	61.1	7/8	1-5/8	151	61	88	3,000		
LDD4400L6 ¹	4DT3F76KE			187,800	145.8	72.9	7/8	2-1/8	151	61	88	3,000		
LDD5400L6 ¹	6DL3F93KE			232,200	179.0	89.5	1-1/8	2-1/8	151	61	88	3,340		
LDD6000L6 ¹	6DT3F11ME			277,000	221.0	110.5	1-1/8	2-1/8	179	61	88	3,770		

* MCA based on remote loads and one contactor
¹ Must be ordered with demand cooling

Condensing Units

1/2 - 6 HP Indoor Water-Cooled Condensing Units with Hermetic or Scroll® Compressors

Models HWN/ZWN are water-cooled hermetic and Scroll® condensing units from 1/2 to 6 HP. Condensing units' component selection, location, base and unit dimensions are all optimized for easy field replacements or in new installations where space is limited. Extra space is provided inside the electrical box for easy servicing. The area is large enough to accommodate circuit breakers, compressor contactors, time clocks and all start components in one enclosure. Standard features include compressor isolation valves that enable services technicians to isolate the compressor for service. Also standard is the extra capacity receiver which provides total refrigerant pump down. Ideal for units requiring long line runs. These units are available with Copeland hermetic or Scroll® low and medium temperature compressors. These units are UL listed for US and Canada.



HWN - 1/2-5 HP Indoor Water-Cooled Condensing Units with Hermetic Compressors

HWN Model	Compressor	Refrigerant	Suction Temp	Capacity* BTUH	Air Defrost Total MCA			Connections (in.)				Dimensions (in.)			Approx. Net Wt. (lbs.)		
					208-230/1/60	208-230/3/60	460/3/60	Liquid (ODS)	Suction (ODS)	Water in (FTP)	Water out (MPT)	L	H	D			
HWN005H2	ART82C1	Medium & High Temp R-22	20° F	5,390	15	-	-	3/8	1/2	1/2	1/2	22	17	14	77		
HWN008H2	RS64C2			7,500	15	-	-	3/8	1/2	1/2	1/2	22	17	14	92		
HWN010H2	RS70C1			8,810	15	15	-	3/8	5/8	1/2	1/2	22	17	14	92		
HWN015H2	CR18KQ			11,240	15	15	15	3/8	5/8	1/2	1/2	27	21	22	136		
HWN020H2	CR24KQ			14,330	20	15	15	3/8	5/8	1/2	1/2	27	21	22	141		
HWN030H2	CR37KQ			23,660	21	15	15	1/2	7/8	1/2	1/2	29	28	25	174		
HWN040H2	CR53KQ			33,740	33	20	15	1/2	7/8	1/2	1/2	29	28	25	196		
HWN050H2	CRN50500			40,460	39	24	15	1/2	7/8	3/4	3/4	29	28	25	221		
HWN005X6	RS43C2†			Extended Temp R-404A/R-507	10° F	4,060	15	-	-	3/8	1/2	1/2	1/2	22	17	14	98
HWN008X6	RS55C2†					5,280	15	-	-	3/8	1/2	1/2	1/2	22	17	14	98
HWN009X6	RS64C2†	6,395	15			-	-	3/8	5/8	1/2	1/2	22	17	14	103		
HWN010X6	RS70C2†	6,800	15			15	-	3/8	5/8	1/2	1/2	22	17	14	107		
HWN015X6	CS10K6E	9,710	15			15	-	3/8	5/8	1/2	1/2	27	21	22	148		
HWN020X6	CS12K6E	11,490	15			15	-	3/8	7/8	1/2	1/2	27	21	22	148		
HWN025X6	CS14K6E	13,630	15			15	15	3/8	7/8	1/2	1/2	27	21	22	152		
HWN030X6	CS18K6E	17,400	18			15	15	1/2	7/8	1/2	1/2	27	28	22	172		
HWN032X6	CS20K6E	19,220	21			15	15	1/2	7/8	1/2	1/2	27	28	22	182		
HWN040X6	CS27K6E	23,901	27			20	15	1/2	7/8	1/2	1/2	29	28	25	183		
HWN050X6	CS33K3E	28,838	35	21	15	1/2	7/8	1/2	1/2	29	28	25	207				
HWN011L6	CF04K6E	Low Temp R-404A/R-507	-10° F	5,310	15	15	-	3/8	5/8	1/2	1/2	27	21	22	114		
HWN014L6	CF06K6E			8,700	15	15	-	3/8	5/8	1/2	1/2	27	21	22	114		
HWN025L6	CF09K6E			12,590	20	15	-	3/8	5/8	1/2	1/2	27	21	22	120		
HWN031L6	CF12K6E			16,060	21	15	15	1/2	7/8	1/2	1/2	27	21	22	136		



ZWN - 3-6 HP Indoor Water-Cooled Condensing Units with Scroll® Compressors

ZWN Model	Compressor	Refrigerant	Suction Temp	Capacity* BTUH	Air Defrost Total MCA			Connections (in.)				Dimensions (in.)			Approx. Net Wt. (lbs.)
					208-230/1/60	208-230/3/60	460/3/60	Liquid (ODS)	Suction (ODS)	Water in (FTP)	Water out (MPT)	L	H	D	
ZWN030X6	ZS21K4E	Extended Temp R-404A/R-507	10° F	19,740	18.4	15	15	1/2	7/8	1/2	1/2	29	28	25	171
ZWN035X6	ZS26K4E			24,490	23.2	15.2	15	1/2	7/8	1/2	1/2	29	28	25	186
ZWN045X6	ZS30K4E			28,480	30	17	15	1/2	7/8	1/2	1/2	29	28	25	207
ZWN055X6	ZS38K4E			34,970	36	24	15	1/2	7/8	3/4	3/4	29	28	25	226
ZWN060X6	ZS45K4E			41,850	-	27	15	1/2	7/8	3/4	3/4	29	28	25	241
ZWN030L6	ZF09K4E	Low Temp R-404A/R-507	-10° F	13,200	18	15	15	1/2	7/8	1/2	1/2	27	28	22	159
ZWN035L6	ZF11K4E			16,200	23	15	15	1/2	7/8	1/2	1/2	27	28	22	165
ZWN045L6	ZF13K4E			19,100	30	17	15	1/2	7/8	1/2	1/2	27	28	22	185
ZWN055L6	ZF15K4E			23,300	36	24	15	1/2	7/8	1/2	1/2	27	28	22	201
ZWN060L6	ZF18K4E			27,700	-	27	15	1/2	7/8	1/2	1/2	29	28	25	207


† Only for use with R-404A

* Capacity rating conditions based on: 85°F Entering Water, 105°F Condensing Temperature, 20°F ITD (ITD = condensing temperature - entering condenser water temperature), 0°F Subcooling.

Condensing Units

3/4 - 22 HP Indoor Water-Cooled Condensing Units

Model SWN are 'vessel-mounted' indoor water-cooled condensing units complete with a shell and tube condenser. The cleanable water-cooled condenser is perfect for applications where air-cooled condensers would not be practical, or water is readily available. Available in sizes 3/4 - 22 HP the SWN units are an economical, compact selection.



SWN Model

SWN Model	Compressor	Refrig.	Suction Temp	Capacity* (BTUH)	Air Defrost (Total MCA)				Connections (in.)				Dimensions (in.)			Approx. Net Wt. (lbs.)	
					208-230/1/60	230/1	208-230/3/60	460/3/60	Liquid (ODS)	Suction (ODS)	Water in (FTP)	Water out (MPT)	L	H	D		
SWN0075H2	KAN10075	Medium & High Temp R-22	25°F	6,700	15.0	-	15.0	-	3/8	5/8	1/2	1/2	3-3/4	37-3/8	33	165	
SWN0075M2	KAE10075			8,000	15.0	-	15.0	-	3/8	5/8	1/2	1/2	1/2	3-3/4	37-3/8	33	165
SWN0090H2	KARA010E			9,370	15.0	-	15.0	-	3/8	5/8	1/2	1/2	1/2	3-3/4	37-3/8	33	180
SWN0100H2	KAM10100			10,690	15.0	-	15.0	15.0	3/8	7/8	1/2	1/2	1/2	3-3/4	37-3/8	33	180
SWN0150H2	KAGA0150			12,150	15.0	-	15.0	15.0	3/8	7/8	1/2	1/2	1/2	3-3/4	37-3/8	33	195
SWN0200H2	ERA10200			16,090	-	15.0	15.0	15.0	3/8	7/8	1/2	1/2	1/2	3-3/4	37-3/8	33	260
SWN0200M2	ERC10200			19,480	-	15.0	15.0	15.0	3/8	7/8	1/2	1/2	1/2	3-3/4	37-3/8	33	260
SWN0300H2	ERF10311			28,290	-	20.0	15.0	15.0	1/2	1-1/8	3/4	3/4	3/4	26-3/4	36-3/8	38-3/8	325
SWN0400H2	NRB20400			40,130	-	-	24.4	15.0	1/2	1-1/8	3/4	3/4	3/4	26-3/4	36-3/8	38-3/8	385
SWN0499H2	2DC3R53KE			46,230	-	-	25.0	15.0	5/8	1-3/8	1-1/4	1-1/4	1-1/4	30-3/8	39-1/4	42-1/2	400
SWN0500H2	2DD3R63KE			53,810	-	-	25.0	15.0	5/8	1-3/8	1-1/4	1-1/4	1-1/4	30-3/8	39-1/4	42-1/2	400
SWN0750H2	2DL3R78KE			67,750	-	-	35.4	20.0	5/8	1-3/8	1-1/4	1-1/4	1-1/4	35-3/8	41-1/2	55-1/2	465
SWN0760H2	2DA3R89KE	76,770	-	-	35.9	20.0	5/8	1-3/8	1-1/4	1-1/4	1-1/4	35-3/8	41-1/2	55-1/2	465		
SWN0761H2	3DA3R10ME	92,810	-	-	46.0	22.4	5/8	1-3/8	1-1/4	1-1/4	1-1/4	35-3/8	41-1/2	55-1/2	465		
SWN1000H2	3DB3R12ME	110,190	-	-	48.9	22.4	7/8	1-5/8	1-1/4	1-1/4	1-1/4	35-3/8	41-1/2	55-1/2	715		
SWN1500H2	3DS3R17ME	146,060	-	-	66.9	29.5	7/8	1-5/8	1-1/2	1-1/2	1-1/2	35-3/8	41-1/2	55-1/2	735		
SWN2000H2	4DA3R18ME	156,830	-	-	65.9	32.9	7/8	1-5/8	1-1/2	1-1/2	1-1/2	35-3/8	41-1/2	55-1/2	795		
SWN0090M6	KARA010E	Medium Temp R-404A/R-507	20°F	9,140	15.0	-	15.0	-	3/8	7/8	1/2	1/2	23-3/4	37-3/8	33	180	
SWN0199M6	KAKA020E			15,120	15.0	-	15.0	-	3/8	7/8	1/2	1/2	1/2	23-3/4	37-3/8	33	210
SWN0200M6	ERCA021E			19,430	-	15.0	-	15.0	-	3/8	7/8	1/2	1/2	23-3/4	37-3/8	33	260
SWN0310M6	ERFA031E			28,090	-	20.0	15.0	15.0	1/2	1-1/8	3/4	3/4	3/4	26-3/4	36-3/8	38-3/8	325
SWN0500M6	2DC3R53KE			43,470	-	-	25.0	15.0	5/8	1-3/8	1-1/4	1-1/4	1-1/4	30-3/8	39-1/4	42-1/2	400
SWN0150L6	KALA016E			6,830	15.0	-	15.0	15.0	3/8	7/8	1/2	1/2	1/2	23-3/4	37-3/8	33	195
SWN0200L6	EADA020E			7,770	-	15.0	15.0	-	3/8	7/8	1/2	1/2	1/2	23-3/4	37-3/8	33	325
SWN0210L6	EAVA021E			8,820	20.0	-	15.0	15.0	3/8	7/8	1/2	1/2	1/2	23-3/4	37-3/8	33	325
SWN0310E6	LACA032E			18,060	-	20.0	15.0	15.0	1/2	1-1/8	3/4	3/4	3/4	26-3/4	36-3/8	38-3/8	325
SWN0310L6	LAHA032E			14,180	-	20.0	15.0	15.0	1/2	1-1/8	3/4	3/4	3/4	26-3/4	36-3/8	38-3/8	325
SWN0311L6	2DF3F16KE			19,950	-	28.7	20.0	15.0	1/2	1-3/8	3/4	3/4	3/4	26-3/4	36-3/8	38-3/8	340
SWN0400L6	2DL3F20KE			24,260	-	-	29.5	15.0	1/2	1-3/8	3/4	3/4	3/4	26-3/4	36-3/8	38-3/8	385
SWN0599L6	2DA3F23KE	27,930	-	-	32.3	15.0	5/8	1-3/8	1-1/4	1-1/4	1-1/4	30-3/8	39-1/4	42-1/2	415		
SWN0600L6	2DB3F25KE	29,930	-	-	31.7	15.0	5/8	1-3/8	1-1/4	1-1/4	1-1/4	30-3/8	39-1/4	42-1/2	415		
SWN0601L6	3DA3F28KE	33,600	-	-	30.0	15.0	5/8	1-3/8	1-1/4	1-1/4	1-1/4	30-3/8	39-1/4	42-1/2	430		
SWN0750L6	3DB3F33KE	39,800	-	-	34.5	20.0	5/8	1-5/8	1-1/4	1-1/4	1-1/4	35-3/8	41-1/2	55-1/2	465		
SWN0900L6	3DF3F40KE	48,620	-	-	41.5	20.0	5/8	1-5/8	1-1/4	1-1/4	1-1/4	35-3/8	41-1/2	55-1/2	560		
SWN1000L6	3DS3F46KE	55,020	-	-	46.5	20.8	7/8	1-5/8	1-1/4	1-1/4	1-1/4	35-3/8	41-1/2	55-1/2	715		
SWN1500L6	4DL3F63KE	75,390	-	-	59.0	29.5	7/8	2-1/8	1-1/2	1-1/2	1-1/2	35-3/8	41-1/2	55-1/2	780		
SWN2200L6	4DT3F76KE	90,720	-	-	74.0	37.0	7/8	2-1/8	1-1/4	1-1/4	1-1/4	35-3/8	41-1/2	55-1/2	865		


* Capacity based on 85°F Entering Water, 105°F Condensing Temperature, 5°F Subcooling.

NOTE: 575V Available

Condensing Units

3/4 - 22 HP Remote Indoor Compressor Units

Model SRN indoor compressor unit is designed for use with a remote air-cooled or evaporative condenser. Typical applications include supermarkets, warehouses, convenience stores or wherever outdoor roof or pad space is at a minimum. Available in sizes 3/4 - 22 HP, the SRN units are an economical, compact selection.



SRN Model

SRN Model	Compressor	Refrig.	Suction Temp	Capacity* (BTUH)	Air Defrost (Total MCA)				Connections (in.)				Dimensions (in.)			Approx. Net Wt. (lbs.)		
					208-230/1/60	230/1	208-230/3/60	460/3/60	Liquid	Suction	Discharge	Condenser Return	L	H	D			
SRN0075H2	KAN10075	Medium & High Temp R-22	25°F	5,970	15.0	-	15.0	-	3/8	5/8	3/8	3/8	23-3/4	36-3/8	35	155		
SRN0075M2	KAE10075			7,110	15.0	-	15.0	-	3/8	5/8	3/8	3/8	23-3/4	36-3/8	35	155		
SRN0090H2	KARA010E			8,360	15.0	-	15.0	-	3/8	5/8	1/2	3/8	23-3/4	36-3/8	35	160		
SRN0100H2	KAM10100			9,580	15.0	-	15.0	15.0	3/8	7/8	1/2	3/8	23-3/4	36-3/8	35	160		
SRN0150H2	KAGA0150			10,920	15.0	-	15.0	15.0	3/8	7/8	1/2	3/8	23-3/4	36-3/8	35	175		
SRN0200H2	ERA10200			13,100	-	15.0	15.0	15.0	3/8	7/8	1/2	1/2	23-3/4	36-3/8	35	245		
SRN0200M2	ERC10200			17,260	-	15.0	15.0	15.0	3/8	7/8	1/2	1/2	23-3/4	36-3/8	35	245		
SRN0300H2	ERF10311			25,580	-	20.0	15.0	15.0	1/2	1-1/8	5/8	5/8	26-3/4	39-1/4	40	305		
SRN0400H2	NRB20400			35,260	-	-	24.4	15.0	1/2	1-1/8	5/8	5/8	26-3/4	39-1/4	40	360		
SRN0499H2	2DC3R53KE			41,290	-	-	25.0	15.0	5/8	1-3/8	7/8	5/8	30-3/8	39-1/4	42-1/2	375		
SRN0500H2	2DD3R63KE			48,320	-	-	25.0	15.0	5/8	1-3/8	7/8	5/8	30-3/8	39-1/4	42-1/2	375		
SRN0750H2	2DL3R78KE			61,380	-	-	35.4	20.0	5/8	1-3/8	7/8	7/8	35-3/8	43-1/2	47	385		
SRN0760H2	2DA3R89KE			69,680	-	-	35.9	20.0	5/8	1-3/8	7/8	7/8	35-3/8	43-1/2	47	385		
SRN0761H2	3DA3R10ME			84,740	-	-	46.0	22.4	5/8	1-3/8	1-1/8	7/8	35-3/8	43-1/2	47	385		
SRN1000H2	3DB3R12ME			101,120	-	-	48.9	22.4	7/8	1-5/8	1-1/8	7/8	35-3/8	43-1/2	47	595		
SRN1500H2	3DS3R17ME			134,160	-	-	66.9	29.5	7/8	1-5/8	1-1/8	1-1/8	35-3/8	43-1/2	47	615		
SRN2000H2	4DA3R18ME			143,520	-	-	65.9	32.9	7/8	1-5/8	1-3/8	1-1/8	35-3/8	43-1/2	47	665		
SRN0090M6	KARA010E			Medium Temp R-404A/R-507	20°F	7,780	15.0	-	15.0	-	3/8	7/8	1/2	3/8	23-3/4	36-3/8	35	155
SRN0199M6	KAKA020E	12,850	15.0			-	15.0	-	3/8	7/8	1/2	1/2	23-3/4	36-3/8	35	200		
SRN0200M6	ERCA021E	16,310	-			-	15.0	-	3/8	7/8	1/2	1/2	23-3/4	36-3/8	35	245		
SRN0310M6	ERFA031E	24,080	-			20.0	15.0	15.0	1/2	1-1/8	5/8	5/8	26-3/4	39-1/4	40	305		
SRN0500M6	2DC3R53KE	37,370	-			-	25.0	15.0	5/8	1-3/8	7/8	5/8	30-3/8	39-1/4	42-1/2	375		
SRN0150L6	KALA016E	Low Temp R-404A/R-507	-20°F			6,470	15.0	-	15.0	15.0	3/8	7/8	1/2	3/8	23-3/4	36-3/8	35	175
SRN0200L6	EADA020E					7,310	-	15.0	15.0	-	3/8	7/8	1/2	1/2	23-3/4	36-3/8	35	305
SRN0210L6	EAVA021E					8,270	20.0	-	15.0	15.0	3/8	7/8	1/2	1/2	23-3/4	36-3/8	35	305
SRN0310E6	LACA032E					17,070	-	20.0	15.0	15.0	1/2	1-1/8	5/8	5/8	26-3/4	39-1/4	40	305
SRN0310L6	LAHA032E					13,250	-	20.0	15.0	15.0	1/2	1-1/8	5/8	5/8	26-3/4	39-1/4	40	305
SRN0311L6	2DF3F16KE					19,080	-	28.7	20.0	15.0	1/2	1-3/8	7/8	5/8	26-3/4	39-1/4	40	320
SRN0400L6	2DL3F20KE					23,110	-	-	29.5	15.0	1/2	1-3/8	7/8	5/8	26-3/4	39-1/4	40	360
SRN0599L6	2DA3F23KE					26,710	-	-	32.3	15.0	5/8	1-3/8	7/8	5/8	30-3/8	39-1/4	42-1/2	390
SRN0600L6	2DB3F25KE					28,620	-	-	31.7	15.0	5/8	1-3/8	7/8	5/8	30-3/8	39-1/4	42-1/2	390
SRN0601L6	3DA3F28KE					32,330	-	-	30.0	15.0	5/8	1-3/8	1-1/8	5/8	30-3/8	39-1/4	42-1/2	405
SRN0750L6	3DB3F33KE					38,370	-	-	34.5	20.0	5/8	1-5/8	1-1/8	7/8	35-3/8	43-1/2	47	385
SRN0900L6	3DF3F40KE					46,850	-	-	41.5	20.0	5/8	1-5/8	1-1/8	7/8	35-3/8	43-1/2	47	520
SRN1000L6	3DS3F46KE					52,890	-	-	46.5	20.8	7/8	1-5/8	1-1/8	7/8	35-3/8	43-1/2	47	650
SRN1500L6	4DL3F63KE			72,720	-	-	59.0	29.5	7/8	2-1/8	1-1/8	7/8	35-3/8	43-1/2	47	710		
SRN2200L6	4DT3F76KE			86,710	-	-	74.0	37.0	7/8	2-1/8	1-1/8	7/8	35-3/8	43-1/2	47	725		

* Based on 110°F Condensing Temperature, 6°F Subcooling for Low Temp models and 120°F Condensing Temperature, 8°F Subcooling for Medium & High Temp models.

NOTE: 575V Available

Air-Cooled Condensers

1 - 26 Tons Direct-Drive Air-Cooled Condensers

Model FCB direct-drive air-cooled condensers are the industry standard for remote air-cooled applications. Key FCB benefits include: versatility, simplicity of design and easy serviceability.

- Fully baffled fan sections to provide structural strength and prevent fan windmilling in the off cycle
- Multicircuiting at no extra cost
- Optional coils with coated or all copper fins are available for corrosive or damaging atmospheres
- Weatherproof junction box, with motor leads terminating for single-point field wiring
- Available in either vertical or horizontal arrangement
- Fan cycling or variable-speed for head pressure control
- PVC coated steel fan guards
- PSC or 3 phase motors standard



FCB Model

FCB Model	Total Heat Rejection 30°F TD		No. of Fans	CFM	Motor HP	FLA			Dimensions (in.)			Connections (in.)		Approx. Net Wt. (lbs.)
	R-22	R-404A, 507				208-230/1/60	208-230/3/60 ¹	460/3/60 ¹	L	H	D	Inlet	Outlet	
FCB1	22.9	22.4	1	2,400	1/4	2.0	-	-	37-1/2	22	43	3/8	3/8	96
FCB1.5	26.7	26.2	1	2,400	1/4	2.0	-	-	37-1/2	22	43	5/8	5/8	96
FCB2	30.5	29.9	1	2,400	1/4	2.0	-	-	37-1/2	22	43	7/8	5/8	96
FCB3	47.1	46.2	1	2,100	1/4	2.0	-	-	37-1/2	40-1/2	43	7/8	5/8	114
FCB5	73.0	71.5	1	5,050	1/3	3.4	2.6	1.3	39-3/4	40-1/2	43	1-1/8	7/8	180
FCB8	120.0	117.6	1	6,450	1/2	3.9	2.6	1.3	49-3/4	40-1/2	43	1-1/8	7/8	260
FCB10	146.0	143.1	2	10,100	1/3	6.8	5.2	2.6	69-3/4	40-1/2	43	(2) 1-1/8	(2) 7/8	450
FCB12	182.4	178.8	2	12,400	1/2	7.8	5.2	2.6	69-3/4	40-1/2	43	(2) 1-1/8	(2) 7/8	470
FCB14	209.6	205.5	2	13,700	1/2	7.8	5.2	2.6	89-3/4	40-1/2	43	(2) 1-1/8	(2) 7/8	510
FCB16	239.6	234.8	2	12,900	1/2	7.8	5.2	2.6	89-3/4	40-1/2	43	(2) 1-3/8	(2) 1-1/8	530
FCB21	314.2	307.9	3	20,500	1/2	11.7	7.8	3.9	129-3/4	40-1/2	43	(2) 1-5/8	(2) 1-1/8	550
FCB23	339.6	332.8	3	19,900	1/2	11.7	7.8	3.9	129-3/4	40-1/2	43	(2) 1-5/8	(2) 1-1/8	580
FCB26	398.2	390.2	3	19,400	1/2	11.7	7.8	3.9	129-3/4	40-1/2	43	(2) 1-5/8	(2) 1-1/8	625

NOTE: FCB 1 - 2 available in 115/1/60 voltage, FCB 5 - 26 available in 575/3/60 voltage

¹ Motors are 1/3 HP

Air-Cooled Condensers

Models LNE, LNQ, LNX, LNL and LNH Air-Cooled Condensers

Solus™ and Altus™ series air-cooled condensers feature improved energy efficiency and low sound levels, which are key features sought by the supermarket and grocery industry. Traditional condensers using 1140 RPM motors offer high capacities, but cannot meet the low sound and energy efficiency standards demanded today by this industry. Now, Larkin brings the best of both worlds together with advanced solutions that offer high capacities for operation, while meeting the low sound and energy efficiency requirements you demand.

Model LNE with EC motor technology offers all the benefits of variable speed motors without the complexity. EC motors utilize variable-speed technology, which optimizes fan speeds for load requirements, maximizes energy efficiency and minimizes sound.

Models LNQ, LNX and LNL features Larkin's patented QuietEdge™ technology that uses specially designed swept fan blades to reduce noise levels. These blades are uniquely designed for each motor speed, optimizing performance and ensuring you're receiving the lowest sound levels possible. Look for the QuietEdge™ 4 blade on the 540 RPM motors and the QuietEdge™ 5 on the 830 RPM motors.

Model LNH continues to offer Larkin's 1140 RPM series for customers seeking the most economical solution for their capacity requirements.



Solus™ Series Model LNE, 2.2 kW, 31.5" Fan Diameter

LNE Model	THR, MBH/1°F TD		CFM	Total FLA		Maximum No. of Feeds	Connections (in.)	Refrigerant Summer Charge R-22 (lbs.)	Approx. Net Wt. (lbs.)
	R-22	R-404A		230/3/60	460/3/60				
Single Row									
LNES01A008	7.7	7.6	11,000	7.0	3.5	7	1-3/8	8	330
LNES01A009	9.3	9.1	10,500	7.0	3.5	14	1-3/8	10	360
LNES02A011	11.3	11.1	23,400	14.0	7.0	14	1-3/8	10	590
LNES02A015	15.4	15.1	22,000	14.0	7.0	21	1-5/8	15	640
LNES02A018	18.1	17.8	20,900	14.0	7.0	28	2-1/8	29	690
LNES03A023	23.1	22.7	33,100	21.0	10.5	21	2-1/8	22	930
LNES03A027	27.2	26.7	31,400	21.0	10.5	28	2-1/8	30	1,010
LNES04A031	30.8	30.2	42,600	28.0	14.0	21	2-1/8	51	1,220
LNES04A036	36.3	35.5	40,000	28.0	14.0	28	2-5/8	70	1,320
LNES05A039	39.3	38.5	53,200	35.0	17.5	21	2-5/8	64	1,520
LNES05A047	46.6	45.7	50,000	35.0	17.5	28	2-5/8	86	1,650
LNES06A056	56.0	54.8	60,000	42.0	21.0	28	2-5/8	102	1,960
LNES07A065	64.6	63.3	70,000	49.0	24.5	28	(2) 2-5/8	118	2,260
Double Row									
LNED04A023	22.7	22.2	46,700	28.0	14.0	28	(2) 1-3/8	19	1,290
LNED04A031	30.8	30.2	44,100	28.0	14.0	42	(2) 1-5/8	29	1,390
LNED04A036	36.3	32.5	41,800	28.0	14.0	56	(2) 2-1/8	40	1,490
LNED06A046	46.2	45.3	66,100	42.0	21.0	42	(2) 2-1/8	44	2,060
LNED06A054	54.4	53.3	62,700	42.0	21.0	56	(2) 2-1/8	58	2,210
LNED08A062	61.7	60.5	85,100	56.0	28.0	42	(2) 2-1/8	104	2,730
LNED08A073	72.5	71.1	80,000	56.0	28.0	56	(2) 2-5/8	140	2,930
LNED10A079	78.6	77.0	106,400	70.0	35.0	42	(2) 2-5/8	125	3,410
LNED10A093	93.3	91.4	100,100	70.0	35.0	56	(2) 2-5/8	172	3,660
LNED12A112	111.9	109.7	120,100	84.0	42.0	56	(2) 2-5/8	201	4,370
LNED14A129	129.2	126.7	140,100	98.0	49.0	56	(4) 2-5/8	236	5,070

Bold indicates standard model capacity at 10 FPI



Solus™ Series



Altus™ Series



Air-Cooled Condensers



Altus™ Series Model LNQ, 540 RPM, 0.5 HP, 30" Fan Diameter

LNQ Model	THR, MBH/1°F TD		CFM	Total FLA		Maximum No. of Feeds	Connections (in.)	Refrigerant Summer Charge R-22 (lbs.)	Approx. Net Wt. (lbs.)
	R-22	R-404A		230/3/60	460/3/60				
Single Row									
LNQS01A005	5.2	5.1	5,400	3.5	1.8	7	1-3/8	8	330
LNQS01A006	6.1	5.9	5,200	3.5	1.8	14	1-3/8	10	360
LNQS02A008	8.0	7.8	11,200	7.0	3.5	14	1-3/8	10	580
LNQS02A010	10.3	10.1	10,800	7.0	3.5	21	1-5/8	15	630
LNQS02A011	11.5	11.2	10,400	7.0	3.5	28	2-1/8	29	680
LNQS03A016	15.6	15.2	16,100	10.5	5.3	21	2-1/8	22	930
LNQS03A017	17.2	16.9	15,600	10.5	5.3	28	2-1/8	30	1,000
LNQS04A021	20.7	20.3	21,500	14.0	7.0	21	2-1/8	51	1,210
LNQS04A023	22.9	22.4	20,800	14.0	7.0	28	2-5/8	70	1,310
LNQS05A026	25.9	25.4	26,900	17.5	8.8	21	2-5/8	64	1,510
LNQS05A029	28.6	28.1	26,000	17.5	8.8	28	2-5/8	86	1,640
LNQS06A034	34.4	33.7	31,200	21.0	10.5	28	2-5/8	102	1,950
LNQS07A042	41.6	40.7	36,400	24.5	12.3	28	(2) 2-5/8	118	2,240
Double Row									
LNQD04A016	16.0	15.6	22,300	14.0	7.0	28	(2) 1-3/8	19	1,240
LNQD04A021	20.7	20.3	21,500	14.0	7.0	42	(2) 1-5/8	29	1,340
LNQD04A023	22.9	22.4	20,800	14.0	7.0	56	(2) 2-1/8	40	1,440
LNQD06A031	31.0	30.4	32,300	21.0	10.5	42	(2) 2-1/8	44	1,990
LNQD06A034	34.4	33.7	31,200	21.0	10.5	56	(2) 2-1/8	58	2,140
LNQD08A041	41.4	40.6	43,000	28.0	14.0	42	(2) 2-1/8	104	2,630
LNQD08A046	45.8	44.9	41,600	28.0	14.0	56	(2) 2-5/8	140	2,830
LNQD10A052	51.8	50.7	53,700	35.0	17.5	42	(2) 2-5/8	125	3,290
LNQD10A057	57.3	56.1	52,100	35.0	17.5	56	(2) 2-5/8	172	3,540
LNQD12A069	68.7	67.3	62,500	42.0	21.0	56	(2) 2-5/8	201	4,230
LNQD14A083	83.1	81.5	72,900	49.0	24.5	56	(4) 2-5/8	236	4,910

Bold indicates standard model capacity at 10 FPI



Altus™ Series Model LNX, 830 RPM, 1.0 HP, 30" Fan Diameter

LNX Model	THR, MBH/1°F TD		CFM	Total FLA		Maximum No. of Feeds	Connections (in.)	Refrigerant Summer Charge R-22 (lbs.)	Approx. Net Wt. (lbs.)
	R-22	R-404A		230/3/60	460/3/60				
Single Row									
LNXS01A006	6.4	6.2	7,600	4.8	2.4	7	1-3/8	8	330
LNXS01A008	7.5	7.4	7,300	4.8	2.4	14	1-3/8	10	360
LNXS02A010	9.8	9.6	15,900	9.6	4.8	14	1-3/8	10	580
LNXS02A013	13.1	12.8	15,200	9.6	4.8	21	1-5/8	15	630
LNXS02A015	15.1	14.8	14,700	9.6	4.8	28	2-1/8	29	680
LNXS03A020	19.7	19.3	22,900	14.4	7.2	21	2-1/8	22	930
LNXS03A023	22.7	22.3	22,000	14.4	7.2	28	2-1/8	30	1,000
LNXS04A026	26.3	25.7	29,800	19.2	9.6	21	2-1/8	51	1,210
LNXS04A030	30.3	29.7	28,400	19.2	9.6	28	2-5/8	70	1,310
LNXS05A033	32.8	32.1	37,300	24.0	12.0	21	2-5/8	64	1,510
LNXS05A038	37.8	37.1	35,500	24.0	12.0	28	2-5/8	86	1,640
LNXS06A045	45.4	44.5	42,600	28.8	14.4	28	2-5/8	102	1,950
LNXS07A052	52.0	51.0	49,700	33.6	16.8	28	(2) 2-5/8	118	2,240
Double Row									
LNXD04A020	19.6	19.2	31,700	19.2	9.6	28	(2) 1-3/8	19	1,240
LNXD04A026	26.2	25.7	30,500	19.2	9.6	42	(2) 1-5/8	29	1,340
LNXD04A030	30.3	29.7	29,300	19.2	9.6	56	(2) 2-1/8	40	1,440
LNXD06A039	39.4	38.6	45,700	28.8	14.4	42	(2) 2-1/8	44	1,990
LNXD06A045	45.4	44.5	44,000	28.8	14.4	56	(2) 2-1/8	58	2,140
LNXD08A052	52.5	51.4	59,700	38.4	19.2	42	(2) 2-1/8	104	2,630
LNXD08A061	60.6	59.3	56,800	38.4	19.2	56	(2) 2-5/8	140	2,830
LNXD10A066	65.6	64.3	74,600	48.0	24.0	42	(2) 2-5/8	125	3,290
LNXD10A076	75.7	74.2	71,000	48.0	24.0	56	(2) 2-5/8	172	3,540
LNXD12A091	90.8	89.0	85,200	57.6	28.8	56	(2) 2-5/8	201	4,230
LNXD14A104	104.1	102.0	99,400	67.2	33.6	56	(4) 2-5/8	236	4,910

Bold indicates standard model capacity at 10 FPI

Air-Cooled Condensers



Altus™ Series Model LNL, 830 RPM, 1.5 HP, 30" Fan Diameter

LNL Model	THR, MBH/1°F TD		CFM	Total FLA			Maximum No. of Feeds	Connections (in.)	Refrigerant Summer Charge R-22 (lbs.)	Approx. Net Wt. (lbs.)
	R-22	R-404A		230/3/60	460/3/60	575/3/60				
Single Row										
LNLS01A007	6.7	6.6	8,400	6.6	3.3	2.6	7	1-3/8	8	330
LNLS01A008	8.0	7.8	8,000	6.6	3.3	2.6	14	1-3/8	10	360
LNLS02A010	10.1	9.9	17,500	13.2	6.6	5.2	14	1-3/8	10	580
LNLS02A014	13.9	13.6	16,700	13.2	6.6	5.2	21	1-5/8	15	630
LNLS02A016	16.1	15.8	16,100	13.2	6.6	5.2	28	2-1/8	29	680
LNLS03A021	20.9	20.5	25,100	19.8	9.9	7.8	21	2-1/8	22	930
LNLS03A024	24.2	23.8	24,100	19.8	9.9	7.8	28	2-1/8	30	1,000
LNLS04A028	27.8	27.3	32,800	26.4	13.2	10.4	21	2-1/8	51	1,210
LNLS04A032	32.3	31.7	31,200	26.4	13.2	10.4	28	2-5/8	70	1,310
LNLS05A035	35.5	34.7	41,000	33.0	16.5	13.0	21	2-5/8	64	1,510
LNLS05A042	41.6	40.8	39,100	33.0	16.5	13.0	28	2-5/8	86	1,640
LNLS06A050	49.9	48.9	46,900	39.6	19.8	15.6	28	2-5/8	102	1,950
LNLS07A055	55.0	53.9	54,700	46.2	23.1	18.2	28	(2) 2-5/8	118	2,240
Double Row										
LNLD04A020	20.2	19.8	35,000	26.4	13.2	10.4	28	(2) 1-3/8	19	1,240
LNLD04A028	27.8	27.3	33,500	26.4	13.2	10.4	42	(2) 1-5/8	29	1,340
LNLD04A032	32.3	31.7	32,100	26.4	13.2	10.4	28	(2) 2-1/8	40	1,440
LNLD06A042	41.8	40.9	50,200	39.6	19.8	15.6	56	(2) 2-1/8	44	1,990
LNLD06A048	48.4	47.5	48,200	39.6	19.8	15.6	56	(2) 2-1/8	58	2,140
LNLD08A056	55.7	54.6	65,600	52.8	26.4	20.8	42	(2) 2-1/8	104	2,630
LNLD08A065	64.6	63.3	62,500	52.8	26.4	20.8	56	(2) 2-5/8	140	2,830
LNLD10A071	70.9	69.5	82,000	66.0	33.8	26.0	42	(2) 2-5/8	125	3,290
LNLD10A083	83.1	81.5	78,100	66.0	33.0	26.0	56	(2) 2-5/8	172	3,540
LNLD12A100	99.8	97.8	93,700	79.2	39.6	31.2	56	(2) 2-5/8	201	4,230
LNLD14A110	110.0	107.9	109,300	92.4	46.2	36.4	56	(4) 2-5/8	236	4,910

Bold indicates standard model capacity at 10 FPI



1140 Series Model LNH, 1140 RPM, 1.5 HP, 30" Fan Diameter

LNH Model	THR, MBH/1°F TD		CFM	Total FLA			Maximum No. of Feeds	Connections (in.)	Refrigerant Summer Charge R-22 (lbs.)	Approx. Net Wt. (lbs.)
	R-22	R-404A		208/3/60	460/3/60	575/3/60				
Single Row										
LNHS01A007	7.3	7.2	9,900	7.0	3.5	2.8	7	1-3/8	8	330
LNHS01A009	8.7	8.6	9,500	7.0	3.5	2.8	14	1-3/8	10	360
LNHS02A011	10.7	10.5	20,500	14.0	7.0	5.6	14	1-3/8	10	580
LNHS02A015	14.5	14.2	19,800	14.0	7.0	5.6	21	1-5/8	15	630
LNHS02A017	17.1	16.7	19,000	14.0	7.0	5.6	28	2-1/8	29	680
LNHS03A022	21.8	21.4	29,700	21.0	10.5	8.4	21	2-1/8	22	930
LNHS03A026	25.7	25.2	28,500	21.0	10.5	8.4	28	2-1/8	30	1,000
LNHS04A029	29.1	28.5	38,600	28.0	14.0	11.2	21	2-1/8	51	1,210
LNHS04A034	34.2	33.5	37,000	28.0	14.0	11.2	28	2-5/8	70	1,310
LNHS05A037	37.1	36.4	48,300	35.0	14.0	14.0	21	2-5/8	64	1,510
LNHS05A044	44.0	43.1	46,200	35.0	17.5	14.0	28	2-5/8	86	1,640
LNHS06A053	52.8	51.7	55,400	42.0	17.5	16.8	28	2-5/8	102	1,950
LNHS07A061	61.0	59.8	64,700	49.0	21.0	19.6	28	(2) 2-5/8	118	2,240
Double Row										
LNHD04A021	21.4	21.0	41,000	28.0	24.5	11.2	28	(2) 1-3/8	19	1,240
LNHD04A029	29.1	28.5	39,600	28.0	14.0	11.2	42	(2) 1-5/8	29	1,340
LNHD04A034	34.2	33.5	38,100	28.0	14.0	11.2	56	(2) 2-1/8	40	1,440
LNHD06A044	43.6	42.8	59,400	42.0	21.0	16.8	42	(2) 2-1/8	44	1,990
LNHD06A051	51.3	50.3	57,100	42.0	21.0	16.8	56	(2) 2-1/8	58	2,140
LNHD08A058	58.2	57.0	77,200	56.0	28.0	22.4	42	(2) 2-1/8	104	2,630
LNHD08A068	68.4	67.1	73,900	56.0	28.0	22.4	56	(2) 2-5/8	140	2,830
LNHD10A074	74.2	72.7	96,500	70.0	35.0	28.0	42	(2) 2-5/8	125	3,290
LNHD10A088	88.0	86.2	92,400	70.0	35.0	28.0	56	(2) 2-5/8	172	3,540
LNHD12A106	105.6	103.5	110,900	84.0	42.0	33.6	56	(2) 2-5/8	201	4,230
LNHD14A122	121.9	119.5	129,400	98.0	49.0	39.2	56	(4) 2-5/8	236	4,910

Bold indicates standard model capacity at 10 FPI

Fluid Coolers

Direct-Drive Fluid Coolers

Models PFG (vertical or horizontal air flow available) **and RF6** (available in vertical air flow only) direct drive fluid coolers are easy to install and maintain, yet are ruggedly designed to handle all applications. Available in a variety of sizes, the PFG and RF6 units have design features ideal for the commercial/industrial locations. Specifically engineered for outdoor installations, the cabinet is constructed of heavy gauge aluminum or prepainted galvanized steel to resist corrosion in all climates. Additional design features include:

- Fully baffled fan sections to prevent windmilling
- Single-point wiring to junction box
- Balanced fans, featuring heavy gauge aluminum blades riveted to plated steel spiders



Model PFG

PFG Model	CFM	Vol. in Gal.	Base Capacity Range 1°F TD, 40% Glycol (130° Average Temp.)						Motor			Dimensions (in.)			Connections (in.)		Approx. Dry Net Wt. (lbs.)
			Minimum			Maximum			Qty.	HP	208-230V 3 Ph.	L	H	D	Inlet	Outlet	
			GPM	MBH	PD/F	GPM	MBH	PD/F									
PFG5	5,050	3	10	2.23	4.7	30	2.97	15.5	1	1/3	2.6	40	40-1/2	43	1-3/8	1-3/8	180
PFG8	6,450	4	10	3.07	7.4	60	4.62	13.0	1	1/3	2.6	50	40-1/2	43	1-5/8	1-5/8	260
PFG10	10,100	4	10	3.46	7.5	60	6.10	28.2	2	1/3	5.2	70	40-1/2	43	2-1/8	2-1/8	450
PFG12	12,400	4	10	3.62	7.5	60	6.88	28.2	2	1/3	5.2	70	40-1/2	43	2-1/8	2-1/8	470
PFG14	13,700	5	10	3.92	9.4	50	7.64	25.2	2	1/3	5.2	90	40-1/2	43	2-1/8	2-1/8	510
PFG16	12,900	6	10	4.17	12.4	60	8.70	20.9	2	1/3	2.5	90	40-1/2	43	2-1/8	2-1/8	530
PFG21	20,500	7	15	5.93	12.3	120	12.31	25.7	3	1/3	7.8	130	40-1/2	43	2-5/8	2-5/8	550
PFG23	19,900	7	20	6.99	6.8	120	12.94	25.7	3	1/3	7.8	130	40-1/2	43	2-5/8	2-5/8	580
PFG26	19,400	9	20	7.65	12.9	160	14.08	25.7	3	1/3	7.8	130	40-1/2	43	2-5/8	2-5/8	625

*Motors also available in 208-230/1, 460/3

Model RF6

RF6 Model	CFM	Operating Charge (Gal.)	Base Capacity Range @ 1°F TD 40% Glycol (130° Average Temp.)						Motor (Total FLA)					Dimensions (in.)			Approx. Net Wt. (lbs.) [†]
			Minimum			Maximum			Qty.	HP	208-230/3/60	575/3/60	460/3/60	L	H	D	
			GPM	MBH	PD/F	GPM	MBH	PD/F									
Single Row																	
RF60339	19,780	6.6	20	6.4	3.2	120	11.69	10.7	2	1-1/2	14.0	5.6	7.0	127	50	45-1/2	720
RF60399	19,800	9.0	20	7.01	4.8	180	13.34	10.7	2	1-1/2	14.0	5.6	7.0	127	50	45-1/2	760
RF60447	19,110	9.0	20	7.42	4.8	180	14.89	10.7	2	1-1/2	14.0	5.6	7.0	127	50	45-1/2	780
RF60525	18,340	11.6	30	10.2	6.6	240	16.79	10.7	2	1-1/2	14.0	5.6	7.0	127	50	45-1/2	860
RF60597	29,700	12.8	20	8.19	7.0	180	19.40	15.7	3	1-1/2	21.0	8.4	10.5	180	50	45-1/2	1,170
RF60669	28,660	12.8	30	11.62	14.3	180	21.66	15.7	3	1-1/2	21.0	8.4	10.5	180	50	45-1/2	1,190
RF60741	28,070	16.4	30	11.92	9.5	240	23.74	15.7	3	1-1/2	21.0	8.4	10.5	180	50	45-1/2	1,220
RF60797	38,600	16.4	20	8.71	9.2	180	25.09	20.8	4	1-1/2	28.0	11.2	14.0	233	50	45-1/2	1,550
RF60893	37,250	16.4	30	12.34	6.1	180	27.93	20.8	4	1-1/2	28.0	11.2	14.0	233	50	45-1/2	1,590
RF60989	38,020	21.3	30	12.88	12.5	240	30.89	20.8	4	1-1/2	28.0	11.2	14.0	233	50	45-1/2	1,620
RF61049	35,710	21.3	30	13.04	12.5	240	32.13	20.8	4	1-1/2	28.0	11.2	14.0	233	50	45-1/2	1,730
RF61131	46,610	20.0	30	12.97	7.5	180	33.69	25.8	5	1-1/2	35.0	14.0	17.5	286	50	45-1/2	1,960
RF61205	46,200	26.1	30	13.20	15.4	240	35.89	25.8	5	1-1/2	35.0	14.0	17.5	286	50	45-1/2	1,960
RF61331	44,580	26.1	30	13.40	15.4	240	39.12	25.8	5	1-1/2	35.0	14.0	17.5	286	50	45-1/2	2,200
RF61447	55,400	31.0	40	17.22	8.9	220	41.02	26.4	6	1-1/2	42.0	16.8	21.0	339	50	45-1/2	2,350
RF61597	53,460	31.0	40	17.59	8.9	220	44.66	26.4	6	1-1/2	42.0	16.8	21.0	339	50	45-1/2	2,580
Double Row																	
RF60678	39,570	13.3	30	11.24	6.6	240	23.38	10.7	4	1-1/2	28.0	11.2	14.0	127	50	88	1,560
RF60798	39,600	18.2	40	14.03	4.8	350	26.56	10.2	4	1-1/2	28.0	11.2	14.0	127	50	88	1,600
RF60894	38,210	18.2	40	14.84	4.8	350	29.65	10.2	4	1-1/2	28.0	11.2	14.0	127	50	88	1,650
RF60990	37,530	23.1	50	17.77	4.8	500	32.53	11.5	4	1-1/2	28.0	11.2	14.0	127	50	88	1,670
RF61050	36,770	23.1	50	18.21	4.8	500	33.80	11.5	4	1-1/2	28.0	11.2	14.0	127	50	88	1,780
RF61196	59,400	25.4	40	16.38	7.0	350	38.66	15.0	6	1-1/2	42.0	16.8	21.0	180	50	88	2,350
RF61280	58,510	25.4	40	16.69	7.0	350	40.99	15.0	6	1-1/2	42.0	16.8	21.0	180	50	88	2,400
RF61340	57,320	25.4	40	16.93	7.0	350	43.06	15.0	6	1-1/2	42.0	16.8	21.0	180	50	88	2,500
RF61484	56,240	32.8	50	20.73	6.9	500	47.77	16.9	6	1-1/2	42.0	16.8	21.0	180	50	88	2,560
RF61594	77,200	32.7	40	17.42	9.2	350	49.87	19.8	8	1-1/2	56.0	22.4	28.0	233	50	88	3,080
RF61788	74,500	32.7	40	17.74	9.2	350	55.46	19.8	8	1-1/2	56.0	22.4	28.0	233	50	88	3,140
RF61980	72,790	42.5	50	21.96	9.0	500	62.24	22.3	8	1-1/2	56.0	22.4	28.0	233	50	88	3,190
RF62100	71,310	42.5	50	22.13	9.0	500	64.74	22.3	8	1-1/2	56.0	22.4	28.0	233	50	88	3,450
RF62262	93,120	40.0	60	25.94	7.5	350	66.82	24.5	10	1-1/2	70.0	28.0	35.0	286	50	88	3,920
RF62410	92,400	52.1	50	22.23	11.2	500	72.42	27.7	10	1-1/2	70.0	28.0	35.0	286	50	88	3,930
RF62522	91,010	52.1	50	22.45	11.2	500	75.91	27.7	10	1-1/2	70.0	28.0	35.0	286	50	88	4,070
RF62662	89,170	52.1	80	34.06	7.5	500	78.96	27.7	10	1-1/2	70.0	28.0	35.0	286	50	88	4,300
RF62892	110,900	62.0	80	34.44	8.9	500	84.70	33.1	12	1-1/2	84.0	33.6	42.0	339	50	88	4,620
RF63026	109,240	62.0	80	34.86	8.9	500	88.78	33.1	12	1-1/2	84.0	33.6	42.0	339	50	88	4,800
RF63194	107,020	62.0	80	35.17	8.9	500	92.33	33.1	12	1-1/2	84.0	33.6	42.0	339	50	88	5,130

[†] Does not include operating charge

Refrigeration Controls and Technology

Beacon II™ Refrigeration System is Larkin's patented, pre-assembled, factory-installed refrigeration system featuring an integrated microcomputer-based electronic control board. Beacon II™ offers:

- Complete factory installation, wiring and testing, saving time and money
- Simplified field electrical connections and 24 volt wiring between condenser and evaporator coil
- Preset factory superheat allows the system to run more efficiently and reduces future adjustments
- Monitors and controls box temperature, evaporator superheat, system status and defrost
- Monitor and make system changes remotely via modem with exclusive Beacon II™ Smart II software with Beacon II™ Smart Controller
- Data-logging capabilities with Smart Controller



Beacon II™ Smart Controller allows you to monitor and make changes to the refrigeration system via modem connection from anywhere in the world. One Smart Controller can program and control up to four condensing units with up to four evaporators on each system.

The patented **Beacon II™ Smart Defrost** system available with Beacon II™ Smart Controller can reduce the number of system defrost by 75 percent on average, greatly reducing the amount of energy used and reducing operating costs.



Beacon II™ Smart II Software makes it easy to adjust and monitor one or more refrigeration systems as well as capture minute-by-minute system conditions. This Windows®-based software allows you to connect to the Beacon II™ Smart Controller from anywhere in the world to monitor the systems, make adjustments and log real-time system conditions. This data-logging capability is critical in the food-service industry.

Smart Defrost Kit™ (SDK), available as a factory installed option on condensing units or as an aftermarket retrofit kit via Interlink Commercial Refrigeration Parts, is a control module that can reduce the number of defrosts by up to 40% on a typical commercial refrigeration system. This reduces energy consumption and costs.



Additional Products from Larkin

Mohave™

THE ADVANCED HOT GAS DEFROST SYSTEM

The Mohave advanced hot gas defrost refrigeration system with electronic controller utilizes hot gas to greatly reduce defrost times and operates in all outdoor ambient temperatures.* This leads to increased energy efficiency and product integrity in a refrigeration system that can be used in a greater variety of environmental conditions. This system utilizes a state-of-the-art electronic defrost controller with a proprietary control scheme that allows the system to continually operate at its most optimal level.

Condensing Unit


- Integral condenser sub-cooling circuit in condenser for added capacity and vapor free liquid
- Floating Tube™ condenser coil design
- Electronic defrost controller
- Pressure or ambient fan cycling for head pressure control
- Electronic pressure regulator for defrost control
- Anti-short cycling protection
- High pressure and low pressure controls
- Oil pressure safety control
- Easily accessible control box
- High efficiency Copeland Discus® compressors with poe oil
- Thermally protected permanently lubricated ball bearing condenser fan motor(s)
- Receivers are sized for sufficient pumpdown capacity with inlet and outlet service valves
- Cabinet is constructed from painted galvanized steel
- Replaceable core liquid line filter drier
- Replaceable core suction filter

Evaporators

- All components are factory installed and wired
- Independent or single point power supply from condensing unit
- 4 and 6 FPI medium and large unit coolers

Features:

- Mounted TXV and distributor nozzle
- Mounted check valves
- Mounted liquid line solenoid
- Mounted suction "P" trap
- Electric drain pan heater standard (mounted hot gas drain loop optional)
- Mounted and wired control contactors

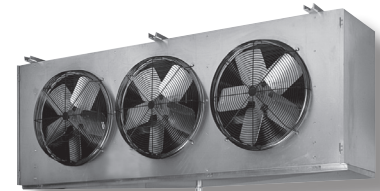

*Tested to -20°F ambient.



FLEXPACK™

Multiple Compressor Condensing Units

The FlexPack™ provides many features that produce outstanding results for both your refrigeration system and your bottom line.

Flexibility for a wide range of applications

- Modular design accommodates up to three compressors (0.5-6 HP Hermetic or Scroll®)
- System capacity range from 5 – 18 HP (dependent upon cabinet size)

Durability and Reliability

- 14-gauge galvanized steel frame
- 1-year parts warranty
- 4-year optional compressor warranty

Reduced installation costs and easy serviceability

- Hinged access panels to refrigeration and electrical components
- Single roof penetration
- Single-point main power
- Clean and intuitive electrical and piping layout

Energy efficiency and reduced noise


- Remote condenser circuits
- Reduces heat load into space resulting in lower air conditioning energy costs
- Recessed, vertical-discharge, flush-mounted 18" fans with 1100 RPM motors
- Reduces noise levels

Clean and uniform appearance

- Painted galvanized steel cabinet
- Small footprint



Air Handlers

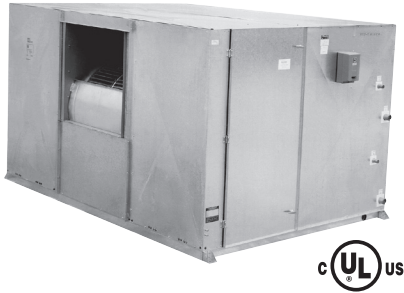

- Available in sizes 03-75
- Multiple coil types and accessories available to fit specific application needs
- Engineered and built to fit your unique project requirements




Indoor and Outdoor Racks




- Available with up to 8 parallel-piped compressors
- Can be used with air-cooled, water-cooled or evaporative-cooled condensers
- Engineered and built to fit your unique project requirements
- ETL-508a listed control panel

Customer Specific Orders

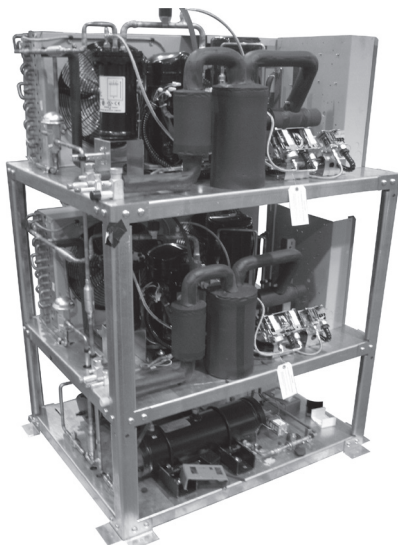

We have a wide range of capabilities and will work with you, from start to finish, to create a customized solution for your needs. With Engineered Solutions, we will visualize, design, and realize the product required for the job.

Contact your sales representative today to get the process started!

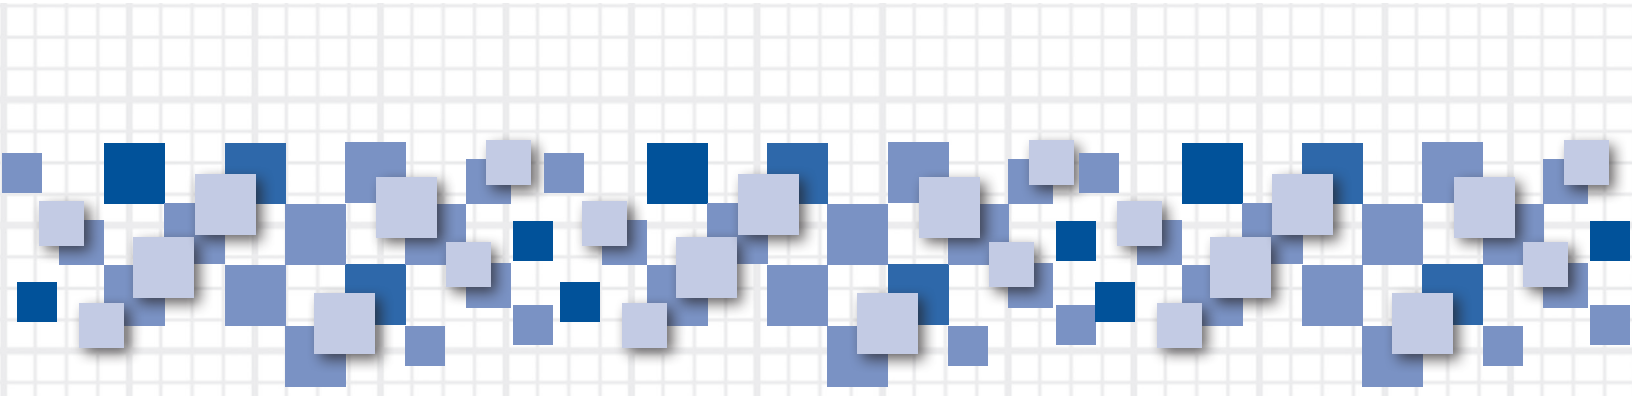

For more information on Larkin products,
contact your Larkin Sales Representative
or visit us at www.larkinproducts.com



Mastering the Art of Cold



A Brand of Heatcraft Refrigeration Products, LLC
2175 West Park Place Blvd. • Stone Mountain, GA • 30087
800.848.9889

www.larkinproducts.com

Since product improvement is a continuing effort, we reserve the right to make changes in specifications without notice.

LK-CC-0609 | Version 000