


HMAX
QUALITY HVAC ACCESSORIES

www.hmax.com

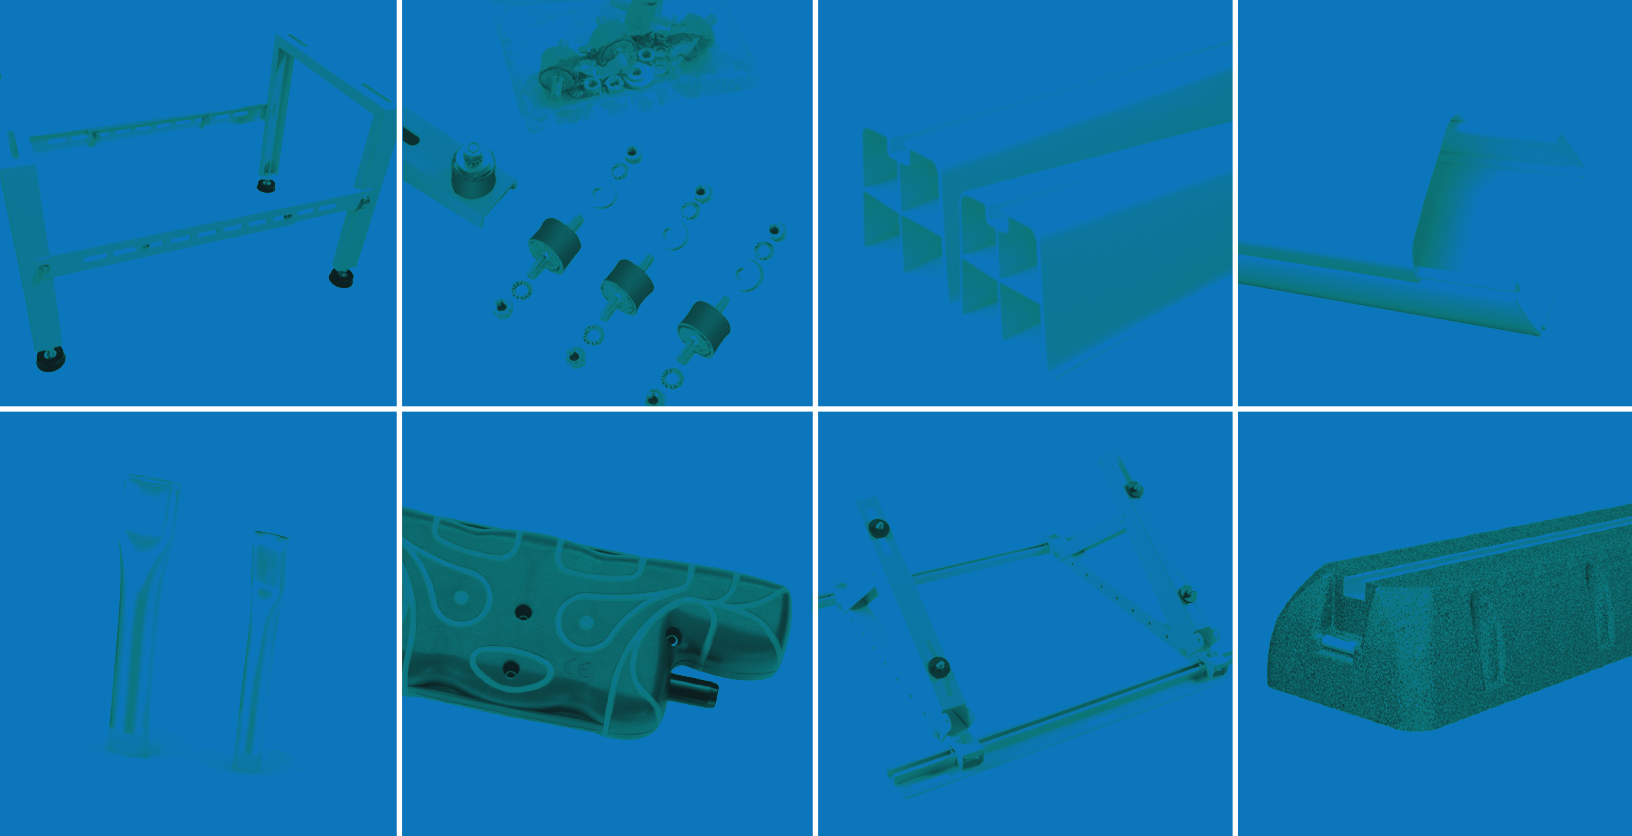



WE HELP YOU DELIVER THE PROFESSIONAL RESULTS YOUR CUSTOMERS EXPECT

HMAX is an innovative, supply-side organization that advances the productivity of the HVACR professional. We offer high-quality, specialized components and accessories for ductless heat pump and traditional air-conditioning applications.


FOR THE CONTRACTOR,
this means increased access to advanced components for a more reliable and professional installation.

FOR THE DISTRIBUTOR,
being able to offer a complete package to your customer will increase your presence in the growing ductless heat pump market.

FOR GLOBAL MANUFACTURERS,
HMAX drives business through our network of representatives and distributors throughout the U.S. This channel is backed by strong relationships and decades of local industry knowledge.

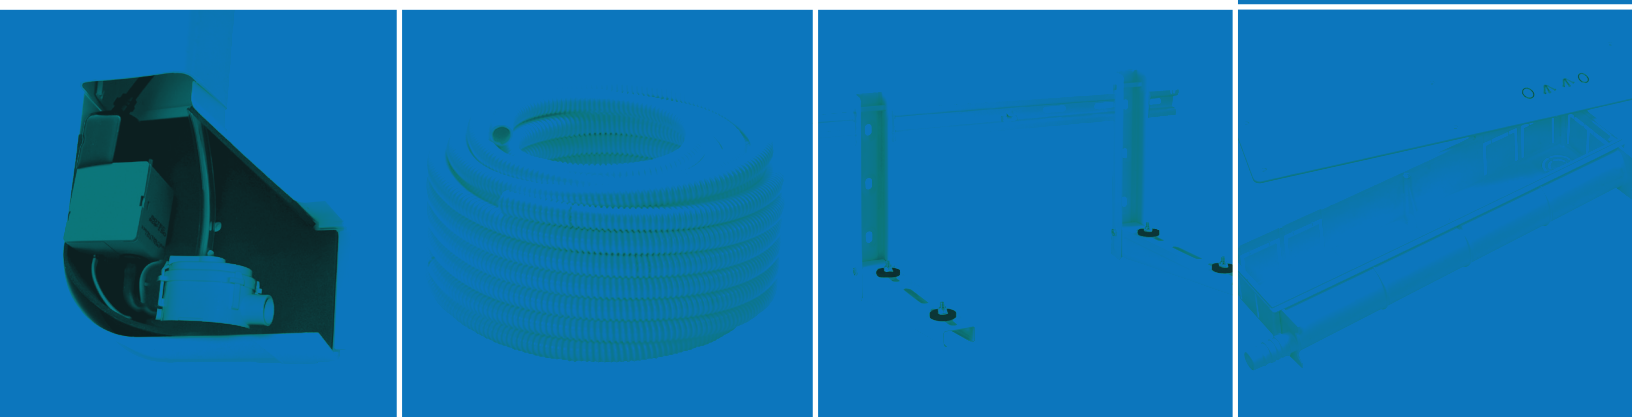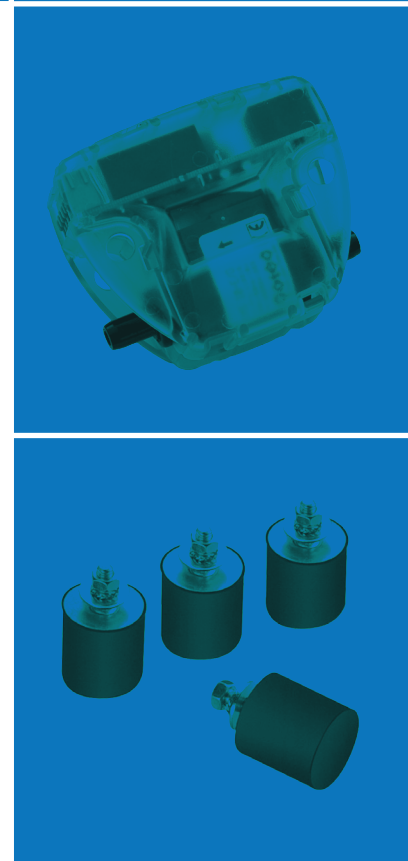

HMAX offers high-quality ISOCLIMA line sets. Quality line sets DO make a difference with less kinks, secure flares and a more reliable installation.

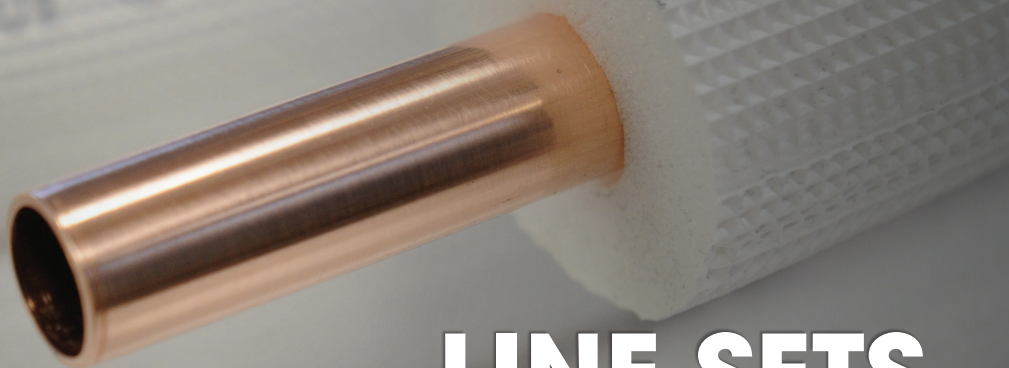

LINE SETS

Perfect for traditional or mini-split systems using R410A
“ASK FOR ISO”



Premium Copper
 3 Coil Lengths
 Full 1/2" Insulation
 1 Foot Markings
 Scratch/Tear Resistant
 Compact Package Footprint
 Single and Dual Tube


PART NUMBER	PIPE	INSULATION	LENGTH (FT)
SINGLE Pre-Insulated Copper Pipe Coils			
ISO14-12-50	1/4"	1/2"	50
ISO38-12-50	3/8"	1/2"	50
ISO12-12-50	1/2"	1/2"	50
ISO58-12-50	5/8"	1/2"	50
ISO34-12-50	3/4"	1/2"	50
ISO78-12-50	7/8"	1/2"	50
ISO14-12-164	1/4"	1/2"	164
ISO38-12-164	3/8"	1/2"	164
ISO12-12-164	1/2"	1/2"	164
ISO58-12-164	5/8"	1/2"	164
ISO34-12-82	3/4"	1/2"	82
ISO78-12-82	7/8"	1/2"	82
DOUBLE Pre-Insulated Copper Pipe Coils			
Bi14X38-12-50	1/4" and 3/8"	1/2"	50
Bi14x12-12-50	1/4" and 1/2"	1/2"	50
Bi14x58-12-50	1/4" and 5/8"	1/2"	50
Bi38x12-12-50	3/8" and 1/2"	1/2"	50
Bi38x58-12-50	3/8" and 5/8"	1/2"	50

Tested in accordance with
 UL 94, UL 723A, UL 746A



ASTM B280

HMAX proudly offers
the complete line of
NICE Duct Systems.

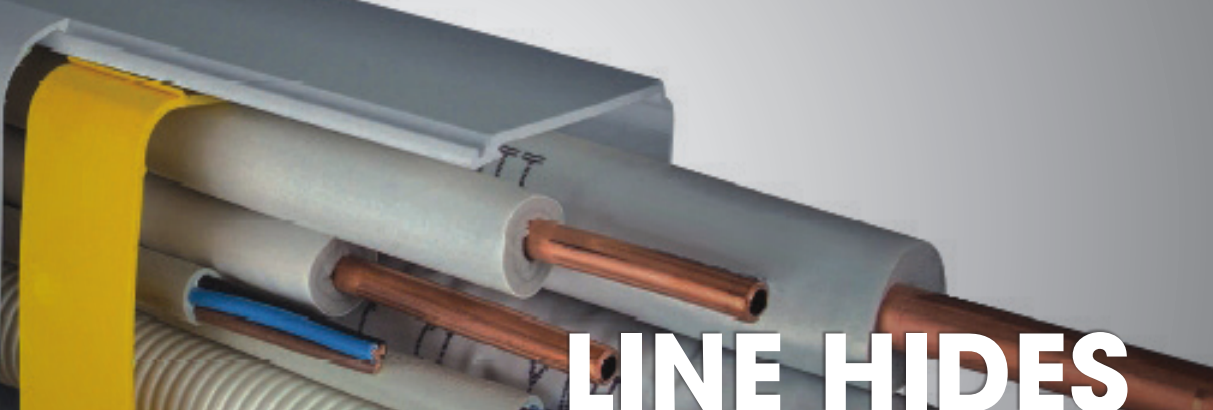


LINE HIDES


Available in
6.5 foot lengths

Components
easily connect
with one click.
No screws
are required.
Fast, easy **one-man**
installation.


Available
Configuration Sizes



3" x 2"










3.5" x 3"



5" x 3"

	NICE™ DUCT	
	NICE-DUCT-SM	3" x 2" (Width x Height)
	NICE-DUCT-M	3.5" x 3" (Width x Height)
	NICE-DUCT-LG	5" x 3" (Width x Height)
	TUBING SUPPORT	
	NICE-TS-SM	3" x 2" (Width x Height)
	NICE-TS-M	3.5" x 3" (Width x Height)
	NICE-TS-LG	5" x 3" (Width x Height)
	UPPER CONNECTOR	
	NICE-UC-SM	3" x 2" (Width x Height)
	NICE-UC-M	3.5" x 3" (Width x Height)
	NICE-UC-LG	5" x 3" (Width x Height)
	WALL DUCT	
	NICE-WD-SM	3" x 2" (Width x Height)
	NICE-WD-M	3.5" x 3" (Width x Height)
	NICE-WD-LG	5" x 3" (Width x Height)
	CORNER BEND 90°	
	NICE-CB-SM	3" x 2" (Width x Height)
	NICE-CB-M	3.5" x 3" (Width x Height)
	NICE-CB-LG	5" x 3" (Width x Height)

	ELBOW BEND 90°	
	NICE-EB-SM	3" x 2" (Width x Height)
	NICE-EB-M	3.5" x 3" (Width x Height)
	NICE-EB-LG	5" x 3" (Width x Height)
	END DUCT TERMINAL	
	NICE-ED-SM	3" x 2" (Width x Height)
	NICE-ED-M	3.5" x 3" (Width x Height)
	NICE-ED-LG	5" x 3" (Width x Height)
	FLAT BEND	
	NICE-FB-SM	3" x 2" (Width x Height)
	NICE-FB-M	3.5" x 3" (Width x Height)
	NICE-FB-LG	5" x 3" (Width x Height)
	WALL TERMINAL	
	NICE-WT-SM	3" x 2" (Width x Height)
	NICE-WT-M	3.5" x 3" (Width x Height)
	NICE-WT-LG	5" x 3" (Width x Height)
	TEE JOINT	
	NICE-TJ-M	3" x 2" (Width x Height)
	NICE-TJ-LG	3.5" x 3" (Width x Height)
	JOINT REDUCTION	
	NICE-RD-M	3.5" x 3" to 3" x 2" (Width x Height)
	NICE-RD-LG	5" x 3" to 3.5" x 3" (Width x Height)
	FLEXIBLE SLEEVE	
	NICE-FS-M	3" x 2" (Width x Height)
	NICE-FS-LG	3.5" x 3" (Width x Height)

Paintable

Component base color is RAL9010 and can be painted to match any installation environment.

Durable

Material is strong, light and highly resistant to cracking, crushing or chipping.

UV Ray and Temperature Resistant

Won't fade, crack or break down-even in extreme temperatures

BRACKETS, DRAINS & SUPPORTS

BRACKETS

	ATENA PRE-MOUNTED BRACKETS WITH LEVEL AWB-500 24" x 16" x 31" (Depth x Height x Width) Capacity: 500 lbs
	ADJUSTABLE CHRONO WIDE PRE-MOUNTED BRACKETS CWB-500 24" x 16" x 39" (Depth x Height x Width) Capacity: 500 lbs
	HEAVY DUTY WALL BRACKETS HWB-700 20" x 16" (Depth x Height) Capacity: 700 lbs
	HEAVY DUTY WALL BRACKETS - STAINLESS STEEL HSSWB-700 20" x 16" (Depth x Height) Capacity: 700 lbs
	REGULAR FLOOR BRACKETS GB-550 Adjustable width from 18" to 39" - Overall height 16" Capacity: 500 lbs
	ROOF BRACKET RB-330 31" x 19" (Width x Depth) Adjustable slope from 15° to 30° Capacity: Up to 330 lbs

HMAX carries a wide range of mounting equipment.

Proven Solutions for:
Rooftop, Walls and Ground










Partially Assembled
For Fast and Easy Setup

Fully compatible with all manufacturers' specifications
to comply with wall-to-unit air circulation standards.

Up to
700 lbs
load capacity

		
VIBRATION DAMPERS FOR WALL BRACKETS BVD-180 1-3/16" x 3/4" (Diameter x Height) Capacity: Up to 180 lbs/piece	VIBRATION DAMPERS WALL BRACKETS BVD-220 1-9/16" x 1-9/16" (Diameter x Height) Capacity: Up to 220 lbs/piece	VIBRATION FLOOR DAMPERS GVD-200 1-9/16" x 1-9/16" (Diameter x Height) Capacity: Up to 220 lbs/piece


DRAINS

	FDH-58	Flexible condensate drain pipe - 5/8"
	FDH-34	Flexible condensate drain pipe - 3/4"
	TWJ-58	Three-way central joint - 5/8"
	TWJ-34	Three-way central joint - 3/4"
	TWSJ-34	Three-way side joint - 3/4"
	CWT-SM	Condensate water tray 31" x 15" (Width x Depth)
	CWT-LG	Condensate water tray 37" x 16" (Width x Depth)
	CLIMABOX	CLIMABOX rough-in box for A/C units 16" x 5" x 3" (Width x Height x Depth)
	FREEBOX	CLIMABOX rough-in box for A/C units 16" x 5" x 3" (Width x Height x Depth)
	INSULTAPE-BK	Black insulating tape 24 Roll/Box - 24 Box/Pallet Height: 2" Length: 30 ft Use Insultape BK for conventional black rubber insulation
	INSULTAPE-WH	White PE insulating tape 24 Roll/Box - 24 Box/Pallet Height: 2" Length: 30 ft Use INSULTAPE-WH with ISOCLIMA line sets


HMAX stocks a wide range of hoses, fittings and accessories for secure, effective drainage of condensate water.


Stabilized UV-Resistant Polypropylene
No Cracks. No Perfs.

Included Gasket Sets
Make PERFECT Seals

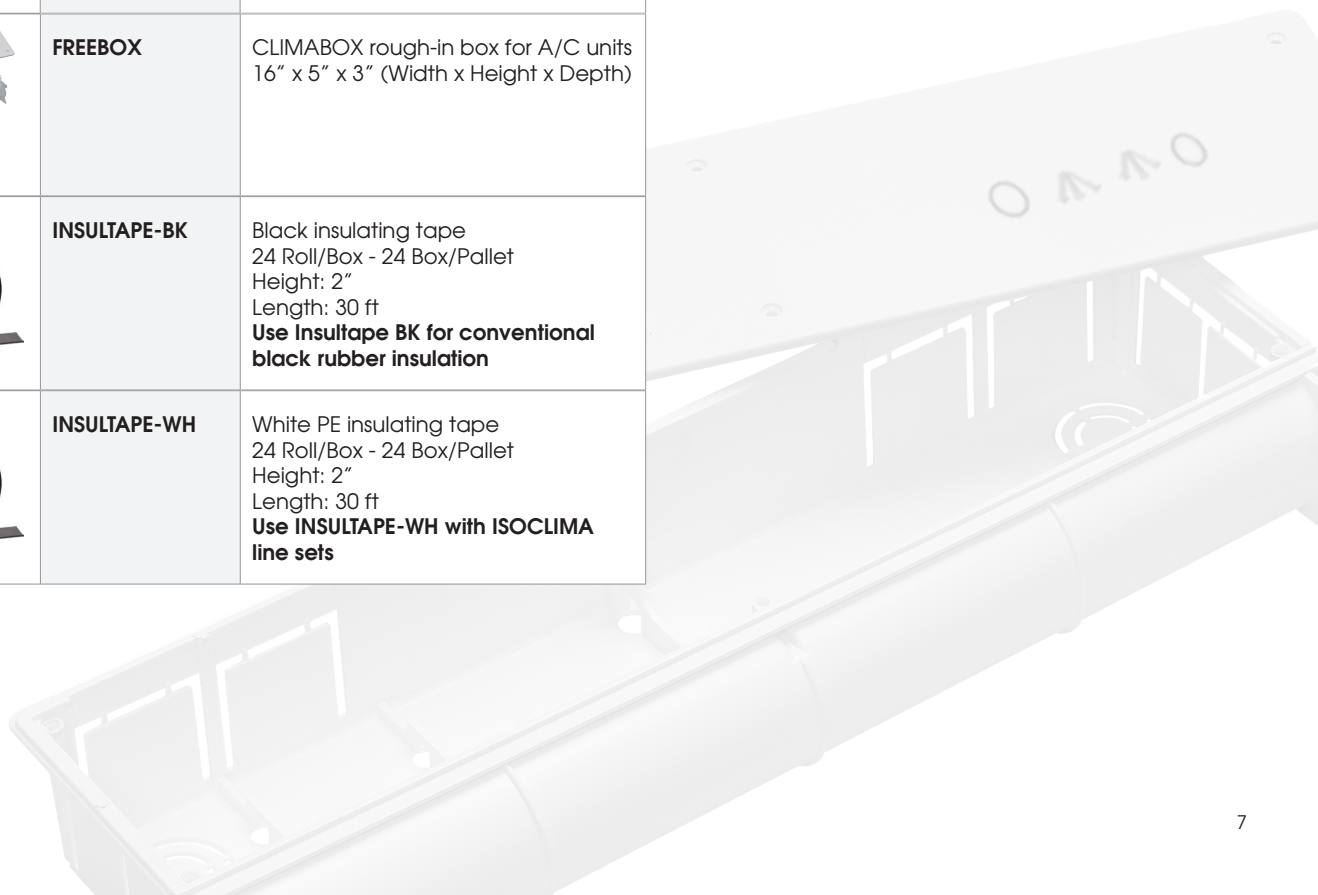

SUPPORTS

	SUMO SUPPORT	
	SUMO-SM	10" x 3.5" (Length x Height) 350 lb capacity
	SUMO-M	18" x 3.5" (Length x Height) 570 lb capacity
	SUMO-LG	23" x 3.5" (Length x Height) 1050 lb capacity
	SUMO-XL	39" x 3.5" (Length x Height) 1400 lb capacity

	SUMO RISER	
	SUMO-LG-H	23" x 4.5" (Length x Height)
	SUMO-XL-H	39" x 4.5" (Length x Height)


	POLYMER RISERS	
	FS-PVC-SM	14" x 3" (Length x Height) 350 lb capacity
	FS-PVC-M	18" x 3" (Length x Height) 350 lb capacity
	FS-PVC-LG	39" x 3" (Length x Height) 350 lb capacity
	PPS-16	16" x 3" (Length x Height) 260 lb capacity

HMAX has SUMO™
Safe, Stable, Silent
Support for all
rooftop and outdoor
HVAC applications

UV Stabilized
Shockproof
Up to 1400 lb Load Capacity
Self-Extinguishing



Get Your AC/Heat Pump
Installations Off The Ground!

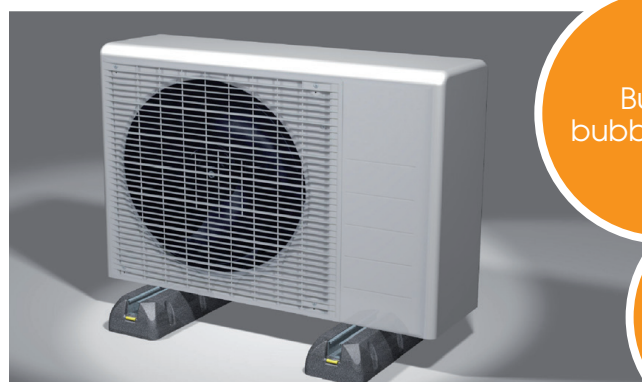

Built-in
bubble levels

NBR recycled
compound

Internal
extruded
aluminum
core



CONDENSATE PUMPS

TATTOO 10



TATTOO 16




The quietest pump on the market...only 16.4 db!

TATTOO 10 / TATTOO 16

The most silent condensate removal system on the market today


	TATTOO 10	TATTOO 16
Max flow rate	2.1 gal/h	4.3 gal/h
Flow rate at 3 ft	1.9 gal/h	3.8 gal/h
Flow rate at 10 ft	1.4 gal/h	2.8 gal/h
Max dry suction height	3.3 ft	3.3 ft
Max wet suction height	6.6 ft	6.6 ft
Max delivery height	28 ft	29.5 ft
Alarm contact	NO/NC-120v/8A	NO/NC-120v/8A
Pump dimensions	5.9" x 2.2" x 1.1"	5.9" x 2.2" x 1.1"
Sensor unit dimensions	3.2" x 1.6" x 1.6"	3.2" x 1.6" x 1.6"
Weight	15.5 oz	15.5 oz
Power supply	120v or 230v	120v or 230v
Noise level	16.4 dBA	22 dBA

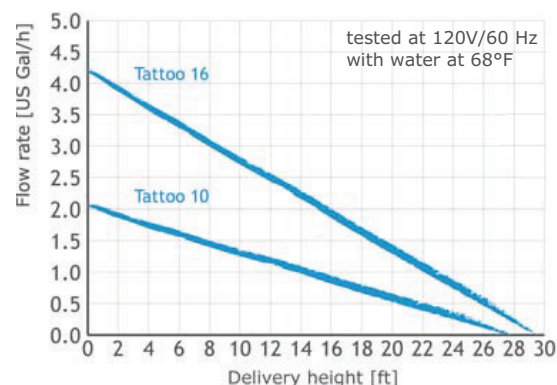

GO 10 / GO 16

All the features of the Tattoo but with a new, compact, transparent design.

	GO 10	GO 16
Max flow rate	2.1 gal/h	4.3 gal/h
Flow rate at 3 ft	1.9 gal/h	3.8 gal/h
Flow rate at 10 ft	1.4 gal/h	2.8 gal/h
Max dry suction height	3.3 ft	3.3 ft
Max wet suction height	6.6 ft	6.6 ft
Max delivery height	28 ft	29.5 ft
Alarm contact	NC-120V/8A	NC-120V/8A
Pump dimensions	3.1" x 1.4" x 2.6"	3.1" x 1.4" x 2.6"
Sensor unit dimensions	3.2" x 1.6" x 1.6"	3.2" x 1.6" x 1.6"
Weight	9.9 oz	9.9 oz
Power supply	120v or 230v	120v or 230v
Noise level	22 dBA	23 dBA


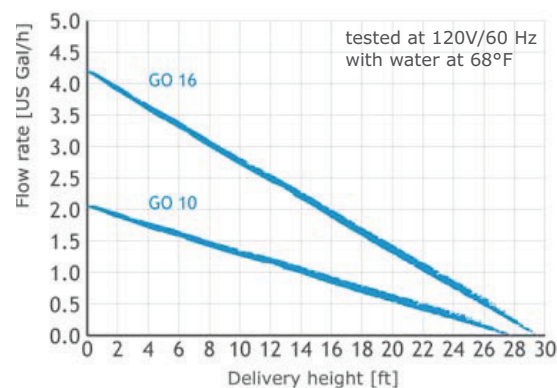




GO 200

A very quiet system with a reversible right or left mount. Features built-in check valve and overflow alarm switch.


GO 200	
Max flow rate	26.4 gal/h
Flow rate at 1 ft	22.4 gal/h
Flow rate at 3 ft	14.4 gal/h
Max delivery height	6.6 ft
Alarm contact	NC-120v/5A
Pump dimensions	7.9" x 4.3" x 3.9"
Power supply	230v only
Noise level	25 dBA

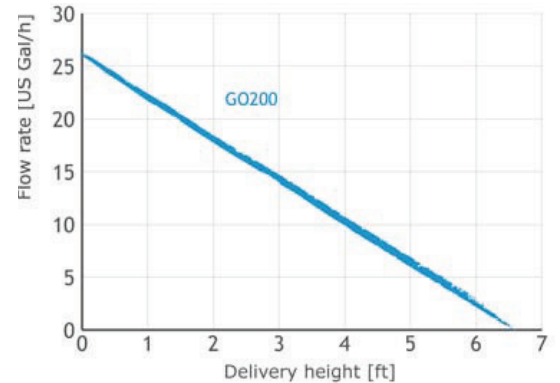

RAPIDO









A silent and reliable solution. Kit comes complete with duct. Reversible right or left mount. Ready to use.

RAPIDO	
Max flow rate	2.1 gal/h
Flow rate at 3 ft	1.9 gal/h
Flow rate at 10 ft	1.4 gal/h
Max dry suction height	3.3 ft
Max wet suction height	6.6 ft
Max delivery height	28 ft
Alarm contact	NO/NC-120v/8A
Pump dimensions	3.4" x 1.8" x 1.7"
Sensor unit dimensions	3.2" x 1.6" x 1.6"
Weight	53 oz
Power supply	120v or 230v
Noise level	28.3 dBA



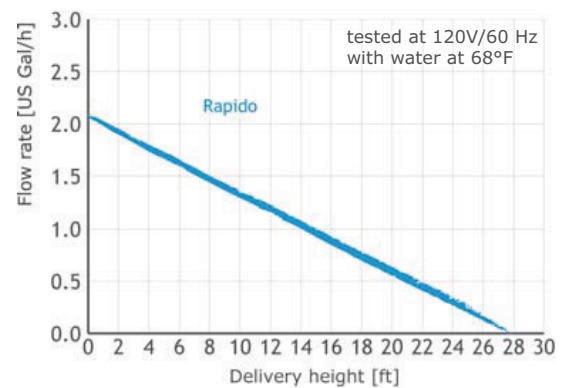


All condensate pump models* are "plug & play" with standard CAT 5 phone jack included.

* Excluding the GO 200 model

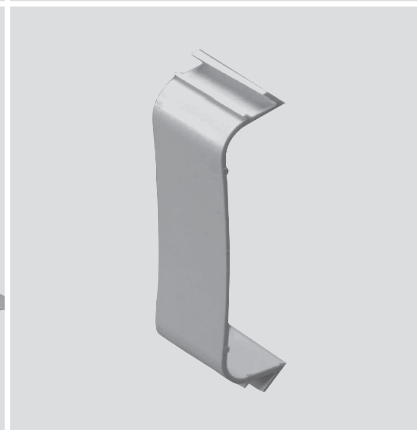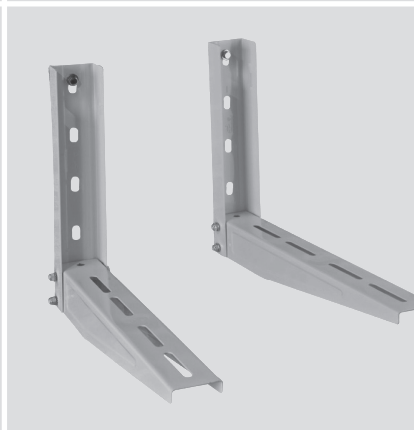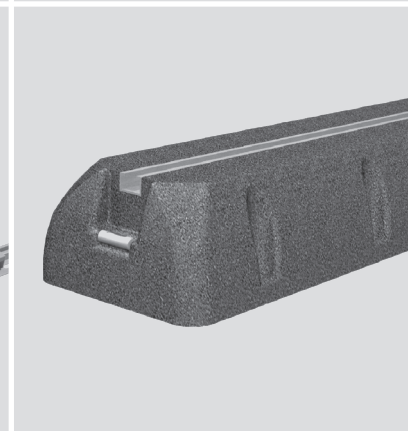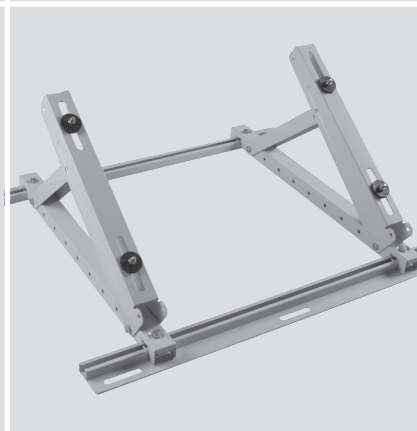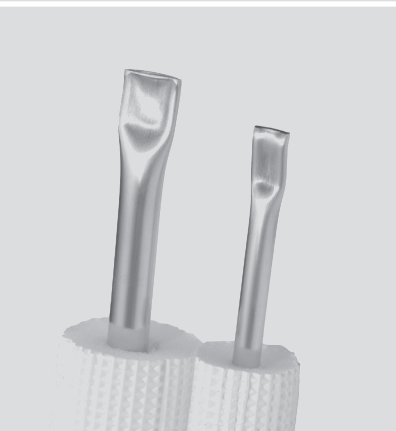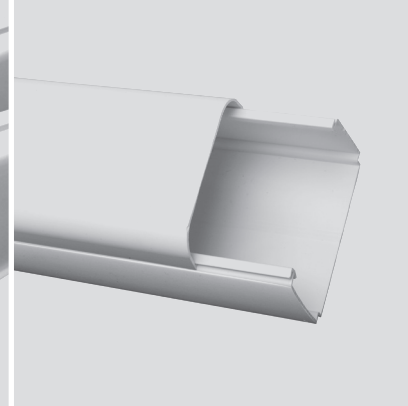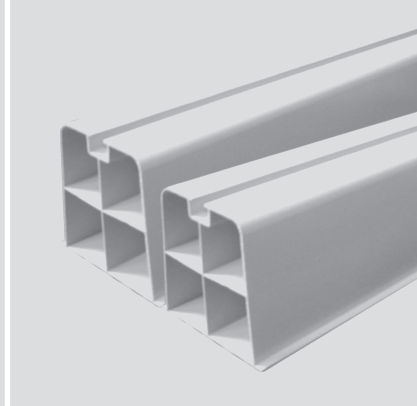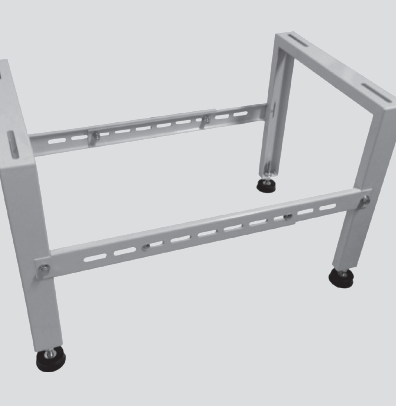

HMAX
QUALITY HVAC ACCESSORIES

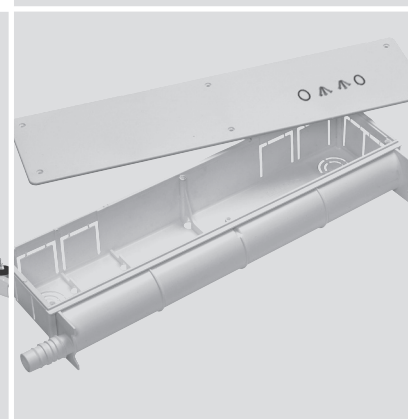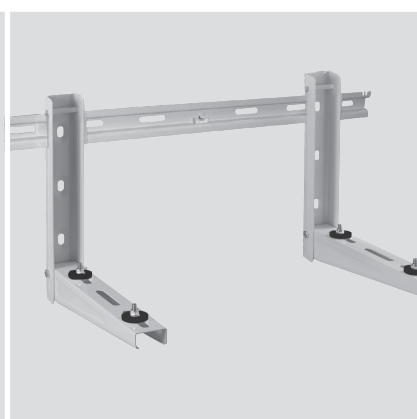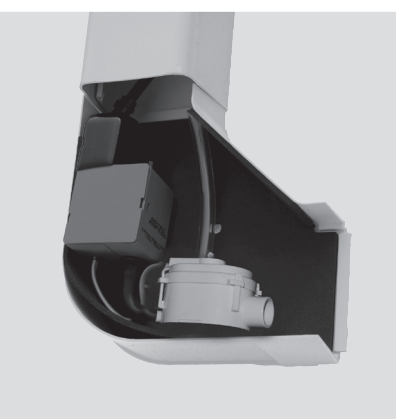



373 Nesconset Highway #147
Hauppauge, New York 11788
Phone: (844) 500-HMAX
E-mail: info@hmax.com

www.hmax.com