


# VAFS-8

The Packless VAFS-8 vibration absorber is for installation on suction and discharge lines with an outer diameter of 7/8 in.

[← View all Vibration Absorbers](#)

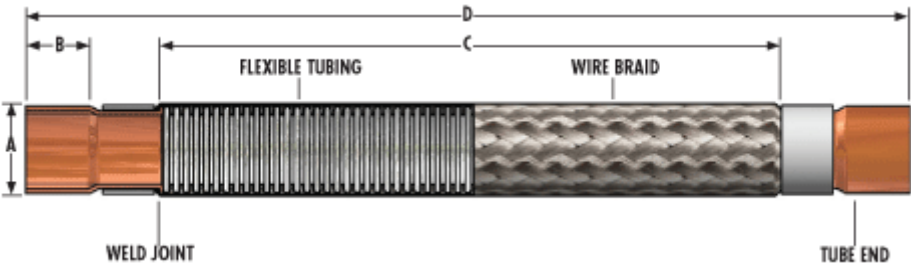

Print Page

## Specifications

|                          |                 |          |
|--------------------------|-----------------|----------|
| Model                    | VAFS-8          |          |
| UL Recognized Number     | VAFS-8          |          |
| Tube Material            | Stainless Steel |          |
| Braid Material           | Stainless Steel |          |
| Ferrule Material         | Stainless Steel |          |
| Connection Material      | Copper          |          |
| A - Connection Size (ID) | 7/8 in          | 22.2 mm  |
| B - Connection Length    | 3/4 in          | 19.1 mm  |
| C - Tube Length          | 8 1/8 in        | 206.4 mm |
| D - Total Length         | 11 1/2 in       | 292.1 mm |
| Flexible Tube Size (ID)  | 3/4 in          | 19.1 mm  |
| Working Pressure         | 650 psig        | 45 bar   |
| Burst Pressure           | 3250 psig       | 224 bar  |
|                          |                 |          |