

Models DB-25-20, DB-25-16

High-Capacity, High-Efficiency Air Cleaners


Three Standard Sizes for Whole-House Air Filtration



Particle Diameter Comparison Chart


Particle efficiency range of Skuttle Filters = .10 and larger							
Particle Diameter (in microns)		.01	.10	1.0	10	100	1000
Smoke	Tobacco Smoke	██████████					
	Wood Smoke		██████████				
	Cooking Smoke		██████				
Dust	Radon Progeny	██████████					
	Lint				██████		
Plant &	Pollen				██████		
Animal	Dust Mites				██████		
	Viruses	██████					
	Bacteria		██████████				
	Human Hair					██████	
Household	Hair Spray			██████			
	Air Freshener		██████				

The Skuttle Difference

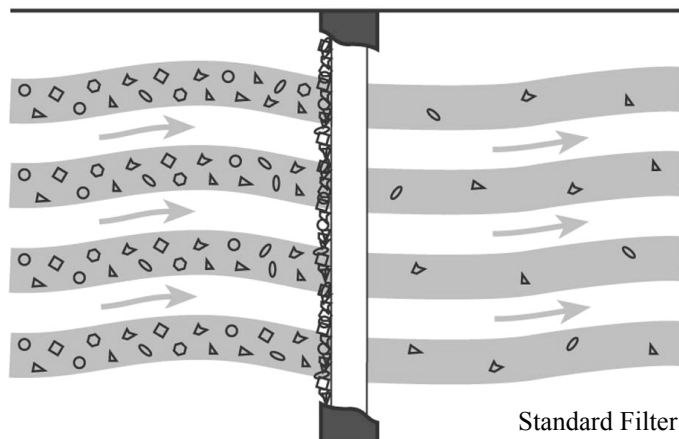


Features & Benefits

- **High-efficiency, high-capacity filtration with minimal airflow resistance** for longer furnace life
- **A sturdy, 20-gauge, zinc-coated steel cabinet** backed by a 10-year warranty
- **A tough, stylish thermoplastic door** to dress up any installation
- **A reminder dial** to tell homeowners when it's time to check the media for possible replacement
- **Pre-punched drill and access holes** in the frame for faster, easier installation

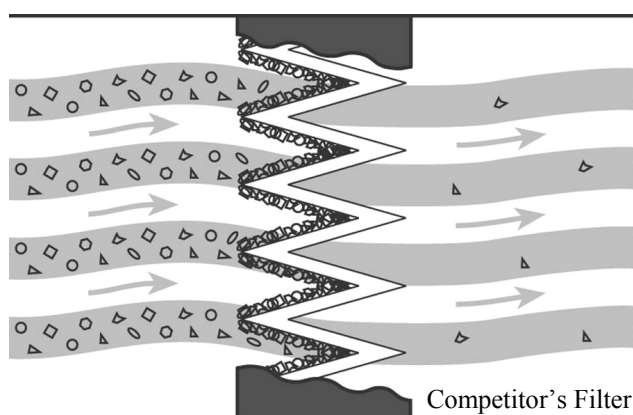

Competitor's Filter

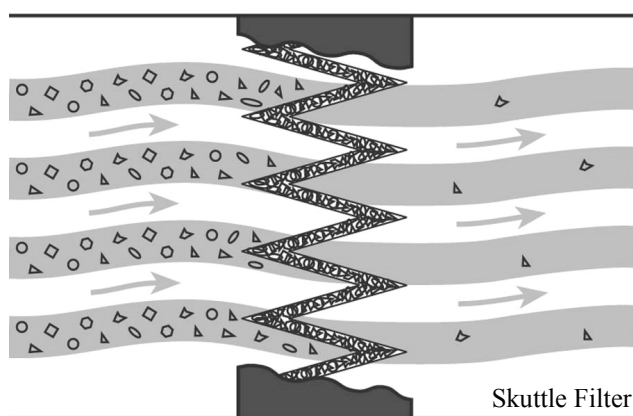





Skuttle Filter

◀ (Left) Standard flat, surface-loading filter found in many American homes.


▲▲ (Upper Filter Image) Competitor's pleated, surface-loading design.

▲ (Lower Filter Image) Skuttle's superior depth-loading design captures more airborne particles and lasts longer.

Typical Installations




Air Filter Replacement Cartridge is classified by Underwriters Laboratories, Inc., as to flammability only, Class 2, 166NG3.

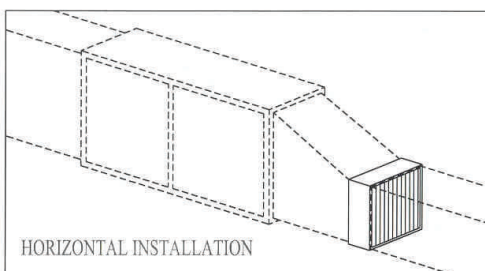


Skuttle High-Efficiency Air Cleaners can be installed horizontally, vertically, even at an angle. They must be installed in an area of the duct that precedes the blower compartment and, if possible, in front of the cooling coils. The filter cartridge must occasionally be replaced, requiring at least 21-to-24-1/2 inches of clearance space, depending upon the model.

Size Specifications


DB-25-20

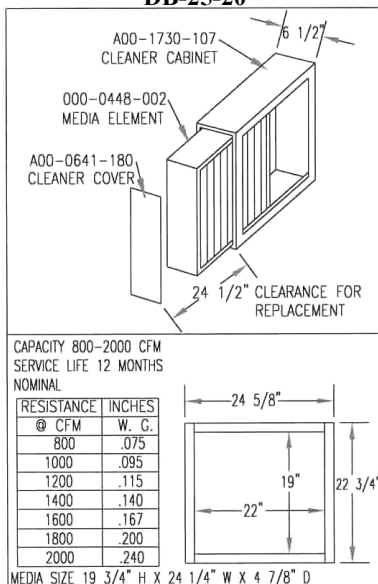


DB-25-16

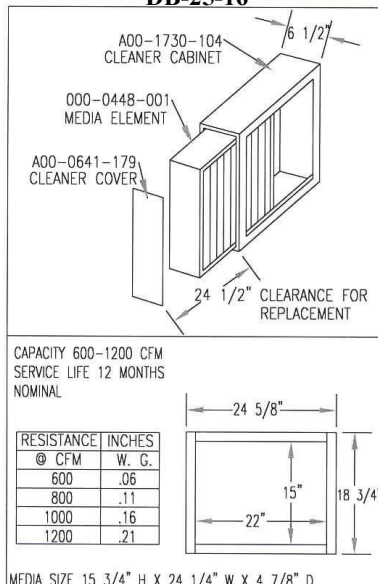

DB-20-20

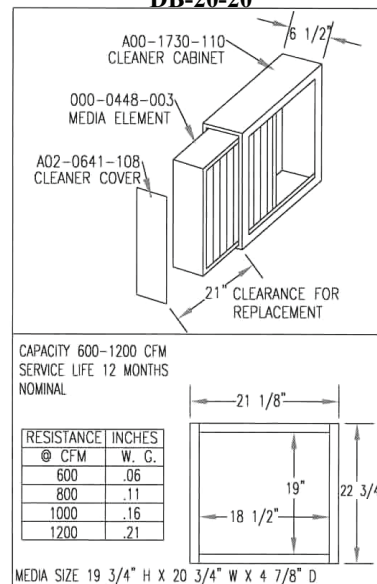

Predrilled Hole Dimensions

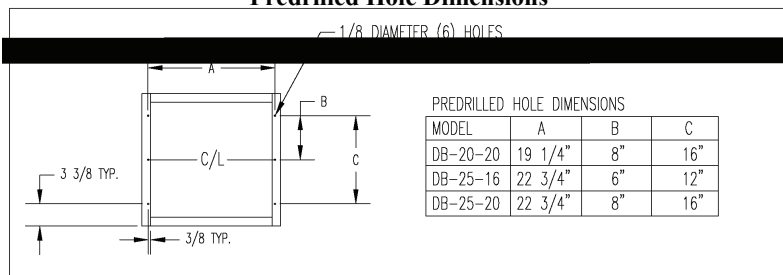

**Quality Made
in the USA**