


Accessories



S1A


Line Voltage rated End-Switch assembly for all new ND and URD style dampers. Easily attaches over the top of the motor. Can operate blower motor, combustion air, hydronic zone valve or circulator, among other applications.

[Click here for submittal sheet.](#)



MAN / MA-5P

The MAN is a 2 Position, power-open, power-close actuator. Used on old-style, standard opposed blade dampers. The MA-5P is a 5 Position, power open, power close actuator used with old-style, standard opposed blade dampers. MAN and MA-5P actuators are only interchangeable with other MAN or MA-5P units.



CPLS

Monitors cooling coil temperature and protects against coil freeze-up. Stops compressor below 37° and restarts above 47°. (Not adjustable) Mounts on a 3/4" suction line.



RAC

A SPDT switch used to replace a thermostat for manual damper control. Face plate marked "Air Cond Damper".



RES

Remote Emergency illuminated switch for use on Heat Pump systems. Used in place of an emergency switch located on the thermostat.



FAC

A SPDT switch used to replace a thermostat for manual damper control. Face plate marked "Fresh Air Damper."




HCD

The Hand Carried Display (HCD) is the perfect way for a salesman to demonstrate and display a complete 2 zone system in a neat, easy-to-carry case.



VAC

One zone illuminated switch provides convenient set back of all zones from one location. Used as an occupied / unoccupied switch.



BT-SP

Single pole bulb thermostat. 15° to 90° range.



RR

Replacement relay for older style ULTRA-ZONE panels and the DTT series ULTRA-ZONE panels.



T-40VA-PT

A plate mounted 24V 40VA transformer for use with Ultra-Zone dampers and control systems.




T-40VA-F

A frame mounted 24V 40VA transformer for use with Ultra-Zone dampers and control systems.



MRK

Motor replacement for models ND, EBD, URD, and RDN dampers. Dampers such as the RDN will also require the purchase of a DHK (Damper Hardware Kit). If unsure if you require a DHK please contact our sales department. Notice: The MA-ND5 (power open/power close) motor actuator cannot be used to replace an existing MA-RSD (spring return) motor actuator.

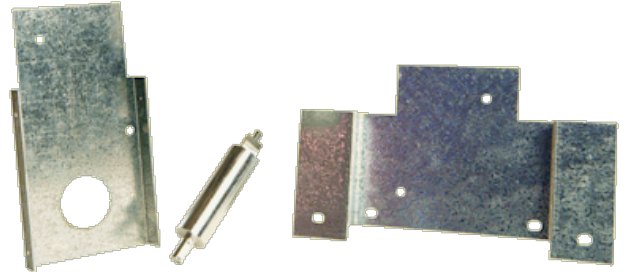

DHK

Damper Hardware Kit for retrofitting the MRK on older damper models.



SAS

Supply air sensor used to monitor the temperature of the supply air.



MA-SRE

Four wire spring return actuator. 24V and 120V available. Includes end switch. Use on models SMD-SR, RD-SR, ND-SRE, and RD-SRE dampers.



MA-RSD

Spring return actuator used on RSD and ND-RSD dampers.
Notice: The MA-RSD (spring return) motor actuator cannot be used to replace an existing MA-ND5 (power open/power close) motor actuator.




DLK

Damper Linkage Kit used with the old style MAN motor and the SMD/BMD style damper.




F1

A 2 AG, 3 amp Slow Blow fuse for replacement on ST and STHP series ULTRAZONE control panels. Package contains 5 fuses.



R4

Basic relay and mounting block for custom control applications.



RI

Single-pole, double-throw, 24volt relay coil.



OAS

Outdoor air sensor used to monitor the temperature of the outside air.