



TYPE 1 "G" & "H" BUSHINGS

TYPE 2

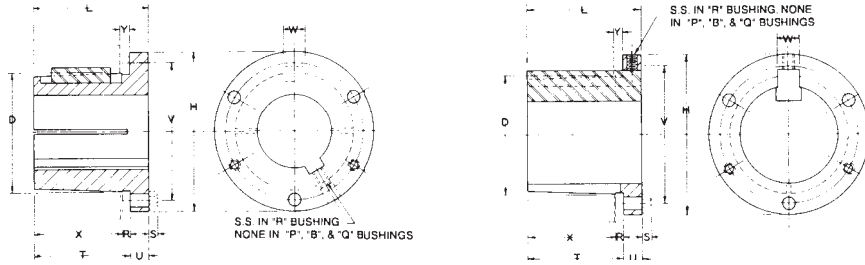


TYPE 1 "P", "B", "Q" & "R" BUSHING

TYPE 2

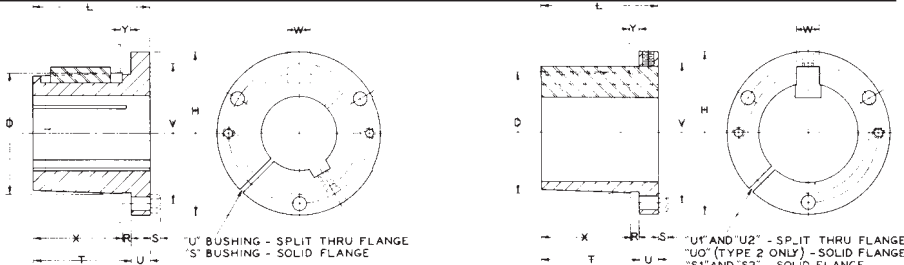

TYPE 1 "S" & "U" BUSHINGS

TYPE 2

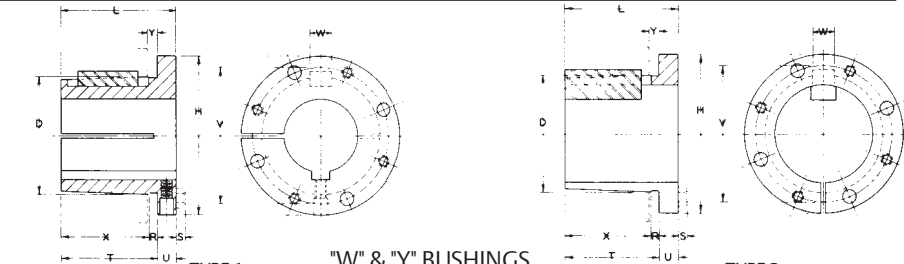

TYPE 1 "W" & "Y" BUSHINGS

TYPE 2

Table No. 1 Bushing Specifications

Part No.	Dimensions												Bore Range		Cap Screws		Av. Wt. Lbs.	Wrench Torque In.-Lbs.
	L	U	T	D		H	V	W	X	Y	R	S	Type 1	Type 2	No.	SIZE		
				Large End	Small End													
G	1"	1/4"	3/4"	1.172"	1.133"	2"	1 9/16"	—	5/8"	3/16"	1/8"	3/16"	3/8" - 15/16"	1"	2	1/4" X 5/8"	.5	95
H	1 1/4	1/4	1	1.625	1.570	2 1/2	2	—	7/8	3/16	1/8	3/16	3/8 - 1 3/8	1 7/16 - 1 1/2	2	1/4 X 3/4	.8	95
P1	1 15/16	13/32	1 17/32	1.9375	1.8555	3	2 7/16	3/8"	1 5/16	7/32	7/32	1/4	1/2 - 7/16	1 1/2 - 1 3/4	3	5/16 X 1	1.3	192
P2	2 15/16	13/32	2 17/32	1.9375	1.7930	3	2 7/16	3/8	2 5/16	7/32	7/32	1/4	3/4 - 1 7/16	1 1/2 - 1 3/4	3	5/16 X 1	1.5	192
P3	4 7/16	13/32	4 1/32	1.9375	1.6993	3	2 7/16	3/8	3 13/16	7/32	7/32	1/4	1 1/8 - 1 3/8	1 5/8	3	5/16 X 1	2	192
B	1 15/16	1/2	1 7/16	2.625	2.5567	3 11/16	3 1/8	1/2	1 3/16	7/32	1/4	1/4	1/2 - 1 15/16	2 - 2 7/16	3	5/16 X 1 1/4	1.8	192
Q1	2 1/2	17/32	1 31/32	2.875	2.7657	4 1/8	3 3/8	1/2	1 3/4	7/32	7/32	9/32	3/4 - 2 1/16	2 1/8 - 2 11/16	3	3/8 X 1 1/4	3.5	348
Q2	3 1/2	17/32	2 31/32	2.875	2.7032	4 1/8	3 3/8	1/2	2 3/4	7/32	7/32	9/32	1 - 2 1/16	2 1/8 - 2 5/8	3	3/8 X 1 1/4	4.5	348
Q3	5	17/32	4 15/32	2.875	2.6094	4 1/8	3 3/8	1/2	4 1/4	7/32	7/32	9/32	1 3/8 - 2 1/16	2 1/8 - 2 1/2	3	3/8 X 1 1/4	5.5	348
R1	2 7/8	5/8	2 1/4	4.000	3.8750	5 3/8	4 5/8	3/4	2	1/4	1/4	9/32	1 1/8 - 2 13/16	2 7/8 - 3 3/4	3	3/8 X 1 3/4	7.5	348
R2	4 7/8	5/8	4 1/4	4.000	3.7500	5 3/8	4 5/8	3/4	4	1/4	1/4	9/32	1 3/8 - 2 13/16	2 7/8 - 3 5/8	3	3/8 X 1 3/4	11	348
S1	4 3/8	3/4	3 5/8	4.625	4.4180	6 3/8	5 3/8	3/4	3 5/16	5/16	5/16	3/8	1 11/16 - 3 3/16	3 1/4 - 4 1/4	3	1/2 X 2 1/4	13.5	840
S2	6 3/4	3/4	6	4.625	4.2696	6 3/8	5 3/8	3/4	5 11/16	5/16	5/16	3/8	1 7/8 - 3 3/16	3 1/4 - 4 3/16	3	1/2 X 2 1/4	19	840
U0	4 15/16	3/4	4 3/16	6.000	5.7656	8 3/8	7	1 1/4	3 3/4	7/16	7/16	15/32	2 3/8 - 4 1/4	4 3/8 - 5 1/2	3	5/8 X 2 3/4	27	1680
U1	7 1/8	1 1/16	6 1/16	6.000	5.6485	8 3/8	7	1 1/4	5 5/8	7/16	7/16	15/32	2 3/8 - 4 1/4	4 3/8 - 5 1/2	3	5/8 X 2 3/4	40	1680
U2	10 1/8	1 1/16	9 1/16	6.000	5.4610	8 3/8	7	1 1/4	8 5/8	7/16	7/16	15/32	2 7/16 - 4 1/4	4 3/8 - 5	3	5/8 X 2 3/4	50	1680
W1	8 1/4	1 7/16	6 13/16	8.500	8.1016	12 1/2	10	1 1/4	6 3/8	7/16	7/16	9/16	3 3/8 - 6 3/16	6 1/4 - 7 7/16	4	3/4 X 3	104	3000
W2	11 1/4	1 7/16	9 13/16	8.500	7.9141	12 1/2	10	1 1/4	9 3/8	7/16	7/16	9/16	3 3/8 - 6 3/16	6 1/4 - 7 7/16	4	3/4 X 3	133	3000
Y0*	11 1/8	2	9 1/8	12.000	11.4688	16 1/2	14 1/2	2	8 1/2	5/8	5/8	5/8	6 - 7 15/16	8 - 10	4	1 X 5	270	7200

S1 — 1 11/16", S1 1 3/4" and S2 — 1 7/8" to 2 1/8" Bushings are Steel. U0 and U1 — 2 3/8" to 3 3/16" and U2 2 7/16" to 3 3/16" are Cast Iron. "W" and "Y" Bushings are Cast Iron. All other Bushings on this page either Sintered Steel, Malleable Iron or Ductile Iron. Contact Factory For Clarification. *Y Bushings are MADE-TO-ORDER.

Note - Taper on all Browning Split Bushings is 3/4" Per Foot on Diameter.