


Dole® Air Valves

Building on a Solid Foundation

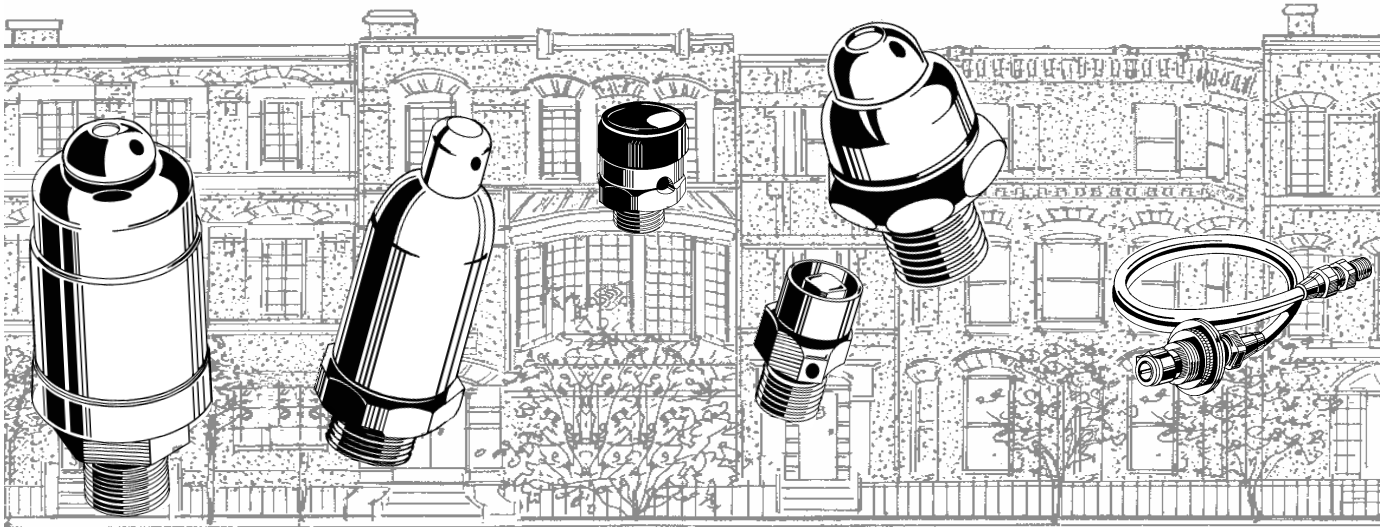

DOLE AIR VALVES FOR HOT WATER SYSTEMS

DOLE AIR VALVES FOR ONE PIPE SYSTEMS

DOLE VALVE MODEL NO.	RADIATORS	CONVECTORS	BASE BOARDS	MAINS	HIGH POINTS	UNIT HEATERS	CONNECTION SIZE	MAX. PRESSURE	REMARKS
20JR	●	●	●				1/8" Male Straight	30 PSI	Automatic Disk Type
20SR	●	●	●				1/8" Male Straight	30 PSI	Auto-Disk Type with manual shut-off
2000		●	●	●	●		1/8" Male Straight	35 PSI	Auto-Float Vent with provisions for drain
75		●	●	●	●		3/4" Male x 1/2" Female Straight	75 PSI	Auto-Main Float Vent with provisions for drain
14 KEY		●					1/8" Male	150 PSI	For venting outside ends. 3/16" x 20" copper tube
14A COIN		●					1/8" Male	150 PSI	As above, coin operated
9 COIN	●						1/8" Male	150 PSI	Manual coin operated
9 COIN SPECIAL			●				1/8" Male	150 PSI	Manual -Special coin for base board radiator
10 KEY	●						1/8" Male	150 PSI	Manual key operation
10-4	●	●					Not applicable		Key for #10 and #14

DOLE VALVE MODEL NO.	FREESTANDING RADIATORS	CONVECTORS	PIPE COILS	CEILING RADIATORS	SHORT MAINS AND DRIPS	LONG MAINS	SMALL UNIT HEATERS	LARGE UNIT HEATERS	CONNECTION SIZE	MAX. OPERATING PRESSURE	REMARKS
1A	●			●					1/8" Male Angle	15 PSI	Adjustable Vent Rate
80-4,5,6,C,D									1/8" Male Angle	15 PSI	Economical
85-5,6,C,D	●	●	●	●					1/8" Male Straight	15 PSI	Economical
1933	●			●					1/8" Male Angle	15 PSI	Non-Spitting
1933 1/8SS	●	●	●	●					1/8" Male Straight	15 PSI	Non-Spitting
1933 1/4SS		●	●	●					1/4" Male Straight	15 PSI	Non-Spitting
1933 3/4SS		●	●	●					3/4" Male x 1/2" Female Straight	15 PSI	Non-Spitting
4					●	●			3/4" Male x 1/2" Female Straight	15 PSI	Economical Only 1/2" Ht.
5					●	●	●		3/4" Male x 1/2" Female Straight	15 PSI	Fast Venting Non Spitting
55					●	●	●	●	3/4" Male x 1/2" Female Straight	15 PSI	Especially for Unit Heaters
20JR	●				●	●			1/8" Male Straight	30 PSI	Disk Type
20SR	●				●	●			1/8" Male Straight	30 PSI	Disk Type

Dole Air Valves Cross Reference Chart

STEAM NON-VACUUM

DOLE	HOFFMAN	VENT-RITE	GORTON	MAID-O-MIST
1A 1B	1A 1B	1		
3 3A 3B 3C	70A 71A 71B 71C	15A		
4 5	4 75, 75H		1	
20JR 20SR 55	500 500 74	40 20 57	54 54	72 72
80-4 80-5 80-6 80-C 80-D			4 1/8" Angle 5 1/8" Angle 6 1/8" Angle C 1/8" Angle D 1/8" Angle	4 1/8" Angle 5 1/8" Angle 6 1/8" Angle C 1/8" Angle D 1/8" Angle
85-5 85-6 85-C 85-D			5 Straight 6 Straight C Straight D Straight	5 1/8" Straight 6 1/8" Straight C 1/8" Straight D 1/8" Straight
1933 ANGLE 1933 SS 1/8" 1933 SS 1/4" 1933 SS 3/4" 1933 SA 1933 SV	40 41 43 45	11 31 33 35		
		51		

HYDRONIC VENTS AUTOMATIC

DOLE	HOFFMAN	VENT-RITE	GORTON	MAID-O-MIST
2000	77,790	700	75	66,67
75	79	300		75
20 JR	500	40	54	72
20 SR	500	20	54	72

HYDRONIC VENTS MANUAL

DOLE	HOFFMAN	VENT-RITE	GORTON	MAID-O-MIST
9 9B 10 14 14A				

The above recommended replacements will function similarly to the competitor's models but may differ in appearance and features. Refer to Dole Air Valve specifications for details. Part numbers (other than Invensys) are solely for identification and reference.

Information subject to change without notice.

7/99