


Common sense designs
to make your job easier


PRO[®]
IAQ

TRUE COMFORT IIII

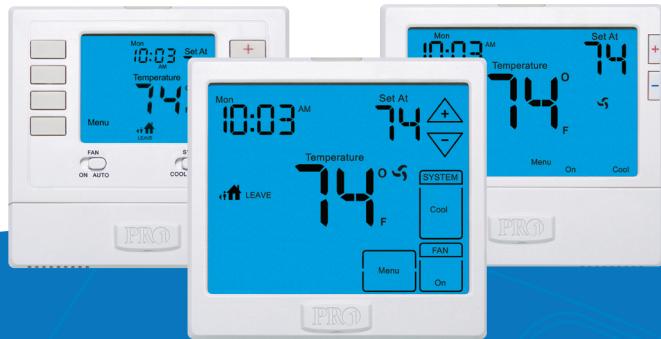

- 1 **Display Size** - We boast the largest displays for the money. Homeowners want large displays and now you can give them what they've been asking for.
- 2 **One Size Thermostats** - All Pro1 thermostats have the same size footprint, so you'll never have to worry about wall marks left by older designs. You can also upgrade to new models without replacing the subbase, just snap on the new model.
- 3 **Badge System** - Private labeling your thermostats has never been easier. Our innovative badge is universal for all Pro1 models. Regardless of price or application, your customized badge will snap on the thermostat of your choice.

Wireless Wire[®] was developed jointly with HVAC professionals. Wireless Wire[®] functionally replaces 24 VAC control wiring. Simply connect the terminals on one module and when those terminals see 24V then the same terminals on the other module close. Wireless Wire[®] is another Pro1 innovation offered exclusively to our professional HVAC contractor partners.

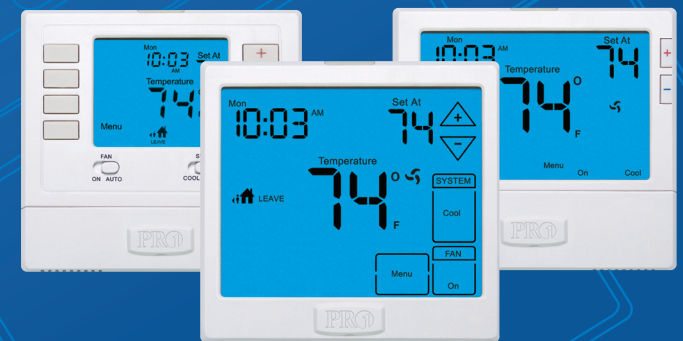

Contact Us

Pro1 IAQ Inc.
1111 S. Glenstone
Suite 2-100
Springfield, MO 65804

Toll-free: 1-888-Pro1iaq (776-1427)
Toll Number (Outside the USA): 330-821-3600
Web: <http://www.pro1iaq.com>
Hours of Operation: Monday - Friday 9 AM - 6 PM Eastern

HEAVY DUTY PRODUCTS
FOR THE PROFESSIONAL
HVACR CONTRACTOR





Pro1
Model #

7D 7 Day Programmable
5/1/1 5/1/1 Programmable
NP Non-programmable

Stages of Heat / Stages of Cool / Gas, Electric or Oil / Heat Pump / Millivolt / Battery Power / 24V Power (Hardwire) / Dual Fuel Compatible (Square Inches) / Auto Changeover / Filter Change Reminder / Room Temperature Calibration / Minimum Compressor Run Time / Compressor Short Cycle Delay / Adjustable Heating Temperature Swing / Adjustable Cooling Temperature Swing / Programmable Fan / Keypad Lockout / Adjustable Setpoint Limits / Humidity Limits / Memory Control (Permanent) / Memory Type / Touchscreen / Warranty (Years) / Terminals

Model #	7D	5/1/1	NP	Stages of Heat	Stages of Cool	Gas, Electric or Oil	Heat Pump	Millivolt	Battery Power	24V Power (Hardwire)	Dual Fuel Compatible (Square Inches)	Auto Changeover	Filter Change Reminder	Room Temperature Calibration	Minimum Compressor Run Time	Compressor Short Cycle Delay	Adjustable Heating Temperature Swing	Adjustable Cooling Temperature Swing	Programmable Fan	Keypad Lockout	Adjustable Setpoint Limits	Humidity Limits	Memory Control (Permanent)	Memory Type	Touchscreen	Warranty (Years)	Terminals
BEST																											
Wireless																											
T955WH**	7D	5/1/1	NP	3*	2	•	•	•	•	H	13	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, Y2, W/E, W2 G, B, O, H, D
T955W**	7D	5/1/1	NP	3*	2	•	•	•	•	H	13	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, Y2, W/E, W2, G, B, O
Wired																											
T955	7D	5/1/1	NP	3*	2	•	•	•	•	S	13	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, Y2, W/E, W2, G, B, O
T925	7D	5/1/1	NP	3	2	•	•	•	•	S	13	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	R, C, Y, Y2, W2, E, G, B, O, L
T915	7D	5/1/1	NP	2	2	•	•	•	•		13	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	R, C, Y, Y2, W, W2, G, B, O
T905	7D	5/1/1	NP	1	1	•	•	•	•		13	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, W, G, B, O
BETTER																											
T855	7D	5/1/1	NP	3*	2	•	•	•	•	S	8	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, Y2, W/E, W2, G, B, O
T805	7D	5/1/1	NP	1	1	•	•	•	•		8	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, W, G, B, O
T801			NP	1	1	•	•	•	•		8	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, W, G, B, O
GOOD																											
T771			NP	0/1	0/1	•	•	•	•		4	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	R, C, W/Y, G
T755H		5/1/1	NP	3*	2	•	•	•	•	S	6	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, Y2, W/E, W2 G, B, O, H, D
T755		5/1/1	NP	3*	2	•	•	•	•	S	6	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, Y2, W/E, W2, G, B, O
T725		5/1/1		2	1	•	•	•	•	S	4	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	R, C, Y, W2, E, G, B, O
T721			NP	2	1	•	•	•	•	S	4	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	R, C, Y, W2, E, G, B, O
T715		5/1/1		2	2	•	•	•	•		4	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	R, C, Y, Y2, W, W2, G
T705		5/1/1		1	1	•	•	•	•		4	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, W, G, B, O
T701			NP	1	1	•	•	•	•		4	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, W, G, B, O
T601			NP	1	1	•	•	•	•		.5	•	•	•	•	•	•	•	•	•	•	•	•	•	•	5	Rh, Rc, C, Y, W, G, B, O



* 3 heat stages for heat pump or 2 heat stages for conventional.

** Wireless accessories available for **T955W(H)**. **R251W** is an indoor remote temperature sensor **R250W** is an outdoor remote temperature sensor.

H Dual fuel hardware balance point. Requires outdoor temperature accessory **R250W**.

S Dual fuel software setting. **Y** de-energizes when **W2** energizes.