

CADDY®

Asia Range Electrical Fasteners




ERICO®

Innovation and Quality – The Cornerstones of Our Business

For more than 100 years, ERICO has built its reputation by developing and marketing high-quality, innovative products. As a trusted industry leader, our products and services are recognised for providing labour-saving and cost-saving solutions for customers throughout the world. It is our goal to continue to create high-quality, state-of-the-art products, while also providing the unparalleled service our customers have come to expect.

ERICO is a leading global designer, manufacturer and marketer of precision-engineered specialty metal products serving niche markets in a diverse range of electrical, construction, utility and rail applications. The company is headquartered in Solon, Ohio, USA with a network of sales locations serving more than 30 countries and with manufacturing and distribution facilities worldwide. ERICO's well-known brand names include: CADDY® electrical and mechanical fixings, fasteners and supports; CADWELD® welded electrical connections; ERICO® rail and industrial products; ERIFLEX® low-voltage power distribution; ERITECH® facility electrical protection; and LENTON® concrete products. Visit ERICO online at www.erico.com.

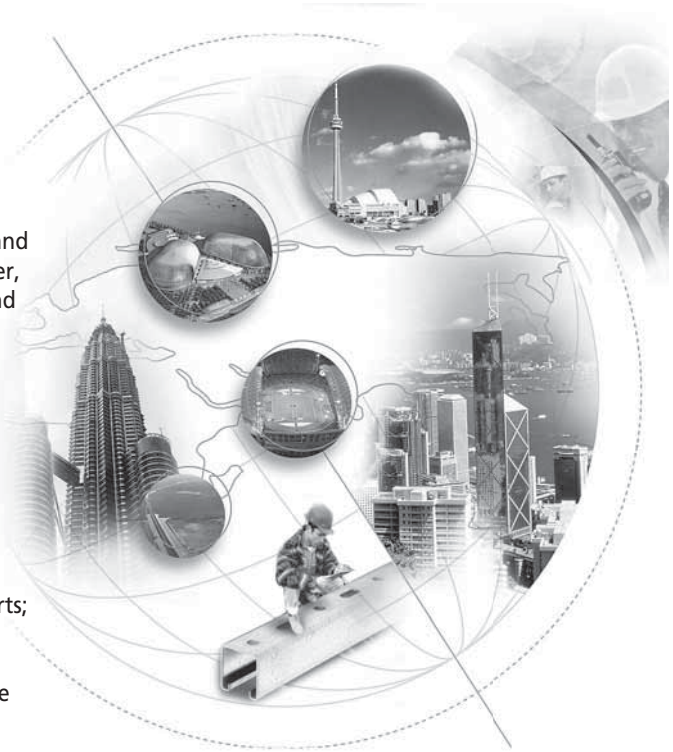

Symbols

Base Material

Product and profile type onto which the fixing will be attached.

Beam Profiles



Purlin Profiles




Metal Decking Profiles



Strut Profiles




Rod Types




T-Grid



Pedestal Types



Wall Types



Legend


	Part Number		Bulk Pack		Corrosion Protection
	Part Description		Static Load in Newtons		Safety Factor
	Box Quantity		Number of Twisted Pairs		Cable Diameter

Corrosion Protection

	P1 Electro-zinc Plated
	P2 Stainless Steel
	P3 Hot-dip Galvanised
	P21 CADDY® ARMOUR



Featured Innovations

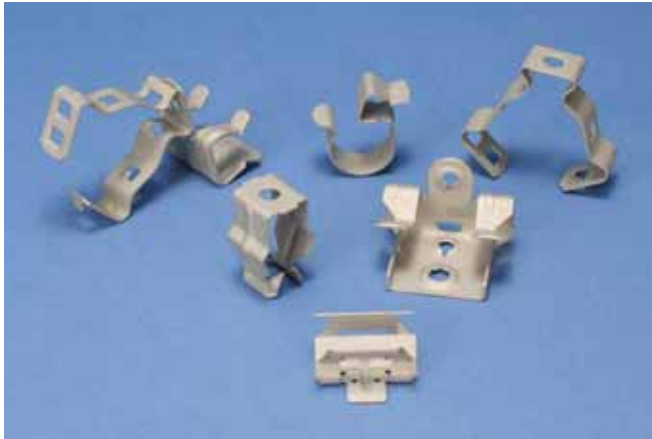

CADDY® ARMOUR

Superior Corrosion Resistance

ERICO is revolutionizing corrosion protection with CADDY® ARMOUR. This innovative corrosion protection system for steel parts is UL® Recognized and RoHS compliant. Testing conducted by independent testing facilities and ERICO has proven CADDY ARMOUR to be the most advanced, self-healing coating available, providing the highest level of corrosion resistance on the market.

Excellent Coat Quality

CADDY ARMOUR provides an extremely consistent and even coating. This aesthetically pleasing appearance is particularly important for installations in highly visible areas, such as open ceilings.

Utilising a state-of-the-art, computer-controlled process, the coating is applied consistently to each part, enabling improved corrosion resistance performance. Corrosion resistance is proven through the ASTM® B117 / DIN 50021 salt spray and GM 9540P Accelerated Cyclic Corrosion tests.



CADDY® CAT LINKS


CADDY® CAT LINKS is the newest, most innovative J-Hook support solution from ERICO. Not requiring any pre-fabricated brackets or supports, the CADDY CAT LINKS system is faster and easier to install than conventional tray systems, offering the installer substantial project and logistical cost savings.

CADDY CAT LINKS offers the largest family of J-Hook sizes on the market. The full range provides a bending radius that meets TIA standards for Cat 6a and easily accommodates Cat 7, large-diameter optical fibre, inner duct and coaxial cable.

See for yourself how the versatile CADDY CAT LINKS can simplify your installations while saving time and labour.



DIN-4102-12




CADDY® SPEED LINK 2.0 mm

		Ø (mm)	L	P					SF
HOOK									
195800	SLD2L1	2.0	1 m	P1	100	10x10	440 N	5:1	
195805	SLD2L2	2.0	2 m	P1	100	10x10	440 N	5:1	
195810	SLD2L3	2.0	3 m	P1	100	10x10	440 N	5:1	
195815	SLD2L5	2.0	5 m	P1	50	5x10	440 N	5:1	
195820	SLD2L10	2.0	10 m	P1	25	5x5	440 N	5:1	



DIN 4102-2






CADDY® SPEED LINK 3.0 mm

		L (m)	Ø (mm)	P					SF
HOOK									
195825	SLD3L1	1	3.0	P1	100	10x10	880 N	5:1	
195830	SLD3L2	2	3.0	P1	100	10x10	880 N	5:1	
195835	SLD3L3	3	3.0	P1	50	5x10	880 N	5:1	
195840	SLD3L5	5	3.0	P1	50	5x10	880 N	5:1	
195845	SLD3L10	10	3.0	P1	25	5x5	880 N	5:1	



DIN 4102-2



CADDY® SPEED LINK LD 1.5 mm

		Fig. #	L (m)	"Y" L (mm)	Ø (mm)	P					SF
HOOK											
195950	SLD15L1	1	1	-	1.5	P1	100	5x20	195 N	5:1	
195920	SLD15L2	1	2	-	1.5	P1	100	5x20	195 N	5:1	
195955	SLD15L3	1	3	-	1.5	P1	100	5x20	195 N	5:1	
195925	SLD15L5	1	5	-	1.5	P1	100	5x20	195 N	5:1	
195930	SLD15L10	1	10	-	1.5	P1	100	5x20	195 N	5:1	
HOOK – STAINLESS STEEL											
195935	SLD15L2S	1	2	-	1.5	P2	40	20x2	195 N	5:1	
195940	SLD15L5S	1	5	-	1.5	P2	40	20x2	195 N	5:1	
195945	SLD15L10S	1	10	-	1.5	P2	40	20x2	195 N	5:1	
TOGGLE											
195970	SLD15L2T	2	2	-	1.5	P1	20	1x20	195 N	5:1	
195969	SLD15L3T	2	3	-	1.5	P1	20	1x20	195 N	5:1	
195975	SLD15L5T	2	5	-	1.5	P1	20	1x20	195 N	5:1	
Y-TOGGLE											
195960	SLD15Y500	3	-	500	1.5	P1	20	1x20	195 N	5:1	




Fig. #1




Fig. #2




Fig. #3



DIN 4102-2



Fig. #1



Fig. #2

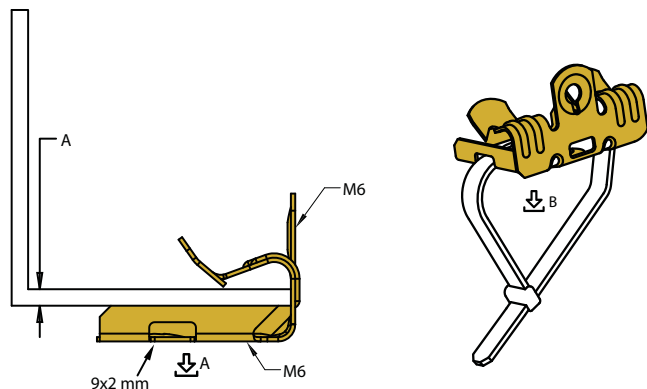


Fig. #3






		A (mm)		↓ A	↓ B
P21					
170050	EM24	3 - 8	100	450	150
170060	EM58	8 - 14	100	450	150
170070	EM912	14 - 20	100	450	150
P2					
179720	EM24-2	3 - 8	100	450	150
179730	EM58-2	8 - 14	100	450	150
179740	EM912-2	14 - 20	100	450	150



H




		A (mm)		↓
P21				
170010	2H4	2 - 3	100	700 N
170020	4H24	3 - 8	100	900 N
170030	4H58	8 - 14	100	900 N
170040	4H912	14 - 20	100	900 N
P2				
179610	4H24-2	3 - 8	100	650 N
179620	4H58-2	8 - 14	100	650 N
179630	4H912-2	14 - 20	100	650 N

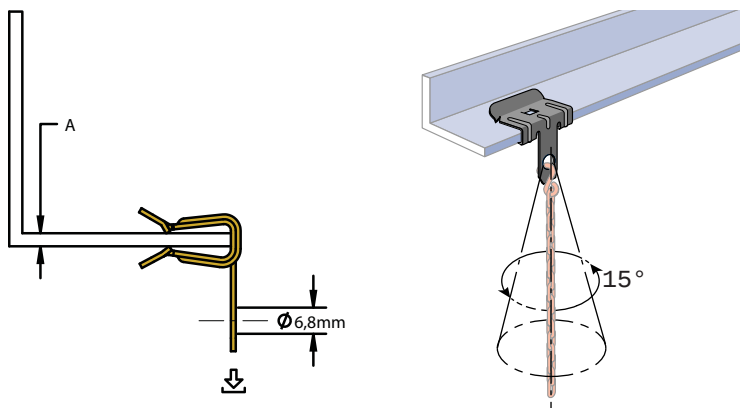




		Ø1	Ø2 (mm)	P		
160260	T10	11 mm	11x15	P21	100	700 N



SC







		A (mm)	Ø (mm)	P	
187510	24SC67	2 - 4	6 - 7	P21	100
187710	24SC78	2 - 4	7 - 8	P21	100
187530	24SC89	2 - 4	8 - 9	P21	100
187750	24SC910	2 - 4	9 - 10	P21	100
187550	24SC1011	2 - 4	10 - 11	P21	100
187570	24SC1214	2 - 4	12 - 14	P21	100
187590	24SC1518	2 - 4	15 - 18	P21	100
187610	24SC1924	2 - 4	19 - 24	P21	100
187630	24SC2530	2 - 4	25 - 32	P21	100
187500	47SC67	4 - 7	6 - 7	P21	100
187720	47SC78	4 - 7	7 - 8	P21	100
187520	47SC89	4 - 7	8 - 9	P21	100
187760	47SC910	4 - 7	9 - 10	P21	100
187540	47SC1011	4 - 7	10 - 11	P21	100
187560	47SC1214	4 - 7	12 - 14	P21	100
187580	47SC1518	4 - 7	15 - 18	P21	100
187600	47SC1924	4 - 7	19 - 24	P21	100
187620	47SC2530	4 - 7	25 - 32	P21	100
187640	812SC67	8 - 12	6 - 7	P21	100
187730	812SC78	8 - 12	7 - 8	P21	100
187650	812SC89	8 - 12	8 - 9	P21	100
187770	812SC910	8 - 12	9 - 10	P21	100
187660	812SC1011	8 - 12	10 - 11	P21	100
187670	812SC1214	8 - 12	12 - 14	P21	100
187680	812SC1518	8 - 12	15 - 18	P21	100
187690	812SC1924	8 - 12	19 - 24	P21	100
187700	812SC2530	8 - 12	25 - 32	P21	100



SCA



		A (mm)	B (mm)	P	
160510	SCA	13 - 20	2 - 4	P21	100



VF14



		Fig. #	A (mm)	Ø (mm)	P		↓
179850	VF14	1	1.5 - 6.0	—	P21	100	600 N
179060	VF14T10	2	1.5 - 6.0	11	P21	100	600 N
	VF146T	3	1.5 - 6.0	11	P21	100	600 N

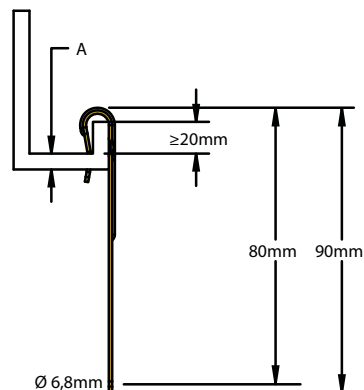


Fig. 1



Fig. 2



Fig. 3



Fig. 1

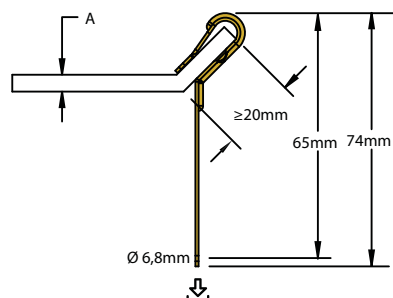


Fig. 2

AF14




		A (mm)	P		↓
179860	AF14	1.5 - 6.0	P21	100	350 N



J-Ti/T






		A (mm)	Ø 1	Ø 2 (mm)	P		↓
160220	T10J1	1.5 - 4.0	11 mm	11x15	P21	100	700 N
160230	T10J2	4.0 - 6.5	11 mm	11x15	P21	100	700 N





🌐	📖	ØA (mm)	Ø B	P	📦	⬇️ N1
170660	K8	8-18	M4-M6	P21	100	220 N
170670	K12	18-24	M4-M6	P21	100	220 N
		16-22	M8-M10	P21	100	220 N
170680	K16	14-20	M12	P21	100	220 N
		26-30	M4-M6	P21	100	220 N
		24-26	M8-M10	P21	100	220 N
170690	K20	22-24	M12	P21	100	220 N
		30-42	M4-M6	P21	100	220 N
		25-38	M8-M10	P21	100	220 N
		20-36	M12	P21	100	220 N



🌐	📖	ØA (mm)	B	P	📦	⬇️ N2
170660	K8	3-7	12-16	P21	100	110 N
170670	K12	3-7	16-22	P21	100	110 N
		8-10	14-20	P21	100	110 N
		11-13	12-19	P21	100	110 N
170680	K16	3-7	24-28	P21	100	110 N
		8-10	20-26	P21	100	110 N
		11-13	19-24	P21	100	110 N
170690	K20	3-7	28-40	P21	100	110 N
		8-10	26-38	P21	100	110 N
		11-13	21-35	P21	100	110 N

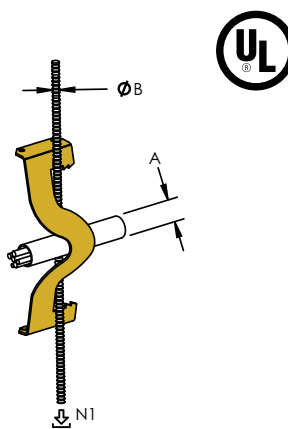

Z-CTS




🌐	📖	Ø	P	📦	⬇️
172950	4Z34CTS	M4 - M8	P21	50	110 N
172960	6Z34CTS	M8 - M12	P21	50	110 N

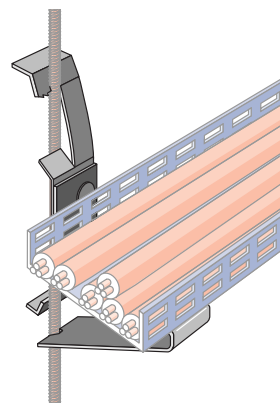





🌐	📖	Ø (mm)	P	🏠	↓ ₁	↓ ₂
171130	8P	18 - 22	P21	100	110	65
171150	12P	22 - 30	P21	100	110	65
171170	16P	30 - 35	P21	100	110	65

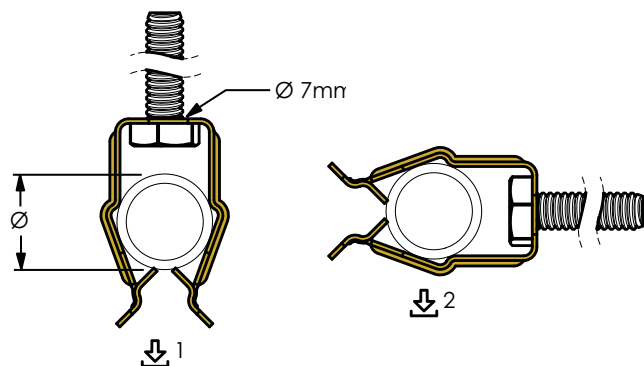


🌐	📖	Ø (mm)	🏠	↓ ₁	↓ ₂
P21					
170790	6M	14-18	100	440	110
177130	812M	18-30	100	440	110
170100	16M	30-35	100	440	110
170110	20M	35-42	100	440	110
170120	24M	45-50	100	440	110
170130	32M	50-60	100	440	110
P2					
179900	8M-2	18-22	100	440	110
179910	12M-2	22-30	100	440	110

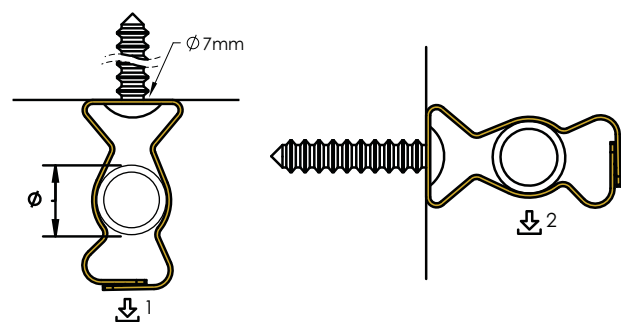

CD-B



	Ø 1 (mm)	Ø 2 (mm)	P		
CD0B	7	17-22	P1	100	70 N
CD2B	7	25-33	P1	100	70 N
CD1B	7	19-25	P1	100	70 N
CD2,5B	7	31-38	P1	100	70 N
CD3B	7	36-43	P1	100	70 N
CD4B	7	40-47	P1	50	70 N
CD5B	7	50-60	P1	50	70 N
CD6B	8	66-76	P1	25	70 N
CD7B	8	80-90	P1	25	70 N
CD8B	8	95-105	P1	10	70 N
CD9B	8	108-115	P1	10	70 N

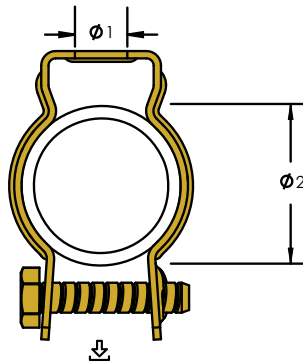


EBC / BC





		A	M	Ø	P		
170380	EBC	<16 mm	M6	10.5 mm	P21	100	450 N

		A	M	Ø	P		
BC		<1/2"	1/4"	3/8"	P21	100	450 N










		C (mm)	M (mm)		
P3					
336100	C20-3	20	6 x 25	100	1100 N
336110	C30-3	30	8 x 30	100	1100 N
336120	C45-3	45	8 x 30	50	1100 N
P2					
336130	C20-2	20	6 x 25	100	1100 N
336140	C30-2	30	8 x 30	100	1100 N
336150	C45-2	45	8 x 30	50	1100 N




		B (mm)	D (mm)	
P3				
336300	CR17-3	16	16.0 - 20.0	200
336310	CR21-3	16	20.4 - 25.0	100
336320	CR28-3	16	26.9 - 31.8	100
336330	CR37-3	20	33.7 - 38.0	50
336340	CR42-3	20	40.0 - 44.5	50
336350	CR48-3	20	47.0 - 51.0	50
336360	CR60-3	20	59.2 - 63.5	25
P2				
336400	CR17-2	16	16.0 - 20.0	200
336410	CR21-2	16	20.4 - 25.0	100
336420	CR28-2	16	26.9 - 31.8	100
336430	CR37-2	20	33.7 - 38.0	50
336440	CR42-2	20	40.0 - 44.5	50
336450	CR48-2	20	47.0 - 51.0	50
336460	CR60-2	20	59.2 - 63.5	25



TK300M




		A (mm)	Ø	P			SF	Approvals
389511		19	11 mm	P1	100	2500 N	3:1	VdS, FM
389521		19	13 mm	P1	50	3500 N	3:1	VdS, FM



TOP MOUNT

May be mounted
in either position




BOTTOM MOUNT



BTK310M




		A (mm)	Ø	P			SF	Approvals
389891		31.8	11 mm	P1	50	2500 N	3:1	VdS, FM
388891		31.8	13 mm	P1	50	3500 N	3:1	VdS, FM



TOP MOUNT

May be mounted
in either position



BOTTOM MOUNT



BC200 / BC400



	Flange Thickness	Ø	P		
BC200	>1/2"	1/2"	Bright Zinc	50	450 N
BC400	>3/4"	3/8"-16	Bright Zinc	25	900 N



HB2



		A (mm)	
P1			
336030	HB2-1	<24	50
P3			
336040	HB2-3	<24	50

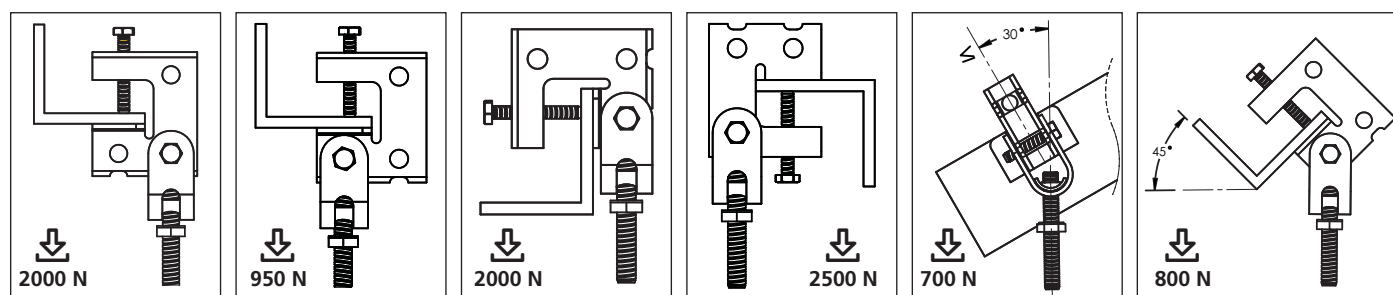



	Fig. #	A x B x S (mm)	Length (m)	Configuration	Height (mm)	P
ES4141PLX3	1	41 x 41 x 2.5	3.0	Plain	41	P3
ES4141SLOTX3	2	41 x 41 x 2.5	3.0	Slotted	41	P3
ES4141PLX6	1	41 x 41 x 2.5	6.0	Plain	41	P3
ES4141SLOTX6	2	41 x 41 x 2.5	6.0	Slotted	41	P3
ES4121PLX3	3	21 x 41 x 2.5	3.0	Plain	21	P3
ES4121SLOTX3	4	21 x 41 x 2.5	3.0	Slotted	21	P3
ES4121PLX6	3	21 x 41 x 2.5	6.0	Plain	21	P3
ES4121SLOTX6	4	21 x 41 x 2.5	6.0	Slotted	21	P3



Fig. #1



Fig. #2




Fig. #3



Fig. #4

KH

	A (mm)	B (mm)
KH10C	125.0	150.0
KH5C	125.0	200.0
KH6C	125.0	250.0
KH11C	125.0	300.0
KH15C	125.0	400.0
KH12C	125.0	450.0
KH16C	125.0	550.0
KH13C	125.0	600.0
KH8C	125.0	650.0
KH9C	125.0	700.0
KH14C	125.0	750.0






		H	M		
P3					
315080	UA 506-3	5 mm	M6	100	12 N-m
315090	UA 608-3	6 mm	M8	100	28 N-m
315100	UA 810-3	8 mm	M10	100	55 N-m
315110	UA 812-3	8 mm	M12	100	95 N-m
SPRA0037HD		3/8"	3/8-16	100	55 N-m
SPRA0050HD		1/2"	1/2-13	100	95 N-m




UA

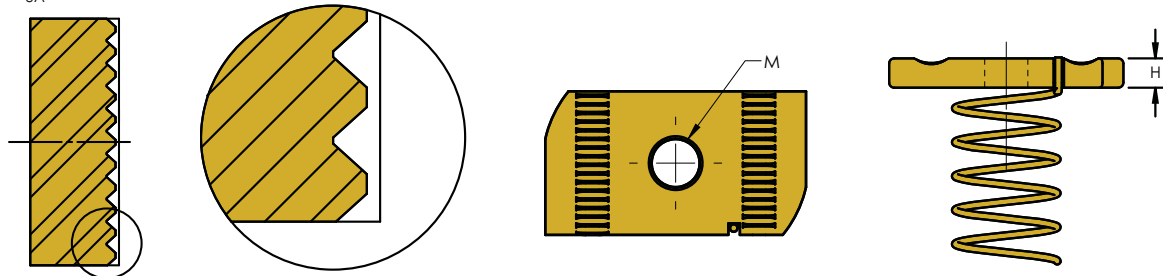

		H (mm)	M		
P3					
315040	UD 506-3	5	M6	100	12 N-m
315050	UD 608-3	6	M8	100	28 N-m
315060	UD 810-3	8	M10	100	55 N-m
315070	UD 812-3	8	M12	100	95 N-m




UD

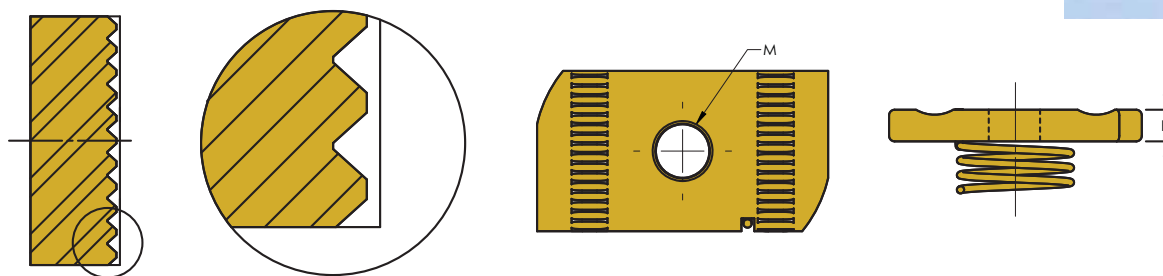




		H (mm)	M		
P3					
315000	UM 506-3	5	M6	100	12 N-m
315010	UM 608-3	6	M8	100	28 N-m
315020	UM 810-3	8	M10	100	55 N-m
315030	UM 812-3	8	M12	100	95 N-m







UM

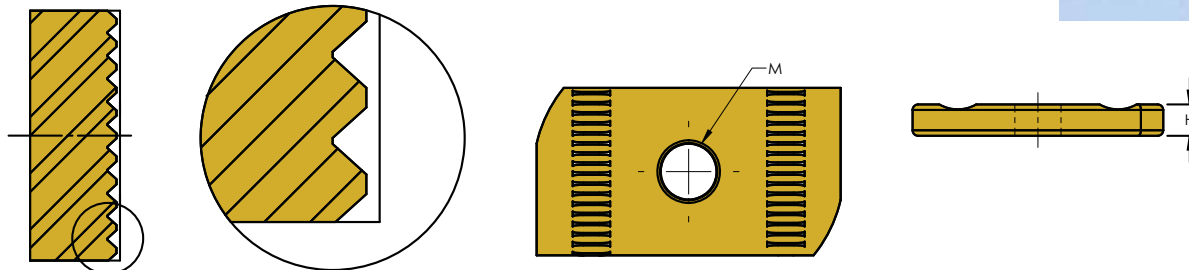

CADDY® SLICK NUT




		Ø	P		
174340	SLICK M8	M8	P21	100	1500 N
174350	SLICK M10	M10	P21	100	1500 N
SLICK375		3/8-16	P21	100	1500 N



ISSP




		M	P		
190820	ISSP M8	M8	P1	24	1000 N
190830	ISSP M10	M10	P1	24	1000 N

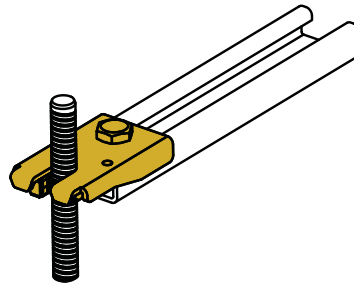

ISN

		Ø	P		
187340	ISN M6	M6	P1	50	550 N
187350	ISN M8	M8	P1	50	660 N
187360	ISN M10	M10	P1	50	660 N
ISN375		3/8-16	P1	50	660 N



SK

		Fig. #	Conduit Size Ø (mm)	Static Load (lbs)	P	
190050	SK405I	1	63.5	350	P1	50
190060	SK485I	1	76.2	350	P1	50
190070	SK565I	1	88.9	350	P1	25
190080	SK645I	1	101.6	350	P1	25
190090	SK85I	2	12.7	200	P1	100
190000	SK125I	2	19.0	200	P1	100
190010	SK165I	2	25.4	200	P1	100
190020	SK205I	2	31.8	200	P1	100
190030	SK245I	2	38.1	200	P1	50
190040	SK325I	2	50.8	200	P1	50



Fig. #1




Fig. #2



CADDY® CAT CR50




					
182335	CATCR50	<50	P12	25	45 N



ESGP

		Pipe Size (mm)	
ESGP	Metal Stud Anti-Rattle Grommet	15.0 - 25.0	100



MSP20



		
188480	MSP20	1







		Ø (mm)	P		↓	SF
181061	CAT16HPE	25	P1	50	267 N	3:1
181062	CAT32HPE	50	P1	50	267 N	3:1
181063	CAT48HPE	75	P1	25	267 N	3:1
181064	CAT64HPE	100	P1	25	267 N	3:1



		AWG	Ø (mm)	CAT16HPE	CAT32HPE	CAT48HPE	CAT64HPE
UTP	4	24	5	25	90	210	350
FTP	4	24	6	15	60	145	245
SFTP	4	24	6	15	60	145	245
SFTP	4	23	7	12	45	105	180
F/STP	4	23	8.5	9	30	70	120
SFTP	4	23	8.5	9	30	70	120
UTP	2 x 4	24	5 x 10	10	35	80	140
FTP	2 x 4	24	6 x 12.5	6	20	55	90
SFTP	2 x 4	24	6 x 13	6	20	50	90
SFTP	3 x 4	24	14	3	12	25	45
UTP	25	24	13	4	14	30	50
Cat 5e	-	-	5.26	20	80	190	320
Cat 6	-	-	6.63	14	50	120	200
Cat 6a (min)	-	-	7.62	11	35	90	150
Cat 6a (max)	-	-	8.99	8	25	65	110

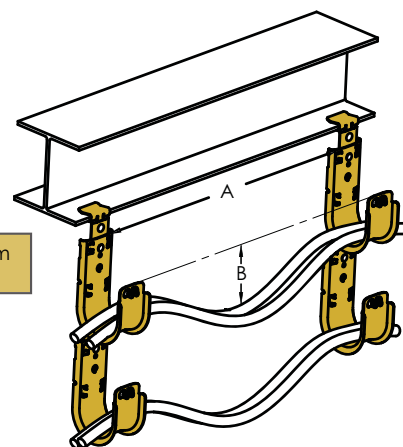


A = 1.20 - 1.50 m
B < 300 mm



CATHPEAN

NEW


		Ø (mm)	P		↓	SF
181065	CATHPEAN	4.7	P21	50	712 N	3:1
181066	CATHPEA4	7.2	P21	50	890 N	3:1
181067	CATHPEA6	10.4	P21	50	890 N	3:1



CATHPS4

NEW


		Ø (mm)	P		↓	SF
181068	CATHPS4	7	P21	50	890 N	3:1



CATHPETM

NEW

		A (mm)	P		↓	SF
181069	CATHPETM	111	P21	50	890 N	3:1




CATHPE - H

NEW



		A (mm)	P		↓	SF
181075	CATHPE24SM	3 - 8	P21	50	890 N	3:1
181076	CATHPE58SM	8 - 14	P21	50	890 N	3:1
181077	CATHPE912SM	14 - 20	P21	25	890 N	3:1

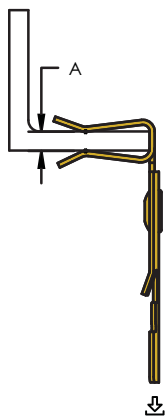


CATHPE-EM

NEW



		A (mm)	P		↓	SF
181091	CATHPE24	3 - 8	P21	25	334 N	3:1
181071	CATHPE58	8 - 14	P21	25	334 N	3:1
181072	CATHPE912	14 - 20	P21	25	334 N	3:1

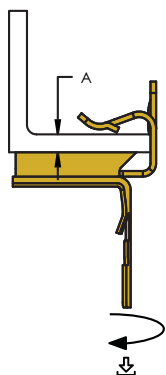


CATHPEBC

NEW



		A (mm)	P		↓	SF
181078	CATHPEBC	<16	P21	50	445 N	3:1




CATHPEBCB

NEW



		A (mm)	P			SF
181073	CATHPEBCB	<16	P21	25	267 N	3:1

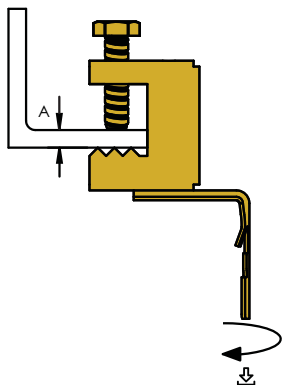


CATHPEBC200B

NEW



		A (mm)	P			SF
181074	CATHPEBC200B	<16	P1	25	445 N	3:1

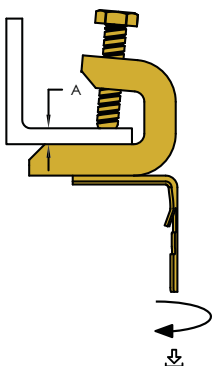


CATHPEBC200

NEW



		A (mm)	P			SF
181079	CATHPEBC200	<16	P1	25	445 N	3:1




CATHPEAF14

NEW



		A (mm)	P			SF
181092	CATHPEAF14	1.5 - 6	P21	50	445 N	3:1

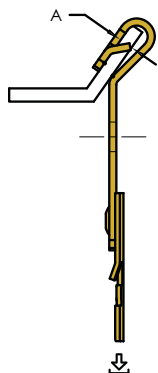


CATHPEVF14

NEW



		A (mm)	P			SF
181081	CATHPEVF14	1.5 - 6	P21	50	712 N	3:1

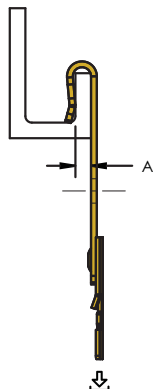


CATHPEESC

NEW



		A (mm)	P			SF
181082	CATHPEESC	9.9	P21	50	445	3:1

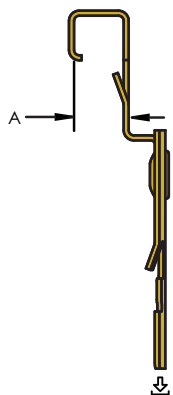


CATHPE - CD

NEW



		Ø (mm)	P		↓	SF
181085	CATHPECD0B	17-22	P1	25	70	3:1
181086	CATHPECD1B	19-25	P1	25	70	3:1
181088	CATHPECD2.5B	31-38	P1	25	70	3:1
181087	CATHPECD2B	25-33	P1	25	70	3:1




CATHPETS

NEW



		Ø (mm)	A (mm)	P	
181089	CATHPETS	25	65	P21	25

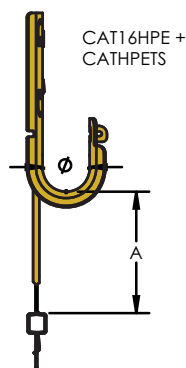


CATHPE-Z

NEW



		Ø	P		↓	SF
181083	CATHPE4Z34	M4-M8	P21	50	110	3:1
181084	CATHPE6Z34	M8-M12	P21	50	110	3:1



Notes





Visit the ERICO website at www.erico.com for new product information, up-to-date product specifications and applications, a list of upcoming events and industry tradeshow participation and more.

A full literature library provides pertinent literature in an easy-to-download PDF format. This is a great way to stay informed on all the current publications. New product brochures and datasheets are posted as soon as they are printed.

In the News & Events section, customers can find new product updates, press releases and lists of seminars.

Locations and contact information is listed for ERICO offices around the world as well as where to buy ERICO products.

www.erico.com provides a convenient way to get the answers you need day or night. Visit ERICO online.

WARNING

ERICO products shall be installed and used only as indicated in ERICO's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your ERICO customer service representative. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.

WARRANTY

ERICO products are warranted to be free from defects in material and workmanship at the time of shipment. NO OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED (INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), SHALL EXIST IN CONNECTION WITH THE SALE OR USE OF ANY ERICO PRODUCTS. Claims for errors, shortages, defects or nonconformities ascertainable upon inspection must be made in writing within 5 days after Buyer's receipt of products. All other claims must be made in writing to ERICO within 6 months from the date of shipment or transport. Products claimed to be nonconforming or defective must, upon ERICO's prior written approval in accordance with its standard terms and procedures governing returns, promptly be returned to ERICO for inspection. Claims not made as provided above and within the applicable time period will be barred. ERICO shall in no event be responsible if the products have not been stored or used in accordance with its specifications and recommended procedures. ERICO will, at its option, either repair or replace nonconforming or defective products for which it is responsible or return the purchase price to the Buyer. THE FOREGOING STATES BUYER'S EXCLUSIVE REMEDY FOR ANY BREACH OF ERICO WARRANTY AND FOR ANY CLAIM, WHETHER SOUNDING IN CONTRACT, TORT OR NEGLIGENCE, FOR LOSS OR INJURY CAUSED BY THE SALE OR USE OF ANY PRODUCT.

LIMITATION OF LIABILITY

ERICO excludes all liability except such liability that is directly attributable to the willful or gross negligence of ERICO's employees. Should ERICO be held liable its liability shall in no event exceed the total purchase price under the contract. ERICO SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS OF BUSINESS OR PROFITS, DOWNTIME OR DELAY, LABOR, REPAIR OR MATERIAL COSTS OR ANY SIMILAR OR DISSIMILAR CONSEQUENTIAL LOSS OR DAMAGE INCURRED BY BUYER.




www.erico.com



AUSTRALIA

Phone 1-800-263-508
Fax 1-800-423-091



CHINA

Phone +86-21-3430-4878
Fax +86-21-5831-8177



HUNGARY

Phone 06-800-16538
Fax +39-0244-386-107



NORWAY

Phone 800-100-73
Fax 800-100-66



SWITZERLAND

Phone 0800-55-86-97
Fax 0800-55-96-15



BELGIUM

Phone 0800-757-48
Fax 0800-757-60



DENMARK

Phone 808-89-372
Fax 808-89-373



INDONESIA

Phone +62-21-575-0941
Fax +62-21-575-0942



POLAND

Phone +48-71-349-04-60
Fax +48-71-349-04-61



THAILAND

Phone +66-2-267-5776
Fax +66-2-636-6988



BRAZIL

Phone +55-11-3623-4333
Fax +55-11-3621-4066



FRANCE

Phone 0-800-901-793
Fax 0-800-902-024



ITALY

Phone 800-870-938
Fax 800-873-935



SINGAPORE

Phone +65-6-268-3433
Fax +65-6-268-1389



**UNITED ARAB
EMIRATES**

Phone +971-4-881-7250
Fax +971-4-881-7270



CANADA

Phone +1-800-677-9089
Fax +1-800-677-8131



GERMANY

Phone 0-800-189-0272
Fax 0-800-189-0274



MEXICO

Phone +52-55-5260-5991
Fax +52-55-5260-3310



SPAIN

Phone 900-993-154
Fax 900-807-333



UNITED KINGDOM

Phone 0808-2344-670
Fax 0808-2344-676



CHILE

Phone +56-2-370-2908
Fax +56-2-369-5657



HONG KONG

Phone +852-2764-8808
Fax +852-2764-4486



NETHERLANDS

Phone 0800-0200-135
Fax 0800-0200-136



SWEDEN

Phone 020-790-908
Fax 020-798-964



UNITED STATES

Phone 1-800-753-9221
Fax +1-440-248-0723

ASTM is a registered trademark of ASTM International
FM is a registered certification mark of FM Approvals LLC, LTD
TIA is a registered certification mark of the Telecommunications Industry Association
UL is a registered trademark of Underwriters Laboratories, Inc.

Copyright ©2011 ERICO International Corporation. All rights reserved.
CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.

F1021B-ASEN F10715L10ASEN 10M0111