

NOMINAL SIZE	ACTUAL SIZE		MEDIA SQ. FT.
	W	H	
10 x 20 x 2	9.50	19.50	6.24
12 x 12 x 2	11.50	11.50	4.33
12 x 20 x 2	11.50	19.50	7.20
12 x 24 x 2	11.375	23.375	8.66
14 x 20 x 2	13.50	19.50	8.64
14 x 25 x 2	13.50	24.50	10.83
15 x 20 x 2	14.50	19.50	9.12
16 x 16 x 2	15.75	15.75	7.66
16 x 20 x 2	15.50	19.50	9.60
16 x 24 x 2	15.50	23.50	11.55
16 x 25 x 2	15.50	24.50	12.03
18 x 18 x 2	17.50	17.50	11.04
18 x 20 x 2	17.50	19.50	11.04
18 x 24 x 2	17.50	23.50	13.28
18 x 25 x 2	17.50	24.50	13.84
20 x 20 x 2	19.50	19.50	12.00
20 x 24 x 2	19.375	23.375	14.43
20 x 25 x 2	19.50	24.50	15.04
20 x 30 x 2	19.625	29.625	18.24
24 x 24 x 2	23.375	23.375	17.61
25 x 25 x 2	24.50	24.50	18.65

NOMINAL SIZE	ACTUAL SIZE		MEDIA SQ. FT.
	W	H	
12 x 24 x 4	11.375	23.375	13.61
16 x 20 x 4	15.50	19.50	15.43
16 x 25 x 4	15.50	24.50	19.34
18 x 24 x 4	17.50	23.50	21.03
20 x 20 x 4	19.50	19.50	18.52
20 x 24 x 4	19.375	23.375	22.27
20 x 25 x 4	19.50	24.50	23.20
24 x 24 x 4	23.375	23.375	27.21

NOTES:


1. FILTER CONSTRUCTION
 - 1.1. PLEATED 100% SYNTHETIC MEDIA
 - 1.2. GALVANIZED EXPANDED METAL
 - 1.3. HEAVY DUTY BEVERAGE BOARD FRAME.
 - 1.4. INTERNALLY LAMINATED

2. FILTERS LISTED AS CLASSIFIED BY U.L.
3. TOLERANCES +/- 1/8" H&W, +/- 1/16"D
4. FILTER THICKNESS:
 - 4.1. 2" NOMINAL = 1.75" ACTUAL
 - 4.2. 4" NOMINAL = 3.75" ACTUAL

PERFORMANCE NOTES:

1. MERV 13 ASHRAE 52.2-2012
2. RECOMMENDED FINAL RESISTANCE IS 1.00 in. wg.
3. MAX. TEMPERATURE OF 180 F
4. INITIAL RESISTANCE
 - 4.1. 2" = .43" AT 500 FPM
 - 4.2. 4" = .37" AT 500 FPM

SEE 4

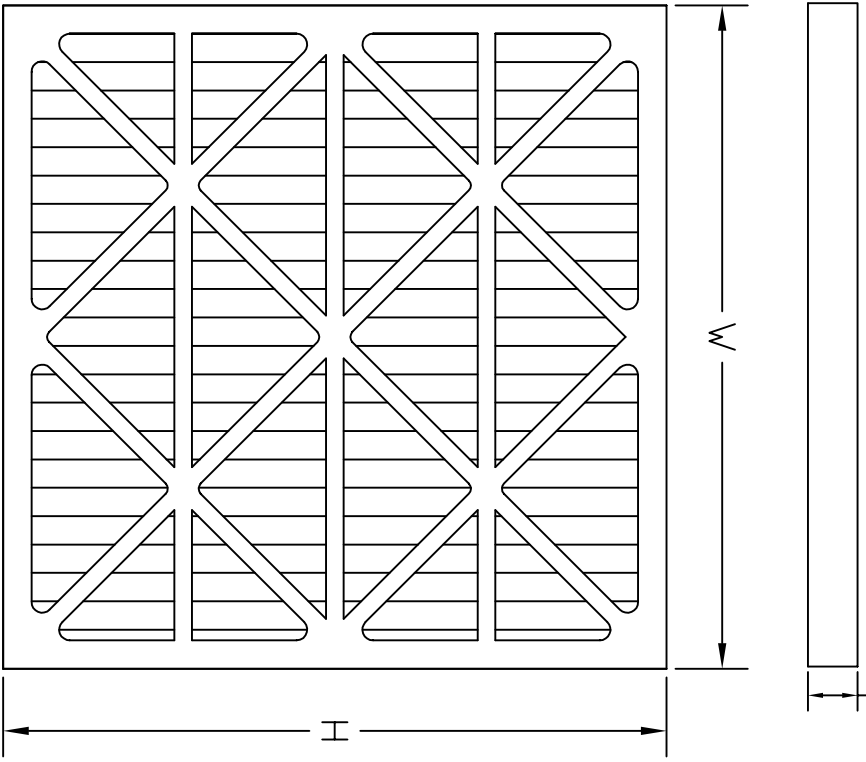

REVISION	DESCRIPTION	DATE	T.M.	NUM
A	FIRST ISSUE NEW LAYOUT	07/11/13		

Glasfloss Industries, Inc.
 Excellence in Air Filtration Since 1936

TITLE: Z-LINE SERIES MR-13 PLEAT
 DRAWING NUMBER: ZLINEMR13001