



## **GB5BM Series Air Handler 13 SEER Residential System 18,000 - 60,000 Btuh (Heat Pump & Air Conditioner)**

The GB5BM Series of air handlers, when combined with our heat pump or air conditioner, offer a full line of quality, split system heating and cooling equipment.


### **FEATURES and BENEFITS**

- **Warranty**
  - This product offers a 10-year all-parts warranty.
  - Consumer product registration required for 10 year All Parts Warranty and Quality Pledge within a limited period of time after the installation. See current warranty document or visit our consumer web site listed on the back of this document for warranty details.
- **Durable, Attractive Cabinet** — Designed using galvanized steel. The door is also galvanized steel, with a polyester urethane finish. The 950 hour salt spray finish resists corrosion 50% better than comparable units. The plastic drain pan is corrosion-resistant.
- **Multi-poised** — Can be used in horizontal, upflow, downflow and vertical applications.
- **Multi-speed** — Gives flexibility of installation.
- **Ease-of-Service** — Plug-in wire connections and built-in filter rack makes the air handler easy to service.
- **Plug-in Heater Kits** — Available in 5kw - 30 kw (Not for use in 115 Volt units)
- **Circuit Board** — Incorporating blower time delay relay, low voltage terminal strip, and heat-strip sequencing.
- **Air Handler Control Board** — Controls time-sequencing of heat stages with field-selectable sequence timing.
- **Breaker Accessibility** — Breaker accessible from front of unit when heater is applied.
- **No Fasteners on Sides or Back** — Smooth surfaces for ease of installation.





# MODEL IDENTIFICATION CODE

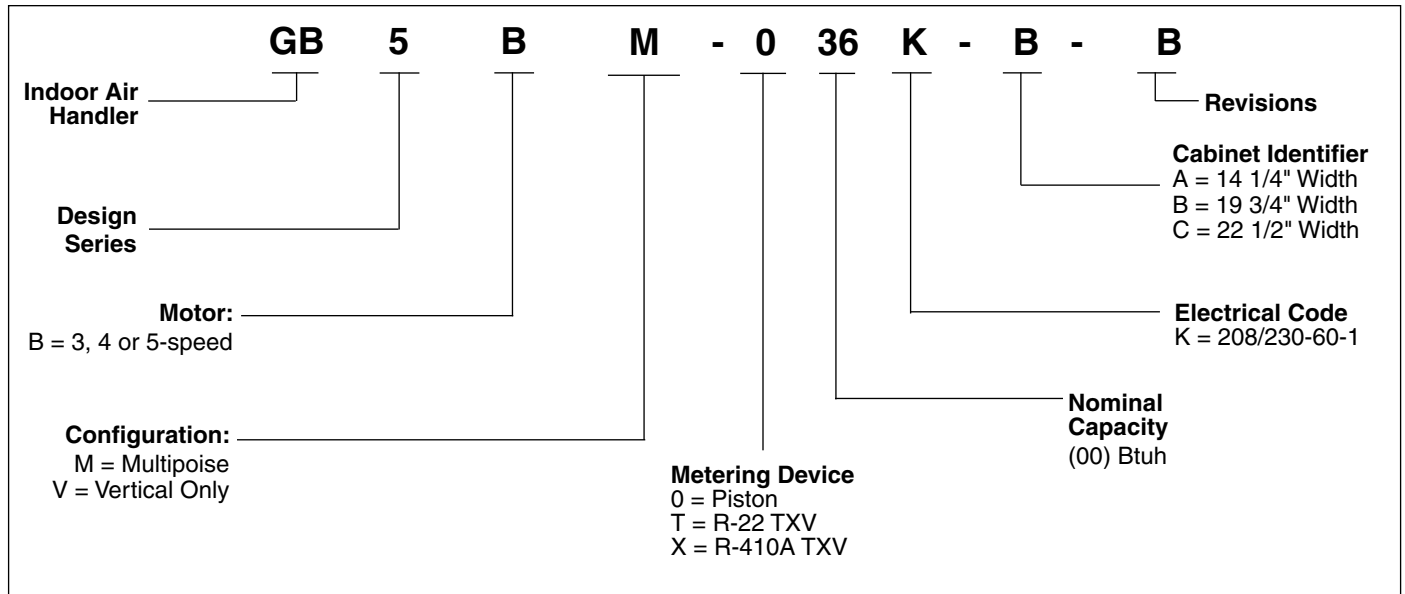

# ELECTRICAL DATA

Model Number H6HK-	Voltage	KW	Standard Air Handler (A & B size)								Variable Speed & Std Air Handler (C size)							
			Min. Circuit Ampacity				Max. Over-Current Protection				Min. Circuit Ampacity				Max. Over-Current Protection			
			Circuit A	Circuit B	Circuit C	Single Circuit	Circuit A	Circuit B	Circuit C	Single Circuit	Circuit A	Circuit B	Circuit C	Single Circuit	Circuit A	Circuit B	Circuit C	Single Circuit
NONE	240	-	-	-	-	7.5	-	-	-	15	-	-	-	8.5	-	-	-	15
005H-XX	240	4.8	-	-	-	30	-	-	-	30	-	-	-	34	-	-	-	40
008H-XX	240	7.5	-	-	-	45	-	-	-	50	-	-	-	48	-	-	-	50
010H-XX	240	9.6	-	-	-	55	-	-	-	60	-	-	-	59	-	-	-	60
015H-XX	240	14.4	55	25	-	80	60	30	-	90	59	25	-	83	60	30	-	90
020H-XX	240	19.2	55	50	-	105	60	60	-	125	59	50	-	109	60	60	-	125
025H-XX	240	24.0	-	-	-	-	-	-	-	-	59	50	25	134	60	60	30	150
030H-XX	240	28.8	-	-	-	-	-	-	-	-	59	50	50	159	60	60	60	175
NONE	208	-	-	-	-	7.5	-	-	-	15	-	-	-	8.5	-	-	-	15
005H-XX	208	3.6	-	-	-	27	-	-	-	30	-	-	-	30	-	-	-	40
008H-XX	208	5.6	-	-	-	39	-	-	-	40	-	-	-	42	-	-	-	50
010H-XX	208	7.2	-	-	-	48	-	-	-	50	-	-	-	52	-	-	-	60
015H-XX	208	10.8	48	21	-	70	50	25	-	80	52	22	-	73	60	25	-	80
020H-XX	208	14.4	48	43	-	92	50	50	-	100	52	43	-	95	60	50	-	100
025H-XX	208	18.0	-	-	-	-	-	-	-	-	52	43	22	117	60	50	25	125
030H-XX	208	21.6	-	-	-	-	-	-	-	-	52	43	43	138	60	50	50	150
009Q-XX	240	9.0	-	-	-	32	-	-	-	40	-	-	-	36	-	-	-	40
015Q-XX	240	14.4	-	-	-	48	-	-	-	50	-	-	-	52	-	-	-	60
009Q-XX	208	6.8	-	-	-	29	-	-	-	30	-	-	-	32	-	-	-	40
015Q-XX	208	10.8	-	-	-	43	-	-	-	50	-	-	-	46	-	-	-	50

# ACCESSORIES

Accessory Kit Description	Cabinet Size			Order Number
	A	B	C	
Down-flow adaptor kit	X			917342
		X		919321
			X	919322
Single circuit adaptor for 2 circuit breakers	X	X	X	913874
Single circuit adaptor for 3 circuit breakers	n/a	n/a	X	913556
Horizontal conversion kit for vertical-only units	X	X		903749
		X <sup>1</sup>		919405
			X	914730
Variable Speed Blower Conversion Kit	X			919325
		X		919326
			X	919327
Mammoth Logo Kit	X	X	X	904196

<sup>1</sup> Required for \*42 models


## 240V Single-Phase Heater Kit Application

Nominal KW	Matched Units								Order Number	
	*24K-A	*30K-A	*24K-B	*30K-B	*36K-B	*42/*48K-B	*48K-C	*60K-C	With Circuit Breakers	Without Circuit Breakers
5	X	X	X	X	X	X	X	X	904407	904406
8	X	X	X	X	X	X	X	X	904409	904408
10	X	X	X	X	X	X	X	X	904412	904411
15	n/a	X	n/a	X	X	X	X	X	904414	n/a
20	n/a	n/a	n/a	X	X	X	X	X	904416	n/a
25	n/a	n/a	n/a	n/a	n/a	n/a	X	X	904417	n/a
30	n/a	n/a	n/a	n/a	n/a	n/a	X	X	904418	n/a

## 240V Three-Phase Heater Kit Application

Nominal KW	Matched Units								Order Number	
	*24K-A	*30K-A	*24K-B	*30K-B	*36K-B	*42K/*48K-B	*48K-C	*60K-C	With Circuit Breakers	Without Circuit Breakers
9	X	X	X	X	X	X	X	X	904410	n/a
15	n/a	X	n/a	X	X	X	X	X	904415	n/a

# DIMENSIONS

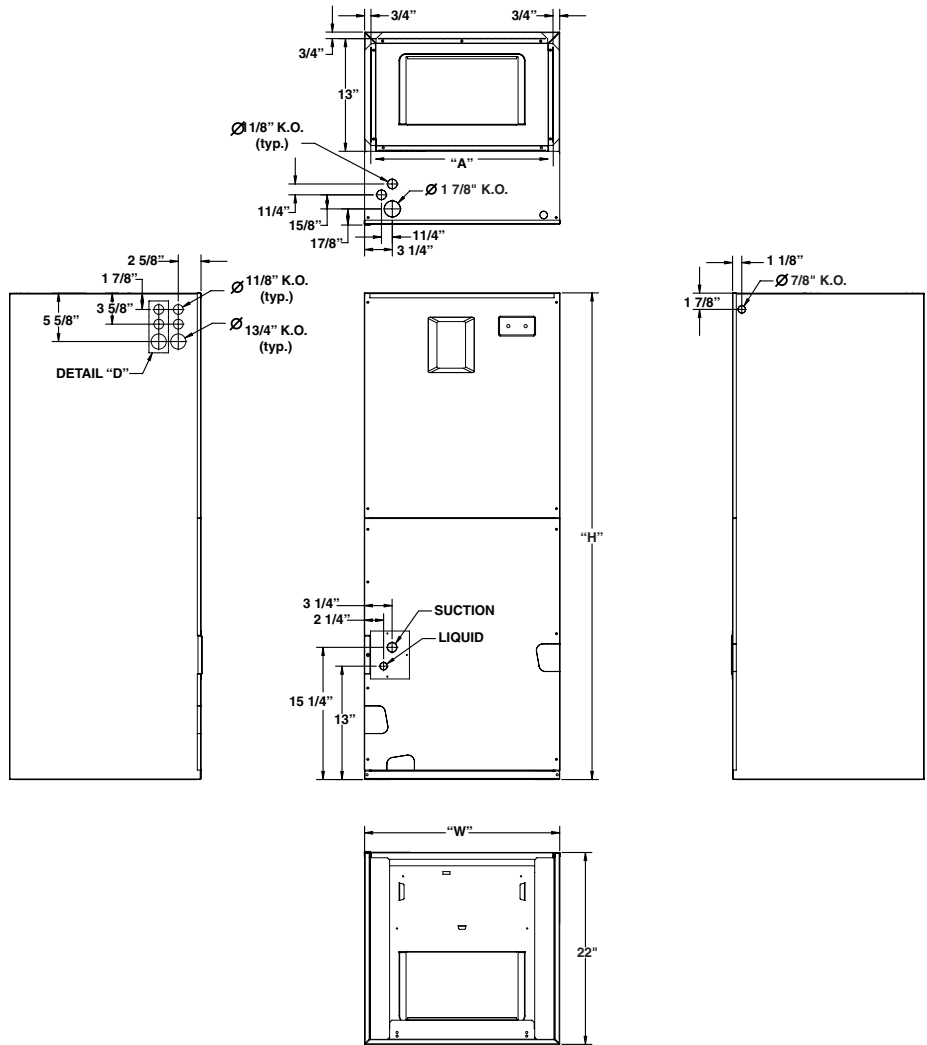

# SPECIFICATIONS

Model Number GB5BM-	*24K-A	*30K-A	*24K-B	*30K-B	*36K-B	*42K-B	*48K-B	*48K-C	*60K-C
Nominal cooling capacity - BTUh <sup>1</sup>	24000	30000	24000	30000	36000	42000	48000	48000	60000
Orifice size (if supplied) <sup>2</sup>	0.050	0.069	0.050	0.069	0.078	0.083	-	0.090	0.101
Maximum Available Auxiliary Heat	10	15	10	20	20	20	20	30	30
Nominal Blower Size (Dia. x Width)	10 x 6	10 x 6	10 x 8	10 x 8	10 x 8	10 x 8	10 x 8	10 x 10	11 x 10
Motor Hp-speeds-type	1/5-3-PSC	1/3-3-PSC	1/5-3-PSC	1/3-3-PSC	1/3-3-PSC	1/3-3-PSC	1/3-3-PSC	1/2-3-PSC	3/4-5-BDC
Filter Size (supplied internal filter rack) <sup>3</sup>	12x20x1	12x20x1	18x20x1	18x20x1	18x20x1	18x20x1	18x20x1	20x20x1	20x20x1
Approximate Shipping Weight, lbs	87	90	107	110	110	130	130	150	155
Height, "H", in.	43-5/16	43-5/16	43-5/16	43-5/16	43-5/16	49-5/16	49-5/16	55-15/16	55-15/16
Width, "W", in.	14-3/16	14-3/16	19-11/16	19-11/16	19-11/16	19-11/16	19-11/16	22-7/16	22-7/16
Supply Air Outlet Dimension, in.	12-7/8 x 12-3/4	12-7/8 x 12-3/4	12-7/8 x 18-1/4	12-7/8 x 18-1/4	12-7/8 x 18-1/4	12-7/8 x 18-1/4	12-7/8 x 18-1/4	12-7/8 x 21	12-7/8 x 21
Ref. Connection Sizes, in. (suc./liq.)	3/4 - 3/8	3/4 - 3/8	3/4 - 3/8	3/4 - 3/8	3/4 - 3/8	7/8 - 3/8	7/8 - 3/8	7/8 - 3/8	7/8 - 3/8

<sup>1</sup> See current AHRI Directory for certified combinations and ratings.

<sup>2</sup> When supplied, orifice is sized for most common R-22 13 SEER HP match. See outdoor unit documentation for orifice size.

<sup>3</sup> Filter is not supplied with unit.

# FLEX AIR HANDLERS

Current Air Handler SKU Number	Current Air Handler Model Number	Refrigerant	TXV Kit SKU	Flex Air Handler SKU Number	Flex Air Handler Model Number
904270GD	GB5BM-T24K-A	R22	920662	904237GD	GB5BM-024K-A
904273GD	GB5BM-T24K-B	R22	920662	904240GD	GB5BM-024K-B
904272GD	GB5BM-T30K-A	R22	920663	904239GD	GB5BM-030K-A
904275GD	GB5BM-T30K-B	R22	920663	904242GD	GB5BM-030K-B
904276GD	GB5BM-T36K-B	R22	920664	904243GD	GB5BM-036K-B
904277GD	GB5BM-T42K-B	R22	920665	904244GD	GB5BM-042K-B
904278GD	GB5BM-T48K-C	R22	920666	904245GD	GB5BM-048K-C
904280GD	GB5BM-T60K-C	R22	920667	904247GD	GB5BM-060K-C
904303GD	GB5BM-X24K-A	R-410A	920668	904237GD	GB5BM-024K-A
904305GD	GB5BM-X24K-B	R-410A	920668	904240GD	GB5BM-024K-B
904304GD	GB5BM-X30K-A	R-410A	920669	904239GD	GB5BM-030K-A
904306GD	GB5BM-X30K-B	R-410A	920669	904242GD	GB5BM-030K-B
904307GD	GB5BM-X36K-B	R-410A	920670	904243GD	GB5BM-036K-B
904308GD	GB5BM-X42K-B	R-410A	920671	904244GD	GB5BM-042K-B
904309GD	GB5BM-X48K-C	R-410A	920672	904245GD	GB5BM-048K-C
904311GD	GB5BM-X60K-C	R-410A	920673	904247GD	GB5BM-060K-C

# BLOWER PERFORMANCE DATA

Dry Coil ESP		0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80
<b>*24K, A-Cabinet</b>	Low	683	647	607	563	515	463	406	345
	<i>Corrected ESP<sup>1</sup></i>	<i>0.00</i>	<i>0.07</i>	<i>0.19</i>	<i>0.30</i>	<i>0.42</i>	<i>0.53</i>	<i>0.65</i>	<i>0.76</i>
	Medium	861	823	781	734	682	625	564	498
	<i>Corrected ESP<sup>1</sup></i>	<i>0.00</i>	<i>0.00</i>	<i>0.11</i>	<i>0.23</i>	<i>0.36</i>	<i>0.48</i>	<i>0.60</i>	<i>0.72</i>
	High	1072	1026	975	920	860	797	730	659
	<i>Corrected ESP<sup>1</sup></i>	<i>0.00</i>	<i>0.00</i>	<i>0.00</i>	<i>0.14</i>	<i>0.27</i>	<i>0.40</i>	<i>0.53</i>	<i>0.67</i>
<b>Dry Coil ESP</b>		<b>0.10</b>	<b>0.20</b>	<b>0.30</b>	<b>0.40</b>	<b>0.50</b>	<b>0.60</b>	<b>0.70</b>	<b>0.80</b>
<b>*30K, A-Cabinet</b>	Low	849	825	793	753	704	647	581	508
	<i>Corrected ESP<sup>1</sup></i>	<i>0.00</i>	<i>0.04</i>	<i>0.15</i>	<i>0.27</i>	<i>0.38</i>	<i>0.50</i>	<i>0.62</i>	<i>0.74</i>
	Medium	1118	1087	1046	997	940	874	799	717
	<i>Corrected ESP<sup>1</sup></i>	<i>0.00</i>	<i>0.00</i>	<i>0.04</i>	<i>0.17</i>	<i>0.29</i>	<i>0.42</i>	<i>0.55</i>	<i>0.68</i>
	High	1277	1233	1184	1130	1070	1005	935	860
	<i>Corrected ESP<sup>1</sup></i>	<i>0.00</i>	<i>0.00</i>	<i>0.00</i>	<i>0.10</i>	<i>0.23</i>	<i>0.36</i>	<i>0.49</i>	<i>0.63</i>
<b>Dry Coil ESP</b>		<b>0.10</b>	<b>0.20</b>	<b>0.30</b>	<b>0.40</b>	<b>0.50</b>	<b>0.60</b>	<b>0.70</b>	<b>0.80</b>
<b>*24K, B-Cabinet</b>	Low	708	690	664	628	584	532	471	401
	<i>Corrected ESP<sup>1</sup></i>		<i>0.08</i>	<i>0.19</i>	<i>0.30</i>	<i>0.41</i>	<i>0.53</i>	<i>0.64</i>	<i>0.76</i>
	Medium	909	904	886	854	810	753	683	600
	<i>Corrected ESP<sup>1</sup></i>			<i>0.10</i>	<i>0.22</i>	<i>0.33</i>	<i>0.46</i>	<i>0.58</i>	<i>0.71</i>
	High	1118	1132	1126	1101	1056	992	908	805
	<i>Corrected ESP<sup>1</sup></i>				<i>0.09</i>	<i>0.22</i>	<i>0.35</i>	<i>0.49</i>	<i>0.64</i>
<b>Dry Coil ESP</b>		<b>0.10</b>	<b>0.20</b>	<b>0.30</b>	<b>0.40</b>	<b>0.50</b>	<b>0.60</b>	<b>0.70</b>	<b>0.80</b>
<b>*30/*36K, B-Cabinet</b>	Low	953	915	871	821	764	701	631	555
	<i>Corrected ESP<sup>1</sup></i>	<i>0.00</i>	<i>0.04</i>	<i>0.16</i>	<i>0.27</i>	<i>0.39</i>	<i>0.51</i>	<i>0.62</i>	<i>0.74</i>
	Medium	1265	1232	1188	1133	1067	991	903	805
	<i>Corrected ESP<sup>1</sup></i>	<i>0.00</i>	<i>0.00</i>	<i>0.03</i>	<i>0.15</i>	<i>0.28</i>	<i>0.41</i>	<i>0.54</i>	<i>0.68</i>
	High	1427	1385	1333	1270	1196	1113	1018	913
	<i>Corrected ESP<sup>1</sup></i>	<i>0.00</i>	<i>0.00</i>	<i>0.00</i>	<i>0.09</i>	<i>0.23</i>	<i>0.36</i>	<i>0.50</i>	<i>0.64</i>
<b>Dry Coil ESP</b>		<b>0.10</b>	<b>0.20</b>	<b>0.30</b>	<b>0.40</b>	<b>0.50</b>	<b>0.60</b>	<b>0.70</b>	<b>0.80</b>
<b>*42/*48K, B-Cabinet</b>	Low	1324	1302	1271	1233	1187	1134	1072	1003
	<i>Corrected ESP<sup>1</sup></i>	<i>0.00</i>	<i>0.06</i>	<i>0.17</i>	<i>0.27</i>	<i>0.38</i>	<i>0.49</i>	<i>0.61</i>	<i>0.72</i>
	Medium	1485	1455	1418	1373	1320	1260	1193	1118
	<i>Corrected ESP<sup>1</sup></i>	<i>0.00</i>	<i>0.00</i>	<i>0.13</i>	<i>0.24</i>	<i>0.36</i>	<i>0.47</i>	<i>0.58</i>	<i>0.70</i>
	High	1637	1601	1558	1506	1447	1380	1305	1223
	<i>Corrected ESP<sup>1</sup></i>	<i>0.00</i>	<i>0.00</i>	<i>0.00</i>	<i>0.21</i>	<i>0.33</i>	<i>0.44</i>	<i>0.56</i>	<i>0.68</i>
<b>Dry Coil ESP</b>		<b>0.10</b>	<b>0.20</b>	<b>0.30</b>	<b>0.40</b>	<b>0.50</b>	<b>0.60</b>	<b>0.70</b>	<b>0.80</b>
<b>*48K, C-Cabinet</b>	Low	1605	1606	1592	1565	1524	1468	1399	1316
	<i>Corrected ESP<sup>1</sup></i>	<i>0</i>	<i>0.11</i>	<i>0.21</i>	<i>0.31</i>	<i>0.42</i>	<i>0.52</i>	<i>0.63</i>	<i>0.74</i>
	Medium	1977	1939	1890	1830	1758	1675	1580	1474
	<i>Corrected ESP<sup>1</sup></i>	<i>0</i>	<i>0</i>	<i>0.18</i>	<i>0.28</i>	<i>0.39</i>	<i>0.50</i>	<i>0.61</i>	<i>0.72</i>
	High	2264	2182	2095	2003	1906	1805	1698	1586
	<i>Corrected ESP<sup>1</sup></i>	<i>0.00</i>	<i>0.00</i>	<i>0.00</i>	<i>0.26</i>	<i>0.37</i>	<i>0.49</i>	<i>0.60</i>	<i>0.71</i>
<b>Dry Coil ESP</b>		<b>0.10</b>	<b>0.20</b>	<b>0.30</b>	<b>0.40</b>	<b>0.50</b>	<b>0.60</b>	<b>0.70</b>	<b>0.80</b>
<b>*60K, C-Cabinet</b>	Low	1348	1272	1198	1126	1056	988	922	858
	<i>Corrected ESP<sup>1</sup></i>	<i>0.00</i>	<i>0.11</i>	<i>0.22</i>	<i>0.33</i>	<i>0.44</i>	<i>0.55</i>	<i>0.65</i>	<i>0.76</i>
	Med-Low	1517	1455	1390	1325	1258	1189	1120	1048
	<i>Corrected ESP<sup>1</sup></i>	<i>0.00</i>	<i>0.00</i>	<i>0.19</i>	<i>0.30</i>	<i>0.41</i>	<i>0.52</i>	<i>0.63</i>	<i>0.74</i>
	Medium	1799	1752	1702	1650	1596	1539	1481	1420
	<i>Corrected ESP<sup>1</sup></i>	<i>0.00</i>	<i>0.00</i>	<i>0.00</i>	<i>0.25</i>	<i>0.36</i>	<i>0.47</i>	<i>0.58</i>	<i>0.69</i>
	Med-High	1956	1910	1862	1811	1756	1699	1639	1575
	<i>Corrected ESP<sup>1</sup></i>	<i>0.00</i>	<i>0.00</i>	<i>0.00</i>	<i>0.22</i>	<i>0.33</i>	<i>0.44</i>	<i>0.55</i>	<i>0.66</i>
	High	2146	2099	2050	2000	1948	1894	1839	1783
	<i>Corrected ESP<sup>1</sup></i>	<i>0.00</i>	<i>0.00</i>	<i>0.00</i>	<i>0.00</i>	<i>0.29</i>	<i>0.40</i>	<i>0.51</i>	<i>0.62</i>

**Notes:**

- 1) Airflow is shown in cfm, +/- 5%.
- 2) External static pressure (ESP) is shown in inches w.c.
- 3) See unit nameplate or installation instructions for maximum recommended external static pressure.

<sup>1</sup> ESP estimate with wet coil and filter



www.nordyne.com

O'Fallon, MO

**NORDYNE**

**246D-0309**

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligation. Printed in U.S.A. (03/09)