


VAFS-3

The Packless VAFS-3 vibration absorber is for installation on suction and discharge lines with an outer diameter of $\frac{3}{8}$ in.

[← View all Vibration Absorbers](#)

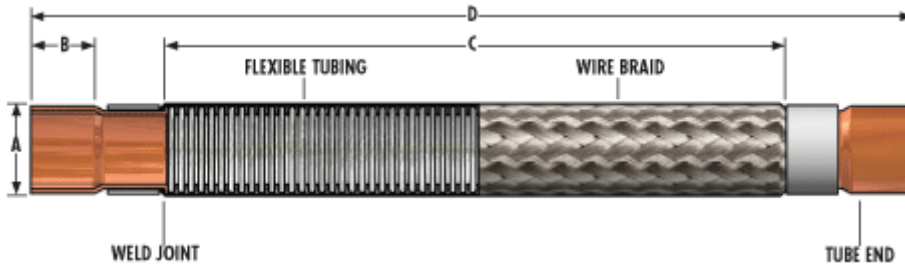

Print Page

Specifications

Model	VAFS-3	
UL Recognized Number	VAFS-3	
Tube Material	Stainless Steel	
Braid Material	Stainless Steel	
Ferrule Material	Stainless Steel	
Connection Material	Copper	
A - Connection Size (ID)	$\frac{3}{8}$ in	9.5 mm
B - Connection Length	$\frac{5}{16}$ in	7.9 mm
C - Tube Length	$6 \frac{7}{16}$ in	163.5 mm
D - Total Length	$8 \frac{1}{4}$ in	209.6 mm
Flexible Tube Size (ID)	$\frac{5}{16}$ in	7.9 mm
Working Pressure	650 psig	45 bar
Burst Pressure	3250 psig	224 bar