
VAFS-11

The Packless VAFS-11 vibration absorber is for installation on suction and discharge lines with an outer diameter of 1 $^{5}/_{8}$ in.

← View all Vibration Absorbers

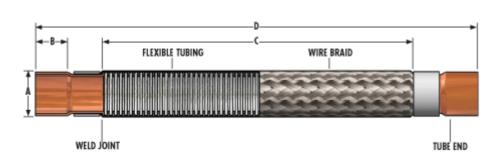

Print Page

Specifications

| Model | VAFS-11 | |
|--------------------------|-----------------------------------|----------|
| UL Recognized Number | VAFS-11 | |
| Tube Material | Stainless Steel | |
| Braid Material | Stainless Steel | |
| Ferrule Material | Stainless Steel | |
| Connection Material | Copper | |
| A - Connection Size (ID) | 1 ⁵ ⁄ ₈ in | 41.3 mm |
| B - Connection Length | 1 ³ / ₃₂ in | 27.8 mm |
| C - Tube Length | $12^{1}/_{2}$ in | 317.5 mm |
| D - Total Length | 17 in | 431.8 mm |
| Flexible Tube Size (ID) | 1 ¹ / ₂ in | 38.1 mm |
| Working Pressure | 650 psig | 45 bar |
| Burst Pressure | 3250 psig | 224 bar |
| | | |

