
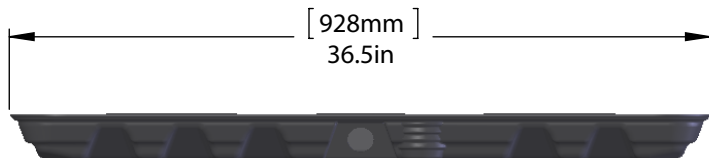


C

B

C

B

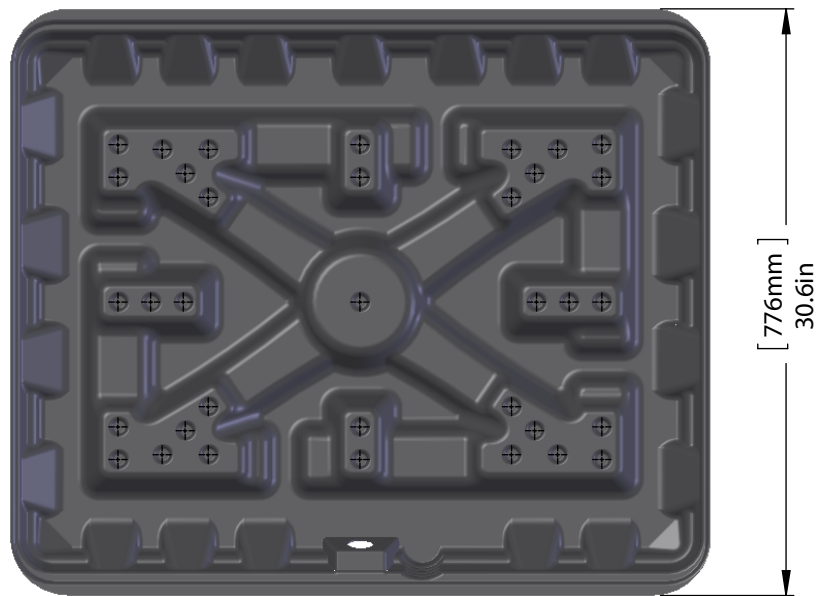

**NOTES:**

- Extreme Temperature Durability (-40°F to 260°F).
- High Tensile Strength.
- Crack/Split/Leak/Rust Resistant.
- Self Extinguishing.
- Made With Pride in the USA

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES	
TOLERANCES:	
FRACTIONAL	±.032
ANGULAR: MACH	± .5 ° BEND ±2°
TWO PLACE DECIMAL	± .010
THREE PLACE DECIMAL	± .005
INTERPRET GEOMETRIC TOLERANCING PER: ANSI Y14.5, 1994	

ENGINEERING	NAME	DATE
DRAWN BY ENG.	DS	12/7/08
CHECKED BY ENG.	JK	12/7/08
ENG APPR.	CC	12/7/08
MFG APPR.	CC	12/7/08



2601 Spenwick Drive,  
Houston, TX 77055  
800-231-3345

TITLE:

AG-GF 30x36 SPECIFICATION SHEET

SIZE  
**A**

SCALE: 1:10

SHEET 1 OF 1

A