


EZ KLEEN AIR FILTER & KLEEN-GARD GREASE FILTER

Specifications

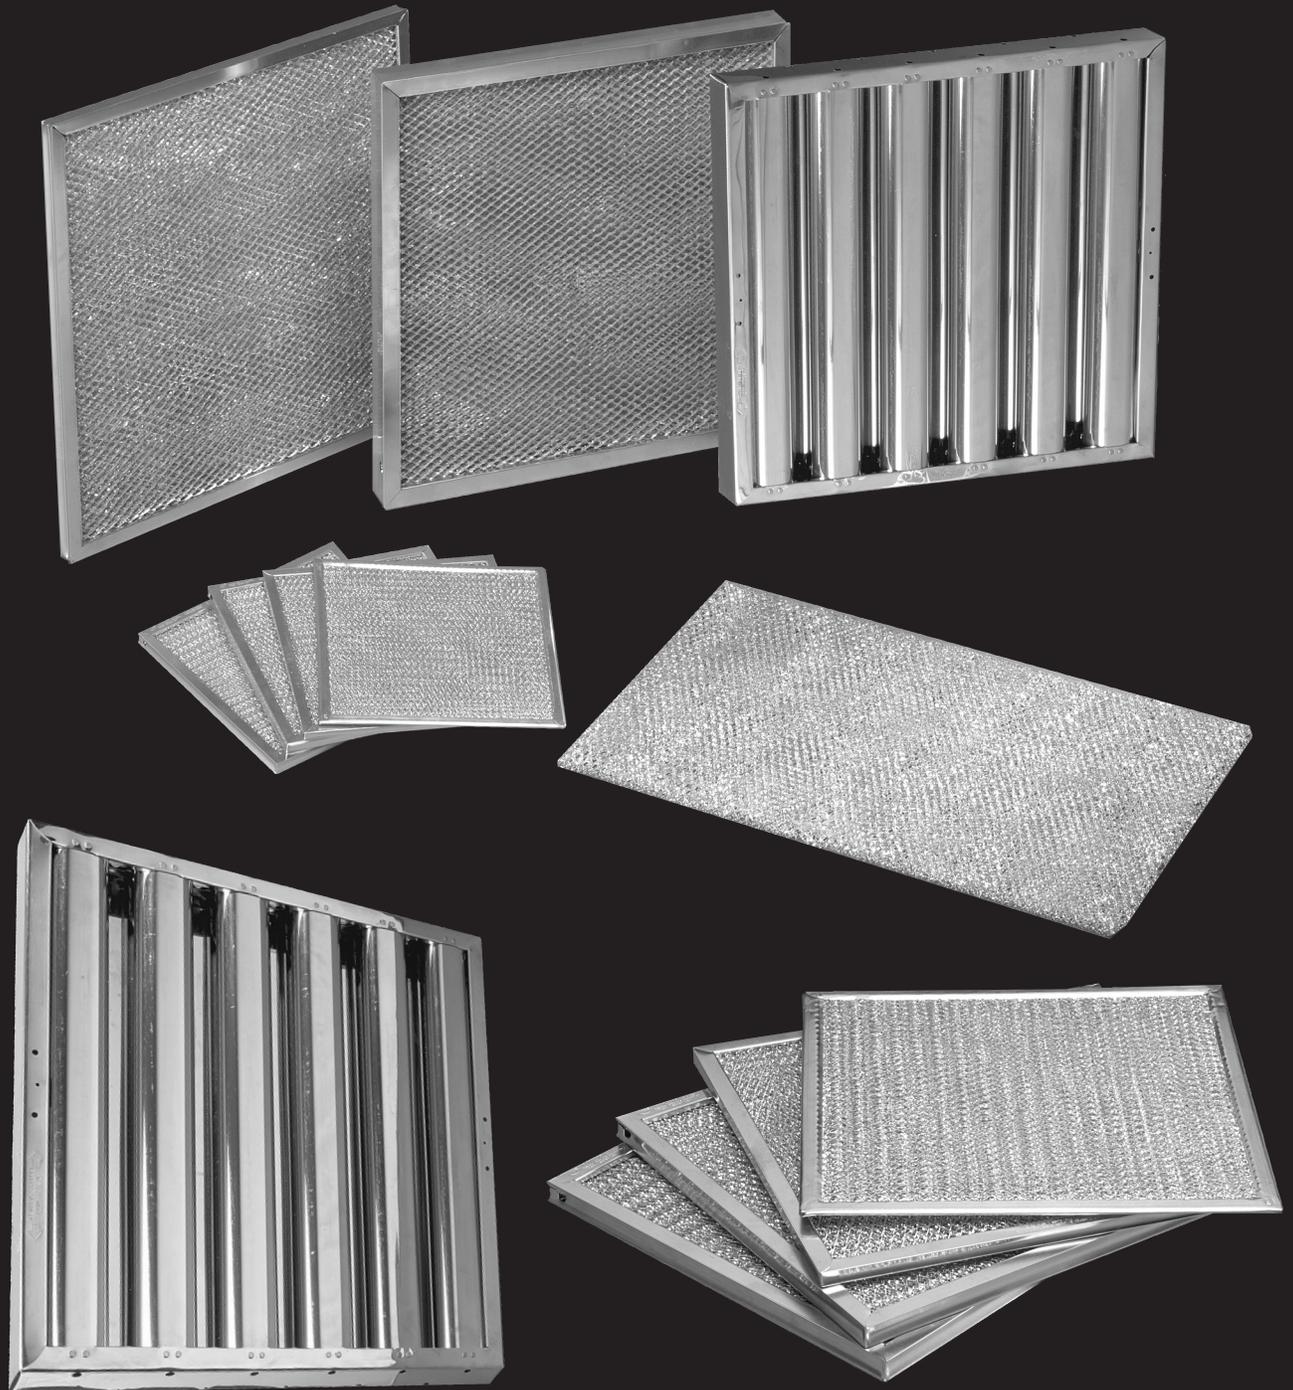

ALWAYS ORDER BY STOCK NUMBER	Stock Size (Nominal)	Stock No.	Performance		
EZ KLEEN[®] AIR FILTERS UL CLASS 2 FILTER RATED VELOCITY 150-650 FPM (0.76-3.31 m/s) OPTIMUM VELOCITY 350-520 FPM (1.78-2.64 m/s)	H x W x D		1" EZ Klean Filters		
	20" x 25" x 1"	9801	1" (25 mm) & 3/32" (2.4 mm)	At 350 fpm	At 520 fpm
	20" x 20" x 1"	9802		(1.78 m/s)	(2.64 m/s)
	16" x 25" x 1"	9803	Average Arrestance	54%	48%
	16" x 20" x 1"	9804	Clean Resistance	.045" w.c.	.09" w.c.
	15" x 20" x 1"	9805		0.011 kPa	0.023 kPa
	10" x 20" x 1"	9806	Dust-Holding Capacity	95 gms/ft ² (1023 gms/m ²)	67 gms/ft ² (721 gms/m ²)
MV EZ KLEEN[®] AIR FILTERS UL CLASS 2 FILTER RATED VELOCITY 150-650 FPM (0.76-4.58 m/s) OPTIMUM VELOCITY 350-520 FPM (1.78-2.64 m/s)	H x W x D		2" MV EZ Klean Filters		
	20" x 25" x 2"	9151		At 350 fpm	At 520 fpm
	20" x 20" x 2"	9152		(1.78 m/s)	(2.64 m/s)
	16" x 25" x 2"	9153	Average Arrestance	72%	68%
	16" x 20" x 2"	9154	Clean Resistance	.07" w.c.	.14" w.c.
	15" x 20" x 2"	9155		0.018 kPa	0.035 kPa
	10" x 20" x 2"	9156	Dust-Holding Capacity	130 gms/ft ²	91 gms/ft ²
24" x 24" x 2"	9157	(1399 gms/m ²)		(980 gms/m ²)	
INDUSTRIAL EZ KLEEN[®] AIR FILTERS UL CLASS 2 FILTER RATED VELOCITY 150-900 FPM (0.76-4.58 m/s) OPTIMUM VELOCITY 350-520 FPM (1.78-2.64 m/s)	H x W x D		2" Industrial Filters		
	20" x 25" x 2"	901		At 350 fpm	At 520 fpm
	20" x 20" x 2"	902		(1.78 m/s)	(2.64 m/s)
	16" x 25" x 2"	903	Average Arrestance	67%	64%
	16" x 20" x 2"	904	Clean Resistance	.05" w.c.	.10" w.c.
	15" x 20" x 2"	905		0.013 kPa	0.025 kPa
	10" x 20" x 2"	906	Dust-Holding Capacity	143 gms/ft ² (1539 gms/m ²)	117 gms/ft ² (1259 gms/m ²)
TRIM-TO-SIZE[®] EZ KLEEN AIR FILTERS UL CLASS 2 FILTER	H x W x D		1/4" Trim-To-Size Filters	5/8" Trim-To-Size Filters*	
	15" x 24" x 1/4"	9200		At 350 fpm (1.78 m/s)	At 350 fpm (1.78 m/s)
	40" x 64" x 1/4"	9250		Average Arrestance	61%
	40" x 64" x 5/8"	9251	Clean Resistance	.07" w.c.	.045" w.c.
	40" x 50" x 1/4"	9260		0.018 kPa	0.011 kPa
	40" x 50" x 5/8"	9261	Dust-Holding Capacity	100 gms/ft ² (1075 gms/m ²)	95 gms/ft ² (1023 gms/m ²)
			* Note: See 1" EZ Klean performance for 520 fpm		
Made-To-Order EZ KLEEN[®] AIR FILTERS Minimum quantities may apply.			EZ Klean Filters: 3/32", 3/8", 1/2"		
	3/32", 3/8" & 1/2" Nominal Frame Thickness		Average Arrestance	At 350 fpm (1.78 m/s)	
				64%	
	Clean Resistance		Dust-Holding Capacity	.06" w.c.	
		(.016 kPa)			
			44 gms/ft ² (474 gms/m ²)		

ALUMINUM KLEEN-GARD® GREASE FILTERS

(Baffle-Type)

RATED VELOCITY 150-400 FPM
(0.76-2.04 m/s)

OPTIMUM VELOCITY 300 FPM
(1.53 m/s)

ALWAYS ORDER BY STOCK NUMBER

(Nominal)	Stock No.
Without Handles	
20" x 25" x 2"	951
20" x 20" x 2"	952
16" x 25" x 2"	953
16" x 20" x 2"	954
10" x 20" x 2"	956
16" x 16" x 2"	957
25" x 20" x 2"	958

With No. 994 Handles	
20" x 25" x 2"	9511
20" x 20" x 2"	9522
16" x 25" x 2"	9533
16" x 20" x 2"	9544
10" x 20" x 2"	9566
16" x 16" x 2"	9577
25" x 20" x 2"	9588

STAINLESS STEEL KLEEN-GARD® GREASE FILTERS

(Baffle-Type)


(Nominal)	Stock No.
Without Handles	
20" x 25" x 2"	961
20" x 20" x 2"	962
16" x 25" x 2"	963
16" x 20" x 2"	964
10" x 20" x 2"	966
16" x 16" x 2"	967
25" x 20" x 2"	968

With No. 994 Handles	
20" x 25" x 2"	9611
20" x 20" x 2"	9622
16" x 25" x 2"	9633
16" x 20" x 2"	9644
10" x 20" x 2"	9666
16" x 16" x 2"	9677
25" x 20" x 2"	9688

KLEEN-GARD BAFFLE FILTERS

- Stainless steel provides added durability and corrosion resistance
- Promotes sanitation by removing grease from the air flowing through filters and draining it safely away
- Prevents spread of range-top fires
- Kleen-Gard is UL classified and meets requirements of NFPA Standard 96 when properly installed
- Protects blower equipment and prolongs motor life
- Handles up to 400 fpm (2.04 m/s)

RESISTANCE VS. AIRFLOW — 2" Kleen-Gard Baffle Type Grease Filters

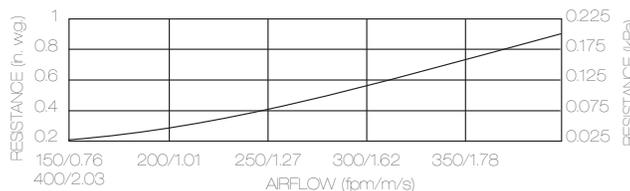

KLEEN-GARD SPARK ARRESTOR FILTERS

Stainless Steel Kleen-Gard Grease Filter with Spark Arrestor available to meet NFPA 96 standard for its solid fuel cooking applications.

- Spark Arrestor constructed of stainless steel mesh in tin-plated steel frame
- All in one construction for ease of handling
- Supplied with Snap-In Handles for easy installation and removal
- Available in same sizes as baffle filters, as well as special sizes

CUSTOMIZED SERVICES FOR OUR CUSTOMERS

- Stock filters are shipped within 24 hours with over 97% of these shipments being made the same day the order is received
- Special size filters are shipped within only 10 business days
- To avoid a line shutdown, a partial shipment can be made of special sizes within 48 hours
- Safety stock program
- No charge samples of the actual filter size which are shipped within only 48 hours
- Additional filter types available are: foam, charcoal and polyester
- No expediting fees
- Special freight rates negotiated through designated carriers
- Internal quality standards established
- Electronic Data Interchange (EDI) and bar coding capabilities for simpler ordering and receiving
- Alternate product designs to offer economies

