
## **FPPF**<sup>®</sup> THE PREMIUM EMERGENCY WINTER DIESEL FUEL TREATMENT

UEL SYSTEMS

- MELT DOWN is a safe unique blend of organic compounds designed to dissolve ice and wax in gelled diesel fuel.
- MELT DOWN reacts within 20 minutes and solubilizes the wax and ice crystals in diesel fuel to completely thaw the fuel in the entire diesel fuel system.
- MELT DOWN is compatible with all types of diesel fuel, biodiesel and home heating oil. Melt Down does not contain chlorinated solvents, methanol, or harmful alcohols that could harm fuel pumps, injectors or other precombustion components.
- MELT DOWN works in all fuel systems including common rail.

MADE IN

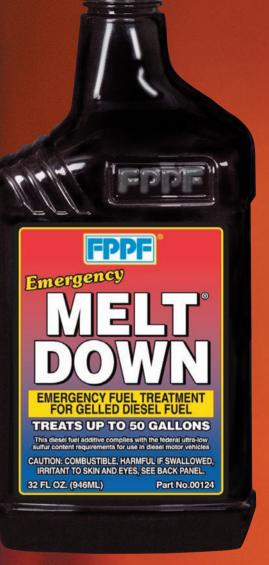

Reliquefies gelled diesel fuel in 20 minutes



"FPPF prides itself as the technology leader in the fuel additive business. For over 25 years we have set the standard for quality performance and value. We will continue to provide our customers a superior line of products."

THE USA

**Chris Lory** This Lang Founder



# **MELT DOWN Product Data Sheet**



### PRODUCT USE

Simply follow label instructions to reliquefy gelled fuel in your truck or bulk storage tank.

#### DOSAGE

Add one quart (32 ounces) directly to each 50 gallons of gelled fuel in the tank. **Disconnect fuel filter** assembly, remove any gelled fuel by adding a 50/50 mix of diesel fuel and Melt Down (usually 3 ounces of each) to the bowl of the fuel filter and reconnect. Wait 20 minutes and restart your vehicle.

#### HANDLING

**Consult product MSDS** for proper handling, safety, storage, and spill information.

## **Packaging:**

**Description** 32 ounce bottle 12/case 1 gallon jug 4/case 55 gallon drum

8

**Case count** 

PRINTED ON RECYCLED AND RECYCLABLE PAPER WITH ENVIRONMENTALLY

Stock # 90124 90330 00170

**Case weight** 27 lbs. 40 lbs. 450 lbs.

