



**Mastercool**<sup>®</sup> Inc.  
*"World Class Quality"*



Distributing Air Conditioning, Refrigeration,  
Service Tools & Equipment Worldwide

2017  
English



For over 30 years Mastercool has been supplying professional quality air conditioning service tools and equipment. As one of the fastest growing companies in this market, our primary goal is to drive New Product Innovation and Technologies to make the every day work of the HVAC/R technician easier!

With our never-ending focus on innovation and new technology, Mastercool has been awarded many patents worldwide. Our products are currently being distributed in over 76 countries and growing everyday!

**MASTERCOOL LOCATIONS:**

**Corporate Office,  
Manufacturing and USA Warehouse**  
1 Aspen Drive, Randolph, NJ 07869  
USA

**European Sales Office and Warehouse**  
Industriezone TTS  
Laagstraat 19  
9140 Temse, Belgium

**Brazil Sales Office and Warehouse**  
R. Ver. Eurípedes Rama Pardal, 157  
07756-595 – Cajamar – SP  
Brazil

**Australian Sales Office**  
82a Chinchin St  
Islington NSW  
2296  
Australia

Corporate Office  
Manufacturing and USA Warehouse



European Sales Office and Warehouse















Brazil Sales Office and Warehouse









Australian Sales Office





**MANIFOLDS**

	4-WAY DIGITAL MANIFOLD	8
	2-WAY DIGITAL MANIFOLD	10
	R134a DIGITAL MANIFOLD	12
	ALUMINUM 4-WAY MANIFOLD GAUGE SETS	13
	3/8" BORE PREMIERE SERIES BALL VALVE MANIFOLDS	15
	2-WAY ALUMINUM MANIFOLD PISTON VALVE	16
	2-WAY BRASS MANIFOLD PISTON VALVE	17
	2-WAY AUTOMOTIVE MANIFOLDS	18
	SPECIALTY MANIFOLDS	19
	SINGLE VALVE MANIFOLDS	21
	REPLACEMENT GAUGES	22
	MANIFOLD REPLACEMENT PARTS	24



**HOSES, ADAPTERS AND ACCESSORIES**

	HOSES, AUTOMATIC AND MANUAL SHUT-OFF VALVES, HOSE REPLACEMENT PARTS	26
	SERVICE TOOLS AND ACCESSORIES	29
	COUPLERS & CONNECTORS	30
	CHARGING ADAPTERS, REPLACEMENT GASKETS & DEPRESSORS, RETROFIT ADAPTERS	32
	A/C CHARGING ADAPTER REPAIR KITS	34
	VALVE CORE REMOVER/INSTALLERS	36

**MEASURE AND TEST INSTRUMENTS**

	HANDHELD DIAGNOSTIC TOOLS	38
	TEMPERATURE MEASUREMENT	42

**VACUUM PUMPS**

	VACUUM PUMPS	48
	DIGITAL VACUUM GAUGE	52

## CONTENTS

## ENGLISH

### CHARGING AND RECOVERY EQUIPMENT

---



CHARGING SCALES & EQUIPMENT 54



RECOVERY CYLINDERS 56



RECOVERY/RECYCLE/RECHARGE 58



RECOVERY EQUIPMENT 60



CHARGING STATIONS 63



REFRIGERANT IDENTIFIERS 64

### LEAK DETECTION

---



ELECTRONIC LEAK DETECTION 66



UV LIGHTS 70



UV LEAK LOCATOR KITS 71



UV DYES/OIL INJECTORS & ACCESSORIES 72

### SERVICE ACCESSORIES AND CONSUMABLES

---



NITROGEN REGULATORS 76



FLUSH 78



OILS AND ACCESSORIES 79



COMPRESSOR SERVICE TOOLS 80

### TUBE AND HOSE FORMING

---



HOSE CRIMPING TOOLS 82



SPECIALTY HYDRAULIC TOOLS 83



TUBING TOOLS 86

PROMOTIONAL PRODUCTS 94


NUMERICAL INDEX 96

**MASTERCool PRODUCTS ARE  
MADE/ASSEMBLED IN THE USA**



Mastercool manufactures all of its products with the highest quality components and management systems. All products are checked and tested directly at Mastercool headquarters in Randolph, New Jersey, USA.

Our products comply in every respect with the requirements set forth by SAE and EPA Standards as well as ARI Standard 740-98 and EU Directives.

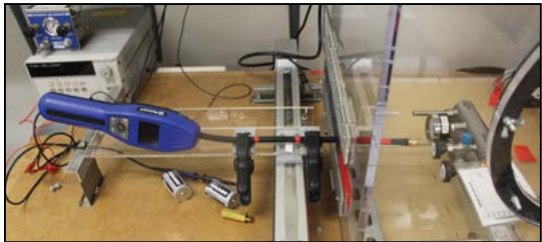



**MANIFOLDS**

**THE BEST KEEPS GETTING BETTER.....**

Patent Pending

**NOW COMPATIBLE WITH R744 (CO<sub>2</sub>)  
SENSORS ABLE TO WITHSTAND  
PRESSURE UP TO 750 PSI (50 BAR)**



**USB CONNECTOR PORT**

USB Cable  
99903-USB



**THERMOCOUPLE PORT**

3 ft. Clamp-On  
Thermocouple  
52336



**VACUUM THERMOCOUPLE SENSOR PORT**

Vacuum Sensor and  
Cable Assembly  
98062



99961

**99903** 4-Way Digital Manifold only

**99903-2** Manifold with (2) clamp-on thermocouples in a blow molded case

**99961** Complete Kit in a blow molded case includes: manifold with a set of 3-150 cm ball valve hoses with manual shut-off valves and one black vacuum hose, vacuum sensor with cable, clamp-on thermocouple, data logger CD and USB cable

**99972** Complete Kit in a blow molded case includes: manifold with a set of 3-180 cm ball valve hoses with manual shut-off valves and one black vacuum hose, vacuum sensor with cable, clamp-on thermocouple, data logger CD and USB cable

**99961-EU** Complete Kit in a blow molded case includes: manifold with a set of 3-150 cm ball valve hoses with manual shut-off valves and one black vacuum hose, vacuum sensor with cable, clamp-on thermocouple, 2-straight adapter fittings (90413), data logger CD and USB cable

**99963-EU** Same as 99961-EU less vacuum sensor with cable

\* Manifolds assembled with Teflon gasket hoses, add a -T

\* Manifolds assembled with ball valves at the end of hoses, add a -E

**OPTIONAL ACCESSORIES**



90413

90430

90433

99333

<b>52336</b>	Clamp-on Thermocouple (extends 1 m)	<b>90433</b>	1/4 x 5/16" Swivel Ball Valve
<b>52337</b>	Clamp-on Thermocouple (extends 3 m)	<b>99333</b>	1/4 FL-M x 1/4 FL-M x 1/4 FL-F Tee
<b>90413</b>	R410A Straight Adapter 1/4 FL-M x 5/16 Swivel-F	<b>99334-110</b>	110 V AC/DC Adapter
<b>98062</b>	Vacuum Sensor and Cable Assembly (6.5 ft)	<b>99334-220</b>	220 V AC/DC Adapter (schuko plug)
<b>90430</b>	1/4 x 1/4" Swivel Ball Valve	<b>99903-PBA</b>	Plastic Carrying Case



**Mastercool®**  
Inc.  
"World Class Quality"






Includes three 1/4" SAE B-R-Y nylon barrier ball valve hoses with manual shut-off valves and one 3/8" SAE black vacuum hose



Mastercool Datalogger Application



Temperature/Pressure Screen



Vacuum Screen



Analog Gauge Screen

With the 4-Way Digital Manifold, Mastercool is showing its determination to become the leader in this sector of the industry. Taking the experience gained with the 2-Way Digital Manifold the 4-Way model not only offers a 4-valve option but it also allows for a multitude of interactive PC enhanced functions and the capability of 24 hours of data logging.

- Record and store up to 24 hours of data and up to 15 jobs
- Large Easy to Read LCD
- Displays Pressures, Saturated, Actual, Superheat and Subcool Temperatures
- Over 60 Refrigerants
- Clamp-on Thermocouple Connector displays Actual Temperature and Automatically Calculates Superheat or Subcool Temperature
- Vacuum Sensor Cable displays Deep Vacuum
- Ball valve design includes 3/8" bore through the block for increased flow

#### SPECIFICATIONS:

- Class 1.0 standard gauge reading
- Pressure Display: PSI, INHg, Bar, MPa, Kg/cm<sup>2</sup>
- Temperature Display: °F or °C
- Deep Vacuum Display: Micron, mBar, KPa, Pa, Torr, mTorr, mmHg
- Sensing Resolution: 1 psi (.07 Bar, .007 MPa, .07 Kg/cm<sup>2</sup>)
- Sensing Accuracy: ±1 psi or 1% of reading (whichever is greater)
- Working Pressure: 0 to 750 psi (52 Bar, 5 MPa, 52 Kg/cm<sup>2</sup>) (does not display 0-5 psi)
- Proof Pressure: 1000 psi (70 Bar, 7 MPa, 70 Kg/cm<sup>2</sup>) (Tolerable pressure without internal damage)
- Refrigerant Temperature Range: -40 to 200°F (-40 to 93°C)
- Operating Temperature: 32 to 122°F (0 to 45°C)
- Temperature Accuracy: ±1°F (±0.5°C) between 32 to 160°F (0 to 71°C)
- Storage Temperature: 10 to 120°F (-12 to 49°C)
- Connections: 1/4" M-Flare
- Power: 9V DC battery with optional AC/DC adapter
- Battery Life: 30-36 hours pressure and temperature mode only (continuous use)  
25-30 hours vacuum or backlight mode (continuous use)
- Auto-Off: 15 min. with disabling capability

#### EASILY UPDATE REFRIGERANTS:

New refrigerants can be updated with a USB connection and Mastercool Software.

R12, R22, R23, R32, R113, R114, R115, R116, R123, R124, R134, R134a, R141B, R142B, R143, R143A, R290, R401A, R401B, R401C, R402A, R402B, R403A, R403B, R404A, R405A, R406A, R407A, R407B, R407C, R407D, R407F, R408A, R409A, R410A, R410B, R411A, R411B, R412A, R413A, R414A, R414B, R417A (ISCEON M059), R421A, R422A (ISCEON M079), R422B, R422C, R422D (ISCEON M029), R427A (FX100), R434A, R437A, R438A, R441A, R501, R502, R503, R504, R507A, R508B, R509A, R600, R600A, R601, R601A, R744

#### MASTERCool'S 4-WAY DIGITAL MANIFOLD RECORDING FUNCTION:

- Records and stores data directly into the manifold memory
- Records up to 24 hours of data or 15 jobs before having to download
- Downloads data at a rate 115 kb per second (24 hrs of data = approx. 15 min of download time)
- Uses Mastercool's Data Logger Application to easily view data

#### MASTERCool DATA LOGGER APPLICATION:

- Display data in "real time" using a USB connection, computer and software
- Platform: Windows 2000, XP, Windows Vista and Windows 7
- Log Customer Name, Date and Technician's Name
- Recorder/Cursor Function Features
  - (1) Recorder TIME command. Record in intervals of 5, 15 min, 1, 4, 8 and 24 hrs.
  - (2) Recorder ON/OFF command.
  - (3) ZOOM: NORMAL, 5X or 10X. Use the zoom option to view specific data points of interest.
  - (4) The Time-Line measures the selected recording time. Moving the cursor along the timeline easily displays specific plot points.
- The Data Logger program uses the Units information (Kg/cm<sup>2</sup>, BAR, Mpa, PSI, °C, and °F) contained in each data bit on the manifold and displays these units on the screen.
- Display Function Features
  - (1) Display ALL command. This enables all parameters of the Digital Manifold to be displayed simultaneously. As the line functions propagate across the screen, the "real-time" data will also be displayed digitally.
  - (2) Monitor specific functions of interest. The Data Logger continues to record all the functions in the background, regardless of how many individual functions are being displayed.
  - (3) Display DEEP VACUUM ONLY command. This enables only the deep vacuum readings to be displayed on the screen.
  - (4) View ANALOG GAUGES function enables the user to represent the Digital Manifold data in the form of high and low pressure analog gauges.



**Mastercool®**  
"World Class Quality"

**ALL THE INFORMATION YOU NEED IN THE PALM OF YOUR HAND!**

Patent Pending



**THERMOCOUPLE PORT**

**3 ft. Clamp-On Thermocouple 52336**



**VACUUM THERMOCOUPLE SENSOR PORT**

**Vacuum Sensor and Cable Assembly 98062**



**AC/DC PORT**

**AC/DC Adapter 99334-110 99334-220**



90413

90430

90433



99103-A



99661-A-EU

- 99103-A** 2-Way Digital Manifold only
- 99103-A-2** Manifold with (2) clamp-on thermocouples in a blow molded case
- 99661-A** Complete Kit in a blow molded case includes: manifold with a set of 3-150 cm hoses, vacuum sensor with cable and clamp-on thermocouple
- 99772-A** Complete Kit in a blow molded case includes: manifold with a set of 3-180 cm hoses, vacuum sensor with cable and clamp-on thermocouple
- 99661-A-EU** Complete Kit in a blow molded case includes: manifold with a set of 3-150 cm ball valve hoses with manual shut-off valves, vacuum sensor with cable, clamp-on thermocouple and 2-straight adapter fittings (90413)
- 99663-A-EU** Same as 99661-A-EU less vacuum sensor with cable

\* Manifolds assembled with Teflon gasket hoses, add a -T

\* Manifolds assembled with ball valves at the end of hoses, add a -E

**OPTIONAL ACCESSORIES**

<b>52336</b>	Clamp-on Thermocouple (extends 1 m)	<b>90433</b>	1/4 x 5/16" Swivel Ball Valve
<b>52337</b>	Clamp-on Thermocouple (extends 3 m)	<b>99333</b>	1/4 FL-M x 1/4 FL-M x 1/4 FL-F Tee
<b>90413</b>	R410A Straight Adapter 1/4 FL-M x 5/16 Swivel-F	<b>99334-110</b>	110 V AC/DC Adapter
<b>98062</b>	Vacuum Sensor and Cable Assembly (6.5 ft)	<b>99334-220</b>	220 V AC/DC Adapter (schuko plug)
<b>90430</b>	1/4 x 1/4" Swivel Ball Valve	<b>99903-PBA</b>	Plastic Carrying Case



**Mastercool®**  
"World Class Quality" Inc.

**NOW COMPATIBLE WITH R744 (CO<sub>2</sub>)  
SENSORS ABLE TO WITHSTAND  
PRESSURE UP TO 750 PSI (50 BAR)**



78 PSI		R 11	290 PSI	
Saturated Temp.	19 °F	Low	Saturated Temp.	137°F
Sensor Temp.	49°F			High
Superheat	14 °F			

**SUPERHEAT & SUBCOOL CALCULATIONS**  
Clamp-on thermocouple provides fast and accurate superheat and subcool readings.



Vacuum	120 MICRONS
--------	-------------

**PRECISE VACUUM READINGS**  
Vacuum thermocouple sensor provides accurate vacuum readings.

Mastercool's 2-Way Digital Manifold is the most advanced and user friendly Digital Manifold on the market today! This manifold offers a large easy to read LCD that displays Pressures, Saturated Temperatures, Actual Temperatures, Superheat and Subcooling Temperatures for over 60 refrigerants. When used with the clamp-on thermocouple connector it will display the actual temperature and automatically calculate the superheat or subcool temperature. When the vacuum sensor cable is attached to the manifold it will display deep vacuum. To insure lasting performance and durability the manifold case is constructed of ABS material and protected by a rugged rubber boot. The technician now has a fully functional manifold with the intelligence to quickly access and deliver the accurate information needed to *do the job right!*

**REFRIGERANTS INCLUDED:**

R12, R22, R23, R32, R113, R114, R115, R116, R123, R124, R134, R134a, R141B, R142B, R143, R143A, R290, R401A, R401B, R401C, R402A, R402B, R403A, R403B, R404A, R405A, R406A, R407A, R407B, R407C, R407D, R407F, R408A, R409A, R410A, R410B, R411A, R411B, R412A, R413A, R414A, R414B, R417A (ISCEON M059), R421A, R422A (ISCEON MD79), R422B, R422C, R422D (ISCEON M029), R427A (FX100), R434A, R437A, R438A, R441A, R501, R502, R503, R504, R507A, R508B, R509A, R600, R600A, R601, R601A, R744

**SPECIFICATIONS:**

- Class 1.0 standard gauge reading
- Pressure Display: PSI, INHg, Bar, MPa, Kg/cm<sup>2</sup>
- Temperature Display: °F or °C
- Deep Vacuum Display: Micron, mBar, KPa, Pa, Torr, mTorr, mmHg
- Sensing Resolution: 1 psi (.07 Bar, .007 MPa, .07 Kg/cm<sup>2</sup>)
- Sensing Accuracy: ±1 psi or 1% of reading (whichever is greater)
- Working Pressure: 0 to 750 psi (52 Bar, 5 MPa, 52 Kg/cm<sup>2</sup>) (does not display 0-5 psi)
- Proof Pressure: 1000 psi (70 Bar, 7 MPa, 70 Kg/cm<sup>2</sup>) (Tolerable pressure without internal damage)
- Refrigerant Temperature Range: -40 to 200°F (-40 to 93°C)
- Operating Temperature: 32 to 122°F (0 to 45°C)
- Temperature Accuracy: ±1°F (±0.5°C) between 32 to 160°F (0 to 71°C)
- Storage Temperature: 10 to 120°F (-12 to 49°C)
- Connections: 1/4" M-Flare
- Power: 9V DC battery with optional AC/DC adapter
- Battery Life: 30-36 hours pressure and temperature mode only (continuous use) 25-30 hours vacuum and backlight mode (continuous use)
- Auto-Off: 15 min. with disabling capability



**Mastercool**<sup>®</sup>  
"World Class Quality"

**R134a DIGITAL MANIFOLD**

Patent Pending



99860-1/4-A



This manifold offers a large easy to read LCD that displays temperature, pressure and vacuum readings for R134a. The unit easily allows the technician to obtain refrigerant and oil capacity readings for 55 automobile manufacturers. This unit also performs systems leak check at the conclusion of the evacuation process. To insure lasting performance and durability the manifold case is constructed of ABS material and protected by a rugged rubber boot. The technician now has a fully functional manifold with the intelligence to quickly access and deliver the accurate information needed to do the job right!

**SPECIFICATIONS**


- Refrigerant: R134a
- Pressure & Vacuum Display: Low Side - PSI, Bar, MPa, Kg/cm<sup>2</sup> & IN-Hg  
High Side - PSI, Bar, MPa, Kg/cm<sup>2</sup>
- Temperature Display: -40 to 200°F (-4 to 93°C)
- Response Time: 250 mSec.
- Connection: 1/4" FL-M
- Operating Temperature: 32 to 122°F (0 to 45°C)
- Power: 9V DC battery
- Battery Life: 50-60 hours continuous use
- Low Battery Indicator: Special ICON on LCD
- Auto-Off: 15 min. with disabling capability

**MANUFACTURERS INCLUDE:**

Acura	Hummer	Mercury	Saab
Audi	Hyundai	Mini	Saturn
BMW	Infiniti	Mitsubishi	Scion
Buick	Isuzu	Mercedes Benz	Smart
Cadillac	Jaguar	Nissan	Subaru
Chevrolet	Jeep	Oldsmobile	Suzuki
Chrysler	Kia	Peugeot	Toyota
Dodge	Lancia	Plymouth	Volkswagen
Fiat	Land Rover	Pontiac	Volvo
Ford	Lexus	Porsche	
GMC	Lincoln	Renault	
Honda	Mazda	Rover	



**MANUFACTURER/MODEL/YEAR REFRIGERANT (LB/KG) & OIL CAPACITY (OZ/ML) DISPLAY**



**TEMPERATURE/PRESSURE DISPLAY**

**99134-1/4-A** Manifold only with 1/4 FL-M (7/16"-20 UNF) connection

**99860-1/4-A** Complete Kit in a blow molded case includes: manifold with a set of 3-150 cm hoses and a set of manual couplers (82834-E & 82934-E).

**99872-1/4-A** Complete Kit in a blow molded case includes: manifold with a set of 3-180 cm hoses and a set of manual couplers (82834-E & 82934-E).


\* Manifolds assembled with Teflon gasket Hoses, add a -T

\* Capable of Software Upgrade



**Mastercool**<sup>®</sup>  
Inc.  
"World Class Quality"

**3/8" BORE 4-WAY BALL VALVE MANIFOLD**




Mastercool is the leading manufacturer of professional quality A/C manifold gauge sets. Our manifold gauge sets are constructed of the finest materials and machined with precision to the highest quality standards. At Mastercool, every manifold we build is built to last.




**All Mastercool Gauges are Color Coordinated for Easy Refrigerant Recognition.**

- Full 3/8" bore through the block increases flow considerably, faster charging & recovery
- Ball valve rotates 90° between two teflon washers requiring little effort to turn, even under pressure
- Opens and closes quickly with only a quarter turn
- Knob position shows whether valves are open or closed (Vertical = OPEN, Horizontal = CLOSED)

All fittings 1/4" SAE, tee with branch 3/8"  
Assemblies packed in custom molded plastic carrying case, p/n 86772-PB.



**Mastercool's Aluminum 4-Way Manifolds feature PREMIER SERIES BALL VALVE DESIGN.**




Gauge class – diameter	1.6 - 80 mm			
Units	Bar/PSI/°C	Bar/°C	Bar/PSI/°C	Bar/°C
Refrigerant scales	R134a R22 R12 R404A	R134a R404A R407C R22 R507A	R410A R407C R22	R22 R422A R427A R422D R417A
Gauge p/n (HP/LP)	MRBH MRBL	MBH MBL	EBH EBL	EBRL EBRH
Manifold body only	<b>95102</b>	<b>95102</b>	<b>95102</b>	<b>95102</b>
Manifold with gauges only	<b>96203-MRB</b>	<b>96203-MB</b>	<b>96203-EB</b>	<b>96203-EBR</b>
Manifold (as above) with 3 - 150 cm ball valve hoses (p/n 49262-60) + 1 - 150 cm black 3/8" hose (p/n 94160)	<b>96261-MRB</b>	<b>96261-MB</b>	<b>96261-EB</b>	<b>96261-EBR</b>
Manifold (as above) with 3 - 180 cm ball valve hoses (p/n 49262-72) + 1 - 180 cm black 3/8" hose (p/n 94172)	<b>96272-MRB</b>	<b>96272-MB</b>	<b>96272-EB</b>	<b>96272-EBR</b>

\* Manifolds assembled with teflon gasket hoses, add a -T  
\* Manifolds assembled with ball valves at the end of hoses, add a -E

**OPTIONAL 1/4 X 5/16" ADAPTERS**

For all manifolds ending in -E and -EB add the suffix



<b>-410</b>	to include <b>2 pieces of 90410</b> flex adapters to convert 1/4 SAE hose into 5/16 SAE
<b>-411</b>	to include <b>2 pieces of 90411</b> flex adapters with ball valve to convert 1/4 SAE hose into 5/16 SAE
<b>-413</b>	to include <b>2 pieces of 90413</b> straight adapter fittings to convert 1/4 to 5/16 SAE
<b>-433</b>	to include <b>2 pieces of 90433</b> adapter with fittings to convert 1/4 to 5/16 SAE



4-WAY BALL VALVE MANIFOLD FOR AUTOMOTIVE A/C




86972-MRB

Mastercool is the leading manufacturer of professional quality A/C manifold gauge sets. Our manifold gauge sets are constructed of the finest materials and machined with precision to the highest quality standards. At Mastercool, every manifold we build is built to last.


**All Mastercool Gauges are Color Coordinated for Easy Refrigerant Recognition.**

- Full 3/8" bore through the block increases flow considerably, faster charging & recovery
- Ball valve rotates 90° between two teflon washers requiring little effort to turn, even under pressure
- Opens and closes quickly with only a quarter turn
- Knob position shows whether valves are open or closed (Vertical = OPEN, Horizontal = CLOSED)

All fittings 1/4" SAE, blind connections for automotive quick couplers. Assemblies packed in custom molded carrying case, inclusive quick couplers (p/n 82834-E and 82934-E)



Mastercool's Aluminum 4-Way Manifolds feature PREMIER SERIES BALL VALVE DESIGN.




Gauge class – diameter	1.6 - 80 mm	
Units	Bar/°C	Bar/PSI/°C
Refrigerant scales	R134a	R134a
	R404A	R22
	R407C	R12
	R507A	R404A
	R22	
Gauge p/n (HP/LP)	MBH - MBL	MRBH - MRBL
Manifold body only, 1/4"	<b>86102-1/4</b>	<b>86102-1/4</b>
Manifold with gauges only	<b>86103-MB</b>	<b>86103-MRB</b>
Manifold (as above) with (3) 180 cm 1/4" hoses (p/n 40372) + (1) 180 cm black 1/4" hose (p/n 47724) - No quick couplers	<b>86572-MB</b>	<b>86572-MRB</b>
Manifold (as above) with (3) 180 cm 1/4" hoses (p/n 40372) + (1) 180 cm black 1/4" hose (p/n 47724) - Manual quick couplers	<b>86972-MB</b>	<b>86972-MRB</b>
Manifold (as above) with (3) 250 cm 1/4" hoses (p/n 40396) + (1) 250 cm black 1/4" hose (p/n 47964) - No quick couplers	<b>86596-MB</b>	<b>86596-MRB</b>
Manifold (as above) with (3) 250 cm 1/4" hoses (p/n 40396) + (1) 250 cm black 1/4" hose (p/n 47964) - Manual quick couplers	<b>86996-MB</b>	<b>86996-MRB</b>

\* Manifolds assembled with teflon gasket hoses, add a -T

\* Manifolds assembled with ball valves at the end of hoses, add a -E

**OPTIONAL 1/4 X 5/16" ADAPTERS**

For all manifolds ending in -E and -EB add the suffix



- 410 to include **2 pieces of 90410** flex adapters to convert 1/4 SAE hose into 5/16 SAE
- 411 to include **2 pieces of 90411** flex adapters with ball valve to convert 1/4 SAE hose into 5/16 SAE
- 413 to include **2 pieces of 90413** straight adapter fittings to convert 1/4 to 5/16 SAE
- 433 to include **2 pieces of 90433** adapter with fittings to convert 1/4 to 5/16 SAE



**Mastercool**<sup>®</sup>  
Inc.  
"World Class Quality"


2-WAY SIGHT GLASS MANIFOLD – BALL VALVES



**All Mastercool Gauges are Color Coordinated for Easy Refrigerant Recognition.**




- Full 3/8" bore all the way through the block increases flow considerably – faster charging and time savings
- Ball valve rotates 90° between two Teflon washers requiring little effort to turn, even under pressure
- Opens and closes quickly with only a quarter turn
- Knob position shows whether valves are open or closed
- Includes nylon barrier GY5 hoses with manual ball valves
- Assemblies packed in plastic carrying case
- Plastic carrying case, p/n 58102-PBR



1.6 GAUGE CLASS – 63 MM DIAMETER

Units	Bar/PSI/°C	Bar/PSI/°C	Bar/°C
Refrigerant scales	R410A-R507 R404A-R22	R134a-R22 R12-R404A	R134a-R404A R407C-R22 R507A
Gauge p/n (HP/LP)	EH-EL	MRH-MRL	MH-ML
Hoses 1/4" SAE	nylon barrier with in-line ball valve		
Manifold with gauges 2 x 1/4" fittings + central tee 1/4" SAE with branch 3/8"	58103-E	58103-MR	58103-M
Manifold with 3-90 cm ball valve hoses	57236-E	57236-MR	57236-M
Manifold with 3-150 cm ball valve hoses	57261-E	57261-MR	57261-M
Manifold with 3-180 cm ball valve hoses	57272-E	57272-MR	57272-M
R410A Manifold with 3-150 cm nylon barrier with in-line ball valve - red and blue 1/4" x 5/16", yellow 1/4" x 1/4" hoses	57261-E-JT	-	-

Mastercool's Aluminum 2-Way Manifolds feature PREMIER SERIES BALL VALVE DESIGN.



Optional 90° 3/8" swivel ball valve 90530 for 3/8" vacuum, makes 2-valve into 3-valve full control 4-way manifold

1.6 GAUGE CLASS – 80 MM DIAMETER


Units	Bar/PSI/°C	Bar/PSI/°C	Bar/°C	Bar/°C
Refrigerant scales	R410A R407C R22	R134a R22 R12 R404A	R134 R404A R407C R22 R507A	R22 R422A R427A R422D R417A
Gauge p/n (HP/LP)	EBH-EBL	MRBH-MRBL	MBH-MBL	EBRL-EBRH
Hoses 1/4" SAE	nylon barrier with in-line ball valve			
Manifold with gauges 2 x 1/4" fittings + central tee 1/4" SAE with branch 3/8"	58103-EB	58103-MRB	58103-MB	58103-EBR
Manifold with 3-90 cm ball valve hoses	57236-EB	57236-MRB	57236-MB	57236-EBR
Manifold with 3-150 cm ball valve hoses	57261-EB	57261-MRB	57261-MB	57261-EBR
Manifold with 3-180 cm ball valve hoses	57272-EB	57272-MRB	57272-MB	57272-EBR
R410A Manifold with 3-150 cm nylon barrier with in-line ball valve - red and blue 1/4" x 5/16", yellow 1/4" x 1/4" hoses	57261-EB-JT	-	-	-

\* Manifolds assembled with teflon gasket hoses, add a -T

\* Manifolds assembled with ball valves at the end of hoses, add a -E

OPTIONAL 1/4 X 5/16" ADAPTERS

For all manifolds ending in -E and -EB add the suffix



-410 to include 2 pieces of 90410 flex adapters to convert 1/4 SAE hose into 5/16 SAE

-411 to include 2 pieces of 90411 flex adapters with ball valve to convert 1/4 SAE hose into 5/16 SAE

-413 to include 2 pieces of 90413 straight adapter fittings to convert 1/4 to 5/16 SAE

-433 to include 2 pieces of 90433 adapter with fittings to convert 1/4 to 5/16 SAE



**Mastercool®**  
"World Class Quality"

2-WAY ALUMINUM MANIFOLD – PISTON VALVES



93636-MR

**All Mastercool Gauges are Color Coordinated for Easy Refrigerant Recognition.**

- Our Free Floating Piston Valve results in less wear and tear in comparison to market standard twisting piston valves
- Double O-Ring allows for a much better seal resulting in less leaks



Mastercool's 2-Way Manifolds feature **FREE FLOATING PISTON VALVE DESIGN.**

1.6 GAUGE CLASS - 63 MM DIAMETER

Units	Bar/PSI/°C	Bar/PSI/°C	Bar/°C
Refrigerant scales	R410A- R507A R404A-R22	R134a-R22 R12-R404A	R134a-R404A R407C-R22 R507A
Gauge p/n (HP/LP)	EH-EL	MRH-MRL	MH-ML
Hoses 1/4" SAE	standard		
Manifold with gauges, fittings + central tee 1/4" SAE	93103-E	93103-MR	93103-M
Manifold with 3-90 cm hoses	93636-E	93636-MR	93636-M
Manifold with 3-150 cm hoses	93661-E	93661-MR	93661-M
Manifold with 3-150 cm ball valve hoses	92661-E	92661-MR	92661-M
Manifold with 3-180 cm hoses	93772-E	93772-MR	93772-M
R410 Manifold with 3-150 cm standard with in-line ball valve - red and blue 1/4" x 5/16", yellow 1/4" x 1/4" hoses	92661-E-JT	-	-

1.6 GAUGE CLASS - 80 MM DIAMETER

Units	Bar/PSI/°C	Bar/PSI/°C	Bar/°C	Bar/°C
Refrigerant scales	R410A R407C R22	R134a R22 R12 R404A	R134a R404A R407C R22 R507A	R22-R422A R427A R422D R417A
Gauge p/n (HP/LP)	EBH-EBL	MRBH-MRBL	MBH-MBL	EBRL-EBRH
Hoses 1/4" SAE	standard			
Manifold with gauges, fittings + central tee 1/4" SAE	93103-EB	93103-MRB	93103-MB	93103-EBR
Manifold with 3-90 cm hoses	93636-EB	93636-MRB	93636-MB	93636-EBR
Manifold with 3-150 cm hoses	93661-EB	93661-MRB	93661-MB	93661-EBR
Manifold with 3-150 cm ball valve hoses	92661-EB	92661-MRB	92661-MB	92661-EBR
Manifold with 3-180 cm hoses	93772-EB	93772-MRB	93772-MB	93772-EBR
R410 Manifold with 3-150 cm standard with in-line ball valve - red and blue 1/4" x 5/16", yellow 1/4" x 1/4" hoses	92661-EB-JT	-	-	-


\* Manifolds assembled with teflon gasket hoses, add a -T

\* Manifolds assembled with ball valves at the end of hoses, add a -E

\* For packaging please see page 18

OPTIONAL 1/4 X 5/16" ADAPTERS

For all manifolds ending in -E and -EB add the suffix



90410

90411

90413

90433

-410 to include 2 pieces of 90410 flex adapters to convert 1/4 SAE hose into 5/16 SAE

-411 to include 2 pieces of 90411 flex adapters with ball valve to convert 1/4 SAE hose into 5/16 SAE

-413 to include 2 pieces of 90413 straight adapter fittings to convert 1/4 to 5/16 SAE

-433 to include 2 pieces of 90433 adapter with fittings to convert 1/4 to 5/16 SAE



**Mastercool®**  
"World Class Quality"



2-WAY BRASS MANIFOLD – PISTON VALVES



**All Mastercool Gauges are Color Coordinated for Easy Refrigerant Recognition.**

- Our Free Floating Piston Valve results in less wear and tear in comparison to market standard twisting piston valves
- Double O-Ring allows for a much better seal resulting in less leaks



**Mastercool's 2-Way Manifolds feature FREE FLOATING PISTON VALVE DESIGN.**

**1.6 GAUGE CLASS - 63 MM DIAMETER**

Unit	Bar/PSI/°C	Bar/PSI/°C	Bar/°C
Refrigerant scales	R410A-R507A R404A-R22	R134a-R22 R12-R404A	R134a-R404A R407C-R22 R507A
Gauge p/n (HP/LP)	EH-EL	MRH-MRL	MH-ML
Hoses 1/4" SAE	standard		
Manifold with gauges, 3 x 1/4" SAE fittings	<a href="#">33103-E</a>	<a href="#">33103-MR</a>	<a href="#">33103-M</a>
Manifold with 3 – 90 cm hoses	<a href="#">33636-E</a>	<a href="#">33636-MR</a>	<a href="#">33636-M</a>
Manifold with 3 – 150 cm hoses	<a href="#">33661-E</a>	<a href="#">33661-MR</a>	<a href="#">33661-M</a>
Manifold with 3 – 150 cm ball valve hoses	<a href="#">32661-E</a>	<a href="#">32661-MR</a>	<a href="#">32661-M</a>
Manifold with 3 – 180 cm hoses	<a href="#">33772-E</a>	<a href="#">33772-MR</a>	<a href="#">33772-M</a>
R410 Manifold with 3-150 cm standard with in-line ball valve - red and blue 1/4" x 5/16", yellow 1/4" x 1/4" hoses	<a href="#">33661-E-JT</a>	-	-

**1.6 GAUGE CLASS - 80 MM DIAMETER**

Unit	Bar/PSI/°C	Bar/PSI/°C	Bar/°C	Bar/°C
Refrigerant scales	R410A R407C R22	R134a R22 R12 R404A	R134a R404A R407C R22-R507A	R22-R422A R427A R422D R417A
Gauge p/n (HP/LP)	EBH-EBL	MRBH-MRBL	MBH-MBL	EBRL-EBRH
Hoses 1/4" SAE	standard			
Manifold with gauges, 3 x 1/4" SAE fittings	<a href="#">33103-EB</a>	<a href="#">33103-MRB</a>	<a href="#">33103-MB</a>	<a href="#">33103-EBR</a>
Manifold with 3 – 90 cm hoses	<a href="#">33636-EB</a>	<a href="#">33636-MRB</a>	<a href="#">33636-MB</a>	<a href="#">33636-EBR</a>
Manifold with 3 – 150 cm hoses	<a href="#">33661-EB</a>	<a href="#">33661-MRB</a>	<a href="#">33661-MB</a>	<a href="#">33661-EBR</a>
Manifold with 3 – 150 cm ball valve hoses	<a href="#">32661-EB</a>	<a href="#">32661-MRB</a>	<a href="#">32661-MB</a>	<a href="#">32661-EBR</a>
Manifold with 3 – 180 cm hoses	<a href="#">33772-EB</a>	<a href="#">33772-MRB</a>	<a href="#">33772-MB</a>	<a href="#">33772-EBR</a>
R410 Manifold with 3-150 cm standard with in-line ball valve - red and blue 1/4" x 5/16", yellow 1/4" x 1/4" hoses	<a href="#">32661-EB-JT</a>	-	-	-


\* Manifolds assembled with teflon gasket hoses, add a -T

\* Manifolds assembled with ball valves at the end of hoses, add a -E

\* For packaging please see page 18

**OPTIONAL 1/4 X 5/16" ADAPTERS**

For all manifolds ending in -E and -EB add the suffix



**-410** to include **2 pieces of 90410** flex adapters to convert 1/4 SAE hose into 5/16 SAE

**-411** to include **2 pieces of 90411** flex adapters with ball valve to convert 1/4 SAE hose into 5/16 SAE


**-413** to include **2 pieces of 90413** straight adapter fittings to convert 1/4 to 5/16 SAE

**-433** to include **2 pieces of 90433** adapter with fittings to convert 1/4 to 5/16 SAE



**Mastercool®**  
"World Class Quality"

**2-WAY PISTON VALVE MANIFOLD FOR AUTOMOTIVE A/C - R134a**



**All Mastercool Gauges are Color Coordinated for Easy Refrigerant Recognition.**

- Our Free Floating Piston Valve results in less wear and tear in comparison to market standard twisting piston valves
- Double O-Ring allows for a much better seal resulting in less leaks
- Solid extruded aluminum body
- Extra access port for vacuum line
- Silicone dampened gauges smooth out needle movement
- Gauges can be easily re-calibrated in the field to maintain accuracy
- Extra large sight glass for visual refrigerant check
- Large easy-to-grip knobs



Gauge class – diameter	1.6 - 63 mm	1.6 - 80 mm	
Units	Bar/°C	Bar/°C	Bar/PSI/°C
Refrigerant scales	R134a	R134a	R134a
	R404A	R404A	R22
	R407C	R407C	R12
	R22	R22	R404A
	R507A	R507A	
Gauge p/n (HP/LP)	MH-ML	MBH-MBL	MRBH-MRBL
Manifold body only (1/4" SAE)	<b>85102-1/4</b>	<b>85102-1/4</b>	<b>85102-1/4</b>
Manifold with gauges only (1/4" SAE)	<b>85103-M</b>	<b>85103-MB</b>	<b>85103-MRB</b>
Manifold (as above) with 3 - 180 cm hoses, 1/4" SAE (p/n 40372) w/quick couplers (p/n 82834-E & 82934-E)	<b>89772-M</b>	<b>89772-MB</b>	<b>89772-MRB</b>
Manifold (as above) with 3 - 250 cm hoses, 1/4" SAE (p/n 40396) w/quick couplers (p/n 82834-E & 82934-E)	<b>89996-M</b>	<b>89996-MB</b>	<b>89996-MRB</b>

**2-WAY PISTON VALVE MANIFOLD FOR AUTOMOTIVE A/C - R1234yf**



- Anti-flutter gauges smooth out needle movement
- E-Z to read temperature scales on gauge face
- E-Z to recalibrate gauges to insure accuracy
- Extra large sight glass for visual checks of refrigerant
- Easy grip front-facing knobs
- Piston type free-floating valves reduce o-ring wear
- Manifold block assembled with (3) 12 mm-F fittings per SAE J2888
- Red & Blue nylon barrier hoses with 12 mm-M fittings on both sides meets SAE J2888, EPA, SAE & UL standards
- Yellow hose 12 mm fitting on one side and 1/2 x 16 ACME LH on the other meets SAE J2888
- R1234yf high and low side couplers with extended disconnect protection sleeve meets SAE J639 & J2888



Gauge class – diameter	1.6 - 80 mm
Unit	Bar/PSI
Refrigerant scales	R1234yf
Gauge p/n (HP/LP)	87500-87350
Manifold with gauges, 3 x 12 mm-F fittings	<b>83102</b>
Manifold with 3 – 180 cm hoses and R1234yf couplers packaged in a clam shell	<b>83272</b>

**83634 VACUUM PUMP ADAPTER FITTING**



1/4 FL-F x 1/2 ACME LH male vacuum pump adapter fitting for R1234yf systems

**\*Packaging Note**



clamshell      cardboard box      58102-PBR

- All piston valve 2-way manifold gauge sets are packaged in a clamshell


- European Standard Packaging - Cardboard Box

- For Plastic Carrying Case, please order Part# 58102-PBR



**Mastercool® Inc.**  
"World Class Quality"

**2-WAY ALUMINUM MANIFOLD – PISTON VALVES – CLASS 1.0 GAUGES**

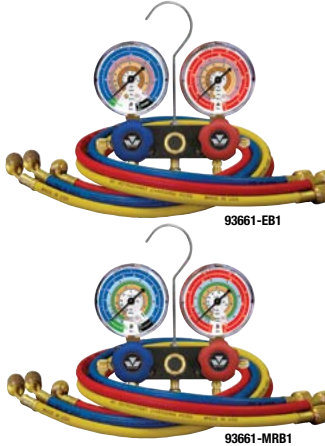

*All Mastercool Gauges are Color Coordinated for Easy Refrigerant Recognition.*



**1.0 GAUGE CLASS - 80 MM DIAMETER**

Units	Bar/PSI/°C	Bar/PSI/°C
Refrigerant scales	R22-R407C R32-R410A	R22-R404A R407F-R134a
Gauge p/n (HP/LP)	EBH1-EBL1	MRBH1-MRBL1
Hoses 1/4" SAE	standard	
Manifold with gauges, fittings + central tee 1/4" SAE	<a href="#">93103-EB1</a>	<a href="#">93103-MRB1</a>
Manifold with 3-90 cm hoses	<a href="#">93636-EB1</a>	<a href="#">93636-MRB1</a>
Manifold with 3-150 cm hoses	<a href="#">93661-EB1</a>	<a href="#">93661-MRB1</a>
Manifold with 3-150 cm ball valve hoses	<a href="#">92661-EB1</a>	<a href="#">92661-MRB1</a>
Manifold with 3-180 cm hoses	<a href="#">93772-EB1</a>	<a href="#">93772-MRB1</a>
R410 Manifold with 3-150 cm standard with in-line ball valve - red and blue 1/4" x 5/16", yellow 1/4" x 1/4" hoses	<a href="#">92661-EB1-JT</a>	-

\* Manifolds assembled with teflon gasket hoses, add a -T  
 \* Manifolds assembled with ball valves at the end of hoses, add a -E  
 \* For packaging please see page 18

**2-WAY ALUMINUM MANIFOLD – PISTON VALVES – ISOBUTANE GAUGES**



*All Mastercool Gauges are Color Coordinated for Easy Refrigerant Recognition.*




**1.6 GAUGE CLASS - 80 MM DIAMETER**

Units	Bar/PSI/°C
Refrigerant scales	R1270-R290 R600a
Gauge p/n (HP/LP)	RBH-RBL
Hoses 1/4" SAE	standard
Manifold with gauges, fittings + central tee 1/4" SAE	<a href="#">93103-RB</a>
Manifold with 3-90 cm hoses	<a href="#">93636-RB</a>
Manifold with 3-150 cm hoses	<a href="#">93661-RB</a>
Manifold with 3-150 cm ball valve hoses	<a href="#">92661-RB</a>
Manifold with 3-180 cm hoses	<a href="#">93772-RB</a>

\* Manifolds assembled with teflon gasket hoses, add a -T  
 \* Manifolds assembled with ball valves at the end of hoses, add a -E  
 \* For packaging please see page 18

**OPTIONAL 1/4 X 5/16" ADAPTERS**

For all manifolds ending in -E and -EB add the suffix



- 410 to include **2 pieces of 90410** flex adapters to convert 1/4 SAE hose into 5/16 SAE
- 411 to include **2 pieces of 90411** flex adapters with ball valve to convert 1/4 SAE hose into 5/16 SAE
- 413 to include **2 pieces of 90413** straight adapter fittings to convert 1/4 to 5/16 SAE
- 433 to include **2 pieces of 90433** adapter with fittings to convert 1/4 to 5/16 SAE

**2-WAY PISTON VALVE MANIFOLD FOR CO2 (R744)**



- Our Free Floating Piston Valve results in less wear and tear in comparison to market standard twisting piston valves
- Double O-Ring allows for a much better seal resulting in less leaks
- Oil filled, class 1.0, 70 mm gauges
- E-Z to read temperature scales on gauge face
- Solid extruded aluminum body
- Large easy-to-grip-knobs
- 1/4" SAE
- Steel braided hoses for CO2
- Assemblies packed in plastic carrying case
- Plastic carrying case, p/n 58102-PBR



Gauge class – diameter	1.0 - 70 mm
Units	PSI/MPa
Refrigerant scales	R744
Gauge p/n (HP/LP)	55102-2400 55102-1400
Manifold body with hook and hose holder (1/4" SAE)	<b>55102</b>
Manifold with oil filled gauges only (1/4" SAE)	<b>55103</b>
Manifold (as above) with 3 - 150 cm braided hoses	<b>55661</b>

**CLASS 1.0 REPLACEMENT GAUGE FOR CO2**



High pressure p/n	Low pressure p/n	Gauge Diameter	Units	Refrigerant Scales
<b>55102-2400</b>	<b>55102-1400</b>	70 mm	PSI/MPa	R744

**STEEL BRAIDED HOSES FOR CO2**



**Steel Braided Hoses, Working Pressure 200 BAR, Burst 800 BAR**

<b>HOSE LENGTH</b>	<b>150 cm</b>
Steel braided hose for CO2	<b>55601</b>
<b>SET of 3 steel braided hoses for CO2</b>	<b>55360</b>



**1/4" SINGLE VALVE MANIFOLD – BALL VALVE**



92103-MRL

(packaged in a clamshell)



Single Valve Manifold	Gauge Class Diameter	Unit	Refrigerant Scales	Gauge p/n (HP/LP)
92103-EL	1.6 63 mm	Bar/PSI/°C	R410A-R507A-R404A-R22	EL
92103-MRL		Bar/PSI/°C	R134a-R22-R12-R404A	MRL
92103-ML		Bar/°C	R134a-R404A-R407C-R22-R507A	ML
92103-EBL	1.6 80 mm	Bar/PSI/°C	R410A-R407C-R22	EBL
92103-MRBL		Bar/PSI/°C	R134a-R22-R12-R404A	MRBL
92103-MBL		Bar/°C	R134a-R404A-R407C-R22-R507A	MBL
92103-EBRL		Bar/°C	R22-R422A-R427A-R422D-R417A	EBRL
92103-RB		Bar/PSI/°C	R1270-R290-R600a	RBL
92103-MRB1		1.0 80 mm	Bar/PSI/°C	R22-R404A-R407F-R134a
92103-EB1	Bar/PSI/°C		R22-R407C-R32-R410A	EBL1

\* Manifolds assembled with gauge guards, add a -G

**5/16" SINGLE VALVE MANIFOLD – BALL VALVE**



92103-EBL-5/16

(packaged in a clamshell)



Single Valve Manifold	Gauge Class Diameter	Unit	Refrigerant Scales	Gauge p/n (HP/LP)
92103-EL-5/16	1.6 63 mm	Bar/PSI/°C	R410A-R507A-R404A-R22	EL
92103-MRL-5/16		Bar/PSI/°C	R134a-R22-R12-R404A	MRL
92103-ML-5/16		Bar/°C	R134a-R404A-R407C-R22-R507A	ML
92103-EBL-5/16	1.6 80 mm	Bar/PSI/°C	R410A-R407C-R22	EBL
92103-MRBL-5/16		Bar/PSI/°C	R134a-R22-R12-R404A	MRBL
92103-MBL-5/16		Bar/°C	R134a-R404A-R407C-R22-R507A	MBL
92103-EBRL-5/16		Bar/°C	R22-R422A-R427A-R422D-R417A	EBRL
92103-RB-5/16		Bar/PSI/°C	R1270-R290-R600a	RBL
92103-MRB1-5/16		1.0 80 mm	Bar/PSI/°C	R22-R404A-R407F-R134a
92103-EB1-5/16	Bar/PSI/°C		R22-R407C-R32-R410A	EBL1




\* Manifolds assembled with gauge guards, add a -G

**CLASS 1.6 REPLACEMENT GAUGES**



	High pressure p/n	Low pressure p/n	Gauge Diameter	Units	Refrigerant Scales
	MH	ML	63 mm	Bar/°C	R134a R404A R407C R22 R507A
	MRH	MRL	63 mm	Bar/PSI/°C	R134a R22 R404A R12
	EH	EL	63 mm	Bar/PSI/°C	R410A R404A R507A R22
	MRKH	MRKL	63 mm	PSI/kg/cm <sup>2</sup> /°C	R12 R404A R22 R134a
	MBH	MBL	80 mm	Bar/°C	R134a R404A R407C R22 R507A
	MRBH	MRBL	80 mm	Bar/PSI/°C	R134a R22 R404A R12
	EBH	EBL	80 mm	Bar/PSI/°C	R410A R407C R22



**CLASS 1.6 REPLACEMENT GAUGES**

	High pressure p/n	Low pressure p/n	Gauge Diameter	Units	Refrigerant Scales
	<b>EBRH</b>	<b>EBRL</b>	80 mm	Bar/°C	R22 R422A R427A R422D R417A
	<b>RBH</b>	<b>RBL</b>	80 mm	Bar/PSI/°C	R1270 R290 R600a
	<b>87500</b>	<b>87350</b>	80 mm	Bar/ PSI/°F/°C	R1234yf

**CLASS 1.0 REPLACEMENT GAUGES**

	High pressure p/n	Low pressure p/n	Gauge Diameter	Units	Refrigerant Scales
	<b>EBH1</b>	<b>EBL1</b>	80 mm	Bar/PSI/°C	R22 R407C R32 R410A
	<b>MRBH1</b>	<b>MRBL1</b>	80 mm	Bar/PSI/°C	R22 R404A R407F R134a

## MANIFOLD REPLACEMENT PARTS

### 63 MM GAUGE PROTECTORS



93253-E	63 mm Blue Gauge Protector
93503-E	63 mm Red Gauge Protector
93553-E	63 mm Set (Red & Blue)

### 80 MM GAUGE PROTECTORS



91253-EE	80 mm Red Gauge Protector
91503-EE	80 mm Blue Gauge Protector
91553-EE	80 mm Set (Red & Blue)

### LENS



85253-E	63 mm (2 1/2") Lens
98251-E	80 mm (3 1/8") Lens

### 4-WAY MANIFOLD REPLACEMENT KNOBS



58211	Blue Knob
58212	Red Knob
58213	Yellow Knob
58214	Black Knob

### 2-WAY MANIFOLD REPLACEMENT KNOBS



85211	Blue Knob
85212	Red Knob
93211	Black Knob
85211-R	Blue Knob
85212-R	Red Knob
93211-R	Black Knob

### PARTS FOR PISTON MANIFOLDS

85215	O-rings (4 pcs)
85216	Seal & Seat Assembly (2 pcs)


### PARTS FOR 2-3 AND 4 WAY BALL VALVE MANIFOLDS



95102-R-KIT	O-Ring Repair Kit for 2-3 and 4 Way Ball Valve Manifold
-------------	---



# HOSES, ADAPTERS & ACCESSORIES

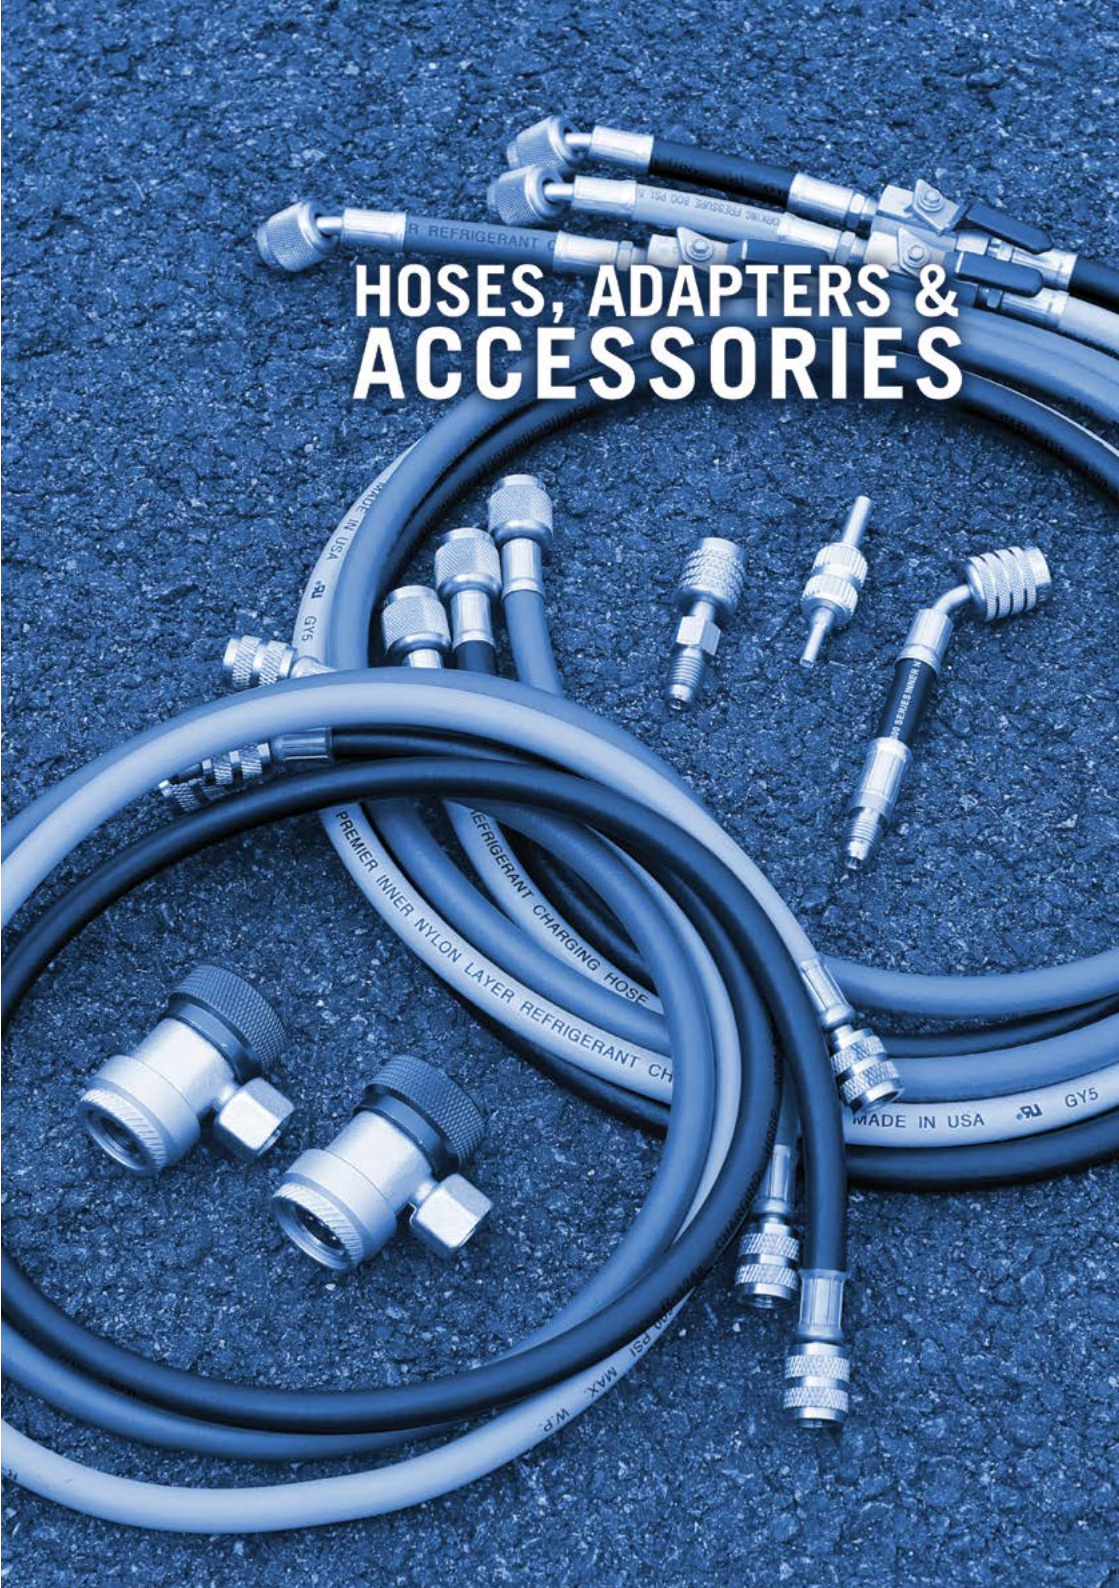

Mastercool uses only **(GRADE 5 HOSE)** with a selection of Standard and Nylon Barrier for high pressure applications. Knurled brass nuts make finger tightening easy. **Crimped with 8 segment dies for secure fit and maximum durability.** Hoses are available in sets and a variety of lengths to meet all EPA, SAE and UL requirements for containment of refrigerant.

- Sets include one blue, one red and one yellow hose
- Hoses assembled with teflon gaskets, add a -T to the p/n
- For special length hoses, please inquire

**STANDARD & HIGH PRESSURE HOSES W/STANDARD FITTINGS (1/4" SAE)**



47360

Standard Hoses, Working Pressure 52 BAR, Burst 210 BAR						
HOSE LENGTH	90 cm	150 cm	180 cm	250 cm	3 m	5 m
Blue 1/4" x 1/4"	41361	41601	41721	41961	41961-120	41961-200
Yellow 1/4" x 1/4"	41362	41602	41722	41962	41962-120	41962-200
Red 1/4" x 1/4"	41363	41603	41723	41963	41963-120	41963-200
<b>SETS 1/4" x 1/4"</b>	<b>40336</b>	<b>40360</b>	<b>40372</b>	<b>40396</b>	<b>40396-120</b>	<b>40396-200</b>
Nylon Barrier Hoses, Working Pressure 56 BAR, Burst 280 BAR						
Blue 1/4" x 1/4"	47361	47601	47721	47961	47961-120	47961-200
Yellow 1/4" x 1/4"	47362	47602	47722	47962	47962-120	47962-200
Red 1/4" x 1/4"	47363	47603	47723	47963	47963-120	47963-200
Black 1/4" x 1/4"	47364	47604	47724	47964	N/A	N/A
<b>SETS 1/4" x 1/4"</b>	<b>47336</b>	<b>47360</b>	<b>47372</b>	<b>47396</b>	<b>47396-120</b>	<b>47396-200</b>
Black 1/4" hose w/(3/8" x 3/8" fitting)	48364	48604	48724	48964	N/A	N/A
Black 3/8" hose w/(3/8" x 3/8" fitting)	94136	94160	94172	N/A	N/A	N/A

**R410A HOSES**



49360-J

Nylon Barrier Hoses, Working Pressure 56 BAR, Burst 280 BAR		
HOSE LENGTH	90 cm	150 cm
Blue 5/16" SAE x 5/16" SAE	49361-J	49601-J
Yellow 5/16" SAE x 5/16" SAE	49362-J	49602-J
Red 5/16" SAE x 5/16" SAE	49363-J	49603-J
<b>SETS 5/16" SAE x 5/16" SAE</b>	<b>49336-J</b>	<b>49360-J</b>
Blue 1/4" x 5/16"	-	96411
Red 1/4" x 5/16"	-	96413
<b>SETS Blue/Red 1/4" x 5/16" and Yellow 1/4" x 1/4"</b>	<b>49336-JT</b>	<b>49360-JT</b>

**R134a HOSES WITH 1/2" ACME-F AND 14 MM-M AUTO A/C FITTINGS**




84372

Nylon Barrier Hoses, Working Pressure 56 BAR, Burst 280 BAR				
HOSE LENGTH	90 cm	150 cm	180 cm	240 cm
Blue-14 mm-M x 1/2" ACME-F	84361	84601	84721	84961
Yellow w/Shut-off Valve 1/2" ACME-F x 1/2" ACME-F	84362	84602	84722	84962
Red-14 mm-M x 1/2" ACME-F	84363	84603	84723	84963
Black-1/2" ACME-F x 1/2" ACME-F	84364	84604	84724	84964
Yellow w/o Shut-off Valve 1/2" ACME-F x 1/2" ACME-F	84365	84605	84725	84965
<b>SETS Blue/Red 14 mm-M x 1/2" ACME-F and Yellow w/Shut-off Valve 1/2" ACME-F x 1/2" ACME-F</b>	<b>84336</b>	<b>84360</b>	<b>84372</b>	<b>84396</b>

Mastercool R134a charging hoses meet SAE J2196 specifications and are UL tested.

**R1234yf HOSES (Meets J2888, EPA, SAE & UL Standards)**




83372

**Nylon Barrier Hoses, Working Pressure 56 BAR, Burst 280 BAR**

HOSE LENGTH	180 cm
Blue-12 mm-M x 12 mm-M	83721
Yellow-12 mm fitting x 1/2 x 16 ACME LH	83722
Red-12 mm-M x 12 mm-M	83723
<b>SET Blue/Red 12 mm-M x 12 mm-M and Yellow 12 mm fitting x 1/2 x 16 ACME LH</b>	<b>83372</b>

**STANDARD & HIGH PRESSURE HOSES W/AUTOMATIC SHUT-OFF VALVE FITTINGS (1/4" SAE)**



45336

**Standard Hoses, Working Pressure 52 BAR, Burst 210 BAR**


HOSE LENGTH	90 cm	150 cm	180 cm	250 cm
Blue 1/4" x 1/4"	45361	45601	45721	45961
Yellow 1/4" x 1/4"	45362	45602	45722	45962
Red 1/4" x 1/4"	45363	45603	45723	45963
Black 1/4" x 1/4"	N/A	N/A	N/A	N/A
<b>SETS 1/4" x 1/4"</b>	<b>45336</b>	<b>45360</b>	<b>45372</b>	<b>45396</b>

**Nylon Barrier Hoses, Working Pressure 56 BAR, Burst 280 BAR**

Blue 1/4" x 1/4"	46361	46601	46721	46961
Yellow 1/4" x 1/4"	46362	46602	46722	46962
Red 1/4" x 1/4"	46363	46603	46723	46963
Black 1/4" x 1/4"	46364	46604	46724	46964
<b>SETS 1/4" x 1/4"</b>	<b>46336</b>	<b>46360</b>	<b>46372</b>	<b>46396</b>

Auto shut-off valves automatically retain refrigerant in the service hose when they are removed from the system, meets EPA, SAE and UL standards for containment of refrigerant.

**STANDARD & HIGH PRESSURE HOSES W/MANUAL SHUT-OFF VALVE FITTINGS (1/4" SAE)**

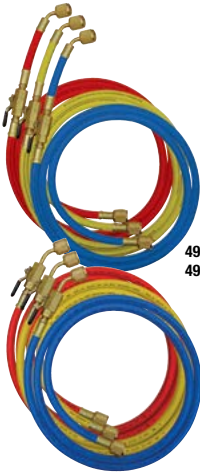

49262-60  
49262-60-JT

**Standard Hoses, Working Pressure 52 BAR, Burst 210 BAR**

HOSE LENGTH	90 cm	150 cm	180 cm
Blue 1/4" x 1/4"	90263-36	90263-60	90263-72
Yellow 1/4" x 1/4"	90264-36	90264-60	90264-72
Red 1/4" x 1/4"	90265-36	90265-60	90265-72
<b>SETS 1/4" x 1/4"</b>	<b>90262-36</b>	<b>90262-60</b>	<b>90262-72</b>

**Nylon Barrier Hoses, Working Pressure 56 BAR, Burst 280 BAR**

Blue 1/4" x 1/4"	49263-36	49263-60	49263-72
Yellow 1/4" x 1/4"	49264-36	49264-60	49264-72
Red 1/4" x 1/4"	49265-36	49265-60	49265-72
<b>SETS 1/4" x 1/4"</b>	<b>49262-36</b>	<b>49262-60</b>	<b>49262-72</b>
Black 3/8" Hose with (3/8" x 3/8" fitting)	94236	94260	94272
Red 1/4 x 5/16"	49265-36-JT	49265-60-JT	49265-72-JT
Blue 1/4 x 5/16"	49263-36-JT	49263-60-JT	49263-72-JT
<b>SETS Red/Blue 1/4 x 5/16", Yellow 1/4 x 1/4"</b>	<b>49262-36-JT</b>	<b>49262-60-JT</b>	<b>49262-72-JT</b>

Add a -E for Ball Valve at the end hoses

49262-60-E  
49262-60-JT-E



**PRESSURE CONTROL HOSES**



Replaces regular copper capillary tubing and eliminates capillary failure due to work hardening from vibration.

- 1/4" operates to 600 psi (42 bar) and 200°F (93°C)
- Operational temperature: -20° to 200°F (-29° to 93°C)

**Hex Style Fittings with 1/4" SAE Thread**

HOSE LENGTH	STRAIGHT X STRAIGHT	STRAIGHT X 90°
12"	47124-STR	47124-ST
18"	47184-STR	47184-ST
24"	47244-STR	47244-ST
36"	47364-STR	47364-ST
48"	47484-STR	47484-ST
60"	47604-STR	47604-ST

**AUTOMATIC SHUT-OFF VALVES**



Valve simply screws onto hose end. Available in straight and 90° models. Meets SAE, EPA and UL requirements for containment of refrigerant.

<< QUICK DISCONNECT : NO LOSS OF REFRIGERANT >>

90333-R	90° 1/4 x 1/4"
90333-UV	90° 1/4" FFL x 13 mm
90335-R	Straight 1/4 x 1/4"
90337	Straight 1/4 x 3/16"

**CONTROL VALVE**



Ideal for use on charged systems. Eliminates refrigerant, oil or dye from spraying during connections.



90328	1/4" FFL x 1/4" MFL
90328-5/16	5/16" x 5/16"

**MANUAL SHUT-OFF BALL VALVES**



For custom application, Mastercool offers swivel ball valves without the hoses. This valve may be used to add shut-off valves to recycling equipment, manifold sets, flushing equipment, etc.

90430	1/4 x 1/4" Swivel Ball Valve
90433	1/4 x 5/16" Swivel Ball Valve

**SERVICE HOSE REPLACEMENT PARTS**



	1/4" SAE		1/2" ACME		14 mm-M	3/8"	UNF 1/2 - 20"	
	GASKET	DEPRESSOR	GASKET	DEPRESSOR	O-RING	GASKET	GASKET	DEPRESSOR
Charging Hoses	42010-10 42010-T-10 (Teflon)	42014-10 42016-10 (Screw-Type)	82010-10	42014-10	83341-10	48010-10	82010-10	42016-10
Shut-Off Valve	90336-10	N/A	90336-10	N/A	N/A	N/A	N/A	N/A



**80011 HEAVY DUTY RATCHET HOSE CUTTER**



Ratcheted action makes this cutter extremely easy to operate resulting in quick, clean cuts. Cutting blade is made of special alloy, heat treated steel for long life. Cuts all rubber hoses and PVC pipe up to 1 1/2" (38 mm) O.D. (Not recommended for PVC200)

**80111** Replacement blade for 80011

**80013 AUTOMOTIVE REFRIGERANT HOSE CUTTER**



Makes quick, clean cuts. Cuts rubber automotive refrigerant hoses up to 1 1/2" O.D.

**80113** Replacement blade for 80013

**91390 R12 SERVICE PORT THREAD REPAIR TOOL**



Recuts stripped R12 service port threads. All-in-one design for 1/8", 3/16" and 1/4" service ports. An excellent retrofit tool - it will ensure that the R134a retrofit adapters will fit securely.

**R134a OCTAGON SERVICE PORT SOCKETS**



**98134** R134a Low Side Octagon Socket


**98234** R134a High Side Octagon Socket

**90925 CONDENSER FIN COMB**



Cleans and straightens condenser and evaporator fins. Six sided head for 8, 9, 10, 12, 14 and 15 fins per inch applications.

**CAN TAP VALVES**



**85510-E**

**85510-J**

**85510-E** 1/4" SAE Can Tap Valve - Screw-On Model (European Standard)

**85510-J** R134a Can Tap Valve - Screw-On Model (Japanese Standard) M14-F x M10-FL-M



**MANUAL COUPLERS**



82834 82934



82834-E 82934-E

Patented manual couplers adjust easily to R134a service ports with varying dimensions. All metal construction for extra durability. Patented, spring loaded depressor will not damage service valves. Can be removed from service ports regardless of knob position without losing refrigerant. Meets SAE, UL and EPA requirements for containment of refrigerant. Color coded.

**PATENT# 5,370,359**

- 82834** High-Side Manual R134a 14 mm-F x 16 mm Quick Coupler
- 82934** Low-Side Manual R134a 14 mm-F x 13 mm Quick Coupler
- 82834-E** High-Side Manual R134a 1/4" FL-M x 16 mm Quick Coupler
- 82934-E** Low-Side Manual R134a 1/4" FL-M x 13 mm Quick Coupler
- 82834-3/8** High-Side Manual R134a 3/8" FL-M x 16 mm Quick Coupler
- 82934-3/8** Low-Side Manual R134a 3/8" FL-M x 13 mm Quick Coupler
- 82834-J** High-Side Manual R134a M12 x 1.75 x 16 mm Quick Coupler
- 82934-J** Low-Side Manual R134a M10 x 1.5 x 13 mm Quick Coupler
- 80034** O-ring for 16 mm Quick Coupler (10 pcs)
- 80134** O-ring for 13 mm Quick Coupler (10 pcs)

**SAFETY-LOCK MANUAL COUPLERS**



82834-SL 82934-SL

Mastercool's new safety-lock manual couplers are designed for use on all R134a systems. This unique design allows the technician to work on the system without the worry of accidentally disconnecting the hose regardless of movement. Once the coupler is connected to the system, the safety-lock sleeve slides into place guaranteeing that the coupler cannot be taken off without unscrewing the manual valve. Meets all SAE, UL and EPA requirements for containment of refrigerant. Color coded.

- 82834-SL** High Side Manual R134a Safety Lock Coupler 14 mm-F x 16 mm
- 82934-SL** Low Side Manual R134a Safety Lock Coupler 14 mm-F x 13 mm
- 82834-SL-E** High Side Manual R134a Safety Lock Coupler 1/4" FL-M x 16 mm
- 82934-SL-E** Low Side Manual R134a Safety Lock Coupler 1/4" FL-M x 13 mm
- 82834-SL-3/8** High Side Manual R134a Safety Lock Coupler 3/8" FL-M x 16 mm
- 82934-SL-3/8** Low Side Manual R134a Safety Lock Coupler 3/8" FL-M x 13 mm
- 82834-SL-J** High Side Manual R134a Safety Lock Coupler M12 x 1.75 x 16 mm
- 82934-SL-J** Low Side Manual R134a Safety Lock Coupler M10 x 1.5 x 13 mm
- 80034** O-ring for 16 mm Quick Coupler (10 pcs)
- 80134** O-ring for 13 mm Quick Coupler (10 pcs)

**E-Z SNAP™ COUPLERS**



82214 82224



82214-E 82224-E

This unique patented design easily snaps on and off the A/C systems service ports under any pressure. The E-Z Snap™ automatically adjusts to various service port dimensions allowing fast and immediate access into the A/C system. The swivel feature enables the user to easily access all service ports, even in the tightest quarters. Meets SAE, UL, and EPA requirements for containment of refrigerant.

**PATENT# 5,244,010**

- 82214** High-Side E-Z Snap R134a 14 mm-F x 16 mm Quick Coupler
- 82224** Low-Side E-Z Snap R134a 14 mm-F x 13 mm Quick Coupler
- 82214-E** High-Side E-Z Snap R134a 1/4" FL-M x 16 mm Quick Coupler
- 82224-E** Low-Side E-Z Snap R134a 1/4" FL-M x 13 mm Quick Coupler
- 82214-3/8** High-Side E-Z Snap R134a 3/8" FL-M x 16 mm Quick Coupler
- 82224-3/8** Low-Side E-Z Snap R134a 3/8" FL-M x 13 mm Quick Coupler
- 82214-J** High-Side E-Z Snap R134a M12 x 1.75 x 16 mm Quick Coupler
- 82224-J** Low-Side E-Z Snap R134a M10 x 1.5 x 13 mm Quick Coupler
- 80034** O-ring for 16 mm Quick Coupler (10 pcs)
- 80134** O-ring for 13 mm Quick Coupler (10 pcs)



**ECONOMY COUPLERS**



Specially designed to work in the tightest quarters. Attaches to your existing 1/4" flare hoses and snaps easily to A/C service ports.

- 66434-R** High Side R134a 1/4" FL-M x 16 mm Economy Coupler
- 66534-R** Low Side R134a 1/4" FL-M x 13 mm Economy Coupler
- 60034-10** O-ring for 66434 (10 pcs)
- 60134-10** O-ring for 66534 (10 pcs)

**R1234yf COUPLERS**



- High and low couplers with extended disconnect protection sleeve
- Meets SAE J639 & J2888
- Allows recovery of entire refrigerant, including the space between the coupler and fitting.

- 83834** High Side R1234yf Coupler
- 83934** Low Side R1234yf Coupler

**R134a EXTRA LONG COUPLERS**



Extra Long High Side R134a coupler used on BMW E60 (2003-2009 5 series), Volvo and Renault models. This extra long high side coupler can easily reach the service port.

- 82836** High Side Extra Long 14 mm-F x 16 mm
- 82836-E** High Side Extra Long 1/4" SAE-M x 16 mm

**MALE x MALE CONNECTORS**



- 82734** 14 mm-M x 1/4" FL-M (7/16-20") Connector
- 82735** 14 mm-M x M10 x 1.5-M Connector
- 82736** 14 mm-M x M12 x 1.75-M Connector
- 82738** 14 mm-M x 3/8" FL-M Connector
- 83341** O-Ring for 82733, 82734, 82735 and 82736
- 80234** O-Ring for 82634, 82634-M, 90364 and 90365

**FEMALE x MALE CONNECTORS**



- 82635** 1/2" ACME-F x 1/4" FL (7/16-20")-M R134a Adapter Coupler
- 82733** 14 mm-F x 1/2" ACME-M Connector
- 90364** 1/4" (7/16-20")-F x M10 x 1.5-M Adapter
- 90363** 5/16" (1/2-20 UNF)-F x 1/4" FL-M Connector
- 82634** 1/4" FL-F (7/16-20") x 1/2" ACME-M Connector
- 82634-M** 1/4" FL-F (7/16-20") x 1/2" ACME-M R134a Connector

**93000 SPRING LOCK COUPLING TOOL SET**



Four sizes 3/8" (#6), 1/2" (#8), 5/8" (#10) and 3/4" (#12) used on Fords and Chryslers. Durable spring loaded design for long life and reliable fit.

Set includes:

- |              |                |              |                  |
|--------------|----------------|--------------|------------------|
| <b>93098</b> | 3/8" (#6) Red  | <b>93100</b> | 5/8" (#10) Black |
| <b>93099</b> | 1/2" (#8) Blue | <b>93101</b> | 3/4" (#12) Beige |



## 90° ADAPTERS



A

B

	REPLACEMENT	GASKET/O-RING	DEPRESSOR
A	<b>90333-R</b> Shut-Off Valve 1/4" MFL x 1/4" FFL	90336	-
B	<b>90314*</b> 1/4" MFL x 1/4" FFL	42010	42014
B	<b>90340*</b> 1/4" MFL x 1/8" FFL (High Side) Ford 1977-1980	90341	90368
B	<b>90354*</b> 1/4" MFL x 3/16" FFL (High Side) GM 1976 & Later	90369	90368

## 45° ADAPTERS



C

	REPLACEMENT	GASKET/O-RING	DEPRESSOR
C	<b>90924</b> 1/4" MFL x 1/4" FFL	42010	42014
C	<b>90927*</b> 1/4" MFL x 3/16" FFL (High-Side)	90369	90368

## STRAIGHT ADAPTERS



D

E

F

G

H

I

J

K

	REPLACEMENT	GASKET/O-RING	DEPRESSOR
D	<b>82272*</b> R134a 1/2" ACME-F x 13 mm R134a (Low-Side)	85511	-
E	<b>82335</b> R134a Shut-Off Valve 1/2" ACME-M x 1/2" ACME-F	90336	-
E	<b>90335-R</b> Shut-Off Valve 1/4" MFL x 1/4" FFL	90336	-
E	<b>90337</b> Shut-Off Valve 1/4" MFL x 3/16" FFL	90331	-
F	<b>82634*</b> 1/4" FFL x 1/2" ACME-M	80234	-
F	<b>82634-M</b> 1/4" FFL x 1/2" ACME-M Without Core Valve	80234	-
G	<b>82734</b> 14 mm-M x 1/4" MFL	83341	-
H	<b>90358*</b> 1/4" MFL x 3/16" FFL (High-Side)	42010	42014
I	<b>90274</b> 1/4" MFL x 1/4" FFL Swivel	42010	42014
I	<b>90332**</b> 1/4" MFL x 1/4" FFL Anti-Blowback Fitting	42010	42014
I	<b>90357</b> 1/4" MFL x 3/16" FFL (High-Side) Swivel	90369	90368
I	<b>91084*</b> 1/4" MFL x 3/16" FFL (High-Side) Swivel Adapter GM 1976 & Later, Ford 1981 & Later	90369	90368
J	<b>90338*</b> GM 1991 & Later Service Adapter	90339	-
K	<b>90633</b> 1/4" MFL x 1/4" MFL Union	-	-
K	<b>82633</b> 1/2" ACME-M x 1/2" ACME-M Union	-	-

## 90413 STRAIGHT ADAPTER FITTING



Convert 1/4 to 5/16 SAE (1/2-20 UNF) swivel female nut with depressor.

## FLEX ADAPTERS



	REPLACEMENT	GASKET/O-RING	DEPRESSOR
L	<b>90355*</b> 1/4" MFL x 3/16" FFL (High-Side) GM 1976 & Later, Ford 1981 & Later	90369	90368
L	<b>90356*</b> 1/4" MFL x 1/4" FFL	42010	42014
L	<b>90373*</b> 1/4" MFL x 1/8" FFL (High-Side) Ford 1977-1980	90341	90368



**90410 FLEX ADAPTER**



Convert 1/4 SAE hose into 5/16 SAE, 1/2-20 UNF swivel connection for R410A.

**90411 FLEX ADAPTER WITH BALL VALVE**



Convert 1/4 SAE hose into 5/16 SAE, 1/2-20 UNF swivel connection for R410A.

**ACCESS SERVICE TOOLS**



		REPLACEMENT	GASKET/O-RING	DEPRESSOR
M	90296*	1/4" MFL x 1/8" NPT	-	-
M	80296*	1/2" ACME-M x 1/8" NPT	-	-

\* Includes Access Valve Core (0377-001) – (90-110 PSI Opening)

\*\* Includes Check Valve Core (0332-002) – (8-12 PSI Opening)

**RETROFIT ADAPTERS**

**82357 GM HIGH FLOW ADAPTER W/VALVE CORE & SERVICE PORT CAPS**



GM High Flow Adapter

**INDIVIDUAL TERMINATION (BLOCK OFF) CAPS**



81297	1/4 (7/16" - 20) alum.
81379	3/16 (3/8" - 24) alum.
82297	Low Side R134a blue cap
82379	High Side R134a red cap

**STRAIGHT ADAPTERS W/VALVE CORE & SERVICE PORT CAPS**



82274	Low Side, 1/4 (7/16" - 20) x 13 mm
82332	High Side, 1/4 (7/16" - 20) x 16 mm
82358	High Side, 3/16 (3/8" - 24) x 16 mm

**90° ADAPTERS W/VALVE CORE & SERVICE PORT CAPS**



82275	Low Side, 1/4 (7/16" - 20) x 13 mm
82333	High Side, 1/4 (7/16" - 20) x 16 mm
82354	High Side, 3/16 (3/8" - 24) x 16 mm



**91207 CHARGING AND DEPRESSOR ASSORTMENT**



Replacement gaskets, o-rings and depressors for charging hoses and adapters.

Consists of:

- 42010** 1/4" Gasket (3 pcs)
- 42014** 1/4" Depressor (3 pcs)
- 90368** 3/16" Depressor (3 pcs)
- 90369** 3/16" Gasket (3 pcs)
- 90341** 1/8" O-ring (3 pcs)

**91334 CHARGING ADAPTER REPAIR KIT**



55 piece assortment of replacement gaskets, o-rings and depressors for charging hoses and adapters.

Consists of:

- 42010** 1/4" Gasket (10 pcs)
- 42014** 1/4" Depressor (10 pcs)
- 90368** 3/16" Depressor (10 pcs)
- 90369** 3/16" Gasket (10 pcs)
- 90341** 1/8" O-ring (10 pcs)
- 92107** Quick Disconnect Gasket (5 pcs)

**91334-A R12/R134a CHARGING HOSE REPLACEMENT PARTS ASSORTMENT**



Consists of:

- 42010** 1/4" FL Gasket (10 pcs)
- 42014** 1/4" FL Depressor (5 pcs)
- 42016** Screw Type Depressor (5 pcs)
- 90336** Gasket for 90335 (5 pcs)
- 82010** Black Gasket for R134a Hose (10 pcs)
- 83341** O-Ring for R134a Hose (5 pcs)
- 80034-2** Black O-Ring for High Side (5 pcs)
- 80134-2** Black O-Ring for Low Side (5 pcs)

**85200 DELUXE A/C SERVICE REPAIR KIT**



Replacement gaskets, depressors, o-rings and nylon guides for charging hoses and adapters.

Consists of:

- 42010** 1/4" Gasket (10 pcs)
- 42014** 1/4" Depressor (10 pcs)
- 80034** O-ring for 82834 (10 pcs)
- 80034-1** High Side Nylon Guide (5 pcs)
- 80134** O-ring for 82934 (10 pcs)
- 80134-1** Low Side Nylon Guide (5 pcs)
- 82010** Gasket for R134a Hose (10 pcs)
- 82336** Gasket for 82335 (10 pcs)
- 83341** O-ring for R134a Hose (10 pcs)
- 90336** Gasket for 90335 Shut-off Valve (10 pcs)



**91335 MASTER A/C CHARGING ADAPTER REPAIR KIT**



126 piece assortment of replacement gaskets, o-rings and depressors for charging hoses and adapters. Also includes valve core removal tool and replacement valve cores.

Consists of:

- 42010** 1/4" Gasket (20 pcs)
- 42014** 1/4" Depressor (20 pcs)
- 90368** 3/16" Depressor (20 pcs)
- 90369** 3/16" Gasket (20 pcs)
- 90341** 1/8" O-ring (20 pcs)
- 92107** Quick Disconnect Gasket (10 pcs)
- 0377-001** Refrigeration Valve Core (10 pcs)
- 90378** GM Large Bore Valve Core (5 pcs)

**91336 FORD SPRING LOCK REPLACEMENT O-RING AND GARTER SPRING ASSORTMENT**



Compatible with R12 and R134a systems.

Consists of:

- 1336-006** #6 O-ring (10 pcs)
- 1336-008** #8 O-ring (10 pcs)
- 1336-010** #10 O-ring (10 pcs)
- 1336-012** #12 O-ring (10 pcs)
- 1336-016** #6 Garter Spring (5 pcs)
- 1336-018** #8 Garter Spring (5 pcs)
- 1336-110** #10 Garter Spring (5 pcs)
- 1336-112** #12 Garter Spring (5 pcs)

**91337 R12/R134a VALVE CORE REPAIR KIT**



Replacement valve cores for valve core removers & installers.

Consists of:

- 0377-001** Access Valve Core (20 pcs)
- 0378-001** Valve Core (10 pcs)
- 0531-001** R134a JRA High/Low Import Valve Core (10 pcs)
- 0768-001** R134a Domestic High Flow Valve Core M8 (5 pcs)
- 0769-001** R134a Domestic High Flow Valve Core M10 (5 pcs)
- 81290** R12/R134a Valve Core Remover/Installer (1 pc)

**91339 AUTOMOTIVE R12 & R134a O-RING ASSORTMENT (270 PIECE HNBR)**



Consists of:

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li><b>91339-01</b> 7/32" x 1/6"<br/>(5.29 x 1.78 mm) (25 pcs)</li> <li><b>91339-02</b> 1/4" x 1/16"<br/>(6.07 x 1.78 mm) (20 pcs)</li> <li><b>91339-03</b> 6.8 x 1.9 mm (20 pcs)</li> <li><b>91339-04</b> 5/16" x 1/16"<br/>(7.65 x 1.78 mm) (20 pcs)</li> <li><b>91339-05</b> 7.8 x 1.9 mm (20 pcs)</li> <li><b>91339-06</b> 8 x 2 mm (20 pcs)</li> <li><b>91339-07</b> 8.8 x 1.9 mm (20 pcs)</li> <li><b>91339-08</b> 7/16" x 1/16"<br/>(10.82 x 1.78 mm) (15 pcs)</li> <li><b>91339-09</b> 7/16" x 3/32"<br/>(10.77 x 2.62 mm) (15 pcs)</li> </ul> | <ul style="list-style-type: none"> <li><b>91339-10</b> 11 x 2 mm (15 pcs)</li> <li><b>91339-11</b> 12 x 2 mm (15 pcs)</li> <li><b>91339-12</b> 13.9 x 1.8 mm (10 pcs)</li> <li><b>91339-13</b> 9/16" x 3/32"<br/>(13.95 x 2.62 mm) (10 pcs)</li> <li><b>91339-14</b> 14 x 2 mm (10 pcs)</li> <li><b>91339-15</b> 15 x 2 (10 pcs)</li> <li><b>91339-16</b> 17 x 2 (10 pcs)</li> <li><b>91339-17</b> 11/16" x 1/16"<br/>(17.17 x 1.78 mm) (10 pcs)</li> <li><b>91339-18</b> 11/16" x 1/8"<br/>(17.04 x 3.53 mm) (10 pcs)</li> </ul> |
|---|---|



**58490 UNIVERSAL R12/R134a MASTER KIT**



Kit covers all R12 & R134a system valve cores for Standard, JRA, Eaton and GM Large Bore.  
**PATENT# 6,253,436**



**VALVE CORE REMOVERS**



**81290 R134a UNIVERSAL LARGE BORE REMOVER**

Used on R12/R134a Standard and JRA/EATON Large Bore R134a Valve Cores.

**91290 UNIVERSAL VALVE CORE REMOVER**

Double ended for easy replacement of Standard and GM R12 Large Bore Valve Cores.

**81490 R134a VALVE CORE REMOVER AND INSTALLER**



- For 13 mm and 16 mm high and low service port standard type valve
- Built-in ball valve retains charge and allows access to A/C system
- Excellent for replacing Valve Cores without discharging the system and for speeding recovery and recharging large systems

**90376 VALVE CORE REMOVER W/VALVE CORES FOR R12**



Quickly removes valve cores. Storage area includes six replacement access valve cores.

**90377** Replacement Standard Valve Cores for 90376 (6 pcs of 0377-001)

**91490 STANDARD VALVE CORE REMOVER/INSTALLER**



Sturdy ball valve design controls refrigerant flow with 1/4 turn of the valve lever. Lever position also gives visual indication of whether valve is opened or closed.

**91496** Valve Core Remover/Installer with 1/4" MFL side port

**91498 UNIVERSAL VALVE CORE REMOVER/INSTALLER KIT**



**(for High Pressure Refrigerants) (410A)** Newly designed with patented locking mechanism, the 91498 is the only valve core remover kit that has a safety nut allowing the technician to freely access the valve core without fighting high pressures. Packaged in a blow molded carrying case, this kit also offers 1/2"-20 UNF and 1/4" flare fittings for all refrigerant applications.  
**PATENT# 6,253,436**



**91499 SUPERHEAT DETERMINATION SET (HVAC)**



Special valve core remover/installer adapter allows replacement of damaged or faulty service valve cores without recharging the system. Valve replacement no longer requires time consuming refrigerant recovery. Calculation of superheat with excellent accuracy by reading refrigerant temperature and pressure from the same location in the system.



# MEASURE & TEST INSTRUMENTS

**THE COMPLETE A/C DIAGNOSTIC TOOL**



52251



52270



52280

Mastercool's new A/C System Analyzer is an all-in-one tool that not only calculates critical information for the air conditioning system but also diagnoses basic system problems. The LCD display leads the technician through basic tests making service quicker and less complicated. The A/C System Analyzer is able to calculate: Actual Superheat, Subcool, Target Superheat, Temperature Split, Dry Bulb, Wet Bulb, Relative Humidity, Dew Point, Air Velocity and Air Flow Volume. The A/C System Analyzer easily guides the technician in determining if the refrigerant charge is correct. No calculations or charts are needed. Easily save test results under a customer and technician name and even download the data for future reference.



**FEATURES:**

- Calculates actual superheat and subcool temperatures for the following refrigerants: R22, R114, R123, R124, R134a, R141B, R142B, R401A, R401B, R404A, R407A, R407B, R407C, R407D, R408A, R409A, R410A, R411A, R411B, R414A, R414B, R417A, R507A
- Provides all the functions of a high-end anemometer: airflow volume, air velocity, dry bulb temperature, wet bulb temperature, relative humidity and dew point
- Save results and download in Excel format for future use
- Optional Pressure Transducer for direct system readings
- Optional Antenna Type Meter for any hard to reach locations

**SPECIFICATIONS:**

- Operating Temperature: 0 to 50°C (32 to 122°F), humidity <80%
- Storage Temperature: -20 to 50°C (-4 to 122°F), humidity <90%
- Dimensions with boot: 191mm x 93 mm x 41 mm
- Weight: (meter w/ batteries & round vane) 500 g
- Temperature Display: °F and °C
- Pressure Display: PSI and Bar
- Backlit LCD Display
- Low battery indicator
- K-type thermocouple connection
- USB connection
- 6 AA batteries

All models available in multiple languages.

Please add the suffix below to the part number for the corresponding languages

- ES : English and Spanish
- EG : English and German
- EF : English and French
- EI : English and Italian
- EP : English and Portuguese

Part #	52251 System Analyzer	52253 Round Vane	52254 Antenna Type Meter (extends to 37")	52336 3 Ft. Clamp-on Thermocouple	52252 Pressure Transducer
<b>SYSTEM ANALYZER KITS</b> in a blow molded plastic box					
52255	✓	✓	-	✓	-
52260	✓	-	✓	✓	-
52270	✓	✓	-	✓	✓
52280	✓	-	✓	✓	✓



**52253 ROUND VANE**



**Temp. Range/Resolution/Accuracy:**

- -20 to 60°C (-4 to 140°F)
- 0.1°C (0.2°F)
- ±0.6°C (1.1°F) (-20 to 50°C (-4 to 122°F), ±1.2°C (2.2°F) at other range

**Humidity Range/Resolution/Accuracy:**

- 0.1% to 99.9% RH
- 0.1% RH
- ±3% RH (at 25°C (77°F), 10 to 90% RH), ±5% RH at other range

**Windspeed Range/Resolution/Accuracy:**

- 0.6 to 32 m/s
- 0.1 m/s
- ±2% of full scale



Just two measurements with the probe will give the target temperature split and actual temperature split across the evaporator and compare the two.

**52254 ANTENNA TYPE METER**



**Temp. Range/Resolution/Accuracy:**

- -20 to 60°C (-4 to 140°F)
- 0.1°C (0.2°F)
- ±0.6°C (1.1°F) (-20 to 50°C (-4 to 122°F), ±1.2°C (2.2°F) at other range

**Humidity Range/Resolution/Accuracy:**


- 0.1% to 99.9% RH
- 0.1% RH
- ±3% RH (at 25°C (77°F), 10 to 90% RH), ±5% RH at other range

**Windspeed Range/Resolution/Accuracy:**

- 0.5 to 25 m/s
- 0.1 m/s
- ±(2% of reading +0.3 m/s)

Probe will measure dry bulb, wet bulb, relative humidity, dew point, air velocity and air volume.

Get target superheat temperature by following instructions for two simple measurements with the probe.

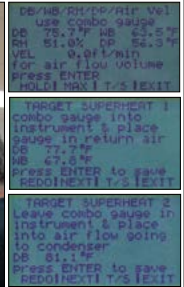


**52252 PRESSURE TRANSDUCER**



- Operating Pressure Range: 0-750 psi (0-52 bar)
- 1/4 FL Swivel nut connection
- Accuracy: ±0.5, ±1% F.S.
- Operating Temperature: -40 to 100°C (-40 to 212°F)
- Certification: CE, Explosion-proof D
- EMC: EN50081-1/-2; EMS: EN50082-2



Pressure transducer and thermocouple will measure saturated temperature and actual temperature, to calculate actual superheat and subcool temperature.



System will compare target and actual superheat.

**52336 CLAMP-ON THERMOCOUPLE (extends 3 ft (1 M))**



**Temp. Range/Resolution**

- -40 to 121°C (-40 to 250°F)
- 0.1°C (0.2°F)

**52337** Clamp-On Thermocouple (extends 10 ft (3 M))



**52246 COMPACT SUBCOOL/SUPERHEAT CALCULATOR**



ACHIEVE SUBCOOL OR SUPERHEAT READINGS IN 3 EASY STEPS...


- 1.) Enter refrigerant
- 2.) Enter pressure from gauges
- 3.) Clamp thermocouple on proper tube

**FEATURES:**

- Pre-programmed with 37 popular refrigerants
- Clamp-on K-Type thermocouple included to achieve accurate temperature measurement
- View bubble and dew temperature for corresponding pressure on large LCD display
- Easily select superheat or subcool temperature with a touch of a button
- Easily look up saturated temperature using the pressure from any gauge set
- Hold function keeps data on the LCD even when thermocouple is disconnected

**SPECIFICATIONS:**

- 37 Refrigerants (R22, R32, R114, R123, R124, R134, R134a, R141B, R142B, R290, R401A, R401B, R404A, R407A, R407B, R407C, R407D, R407F, R408A, R409A, R410A, R411A, R411B, R414A, R414B, R417A, R421A, R422A, R422B, R422C, R422D, R427A, R434A, R437A, R438A, R441A, R507A)
- °F or °C Temperature
- Displays Bubble, Saturated and Dew Point Temperatures
- Pressure displays in Kg/cm<sup>2</sup>, MPa, Bar, PSI (0-600 PSI)



**52236 AIRFLOW+PSYCHROMETER**



Reads Humidity, Air Temp., Dew Point, Wet Bulb, Air Velocity, Air Volume & BTU. The sensor is built into the remote fan and is protected by a rotating cap.

**FEATURES:**

- Auto-off with disabling capability
- Metric & inch unit selection
- Tripod mountable for extended use
- Microprocessor circuitry
- Professional remote vane
- Large backlit LCD display
- Fast response & accurate reading
- Dew Point & Wet Bulb
- 4 AAA batteries
- Low battery indicator

**SPECIFICATIONS:**

- *Temperature:* -4 to 140°F (-20 to 60°C)  
Accuracy: ±1°F (±0.6°C)
- *Relative Humidity:* 0 to 100% RH  
Accuracy: ±3% at 10 to 90% RH (cal. temp.) ±5% at other range
- *Dew Point:* -90 to 158°F (-68 to 70°C)
- *Wet Bulb Temperature:* -7.6 to 158°F (-22 to 70°C)
- *Air Velocity:* 0.3 to 35 m/s (1 to 114 ft/s)
- *Air Volume:* 0 to 99999 m<sup>3</sup>/s (0 to 99999 cfm)

**52237** Data Logger CD & USB Cable for use with 52236 AirFlow+Psychrometer



**52230 PEN TYPE HYGROMETER**



- Rotating cap to protect sensor
- Temperature and humidity in °F or °C
- Data Hold to capture readings
- LCD digital display
- Max/Min record function
- Auto-off function

**SPECIFICATIONS:**

Size: 6.8" x 1.6" x 0.6" (17 x 4 x 1.5 cm)  
 Sensor: Electronic Capacitance Polymer Film  
 Temp. Range: -4 to 140°F (-20 to 60°C)  
 RH Range: 0 to 100%  
 Accuracy: ±3% from 10 to 95% RH at 77°F (25°C) / ±1% from other RH range  
 Resolution: 0.1°F / 0.1°C / 0.1%  
 Storage Temp.: 14 to 140°F (-10 to 60°C) / Storage RH%: <95%  
 Battery: (1) CR2032 (Lithium Coin Cell) / Battery Life: 100 hrs.





**52233 DIGITAL PSYCHROMETER**



- Rotating cap to protect sensor
- LCD digital display
- Low battery indicator
- Max/Min record function
- Auto Power Off with disabling capability
- External Temp. probe (optional)
- Data Hold to capture readings
- Fast response, Accurate reading
- Microprocessor circuitry for reliability

**SPECIFICATIONS:**

Temp. Range: -4 to 122°F (-20 to 50°C)  
 RH% Range: 0 to 100% RH  
 Wet Bulb Range: -6.88 to 122°F (-21.6 to 50.0°C)  
 Dew Point Range: -109.7 to 122°F (-78.7 to 50.0°C)  
 Ext Temp. Range: -4 to 158°F (-20 to 70°C)  
 Accuracy: RH% 3% at 77°F (25°C)/Temp: 1°F (0.6°C)  
 Response Time: 60 seconds  
 Pocket Size: 0.9" (h) x 1.9" (w) x 7.0" (l) (2 x 5 x 18 cm)  
 Power: (2) 1.5V AAA battery

**52231** Probe for 52233



**52238 DIGITAL SOUND LEVEL METER**



- Automatic or manual ranging
- 4 measurement ranges from 40 to 130 dB
- 0.1dB resolution
- Select fast or slow response times
- Select A or C weighting
- Maximum hold function
- Record maximum or minimum measurements
- Jacks provide AC analog output

**52240 PROFESSIONAL HVAC/R CLAMP METER**



- Multi-Function: Frequency count, diode check and alarm
- Current: (AC) 20 MA - 600A
- Voltage: AC 200 mv - 750V / DC 1V-1000V
- Auto Power OFF
- Frequency: 10Hz - 2KHZ
- Ohms: (Resistance) 200m ohm-20K ohm
- Peak data hold
- Unit and sign display

**SALT SOLUTION BOTTLE**



for calibrating 52230 Pen Type Hygrometer and 52233 Digital Psychrometer

**52733** Salt Solution Bottle 33% (Dark Brown Bottle)

**52775** Salt Solution Bottle 75% (Blue Bottle)



**52224-A INFRARED THERMOMETER WITH LASER**



The 52224-A offers laser targeting accuracy, enhanced backlit LCD Display and an expanded temperature range. The compact design is simple to use and easy to store.



**SPECIFICATIONS:**

Non-Contact Temperature Range: -50 to 500°C (-58 to 932°F)  
 Field of View: 12 : 1  
 Display Illumination: Backlit LCD Color Display  
 Target Indicator: Single Laser Spot  
 Emissivity: 0.95  
 Resolution: 0.5°F / 0.5°C  
 Accuracy: ±2°C (4°F) or ±2% of reading  
 Response Time: 0.5 seconds  
 Power Off: Automatic after 15 seconds  
 Battery Life: Approximately 180 hours  
 Included Accessories: 2 AAA batteries, instruction manual, plastic molded carrying case



**52224-C INFRARED THERMOMETER WITH DUAL LASER**



Features both infrared and dual laser technologies.



**SPECIFICATIONS:**

Non-Contact Temperature Range: -60 to 550°C (-76 to 1022°F)  
 Field of View: 12 : 1  
 Display Illumination: Backlit LCD Color Display  
 Target Indicator: Dual Laser Spot  
 Emissivity: 0.95  
 Resolution: 0.1°F / 0.1°C  
 Accuracy: ±2°C (4°F) or ±2% of reading  
 Response Time: 1 second  
 Power Off: Automatic after 15 seconds  
 Battery Life: Approximately 180 hours  
 Included Accessories: 2 AAA batteries, instruction manual, plastic molded carrying case



**52224-D MULTI-LASER INFRARED THERMOMETER**



The multi-laser infrared thermometer safely monitor hot, hazardous, or hard to reach materials without contamination or damage to the surface. Simply point at target, pull the trigger, and read the temperature.



**SPECIFICATIONS:**

Measurement Range: -60 to 760°C (-76 to 1400°F)  
 Field of View: 12 : 1 (90% energy covered)  
 Display Illumination: Backlit LCD Color Display  
 Target Indicator: Eight Laser  
 Emissivity: 0.95 fixed  
 Resolution: 0.1°C/0.1°F at -76 to 999.9 (°C/°F), otherwise 1°C/1°F  
 Modes: E, MAX, MIN, DIF and AVG  
 Accuracy: (Tobj=15-35°C, Tamb=25°C): +/-1.0°C (1.8°F)  
 (Tamb=23 +/- 3°C): 0-550°C: +/-2% of reading or 2°C (4°F) whichever is greater  
 -60-0°C: +/- (2°C+0.05/degree)  
 Response Time (90%): 1 second  
 Battery Life: Typ.12, min 9 hours continuous use (Alkaline, with Laser and Back Light.)  
 Included Accessories: 2 AAA batteries, instruction manual, plastic molded carrying case



**52225-A DUAL TEMP PLUS INFRARED THERMOMETER**



3 ft. (1m) Wire Thermocouple Included

Features both infrared and contact thermometer technologies. Includes programmable HI/LO alarms and Lock Mode to capture temperature readings. The contact function offers a built-in K type jack and wire thermocouple.

**SPECIFICATIONS:**

Non-Contact Temperature Range:	-60 to 760°C (-76 to 1400°F)
Thermocouple Temperature Range:	-64 to 1400°C (-83 to 1999°F)
Field of View:	30 : 1
Display Illumination:	Backlit LCD display
Target Indicator:	Single Laser Spot
Emissivity:	0.10 (10E) to 1.0 (100E)
Resolution:	0.1°F / 0.1°C
Modes:	MIN, MAX, DIFF & AVG
Accuracy:	±2°C (4°F) or ±2% of reading
Response Time:	1 second
Power Off:	Automatic after 15 seconds
Battery Life:	Approximately 180 hours
Included Accessories:	2 AAA batteries, 1m thermocouple probe, instruction manual, plastic molded carrying case
Optional Accessories:	3 m Wire Thermocouple Probe, Piercing Penetration Probe, Surface Probe, Air Probe



MEASURE AND TEST INSTRUMENTS

**52225-B ULTRA TEMP DUAL LASER THERMOMETER**



Optional Wire Thermocouple

Features both infrared and contact thermometer technologies. Includes programmable HI/LO alarms, and Lock Mode to capture temperature readings. The built-in K type jack offers optional contact functions. Illuminates working area with built-in LED light.

**SPECIFICATIONS:**

Non-Contact Temperature Range:	-60 to 1000°C (-76 to 1832°F)
Thermocouple Temperature Range:	-64 to 1400°C (-83 to 1999°F)
Field of View:	50 : 1
Display Illumination:	Backlit LCD display
Target Indicator:	Dual Laser Spot
Emissivity:	0.95
Resolution:	0.1°F / 0.1°C
Modes:	MIN, MAX, DIFF & AVG
Accuracy:	±2°C (4°F) or ±2% of reading
Response Time:	1 second
Power Off:	Automatic after 15 seconds
Battery Life:	Approximately 180 hours
Included Accessories:	2 AAA batteries, instruction manual, plastic molded carrying case
Optional Accessories:	1 m, 3 m Wire Thermocouple Probes, Piercing Penetration Probe, Surface Probe, Air Probe




**TAKE TEMPERATURE MEASURING TO ANOTHER LEVEL  
WITH MASTERCool'S NEW THERMAL IMAGING CAMERA...**



- Fully Automatic
- Focus Free
- Superior Measurement/Accuracy
- Micro SD Card Storage
- Reporting Software Included

**SPECIFICATIONS:**

Thermal Image 82 x 62 pixels  
 Resolution:  
 Measurement Range: -20 to 350°C (-4 to 662°F)  
 Accuracy ±2% of reading, or 2°C (4°F) whichever  
 (Tamb=20~26°C): is greater  
 Thermal Sensitivity: 0.1°C (0.1°F)  
 Frame Rate: 9 Hz  
 Field of View: 40 x 30 deg  
 Emissivity Range: 0.95 default – adjustable 0.1 to 1 step .01  
 Focus: Focus free  
 LCD (inch): 2.8" (71 mm)  
 LCD Type: Color  
 Image Storage: Stores up to 20,000 images, BMP format  
 Memory Type: Support 8G micro SD card  
 Spectral Range: 8 to 14 um  
 Interface: USB  
 Battery Type: (4) AA  
 Battery Life (with  
 backlit): 3 hrs continuous use  
 Dimensions: 94.65 x 74.03 x 233.68 mm  
 (3.73 x 2.91 x 9.20 inch)  
 Weight: 0.10 kg (13.8 oz)



Electrical/Mechanical



Solar

**52350** Thermal Imaging Camera with carry case, 8 gb micro SD card, CD, USB cord, batteries and instructions

**52300 THERMAL IMAGING CAMERA**

with carry case, 8 gb micro SD card, CD, USB cord, batteries and instructions



- Fully Automatic
- Focus Free
- Superior Measurement/Accuracy
- Micro SD Card Storage
- Reporting Software Included

**SPECIFICATIONS:**

Thermal Image 32 x 31 pixels  
 Resolution:  
 Measurement Range: -20 to 350°C (-4 to 662°F)  
 Accuracy (Tamb=20 to 26°C): ±2% of reading, or 2°C (4°F) whichever  
 is greater  
 Thermal Sensitivity: 0.1°C (0.1°F)  
 Frame Rate: 9 Hz  
 Field of View: 33 x 33 deg  
 Emissivity Range: 0.95 default – adjustable 0.1 to 1  
 step 0.1  
 Focus: Focus free  
 LCD Size: 2.8" (71 mm)  
 LCD: Color  
 Image Storage: Stores up to 25,000 images, BMP format  
 Memory Type: Support 8G micro SD card  
 Sensor Filter: 8 to 14 um  
 Interface: USB  
 Battery Type: (4) AA  
 Battery Life (with  
 backlit): 6 hours continuous use  
 Dimensions: 94.65 x 74.03 x 233.68 mm  
 (3.73 x 2.91 x 9.20 inch)  
 Weight: 0.4 kg (14.1 oz)



Building Diagnostics



HVAC



**52226 DUAL TEMP INFRARED/PROBE THERMOMETER**



The 52226 Dual Temp Thermometer offers both infrared and contact probe technologies.

- Infrared Temp Range: -67 to 428°F (-55 to 220°C)
- Probe Temp Range: -67 to 626°F (-55 to 330°C)
- Field of View Ratio 1 : 1
- Adjustable Emissivity
- Lock Mode for hands free scanning
- Minimum/Maximum capture mode
- Contact Probe locks safely on the side of the unit

**52227 POCKET INFRARED THERMOMETER**



The 52227 Pocket Infrared Thermometer offers accurate non-contact temperature measurement in a compact and easy to use size.

- Temp Range: -67 to 428°F (-55 to 220°C)
- Field of View Ratio 1 : 1
- Adjustable Emissivity
- Backlit LCD Display
- Minimum/Maximum capture mode



**52228 DIGITAL DIFFERENTIAL THERMOMETER**



The 52228 Digital Differential Thermometer provides instant measurements of TWO points. (T1, T2) and T1 – T2.

- Max Hold Function
- Data Hold Function
- Temperature in °F or °C
- AUX Output Jacks
- T1 – T2 Differential
- Temp. Range: -50 to 1999°F (-50 to 1300°C)
- Type K Thermocouple Input
- Resolution: 1°F (1°C)
- Includes two 3 ft (1m) Thermocouple Probes

**52229 HANDHELD WATERPROOF DIGITAL THERMOMETER**



- Measuring Range: -58 to 572°F / -50 to 300°C
- Wide Measurement Range
- Maximum/Minimum temperature memory
- Celsius and Fahrenheit exchange
- Data hold function
- High/Low temperature alarm setting
- Key tone for operation confirmation
- Stainless steel probe
- Foldaway stand

MEASURE AND TEST INSTRUMENTS



**POCKET ANALOG DESIGNS**



All thermometers include pocket holder and clip.

Item#	Dial Size	Temperature Scale
52220-C	25 mm	-10 to 100°C
52161	35 mm	-40 to 70°C (-40 to 160°F)
91120	44.5 mm	0 to 220°F


**POCKET DIGITAL DESIGN**



All thermometers include pocket holder and clip.  
 Battery operated, (on/off and auto shut-off after 10 minutes)  
 • ±1°C Accuracy  
 • 0.1°C Resolution


Item#	Dial Size	Temperature Scale
52223-A	25 mm	-50 to 150°C (-58 to 302°F)

**OPTIONAL THERMOCOUPLE PROBES**

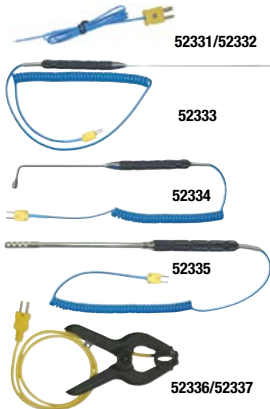

52331	Wire Probe - 3 ft (1 m)
52332	Wire Probe - 10 ft (3 m)
52333	Piercing Penetration Probe w/coil cord
52334	Surface Probe w/coil cord
52335	Air Probe w/coil cord
52336	Clamp-On Probe - 3 ft (1 m)
52337	Clamp-On Probe - 10 ft (3 m)


# VACUUM PUMPS

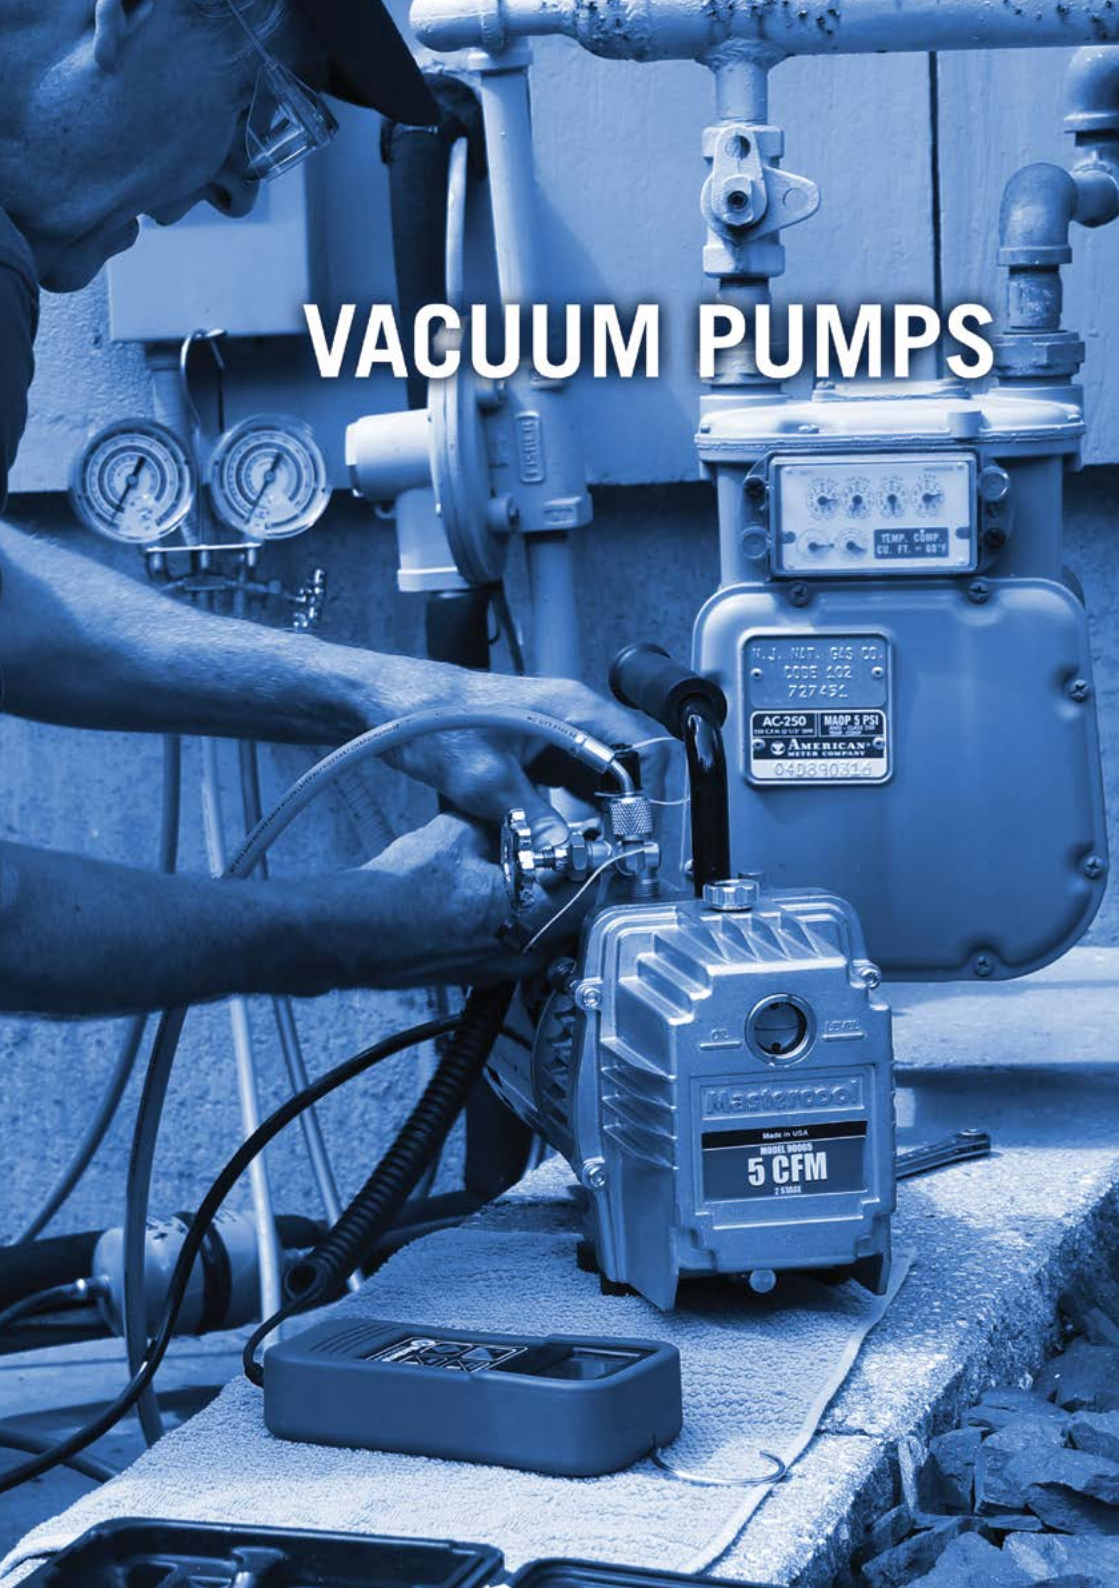


## 2 STAGE ELITE BALL BEARING DESIGN VACUUM PUMPS



A good quality vacuum pump is an integral tool for complete A/C service. Mastercool vacuum pumps are durable and time tested. They stand up to the most grueling conditions and will provide years of reliable service. Mastercool offers a complete selection of pumps. Regardless of your service requirements, Mastercool has a model for your application.



**Ball Bearing Cartridge Design**  
reduces running temperatures by 30% and extends the life of the pump.

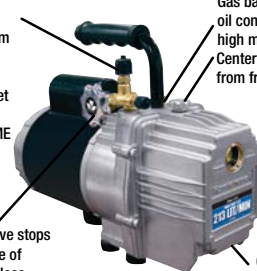

**Manifold valve** isolates pump from the system when testing for leaks. Includes three inlet ports – 1/4", 3/8" SAE and 1/2" ACME on 5 and 7.5 CFM models

**Internal check valve** stops oil blowout in case of accidental power loss

**Gas ballast valve** helps prevent oil contamination caused by high moisture

**Center oil fill port** is accessible from front as well as sides

**Durable lightweight die cast aluminum housing**

**Two-stage design** allows lower pumping pressure resulting in deeper ultimate vacuum

**Oil drain valve** positioned at bottom of oil reservoir assures maximum drainage



### 119 LIT/MIN - 142 LIT/MIN - 5 CFM VACUUM PUMP

\*Japanese Standard



MODEL	90065-220	90065	90065-J*
<b>NO. OF STAGES</b>	2	2	2
<b>FREE AIR DISPLACEMENT</b>	119 lit/min 142 lit/min	5 CFM	119 lit/min 142 lit/min
<b>ULTIMATE VACUUM</b>	25 Microns	25 Microns	25 Microns
<b>MOTOR</b>	1/3 HP	1/3 HP	1/3 HP
<b>PUMP SPEED</b>	1425 RPM 1725 RPM	1425 RPM 1725 RPM	1425 RPM 1725 RPM
<b>ELECTRICAL SPECS</b>	220 V / 50 HZ 220 V / 60 HZ	110 V / 60 HZ	100 V / 50/60 HZ
<b>WEIGHT</b>	13.2 kg (29 lbs)	13.2 kg (29 lbs)	13.2 kg (29 lbs)
<b>DIMENSIONS IN CM</b>	37 x 15.5 x 27.5 x 24	37 x 15.5 x 27.5 x 24	37 x 15.5 x 27.5 x 24

### 178 LIT/MIN - 213 LIT/MIN - 7 CFM VACUUM PUMP

\*Japanese Standard



MODEL	90067-220	90067	90067-J*
<b>NO. OF STAGES</b>	2	2	2
<b>FREE AIR DISPLACEMENT</b>	178 lit/min 213 lit/min	7.5 CFM	178 lit/min 213 lit/min
<b>ULTIMATE VACUUM</b>	25 Microns	25 Microns	25 Microns
<b>MOTOR</b>	1/2 HP	1/2 HP	1/2 HP
<b>PUMP SPEED</b>	1425 RPM 1725 RPM	1425 RPM 1725 RPM	1425 RPM 1725 RPM
<b>ELECTRICAL SPECS</b>	220 V / 50 HZ 220 V / 60 HZ	110 V / 60 HZ	100 V / 50/60 HZ
<b>WEIGHT</b>	16.0 kg (35.5 lbs)	16.0 kg (35.5 lbs)	16.0 kg (35.5 lbs)
<b>DIMENSIONS IN CM</b>	41 x 15.5 x 27.5 x 24	41 x 15.5 x 27.5 x 24	41 x 15.5 x 27.5 x 24





## 2 STAGE DUAL VOLTAGE VACUUM PUMPS

- New U.S. Design
- Stronger Motor
- Field Serviceable



### 70 LIT/MIN - 58 LIT/MIN - 3 CFM DUAL VOLTAGE VACUUM PUMP



MODEL	90063-2V-110-B	90063-2V-220-B
NO. OF STAGES	2	2
FREE AIR DISPLACEMENT	3 CFM	70 lit/min (60Hz) 58 lit/min (50Hz)
ULTIMATE VACUUM	15 Microns	15 Microns
MOTOR	1/3 HP	1/3 HP
PUMP SPEED	1720 RPM	1440 RPM
ELECTRICAL SPECS	110/120 V, 60 HZ	220 V, 50/60 HZ
POWER CORD	110 V Cable (US Standard)	220 V Cable (Schuko)
WEIGHT	7 kg (15.43 lbs)	7 kg (15.43 lbs)
DIMENSIONS IN CM	27 x 15 x 25	27 x 15 x 25

### 170 LIT/MIN - 142 LIT/MIN - 6 CFM DUAL VOLTAGE VACUUM PUMP



MODEL	90066-2V-110-B	90066-2V-220-B
NO. OF STAGES	2	2
FREE AIR DISPLACEMENT	6 CFM	170 lit/min (60Hz) 142 lit/min (50Hz)
ULTIMATE VACUUM	15 Microns	15 Microns
MOTOR	1/2 HP	1/2 HP
PUMP SPEED	1720 RPM	1440 RPM
ELECTRICAL SPECS	110/120 V, 60 HZ	220 V, 50/60 HZ
POWER CORD	110 V Cable (US Standard)	220 V Cable (Schuko)
WEIGHT	11 kg (24.25 lbs)	11 kg (24.25 lbs)
DIMENSIONS IN CM	37.9 x 16.7 x 27.5	37.9 x 16.7 x 27.5

### 227 LIT/MIN - 189 LIT/MIN - 8 CFM DUAL VOLTAGE VACUUM PUMP



MODEL	90068-2V-110-B	90068-2V-220-B
NO. OF STAGES	2	2
FREE AIR DISPLACEMENT	8 CFM	227 lit/min (60Hz) 189 lit/min (50Hz)
ULTIMATE VACUUM	15 Microns	15 Microns
MOTOR	3/4 HP	3/4 HP
PUMP SPEED	1720 RPM	1440 RPM
ELECTRICAL SPECS	110/120 V, 60 HZ	220 V, 50/60 HZ
POWER CORD	110 V Cable (US Standard)	220 V Cable (Schuko)
WEIGHT	15.43 kg (34 lbs)	15.43 kg (34 lbs)
DIMENSIONS IN CM	38 x 18 x 27	38 x 18 x 27

### 340 LIT/MIN - 283 LIT/MIN - 12 CFM DUAL VOLTAGE VACUUM PUMP



MODEL	90612-2V-110-B	90612-2V-220-B
NO. OF STAGES	2	2
FREE AIR DISPLACEMENT	12 CFM	340 lit/min (60Hz) 283 lit/min (50Hz)
ULTIMATE VACUUM	15 Microns	15 Microns
MOTOR	1 HP	1 HP
PUMP SPEED	1720 RPM	1440 RPM
ELECTRICAL SPECS	110/120 V, 60 HZ	220 V, 50/60 HZ
POWER CORD	110 V Cable (US Standard)	220 V Cable (Schuko)
WEIGHT	15.88 kg (35 lbs)	15.88 kg (35 lbs)
DIMENSIONS IN CM	39 x 18 x 27	39 x 18 x 27



**2 STAGE VACUUM PUMPS WITH SOLENOID VALVE**



**DUAL VOLTAGE SERIES WITH SOLENOID VALVE**



MODEL	90063-2V-220SVB	90066-2V-220SVB	90068-2V-220SVB	90612-2V-220SVB
NO. OF STAGES	2	2	2	2
FREE AIR DISPLACEMENT	70 lit/min (60Hz), 58 lit/min (50Hz)	170 lit/min (60Hz), 142 lit/min (50Hz)	227 lit/min (60Hz), 189 lit/min (50Hz)	340 lit/min (60Hz), 283 lit/min (50Hz)
ULTIMATE VACUUM	15 Microns	15 Microns	15 Microns	15 Microns
MOTOR	1/3 HP	1/2 HP	3/4 HP	1 HP
PUMP SPEED	1440 RPM	1440 RPM	1440 RPM	1440 RPM
ELECTRICAL SPECS	220 V, 50/60 HZ	220 V, 50/60 HZ	220 V, 50/60 HZ	220 V, 50/60 HZ
POWER CORD	220 V Cable (Schuko)	220 V Cable (Schuko)	220 V Cable (Schuko)	220 V Cable (Schuko)
WEIGHT	7.37 kg (16.2 lbs)	11.33 kg (25 lbs)	15.76 kg (34.75 lbs)	16.32 kg (36 lbs)

**ELITE BALL BEARING DESIGN WITH SOLENOID VALVE**



MODEL	90065-220-SV	90067-220-SV
NO. OF STAGES	2	2
FREE AIR DISPLACEMENT	119 lit/min, 142 lit/min	178 lit/min, 213 lit/min
ULTIMATE VACUUM	25 Microns	25 Microns
MOTOR	1/3 HP	1/2 HP
PUMP SPEED	1425 RPM 1725 RPM	1425 RPM 1725 RPM
ELECTRICAL SPECS	220 V / 50 HZ, 220 V / 60 HZ	220 V / 50 HZ, 220 V / 60 HZ
POWER CORD	220 V Cable (Schuko)	220 V Cable (Schuko)
WEIGHT	13.6 kg (30 lbs)	17 kg (36.5 lbs)

**90066-SV-220 UNIVERSAL SOLENOID VALVE AND GAUGE ASSEMBLY**



Mastercool's universal solenoid valve and gauge assembly can be assembled on any vacuum pump for protection of pump and systems with full control by solenoid valve. Gauge assembly will also allow for vacuum leak test.

- 3/8 NPT vacuum connection port
- 1/4" flare hose connection port

\*Note: Some internal wiring assembly necessary

**90066-SV-G** Replacement gauge for universal solenoid valve and gauge assembly

**SINGLE STAGE VACUUM PUMPS**



**42 LIT/MIN - 35 LIT/MIN / 1.8 CFM SINGLE STAGE VACUUM PUMP**



90059-R-220

<b>MODEL</b>	<b>90059-R-220</b>	<b>90059-B</b>
<b>NO. OF STAGES</b>	1	1
<b>FREE AIR DISPLACEMENT</b>	42 lit/min, 35 lit/min	1.8 CFM
<b>ULTIMATE VACUUM</b>	75 Microns	80 Microns
<b>MOTOR</b>	1/6 HP	1/4 HP
<b>PUMP SPEED</b>	2850 RPM, 3450 RPM	1720 RPM
<b>ELECTRICAL SPECS</b>	220 V, 50/60 HZ	110/120 V, 60 HZ
<b>WEIGHT</b>	7.25 kg (16 lbs)	6.2 kg (13.6 lbs)
<b>DIMENSIONS IN CM</b>	29.5 x 11.5 x 21.5 x 18	30 x 15 x 26

**170 LIT/MIN - 141 LIT/MIN / 6 CFM SINGLE STAGE VACUUM PUMP**



90066-2V-220-A

<b>MODEL</b>	<b>90066-2V-220-A</b>	<b>90066-B</b>
<b>NO. OF STAGES</b>	1	1
<b>FREE AIR DISPLACEMENT</b>	170 lit/min, 141 lit/min	6 CFM
<b>ULTIMATE VACUUM</b>	75 Microns	80 Microns
<b>MOTOR</b>	1/4 HP	1/3 HP
<b>PUMP SPEED</b>	1720 RPM	1700 RPM
<b>ELECTRICAL SPECS</b>	220 V, 50/60 HZ	110/120 V, 60 HZ
<b>WEIGHT</b>	10.2 kg (22 lbs)	6.35 kg (14 lbs)
<b>DIMENSIONS IN CM</b>	35 x 14.3 x 26.5	30 x 15 x 27

**\* PLEASE NOTE:**

The micron readings on all vacuum pumps represent optimal laboratory conditions. Field conditions may vary from these readings.

All vacuum pumps are available with either a UK or Australian Cable, please add a:

-AUS for an Australian cable

-UK for a UK cable

**SERVICE INFORMATION**

	90065 90065-220	90067 90067-220	90063-2V-110-B 90063-2V-110-B	90066-2V-110-B 90066-2V-220-B	90068-2V-110-B 90068-2V-220-B	90612-2V-110-B 90612-2V-220-B	90059-B 90059-220-B	90066-B 90066-220-B
<b>OIL CAPACITY</b>	531 ml / 18 oz	708 ml / 24 oz	250 ml / 8.5 oz	440 ml / 15 oz	570 ml / 19 oz	536 ml / 18 oz	342 ml / 12 oz	536 ml / 18 oz
<b>REPLACEMENT CARTRIDGE</b>	90165-R	90167-R	-	90166-B	90168-B	90112-B	-	-
<b>SEAL SERVICE KIT</b>	90062-11-SEAL	90062-11-SEAL	-	-	-	-	-	-

**VACUUM PUMP OIL**



<b>90010-6</b>	(Six) - 295 ml / 10 oz bottles (90063-2V-B)
<b>90018-6</b>	(Six) - 531 ml / 18 oz bottles (90065, 90066-2V-B, 90612-2V-B, 90066-B)
<b>90024-6</b>	(Six) - 708 ml / 24 oz bottles (90067, 90068-2V-B)
<b>90061-8</b>	236 ml / 8 oz bottle (90059-R-220)
<b>90016-6</b>	(Six) - 450 ml / 16 oz bottles (90059-B, 90066-2V-220-A)



**Mastercool<sup>®</sup> Inc.**  
"World Class Quality"

**98061 DIGITAL VACUUM GAUGE**




As a professional technician the assurance of a deep vacuum on a system is imperative. The main problem with many small handheld units is their inaccuracy and durability. Although the thermocouple sensor has been proven to be much more accurate and durable than the thermister type, the problem has been the inconvenience of a cumbersome tabletop unit. Mastercool's hand held unit uses thermocouple technology. This vacuum gauge has been designed with the technician's field environment in mind, allowing for self-calibration and a sensor that will not be damaged by small mists of oil. The Mastercool unit allows for a target vacuum range to be programmed with a light sensor indicator. Now you have the freedom to continue with your other work and come back to the system once you see the indicator light signaling your target vacuum. (packaged in blow molded case)

**SPECIFICATIONS:**

- Response Time: 250 mSec.
- Sensor Cable: Spiral cable extended to 6.5 feet (2.6 meter)
- Sensor: Thermocouple sensor
- Connection Fitting: 1/4" flare female adapter
- Operating Temperature: 32 to 120°F (0 to 45°C)
- Power: 9V DC battery (AC/DC Adapter optional)
- Battery Life: 36 hours
- Low Battery Indicator: Special ICON on LCD
- Vacuum Units: Micron, Torr, mTorr, mmHg, mBar, Pa
- Range: 20,000 to 1 micron
- Accuracy Range\*: ATM-1000 Microns: ±10% of reading  
 1000 - 100 Microns: ±7% of reading,  
 100 - 1 Micron: ±5% of reading

*\* Unit accuracy refers to sensor specifications and is based on optimal laboratory conditions. Field operations may greatly deviate from these levels.*

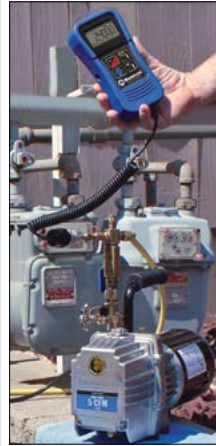


**Optional Accessories**

<b>98061-SENSOR</b>	Replacement Sensor
<b>99334-110</b>	110 V AC/DC Adapter
<b>99334-220</b>	220 V AC/DC Adapter
<b>99333</b>	1/4 FL-M x 1/4 FL-M x 1/4 FL-F Tee



# CHARGING & RECOVERY EQUIPMENT

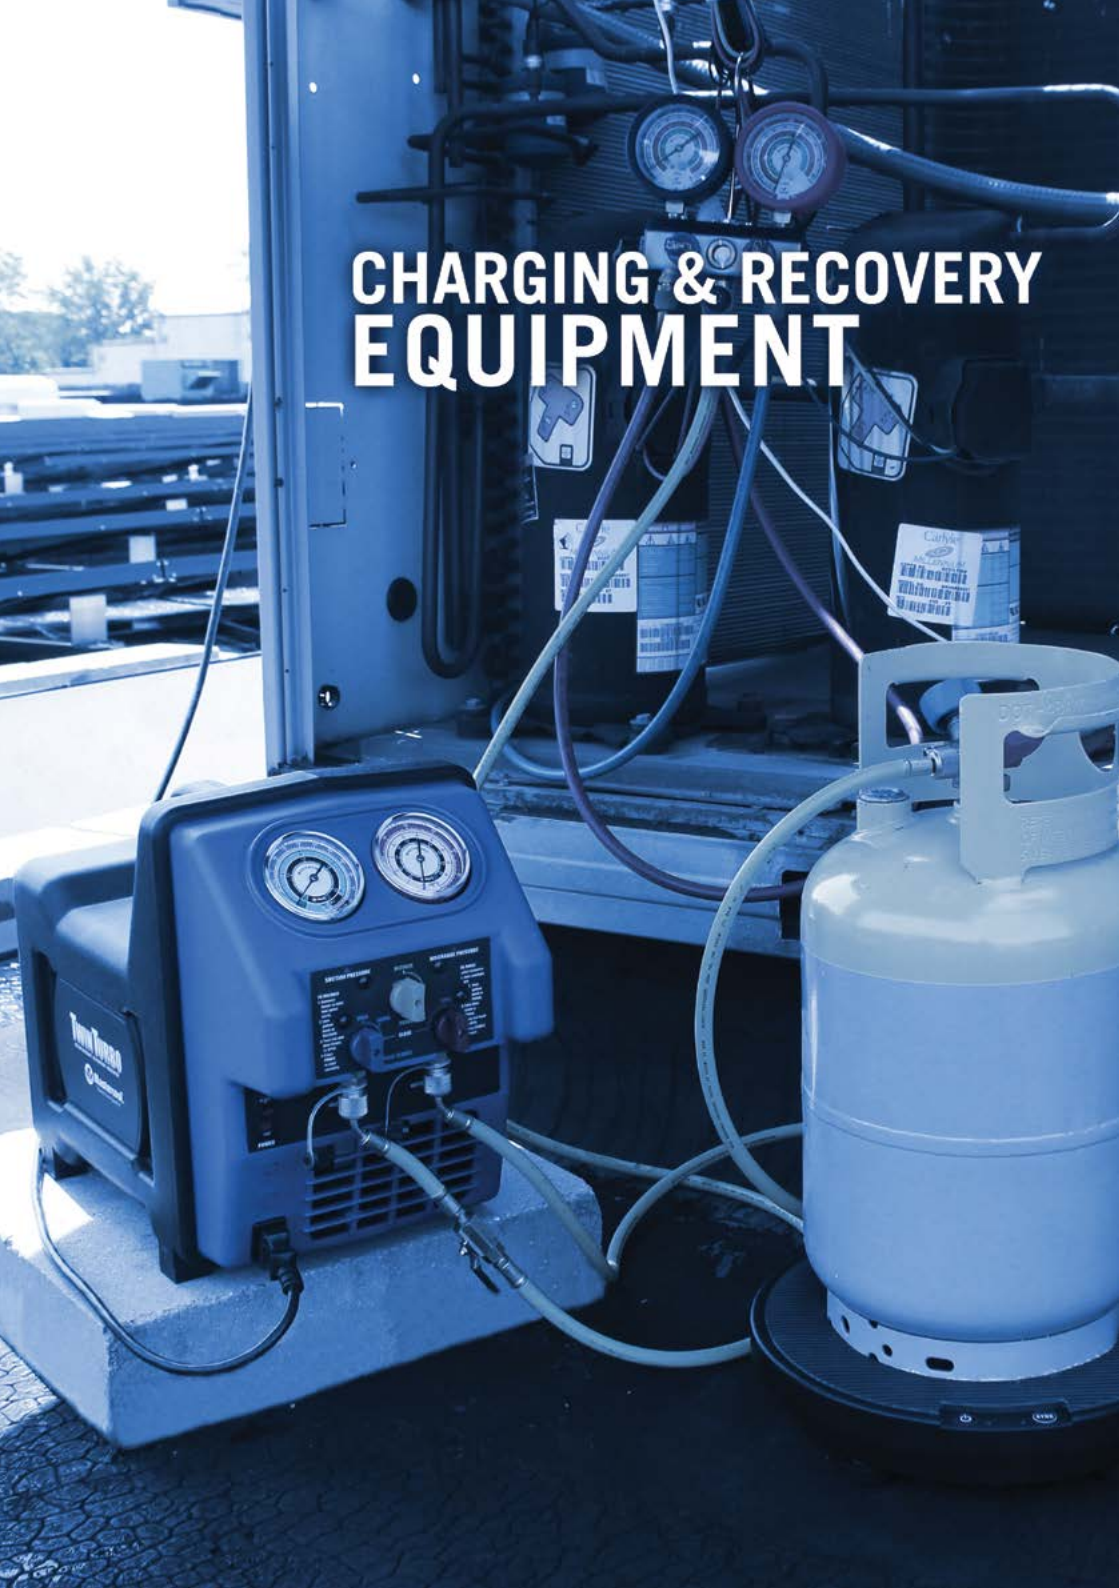

**98310 WIRELESS REFRIGERANT CHARGING SCALE**  
**98315 WIRELESS REFRIGERANT CHARGING SCALE WITH SOLENOID**



98315 with solenoid



REMOTE RANGE:  
100 FEET (30 M),  
LINE OF SIGHT

**FEATURES:**

- Wireless unit prevents unwanted tangles in wires
- Easily store the remote in the body of the platform
- Keypad provides synchronization and zeroing
- Extremely accurate weight sensor
- Magnet on remote allows easy placement on fixtures
- Battery life symbol for platform and remote constantly displayed on LCD
- Wireless signal strength indicator conveniently displays on remote



**FUNCTIONS:**

**CHARGE PROGRAMMING:**

Allows user to program desired quantities. Before charge is complete, an alarm will sound allowing ample time to turn off refrigerant supply.

**PAUSE/CHARGE (98315 model only):**

This feature allows user to stop and continue charging.

**TANK CAPACITY PROGRAMMING:**

EMPTY/FULL tank feature allows user to know the amount of refrigerant in the tank at any time.

**REPEAT (98315 model only):**

Allows user to charge previously stored amount.

**SPECIFICATIONS:**

- Capacity: 243 lbs (110 kg)
- Accuracy:  $\pm 0.01$  lb /  $\pm 0.005$  kg or 0.1% of reading whichever is greater
- Resolution: 0.02 lb / 0.01 kg
- Automatic Shut-Off: After 20 minutes
- Operating Temperature: 32°F to 120°F (0°C to 49°C)
- Battery Life: approximately 20 hours
- 31 cm Platform
- Accepts all US & EU standard cylinders



When remote is out of range the unit will automatically pause. This pause mechanism allows unit to restart when remote is back in range.



**98210-A ACCU-CHARGE II**



Mastercool's ACCU-CHARGE II is the most advanced electronic refrigerant scale in the market today. Constructed with a rugged aluminum cast body, the ACCU-CHARGE II now offers programming capabilities.



**FUNCTIONS:**

**CHARGE PROGRAMMING:**

Allows user to program desired quantities. Before charge is complete, an alarm will sound allowing user ample time to turn off refrigerant supply.

**TANK CAPACITY PROGRAMMING:**

Allows user to know the amount of refrigerant that is left in the tank at any time.

**REPEAT:**

Allows user to charge previously stored amount.

**SPECIFICATIONS:**

- Capacity: 110 kg (240 lbs)
- Accuracy:  $\pm 0.01$  kg } or 0.1% of reading  
 $\pm 0.16$  oz } (whichever is greater)  
 $\pm 0.01$  lb }
- Resolution: 0.01 kg / 0.02 lb
- 3 hrs Auto Off Function
- Operating Temperature is 0 to 49°C (32 to 120°F)
- Battery Life (approximately 40 hrs)
- Works w/110 or 220V Transformer (part no. 99334-110 or 99334-220)
- 22 x 22 cm (9 x 9") Platform



Platform Level Eye

Adjustable Leveling Feet

**98211-A ACCU-CHARGE III CERTIFIED REFRIGERANT SCALE (OIML & CE Approved, Legal for Trade)**



**FUNCTIONS:**

**CHARGE PROGRAMMING:**

Allows user to program desired quantities. Before charge is complete, an alarm will sound allowing user ample time to turn off refrigerant supply.

**PAUSE/CHARGE:**

(Using the 98230 Charging Solenoid Module)

**TANK CAPACITY PROGRAMMING:**

Allows user to know the amount of refrigerant that is left in the tank at any time.

**REPEAT:**

Allows user to charge previously stored amount.

**SPECIFICATIONS:**

- Complies with European (OIML) Standards
- Capacity: 50 kg
- Accuracy: ± 50 g
- Resolution: 0.05 kg
- 3 hrs AUTO OFF Function
- Operating Temperature is 0 to 49°C (32 to 120°F)
- Battery Life (approximately 40 hrs)
- 22 x 22 cm (9 x 9") Platform



**98230 CHARGING SOLENOID MODULE**



The 98230 Charging Solenoid Module turns the 98210-A ACCU-CHARGE II & 98211-A ACCU-CHARGE III into Automatic Programmable Scales!

This module allows the user to control the exact amount of refrigerant transferring to and from the A/C System. The compact design is battery powered (9V), lightweight, portable and works with all types of refrigerant. 98230 includes a short hose for tank connection, USB cord and 1/4"FL - 1/2" ACME adapters.



**98209 ELECTRONIC CHARGING SCALE**



- Slim Design for Easy Storage
- Two Keys for Easy Operation
- Unit Change (grams & ounces)
- One Touch Tare Weighing Function
- Auto Zero and Auto Off
- Automatically turns off its power if the scale is not used within 2 minutes

**SPECIFICATIONS:**

- Capacity: 5000 g / 176 oz
- Sensitivity: 1 g / .035 oz
- Dimension: 140 (w) x 185 (l) x 35 (h) mm
- Platform Size: 120 mm
- Power Source: 2 x AAA 1.5v battery



**ELECTRONIC TANK HEATER BLANKET**



The Mastercool Refrigerant Tank Heater Blanket speeds up recharging time.

- Assures total discharge of refrigerant from 30 lb and 50 lb tanks. Heats tanks to 125°F resulting in maximum pressure of 185 psi for R134a.
- Quick working 300W heater element
- An excellent complement to all Mastercool Refrigerant Scales

98250 110 V

98250-220 220 V

CHARGING AND RECOVERY EQUIPMENT



**Mastercool®**  
"World Class Quality"

**REFRIGERANT/RECOVERY CYLINDERS**

**Features:**

- Y-valve for liquid/vapour TPED approved
- Single valve for vapour TPED approved
- Raised collar for ease of handling and protection
- Tanks Conform to PED and ADR regulations
- CE and TÜV approved
- Used for storage and transport of refrigerant gases



**6 LITER REFRIGERANT/RECOVERY CYLINDERS**

61009-EUGRN-1/4    61009-EUGRY-1/4    61009-EUGRN



61009-EUGRY    61010-EUGRN    61010-EUGRY

- Size (w x h): 185 mm x 338 mm
- Tare Weight: 5.18 Kg
- Standard Specification: ADR/RID2009, EN13322-1N D TUV 1
- Nominal Water Capacity: 6 l
- Tank Test Pressure: 48 bar
- Air Tightness Test Pressure: 32 bar
- Bursting Pressure: >108 bar
- Bursting Volumetric Expansion Rate: >20%
- Body Material: HP295
- Service Pressure: 32 bar

	<i>SINGLE VALVE (available from US factory)</i>	
Model	61009-EUGRY-1/4 (grey tank)	61009-EUGRY (grey tank)
	61009-EUGRN-1/4 (green tank)	61009-EUGRN (green tank)
	<i>DOUBLE VALVE</i>	
Model	61010-EUGRY (grey tank)	NA
	61010-EUGRN (green tank)	NA
Connection	1/4" FL-M (7/16-20)	W21.8-14.M

**12.5 LITER REFRIGERANT/RECOVERY CYLINDERS**

62009-EUGRY-1/4    62009-EUGRN-1/4    62010-EUGRY



62010-EUGRN    62009-EUGRY    62009-EUGRN

- Size (w x h): 228 mm x 516 mm
- Tare Weight: 8 Kg
- Standard Specification: ADR/RID2009, EN13322-1N D TUV 1
- Nominal Water Capacity: 12.5 l
- Service Pressure: 32 bar
- Tank Test Pressure: 48 bar
- Air Tightness Test Pressure: 32 bar
- Bursting Pressure: >108 bar
- Bursting Volumetric Expansion Rate: >20%
- Body Material: HP295

	<i>SINGLE VALVE (available from US factory)</i>	
Model	62009-EUGRY-1/4 (grey tank)	62009-EUGRY (grey tank)
	62009-EUGRN-1/4 (green tank)	62009-EUGRN (green tank)
	<i>DOUBLE VALVE</i>	
Model	62010-EUGRY (grey tank)	NA
	62010-EUGRN (green tank)	NA
Connection	1/4" FL-M (7/16-20)	W21.8-14.M

**27.2 LITER REFRIGERANT/RECOVERY CYLINDERS**

63009-EUGRN-1/4    63009-EUGRY-1/4    63010-EUGRN



63010-EUGRY    63009-EUGRN    63009-EUGRY

- Size (w x h): 298 mm x 613 mm
- Tare Weight: 15.7 Kg
- Standard Specification: ADR/RID2009, EN13322-1N D TUV 1
- Nominal Water Capacity: 27.2 l
- Service Pressure: 32 bar
- Tank Test Pressure: 48 bar
- Air Tightness Test Pressure: 32 bar
- Bursting Pressure: >108 bar
- Bursting Volumetric Expansion Rate: >20%
- Body Material: HP295

	<i>SINGLE VALVE (available from US factory)</i>	
Model	63009-EUGRY-1/4 (grey tank)	63009-EUGRY (grey tank)
	63009-EUGRN-1/4 (green tank)	63009-EUGRN (green tank)
	<i>DOUBLE VALVE</i>	
Model	63010-EUGRY (grey tank)	NA
	63010-EUGRN (green tank)	NA
Connection	1/4" FL-M (7/16-20)	W21.8-14.M

**TANK ADAPTERS**



90639	W21.8-14 x 1/4" FL (EU Standard)	90640	Gasket for 90639
90637	3/4-16 x 1/4" FL (US Standard)	90638	Gasket for 90637



**Mastercool®**  
"World Class Quality"



## DOT-APPROVED RECOVERY CYLINDERS

### Features:

- Powder coated cylinder for high gloss, durable finish
- Pre-charged cylinder provides a clean, dry interior
- 3/4" NPT opening accepts 80% fill float switch shut-off device
- Reusable and conforms to DOT-4BA400 specs and ARI guidelines
- Collar design for ease of handling
- Storage and transport of recovered refrigerant gases
- Y-valve for liquid/vapor
- AUS Approved and TC Canadian Approved
- 1/4" opening for air purge valve
- Valve & Float Switch UL Listed



### 30 LB. DOT-APPROVED RECOVERY CYLINDERS



- Size (w x h): 9.125" x 17.52"
- Standard Spec.: DOT - 4BA400
- Service Pressure: 400 PSI / 2.7 MPa
- Tare Weight: 17.99 LB
- Body Material: HP295
- Relief Valve Pressure: 600 PSI / 4.1 MPa
- Nominal Water Capacity: >26.2 LB / 11.9 L
- Tank Test Pressure: 800 PSI / 5.5 MPa
- Air Tightness Test Pressure: 400 PSI / 2.7 MPa

Model	62010 without float switch	62011 with float switch	62012 with float switch & 1/4" SAE Port	64010 without float switch	67010 with float switch	67011 with float switch
Connection	1/4" FL-M (7/16-20)			1/2" ACME		
Color	yellow/gray			blue		yellow/ blue

### 50 LB. DOT-APPROVED RECOVERY CYLINDERS



- Size (w x h): 12.25" x 18.78"
- Standard Spec.: DOT - 4BA400
- Service Pressure: 400 PSI / 2.7 MPa
- Tare Weight: 28.71 LB
- Body Material: HP325 or HP345
- Relief Valve Pressure: 600 PSI / 4.1 MPa
- Nominal Water Capacity: >47.7 LB / 21.6 L
- Tank Test Pressure: 800 PSI / 5.5 MPa
- Air Tightness Test Pressure: 400 PSI / 2.7 MPa

Model	63010 without float switch	65010 with float switch	66010 without float switch	66011 with float switch	66012 with float switch & 1/4" SAE Port	63010-AUS without float switch (Australian standard)
Connection	1/4" FL-M (7/16-20)		1/2" ACME			
Color	yellow/gray		yellow/gray			white

### 100 LB. DOT-APPROVED RECOVERY CYLINDERS



68010

- Size (w x h): 11.25" x 31.81"
- Standard Spec.: DOT - 4BW400
- Service Pressure: 400 PSI / 2.7 MPa
- Tare Weight: 50.5 LB
- Body Material: HP325
- Relief Valve Pressure: 600 PSI / 4.1 MPa
- Nominal Water Capacity: >92.5 LB / 41.9 L
- Tank Test Pressure: 800 PSI / 5.5 MPa
- Air Tightness Test Pressure: >87 PSI / 0.6 MPa

Model	68010 without float switch
Connection	1/4" FL-M (7/16-20)
Color	yellow/gray

## ENVIRO TANK (REFILLABLE CYLINDER)

### 30 LB. REFILLABLE CYLINDER



62020-W

- Size (w x h): 8.39" x 20"
- Standard Spec.: DOT - 4BA400
- Service Pressure: 400 PSI / 2.7 MPa
- Tare Weight: 19.9 LB
- Body Material: HP295
- Relief Valve Pressure: 600 PSI / 4.1 MPa
- Nominal Water Capacity: >30 LB / 13.6 L
- Tank Test Pressure: 800 PSI / 5.5 MPa
- Air Tightness Test Pressure: >87 PSI / 0.6 MPa

Model	62020-W
Connection	1/4" FL-M (7/16-20)
Color	white



# ARCTIC COMMANDER



Mastercool introduces its new ARCTIC COMMANDER line of RRR machines. Equipped with the latest technology, all models come standard with an 8" command center. The graphic user interface (GUI) will enable navigation through all functions and features with the greatest of ease. There is no longer a need to read any external instructions or paper manuals, simply sit back, watch and learn how to use your machines. All machines are also equipped with Wi-Fi capabilities; allowing for realtime, interactive communication and troubleshooting. ***It's about time somebody introduced RRR machines for the 21st century!***



COMMANDER4000-E



COMMANDER3000-E



COMMANDER2000-E



COMMANDER1000-E

	COMMANDER4000 (110V) COMMANDER4000-E (220V) R1234YF	COMMANDER3000 (110V) COMMANDER3000-E (220V) R134A HYBRID	COMMANDER2000 (110V) COMMANDER2000-E (220V) R134A FULLY AUTOMATIC	COMMANDER1000 (110V) COMMANDER1000-E (220V) R134A MANUAL
8" Color Command Center with Touch Screen	X	X	X	X
Automatic and Manual Procedures	X	X	X	X
Refrigerant Database	X	X	X	NA
Automatic Vacuum Leak Test: Programmable	X	X	X	X
Auto Oil Discharge	X	X	X	X
Auto and Manual Air Purge	X	X	X	X
Auto Filter and Full Tank Alarm	X	X	X	X
Low Refrigerant Alarm	X	X	X	X
Auto Oil Injection	X	X	X	NA
Thermal Printer	X	X	NA	NA
Hose Flushing	X	X	NA	NA
Vehicle A/C System Flushing	X	X	NA	NA
Tank Heater	X	X	X	X
6 CFM Vacuum Pump	X	X	X	NA
3 CFM Vacuum Pump	NA	NA	NA	X
Refrigerant Identifier	X	NA	NA	NA
On-board Instruction Manual	X	X	X	X
Multiple Languages	X	X	X	X
On-board Unit Conversion Calculator	X	X	X	X
New Cabinet Design for Increased Air Flow	X	X	X	X
Large Analog Gauges	X	X	X	X
Hard Wired Power Cord	X	X	X	X
Hose Coupler Storage	X	X	X	X
Solid Durable Wheels with Locking Casters	X	X	X	X
Multi-colored LED Status Bar	X	X	X	NA
Self-Diagnostic Check	X	X	X	X
Wi-Fi Capable	X	X	X	X
Dimensions (mm): 1150 (h) x 600 (w) x 770 (d)	X	X	X	X

For R1234yf machine without a refrigerant identifier, please use COMMANDER4000-X (for 110V model) or COMMANDER4000-E-X (for 220V model)



**Mastercool®**  
"World Class Quality"

**8" COLOR TABLET WITH TOUCH SCREEN FEATURES:**



**Home Screen**  
allows for quick touch selection of options




**Status Screen**  
for quick reference of resources



**Maintenance Screen**  
offered only to authorized service technicians allowing for quick and easy diagnosis



**Maintenance Screen**  
offered only to authorized service technicians allowing for quick and easy diagnosis

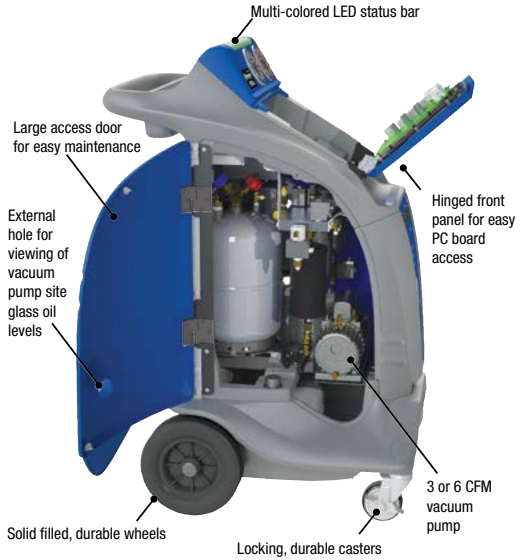

CHARGING AND RECOVERY EQUIPMENT



**Mastercool®**  
"World Class Quality"

**THE TWIN TURBO SERIES IS THE MOST COMPLETE SOLUTION TO YOUR RECOVERY NEEDS!**

**TWINTURBO**  
REFRIGERANT RECOVERY MACHINE



69300-220



DUAL VOLTAGE  
69300-2V-220

Mastercool's newest addition to the recovery machine lineup takes the reliability of the 69000 series machines and enhances those features to allow for maximum recovery capacity while at the same time decreasing size and weight. The design of the new double piston compressor and cooling by the largest fan and condenser in the market makes the 69300 series the most complete solution to your recovery needs!

R32  
Compatible



**FEATURES & BENEFITS:**

- Revolutionary double piston oil-less compressor
- Safety high pressure switch
- Simple internal structure for field service
- Largest volume recovery rate in market
- For use with all refrigerants including R410A
- Injection molded high density polyethylene case for maximum durability
- Front cover has bumper guards built in to reduce damage to the control knobs

**SPECIFICATIONS:**




- 1/2 hp oil less compressor
- Recovery Rate:

R134a	R22
• Direct vapor up to 14 kg/hr	• Direct vapor up to 17 kg/hr
• Direct liquid up to 130 kg/hr	• Direct liquid up to 206 kg/hr
• Push pull up to 318 kg/hr	• Push pull up to 498 kg/hr

- Operating Temperature: 0 to 50°C / 32 to 122°F
- Weight: 12.8 kg / 28.3 lbs
- Dimensions: 457 mm (l) x 254 mm (w) x 356 mm (h) (18" (l) x 10" (w) x 14" (h))
- Case Material is HDPE (High Density Polyethylene)
- Compatible refrigerants: All CFC, HCFC, and HFC's



- 69300 115 V - 60 Hz
- 69300-220 220 V - 50/60 Hz
- 69300-220-EU 220 V - 50/60 Hz  
Includes a manual restart button per EU standards
- 69300-2V-110 Dual Voltage 110/220 V - 50/60 HZ - 110 V Cable
- 69300-2V-220 Dual Voltage 110/220 V - 50/60 HZ - 220 V Cable (Schuko)
- 69300-2V-UK Dual Voltage 110/220 V - 50/60 HZ - UK Cable



**Mastercool®**  
"World Class Quality"

**TWIN TURBO REFRIGERANT RECOVERY MACHINE**



69350-220

This unit offers all the same functions and features as the 69300. In addition it has an oil separation module, filter dryer and sight glass.



69350	115 V - 60 Hz
69350-220	220 V - 50/60 Hz
69350-220-EU	220 V - 50/60 Hz Includes a manual restart button per EU standards
69350-2V-110	Dual Voltage 110/220 V - 50/60 HZ - 110 V Cable
69350-2V-220	Dual Voltage 110/220 V - 50/60 HZ - 220 V Cable (Schuko)
69350-2V-UK	Dual Voltage 110/220 V - 50/60 HZ - UK Cable
69500-DR	Replacement Filter Dryer

**CONTAMINATED MOBILE RECOVERY MACHINE FOR R1234yf**



69390-220

**COMPATIBLE WITH COMBUSTIBLE GASES**

**FOR CONTAMINATED MOBILE A/C SYSTEMS  
DESIGNED FOR R1234yf**

This unit offers all the same functions and features as the 69300. In addition:

- Meets all requirements of SAE J2851, contaminated recovery only device
- 60" R1234yf blue hose and low side (1/4 FL-M x 13 mm) coupler
- 60" yellow transfer hose



69390	115 V - 60 Hz Comes equipped with overflow protection switch cutting off at 80% tank capacity (Recovery tanks must have floats using 3 pin Brad Harris plug)
69390-220	220 V - 50/60 Hz
69395-220	HVAC Combustible Gas Recovery Machine (220 V - 50/60 Hz) Comes as pictured less hoses and couplers with 1/4" flare fittings

**mini TWINTURBO  
REFRIGERANT RECOVERY MACHINE**



**COMPATIBLE WITH COMBUSTIBLE GASES**

Mastercool introduces the new "Mini Twin" all in one recovery machine. Equipped with the same high quality twin piston compressor as the Twin Turbo series this unit has been designed to work in all applications. Whether you find yourself up a ladder, in a crawl space or just not looking forward to lugging around a heavy piece of equipment, this is the right machine for you. Best of all, this machine has been constructed with the safest spark free component allowing for use with all combustible gases.



**SPECIFICATIONS:**

- 1/2 HP motor
- Operating Temperature: 0 to 50°C (32 to 122°F)
- Compatible with all CFC, HCFC, HFC's, and Combustible gases
- Weight: 11 kg (24 lbs)
- Dimensions: 300 mm (l) x 200 mm (w) x 270 mm (h) (11.8" (l) x 7.9" (w) x 10.6" (h))

69400	115 V - 60 Hz
69400-220	220 V - 50/60 Hz

All Twin Turbo Recovery Machines are available with either a UK or Australian Cable, please add a:  
**-AUS** for an Australian cable  
**-UK** for a UK cable



**Mastercool® Inc.**  
"World Class Quality"

**REFRIGERANT RECOVERY SYSTEM**



These recovery systems are compact, lightweight and work with all refrigerants. They're ideal for commercial, residential or industrial appliance applications. Our recovery systems offer a state-of-the-art 1/2 HP oil-less compressor with a built-in high volume cooling fan. This innovative design delivers maximum cooling efficiency which keeps the compressor working at high capacities in even the hottest climates. The compressor is also protected by an automatic low pressure cut-off switch that shuts off the unit once the recovery is complete. This AUTO SHUT-OFF feature eliminates the risk of compressor failure and reduces the user's need to monitor the entire recovery system.



All of our recovery systems offer our color-coded gauges with pressure readings in PSI, BAR and MPa. Our stainless steel ball valve designed manifold, controls the flow smoothly and quickly with only a 1/4 turn. With all of this protected by a reinforced hard plastic case, Mastercool's recovery systems will meet all your refrigerant recovery needs.

**FEATURES:**

- High performance oil-less compressor
- Automatic low pressure Cut-Off Switch
- Safety high pressure Cut-Off Switch
- High volume cooling fan design
- Liquid compatible head-valve system
- Fully reinforced hard plastic casing

**SPECIFICATIONS:**

- 1/2 HP oil-less compressor
- Recovery Rate:
  - direct vapor up to 12 kg/h
  - direct liquid up to 71 kg/h
  - push-pull up to 326 kg/h
- Operating Temp. Range: 0 to 50°C (32 to 122°F)
- Weight: 16 kg (38 lbs)
- Dimensions: 432 mm (l) x 254 mm (w) x 305 mm (h) (17" (l) x 10" (w) x 12" (h))
- Refrigerants: CFC's, HCFC's, HFC's

<b>69000</b>	115 V - 60 Hz
<b>69000-220</b>	220 V - 50/60 Hz
<b>69000-220-TUV</b>	220 V - 50 Hz Certified to TUV/GS and E35-421
<b>69000-J</b>	100 V - 50 Hz (Japanese Standard)

**69200-220 COMPLETE A/C RECOVERY SYSTEM**



This unit offers all the same functions and features as the reliable 69000 recovery machine. In addition, Mastercool has strategically placed an oil separation module inside the unit that will dispense used oil effortlessly. Together with its filter dryer and sight glass this unit allows for the technician to actually clean the used refrigerant and potentially re-use.



**69500-DR** Replacement Filter Dryer

**69500 RECOVERYMATE**



Turn any Recovery Machine into a Portable Recycler by adding the RECOVERYMATE!

**SPECIFICATIONS:**

- Lightweight and easy to carry
- 4-Way Ball Valve Manifold controls the flow smoothly and quickly with only 1/4 turn
- Large capacity oil separator
- High Performance Dryer eliminates moisture from recovered refrigerant
- Extra large sight glass monitors refrigerant flow and changes color when a dryer change is necessary
- Rugged carrying case can stand on its own or be mounted on a wall or bench
- Length: 38 cm (15")
- Height: 43 cm (17")
- Width: 10 cm (4")
- Weight: 5.5 kg (12.25 lbs)
- Includes hoses



**Mastercool<sup>®</sup>**  
"World Class Quality"

**PORTABLE ELECTRONIC CHARGING STATION**



A lightweight, durable, steel frame cart that contains all the necessary tools to quickly and conveniently charge the A/C system. No need for different sized charging cylinders with Mastercool's rugged die cast electronic scale. Simply place the refrigerant cylinder on the scale and charge.



**FEATURES:**

- A rugged, lightweight steel cart with wheels and convenient storage pocket for scale and hoses allows this portable charging station to be taken almost anywhere
- Dimensions: 26" x 17" x 13" (66 cm x 43 cm x 33 cm)
- Extruded aluminum manifold with long lasting valve design
- Large 80 mm gauges make it easy to read the pressure and temperature scales
- 109 kg (240 lb) capacity scale with long lasting 9V battery (60 hrs)
- Deep micron, rotary vane vacuum pumps.  
Available in 119 lit/min and 178 lit/min.
- Includes set of 180 cm (72") hoses

**ALSO AVAILABLE:**

- Refrigerant tank heater blanket #98250 and #98250-220
- \* R134a Automotive Service Couplers not included

VACUUM PUMP	5 CFM	119 lit/min (50 Hz) 142 lit/min (60 Hz)	7.5 CFM	178 lit/min (50 Hz) 213 lit/min (60 Hz)
MANIFOLD	110 V	220 V	110 V	220 V
2 Way Alum Block	91585	91585-220	91587	91587-220
4 Way Alum Block	91586	91586-220	91588	91588-220

**DUAL VOLTAGE PORTABLE CHARGING STATION**

VACUUM PUMP	90063-2V-220-B	90066-2V-220-B
MANIFOLD	110/220 V	110/220 V
2 Way Alum Block	91583-2V-220	91585-2V-220
4 Way Alum Block	91584-2V-220	91586-2V-220

**MOBILE ELECTRONIC CHARGING STATION**



Keeping the same ideals in mind as the Portable Electronic Charging Station, the mobile unit is directed towards the garage technician. With an enlarged carry cart and larger wheels, this unit can get around the shop with the greatest of ease!



- Dimensions: 45" x 18" x 16.5" (114 cm x 46 cm x 42 cm)

VACUUM PUMP	5 CFM	119 lit/min	7.5 CFM	178 lit/min
MANIFOLD	110 V	220 V	110 V	220 V
2 Way Alum Block	91685	91685-220	91687	91687-220
4 Way Alum Block	91686	91686-220	91688	91688-220

**DUAL VOLTAGE MOBILE CHARGING STATION**

VACUUM PUMP	90063-2V-220-B	90066-2V-220-B
MANIFOLD	110/220 V	110/220 V
2 Way Alum Block	91683-2V-220	91685-2V-220
4 Way Alum Block	91684-2V-220	91686-2V-220

All charging stations are available with either a UK or Australian Cable, please add a:

- AUS for an Australian cable
- UK for a UK cable



**69134-A REFRIGERANT IDENTIFIER FOR R134a**



**Keeps Equipment Safe, Prevents Contamination, Detects Air Contamination.** The Refrigerant Identifier helps confirm the presence and quality of R134a refrigerant in vehicle air conditioning systems. This process will help avoid potential damage from refrigerant contamination.

**SPECIFICATIONS:**

- Weight: 0.8 kg
- Refrigerant Detected: R134a (Tetrafluoroethane)
- Accuracy: PASS/FAIL - 95% Pure R134a
- Power Requirements: 12 VDC
- User Interface: Membrane type with visual indicators and function key
- Calibration Method: Manual pump aspirator
- Minimum Input Pressure: 1.38 Bar (20 Psig), Maximum Input Pressure: 20.70 Bar (300 Psig)
- Storage Temperature: -10° to 50°C / Operating Temperature: 10 to 45°C
- Construction Material: Molded ABS housing/molded rubber sleeve



**691234YF ULTIMA ID 1234YF REFRIGERANT ANALYZER**



The Ultima ID 1234yf refrigerant analyzer is certified to the SAE J2912 Refrigerant Analyzer Standard. Its portability and USB integration with the R/R/R machine, provides a versatile and efficient method of validating the refrigerant purity during service.

**SPECIFICATIONS:**

- Refrigerant Measured: R1234yf, R134a
- Accuracy: Better than ±1.0%
- Refrigerant % Displayed: R1234yf, R134a, R22, HC, Air
- Ambient Operating Temperature Range: 50° to 120°F
- Power: 110/220V 50/60Hz
- Communication Protocols: USB 2.0
- Displays % air in pure R1234yf and R134a
- Built-in rechargeable power pack
- User Interface: LCD + 3 switches
- Approvals: CE, UL, SAE
- Integral Pressure/Flow Control: Yes
- Integral Calibration Pump: Yes
- Oil Contamination: User Replaceable Oil Trap
- Filtration: User Replaceable
- Built-in printer to easily print test results
- Connects directly to SAE J2843 R/R/R machine

Comes with complete kit:

- R134a adapter fitting for ACME ported cylinders
- R1234yf adapter for cylinders
- Identifier and accessories housed in a portable case
- R1234yf and R134a sample hoses

**69HVAC ULTIMA ID™ HVAC REFRIGERANT IDENTIFIER**  
**69HVAC-P ULTIMA ID™ HVAC REFRIGERANT IDENTIFIER WITH PRINTER**



Avoid costly cross contamination!

- Contractors can accurately determine the type of refrigerant they are recovering.
- Wholesalers can quickly check contractors' refrigerant and prevent contamination to their bulk reclaim supply.
- Reclaimers can easily pre-screen incoming refrigerant prior to the costly GC process and catch problem refrigerant before it causes damage.

Comes with complete kit: 1/4" FL sample hose, 110/220VAC power adapter, identifier and accessories in a rugged case

**SPECIFICATIONS:**

- Refrigerant: R12, R134a, R22, and HC
- Power requirements: 110/220 VAC via included adapter
- 12-15V DC optional battery pack (Internal)
- Output: Digital display and LEDs
- Operating humidity: 0-95% RH non-condensing
- Weight: 8.0 lbs.
- Display: 128 x 64 Pixel Graphing
- Resolution: 0.1%
- Operating temperature: 40 to 130°F
- Optional built-in printer

**69HVAC-PR** Printer roll for 69HVAC-P & 69HVAC-PRO

**69HVAC-PRO2 ULTIMA ID™ PRO HVAC REFRIGERANT IDENTIFIER**



The Ultima ID Pro2 HVAC/R Refrigerant Analyzer enables fast, accurate testing of refrigerant, reducing the need for costly and time-consuming gas chromatography.

**FEATURES:**

- Oil contamination resistant
- Internal thermal printer
- Wide refrigerant range
- Remote software updates for new refrigerants
- Vapor or liquid sample analysis
- Fast test results
- Greater accuracy in less time
- Refrigerant composition breakdown
- 1/4" flare sample hose

**SPECIFICATIONS:**

- Analyzed Refrigerants: R22, R32, R134a, R404A, R407C, R410a, Hydrocarbons (HC) and Air
- Identified Refrigerants: R12, R1234yf, R408A, R409A, R417A, R421A, R421B, R422A, R422B, R422C, R427A and Hydrocarbons (HC)
- Weight: Less than 10 Lbs.
- Accuracy: +/- 2% of indicated gasses or better
- Approvals: CE, UL and CUL
- Power Requirements: 12 VDC @ 2A via 110/220 VAC Adapter
- User Interface: Graphic display, soft keys, built in printer
- Sample Gas Extraction: Pressure from cylinder or system
- Temperature Range: 50 to 120°F
- Response Time: Less than 3 minutes
- Humidity: 0-95% RH non-condensing
- Test Sample Size: 5g per test, Test Pressure: 50 psi - 500 psi



**Mastercool®**  
 "World Class Quality"



# LEAK DETECTION



VOLUME MUTE

PEAK

H.M.L. SENSITIVITY

A power button icon with a circle and a vertical line through it.

**THE ONLY LEAK DETECTOR YOU WILL EVER NEED**



**IntellaSense**  
REFRIGERANT LEAK DETECTOR

**Detects:**

- Combustible Gases
- Hydrogen
- Refrigerants: All CFC's, HCFC's & HFC's

**<< MEETS AND EXCEEDS J2791 (R134A), J2913 (R1234YF) AND EN 14624 >>**

The 55800 leak detector employs a new metal oxide gas sensor for the detection of chlorofluorocarbon gasses and blends. This tin oxide sensor is characterized by high sensitivity and a fast response, upon detecting the presence of extremely small levels of chlorofluorocarbon gases. Integrated into the design is a powerful microprocessor that automatically selects the best operating conditions for the sensor, to ensure optimum performance. The optimum sensor performance is maintained and monitored throughout the life of the sensor.

**SPECIFICATIONS:**

**SENSITIVITY\*:**

- HIGH  $\geq 0.05$  oz/yr (1.5 g/yr)
  - MEDIUM  $\geq 0.25$  oz/yr (7 g/yr)
  - LOW  $\geq 0.5$  oz/yr (14 g/yr)
- \* based on optimal laboratory conditions

**PROBE:**

- Intelligent tip design that senses the condition of the environment, to eliminate the potential of false alarms.
- Flexible 16" probe for difficult to reach locations

**DISPLAY:**

- Progressive LCD with vertical bars corresponding to the magnitude of the detected leak.
- Visual indication of the selected sensitivity range

**REFRIGERANTS:** Detects all refrigerants (CFC's, HCFC's, & HFC's)

Unit has been tested and approved to work with R1234yf as well as R32 and R410a

**SENSOR LIFE:** 2000 hours

**OPERATING TEMPERATURE RANGE:** 0 to 140°F

**POWER:** Two (2) D Batteries

**BATTERY LIFE:** 60 hours continuous use

**WEIGHT:** 1 lb. 8 oz

**"SUPER SENSITIVE FUNCTION"** allows the unit further sensitizing beyond the standard settings for locating small leaks with gases such as R1234yf and R407C

**LCD FEATURES:**

**WAIT:** This indication flashes whenever the unit is in the wait mode. This could occur whenever the unit is turned on or interference is detected.

**READY:** This indication appears when the unit is ready for use.

**INT:** This indication appears whenever the microprocessor detects conditions that are not suitable for reliable leak detection. Excessive wind blowing, blocked probe (no air flow), burned out fan, or a missing or defective sensor that needs to be replaced.

**BATTERY SYMBOL:** When the battery symbol becomes illuminated this is an indication that the battery is low and needs to be replaced.

**H - M - L:** High, Medium and Low sensitivity ranges will be displayed accordingly based on the selection made on the keypad.

**SIGNAL LEVEL BARS:** There are 10 vertical signal level bars on the display corresponding to the level of signal detected by the unit.

**ERROR SIGNALS:** E1 through E9 indicates diagnostic signals.

**KEYPAD FUNCTIONS:**

**ON/OFF:** Press the ON/OFF button on the center of the keypad to turn the unit on or off.

**VOLUME/MUTE:** Press the VOLUME/MUTE button to control the volume of the unit.

**H M L SENSITIVITY:** Press the H M L SENSITIVITY button to select the desired sensitivity level.

**HOLD:** Press the HOLD button to freeze the signal bars. Press the HOLD button again to disengage.

**PEAK:** Press the PEAK button when multiple leaks are suspected as being present.



LCD Display



Keypad



**Mastercool®**  
"World Class Quality"

**55800** *IntellaSense*  
REFRIGERANT LEAK DETECTOR



- High Sensitivity, Fast Response
- Intelligent tip design senses environmental conditions to eliminate the potential of false alarms
- First progressive color LCD corresponds to the magnitude of the detected leak
- Packaged in a blow molded case with 2 "D" batteries, leak test vial and replacement filters



**55800-FILTER** 3 Replacement Filters  
**55800-VL** Leak Test Vial

**55850** *IntellaSense*  
REFRIGERANT LEAK DETECTOR KIT



- Intella Sense Refrigerant Leak Detector Kit includes:
- Intella Sense Refrigerant Leak Detector
  - 12 LED UV light (53512-UV)
  - UV safety glasses (92398)
  - 2 "D" batteries
  - Replacement filters (55800-FILTER)
  - Leak Test Vial (55800-VL)
  - Blow molded case (55800-PB)



**55975** *IntellaSense III*  
COMBUSTIBLE GAS LEAK DETECTOR



**COMPATIBLE WITH COMBUSTIBLE GASES**

Intella Sense III Combustible Gas Leak Detector is packaged in a blow molded case with 2 "C" batteries, leak test vial and replacement filters

**SPECIFICATIONS**

- Sensing Element: Heated Tin Oxide
- Sensor Life: 2000 hours
- Refrigerants: Detects all refrigerants
- Response Time: less than 1 second
- Battery: 2 "C" Alkaline 6000 mAh batteries
- Operating Temperature Range: 0°F to 120°F
- Ultimate Sensitivity: 50 – 1000 ppm

**Probe:**

- Intelligent tip, with environment sensing element to eliminate the potential of false alarms.
- Flexible 15.5 inch probe length for difficult to reach locations.

**Display:**

Six vertical LED's enable selectively (red, yellow or green) to display the following information to the user such as:

- The relative signal level of the detected leak
- The selected sensitivity range (low/medium or high) of the unit
- Diagnostic information: low battery, interference/wait, contaminated atmosphere, readiness of the unit or fault conditions of the unit

**Keypad Controls:**

- ON/OFF, Volume/Mute, Sensitivity for High, Medium and Low level selection, Peak button when multiple leaks are suspected

DETECTS: Acetone, Acetylene, Ammonia, Benzene, Butane, Butanol, Chlorine, Ethane, Ethanol, Gasoline, Hexane, Hydrogen, Hydrogen Sulfide, Isobutane, Methane (natural gas), Methanol, Methyl Acetate, Methyl Chloride, Methyl Ether, Naptha, N-Butane, Pentane, Propane, Propanol, Sulfur Dioxide and Trichloroethane



The 55200 "INSPECTOR" and 55100 offer revolutionary features and state of the art micro processing technology. The design sensor delivers an accurate and instantaneous response. Both units come in a heavy duty custom molded carrying case and meet SAE J1627 and CE conformity.

**55100 / 55200 GENERAL FEATURES & SPECIFICATIONS:**

- Digital Signal Micro Processor
- Auto Release Feature
- Keypad Control
- Detects All Halogenated Refrigerants
- Battery Test Feature
- Power Supply (2 "C" Batteries)
- Meets SAE J1627 / CE Conformity
- Flexible 43 cm (16") Probe
- Variable Frequency Audible Alarm

**55100 ELECTRONIC LEAK DETECTOR**



The 55100 offers an accurate and reliable solution to Electronic Leak Detection.

**SPECIFIC FEATURES:**

- 3 Levels Of Sensitivity (5 Levels Of Detection)
- Visual Leak Level Indicator
- Detects Leaks As Small As 3 gr (1/10 oz) Per Year\*

\* based on optimal laboratory conditions

- Detects All Refrigerants, CFC'S, HCFC'S, HFC'S
- Includes a Custom Molded Carrying Case



**55100-SEN** Sensor Tip for 55100, 55200, 55300 & 55400

**55200 "INSPECTOR" 2 IN 1 ELECTRONIC / UV LEAK DETECTOR**



This revolutionary design allows the user to perform Electronic and UV Leak Detection all with one tool. The "INSPECTOR" offers six levels of sensitivity (15 levels of detection) with a tri-colored LED indicator. This allows the "INSPECTOR" to pin-point leaks as small as 3 gr (1/10 oz) per year. The ultra bright UV light is built into the end of the probe allowing easy access into tight areas. Incorporating both electronic and UV technology into one unit insures that even the toughest leaks can be found.



**PATENT# 6,647,761**

**SPECIFIC FEATURES:**

- Ultra Bright UV/Blue LED Light
- UV Safety Glasses
- 6 Levels Of Sensitivity (15 Levels Of Detection)
- Tri-colored Visual Leak Level Indicator
- Mute Function
- Detects Leaks As Small As 3 gr (1/10 oz) Per Year\*

\* based on optimal laboratory conditions

- Detects All Refrigerants, CFC'S, HCFC'S, HFC'S
- Includes A Custom Molded Carrying Case

Tri-Colored Visual Leak Level Indicator

Inject the A/C System with Dye! The UV Light Button will illuminate the Leak!

Mute Function  
Use Reset to Ignore Current Level of Leak and look for Higher Level of Concentration

**53515-B** LED Bulb for 55200, 55300 & 55400



**55300 COMPLETE ELECTRONIC & UV LEAK DETECTION KIT**



This kit offers the "INSPECTOR" along with our UV Dye Injection System. Our cartridge type dye injector is fast and easy to use. Just twist the handle to inject the appropriate amount of dye. The 55300 kit is the ultimate solution for all your A/C leak detection needs.

**SPECIFIC FEATURES:**

- 55200 "INSPECTOR" Electronic Leak Detector
- UV Dye Injector w/25 Application Dye Cartridge
- Dye Injector Connection Hose w/ 1/4" FL Adapter
- UV Safety Glasses & Dye Cleaner
- Comes In A Custom Molded Carrying Case

**55400 COMPLETE ELECTRONIC & UV LEAK DETECTION KIT**



This kit offers the "INSPECTOR" along with our UV Dye Injection System. Our refillable dye injector is fast and easy to use. Just twist the handle to inject the appropriate amount of dye. The 55400 kit is the ultimate solution for all your A/C leak detection needs.

**SPECIFIC FEATURES:**

- 55200 "INSPECTOR" Electronic Leak Detector
- Refillable Dye Injector
- Dye Injector Connection Hose w/ 1/4" FL Adapter
- 2 oz Bottle of Concentrated Universal Dye
- UV Safety Glasses & Dye Cleaner
- Comes In A Custom Molded Carrying Case

**55744 ELECTRONIC LEAK DETECTOR FOR R744**



Mastercool's Electronic Leak Detector for R744 is the most technologically advanced instrument of its kind. The minimal power requirements, small size and high sensitivity combine to create a tool which is easy to handle and ultra-effective at locating even the most difficult to find leaks.

**SPECIFICATIONS:**

- Operating Temperature: 32 - 122°F (0-50°C)
- Warm Up Time: 10 seconds
- Response Time: < 1 second
- Reset Time: < 1 second
- Sensitivity (High): < 400 ppm at 350 ppm ambient
- Sensitivity (Low): < 4,000 ppm at 350 ppm ambient
- Sensor Lifetime: > 2 years
- Probe Length: 12" (30cm)
- Batteries: 4 x 1.5V 'AA' Alkaline Batteries (6 VDC)
- Battery Life: 20 hours
- Dimensions: 20.3 cm x 6.3 cm x 5.7 cm
- Weight: 15 oz (425 grams) with batteries



LEAK DETECTION

**53518-UV RECHARGEABLE 110 V UV FLASHLIGHT (LED)**  
**53518-UV-220 RECHARGEABLE 220 V UV FLASHLIGHT (LED)**



- Twist the handle to zoom the UV light in or out
- AAA battery holder provides backup power to flashlight (3 AAA batteries included)
- Battery Life: 3 to 5 hours continuous leak detection
- Includes safety glasses

**SPECIFICATIONS:**

- High Intensity LED
- 154 - 170  $\mu\text{W}/\text{cm}^2$  which is compatible to a 50 watt UV flashlight
- 2 Illumination Modes: super bright and battery conservation
- Battery: Lithium Li-Ion, full discharge and cut-off discharge of 4.2V and 2.75V



**53512-UV MINI UV FLASHLIGHT (LED)**



- 12 LED Bulb UV Illumination
- Aluminum body with Type III anodized finish
- Battery Life: 5 hours continuous leak detection
- Includes safety glasses
- Easy grip texture
- 3 AAA batteries
- 25,000 hour bulb life

**53517-UV COMPACT UV FLASHLIGHT (LED)**



- 17 LED Bulb UV Illumination
- Aluminum body with Type III anodized finish
- Battery Life: 4 hours continuous leak detection
- Includes safety glasses
- Easy grip texture
- 3 AAA batteries
- 25,000 hour bulb life

**53515 MACH IV FLEXIBLE UV LIGHT (LED)**



- The Mach IV flexible UV light has **4 TRUE UV LEDS** delivering a brilliant fluorescent glow.
- Gets into tight areas easily.
  - Includes UV Enhancing Safety Glasses
- PATENT NO. 6,647,761**

53515-B Light Bulb

**53012 UV SWIVEL HEAD LIGHT (12 V/100 WATTS)**



- 180° Swivel Heads Get Into Tight Places
- Heavy Duty Metal Construction
- Instant ON
- Includes UV Enhancing Safety Glasses

53012-B Light Bulb

53012-L Lens

**53312 UV MINI LIGHT (12 V/50 WATTS)**



- High Intensity
- 16ft. (5m) Cord
- Compact & Lightweight
- Instant ON
- Includes UV Enhancing Safety Glasses



53312-B Light Bulb

53312-L Lens



**COMPACT UV LEAK LOCATOR KITS**

Leading the way in UV LEAK DETECTION, Mastercool offers a variety of compact UV Leak Locator Kits. Each kit offers a powerful inspection lamp, a "Refillable" or "Cartridge Type" Dye Injector and accessories. All kits are packaged in a clamshell or custom molded carrying case.



53451-110



53587



53585



53100



53500

KIT PART#	INJECTOR / LIGHT	CONTENTS OF EACH KIT	VOLTAGE/ WATT
53451-110	53123/ 53518-UV	Rechargeable UV light, Batteries, Rechargeable Batteries, Battery Holder, Refillable 2 oz Dye Injector, 2 oz Concentrated Universal A/C Fluorescent Dye (25 Application), 4 oz Dye Remover, 25 Service Information Labels, UV Enhancing Safety Glasses	LED
53451-220	53123/ 53518-UV-220	Rechargeable UV light, Batteries, Rechargeable Batteries, Battery Holder, Refillable 2 oz Dye Injector, 2 oz Concentrated Universal A/C Fluorescent Dye (25 Application), 4 oz Dye Remover, 25 Service Information Labels, UV Enhancing Safety Glasses	LED
53451-C-110	53223/ 53518-UV	Same as 53451-110 but with Replaceable 2 oz Dye Cartridge (25 Applications)	LED
53451-C-220	53223/ 53518-UV-220	Same as 53451-220 but with Replaceable 2 oz Dye Cartridge (25 Applications)	LED
53587	53809/ 53517-UV	Compact UV Flashlight (53517-UV), 1 oz die injector with replaceable 1 oz die cartridge (10 application), Low Side Hose, 1/4" FL adapter, UV Enhancing Safety Glasses, Service Information Labels, Packaged in a clam shell	LED
53580	53809/ 53515	MACH IV Flexible LED UV Light w/1 oz (30 ml) Dye Injector, w/Replaceable 1 oz (30 ml) Dye Cartridge (10 Appl.), Low-Side Hose w/R134a Coupler, 1/4" FL Adapter, 10 Serv. Info. Lbls. & UV Enhancing Safety Glasses	LED
53585	53809/ 53515	Same as above, but w/1 oz OIL/ATF/Gas (53610) & Diesel Fluorescent Dye and 1oz (30ml) Engine Coolant Fluorescent Dye (53609)	LED
53100	53123/ 53012	High Intensity Swivel Head Light, w/ Refillable 2 oz (60 ml) Dye Injector, 2 oz (60 ml) Concentrated Universal A/C Fluorescent Dye (25 Appl.), 4 oz (1200 ml) Dye Remover, 25 Serv. Info. Lbls. & UV Enhancing Safety Glasses	12 V/100 WATT
53100-C	53223/ 53012	Same as 53100, but with Replaceable 2 oz (60 ml) Dye Cartridge (25 Appl.)	12 V/100 WATT
53500	53123/ 53312	High Intensity Mini Light w/Refillable 2 oz (60 ml) Dye Injector, 2 oz (60 ml) Concentrated Universal A/C Fluorescent Dye (25 Appl.), 4 oz (120 ml) Dye Remover, 25 Serv. Info. Lbls. & UV Enhancing Safety Glasses	12 V/50 WATT
53500-C	53223/ 53312	Same as 53500, but with Replaceable 2 oz (60 ml) Dye Cartridge (25 Appl.)	12 V/50 WATT

LEAK DETECTION

**REFILLABLE UNIVERSAL OIL/DYE INJECTOR**



To inject the oil or dye, simply connect the injector to the low side of the A/C system and twist the handle until you reach the desired amount.

- 53123** Refillable Universal Dye Injector with auto shut-off valve adapter and 2 oz (60 ml) Bottle of Concentrated A/C Dye (25 Apps)

---

- 53123-A** Refillable Universal Dye/Oil Injector (w/o dye) with auto shut-off valve adapter

---

- 53134** Refillable Oil/Dye Injector with (R134a 13 mm Connection) and 2 oz (60 ml) Bottle of Concentrated A/C Dye (25 Applications)

---

- 53322** Refillable Dye Injector with (1/4" Auto Shut-off Valve Connection) and 2 oz (60 ml) Bottle of Concentrated A/C Dye (25 Apps)

**53223 "CARTRIDGE TYPE" UNIVERSAL DYE INJECTOR**



Adding dye with the 53223 is fast and easy, simply connect the injector to the low side of the A/C system and twist the handle to the next application line. The replaceable cartridge provides 25 applications of universal dye that is compatible with all systems. The injector hose comes complete with an auto shut-off valve adapter for 1/4" FL systems.

**53809 MINI DYE INJECTOR**



"Cartridge Type" Dye Injector (10 Applications) Concentrated Dye.

**53123-YF REFILLABLE R1234yf OIL/DYE INJECTOR**



To inject the oil or dye, simply connect the injector to the low side of the A/C system and twist the handle until you reach the desired amount. The injector hose comes complete with a R1234yf coupler.



**OIL INJECTOR**



Excellent method for adding refrigerant oil or large amounts of UV leak detection dye to the A/C system. Add oil by allowing vacuum to pull it in after evacuation process, or use refrigerant to push it in using the recharge system.

- 90375** Standard 1/4" FFL x 1/4" MFL

---

- 82375** ACME 1/2" FFL x 1/2" MFL





**STANDARD UNIVERSAL ULTRAVIOLET A/C DYES**



- 92699** Standard Universal Dye - Six 1/4 oz Packs (6 pcs)  
Pack 1/4 oz (7.5 ml) - 1 Application
- 92708** Standard Universal Dye  
8 oz (240 ml) Bottle - 32 Applications
- 92732** Standard Universal Dye  
32 oz (1 L) Bottle - 128 Applications



**CONCENTRATED UNIVERSAL ULTRAVIOLET A/C DYES**



- 53825** Concentrated Universal Dye Cartridge  
Replaceable Cartridge - 25 Applications
- 53810** Concentrated Universal Dye Cartridge  
Replaceable Cartridge - 10 Applications
- 53625** Concentrated Universal Dye  
2 oz (60 ml) Bottle - 25 Applications



**FLUORESCENT DYE**



- 53609** Engine Coolant (1 oz. (30 ml) bottle)
  - 1 oz for 1 vehicle application per 16 quarts (15 L) of fluid
- 53610** Engine Oil (1 oz. (30 ml) bottle)
  - Engine Oil (Gas & Diesel) - 1 vehicle application per 4-5 quarts (4 L-5 L) of oil
  - Automatic Transmission Fluid - 1 vehicle application per 4-5 quarts (4 L-5 L) of fluid
  - Gasoline & Diesel Fuel - 1 vehicle application per 2 gallons (8 L) of fuel



- Lubricates system and helps prevent leaks
- Seals small leaks
- Illuminates larger leaks through the use of high quality universal fluorescent dye
- Compatible with all refrigerants and oils
- No need to recover refrigerant during application.
- Stops leaks in metal and rubber air conditioner and refrigeration parts including evaporators, o-rings, gaskets and hoses.
- Patented delivery system prevents any residual sealant from being left in can



LEAK DETECTION

**Intertek** LABORATORY TESTED

- ✓ NO DAMAGE
- ✓ NO RESTRICTION

- 53615** Master Leak Shield HVAC -  
Up to 1.5 Tons (5.3 kW)  
1 oz can of Master Leak Shield HVAC sealant with dye for use on systems up to 1.5 tons
- 53660** Master Leak Shield HVAC -  
1.5 to 6 Tons (5.3 kW to 21 kW)  
3 oz can of Master Leak Shield HVAC sealant with dye for use on systems 1.5 to 6 tons



- Lubricates system and helps prevent leaks
- Seals small leaks in evaporator, condenser, hoses, o-rings and gaskets
- Illuminates larger leaks through the use of high quality universal fluorescent dye
- For R134a A/C systems
- Safe for hybrid and electric compressors



**Intertek** LABORATORY TESTED  
 ✓ NO DAMAGE  
 ✓ NO RESTRICTION

**53909** Mini Auto A/C Master Leak Shield Dye Injector  
 "Cartridge Type" 1 oz injector with Auto A/C Master Leak Shield Sealant with Dye, low side hose, 1/4" FL adapter

**53910** Auto A/C Master Leak Shield  
 1 oz replacement cartridge of Auto A/C Master Leak Shield Sealant with Dye

**53592** Mini UV Flashlight Kit  
 53512-UV Mini UV Flashlight (12 LED), "cartridge type" 1 oz Injector with Auto A/C Master Leak Shield Sealant with Dye, low side hose, 1/4" FL adapter, UV safety glasses, service info. labels, packaged in clam shell

**53597** Compact UV Flashlight Kit  
 53517-UV Compact UV Flashlight (17 LED), "cartridge type" 1 oz Injector with Auto A/C Master Leak Shield Sealant with Dye, low side hose, 1/4" FL adapter, UV safety glasses, service info. labels, packaged in clam shell



Easy to use! Stops leaks in metal and rubber automotive air conditioner parts including evaporators, condensers, o-rings, gaskets and hoses.

- For use in R134a, HFO-1234yf, hybrid and electronic A/C systems.
- Includes o-ring conditioner, proprietary anti-wear and anti-oxidant additives.
- Adds 1 oz. (30 ml) leak stop with UV leak detection dye.
- Patented delivery system, does not contain refrigerant.
- Safe, does not contain harmful polymers
- HFC Free Aerosol


US Patent No. 8,074,009, other US and foreign patents pending



**53615-A** Auto Master Leak Shield  
 1 oz can of Auto Master Leak Shield Sealant with Dye



**Mastercool®**  
 "World Class Quality"

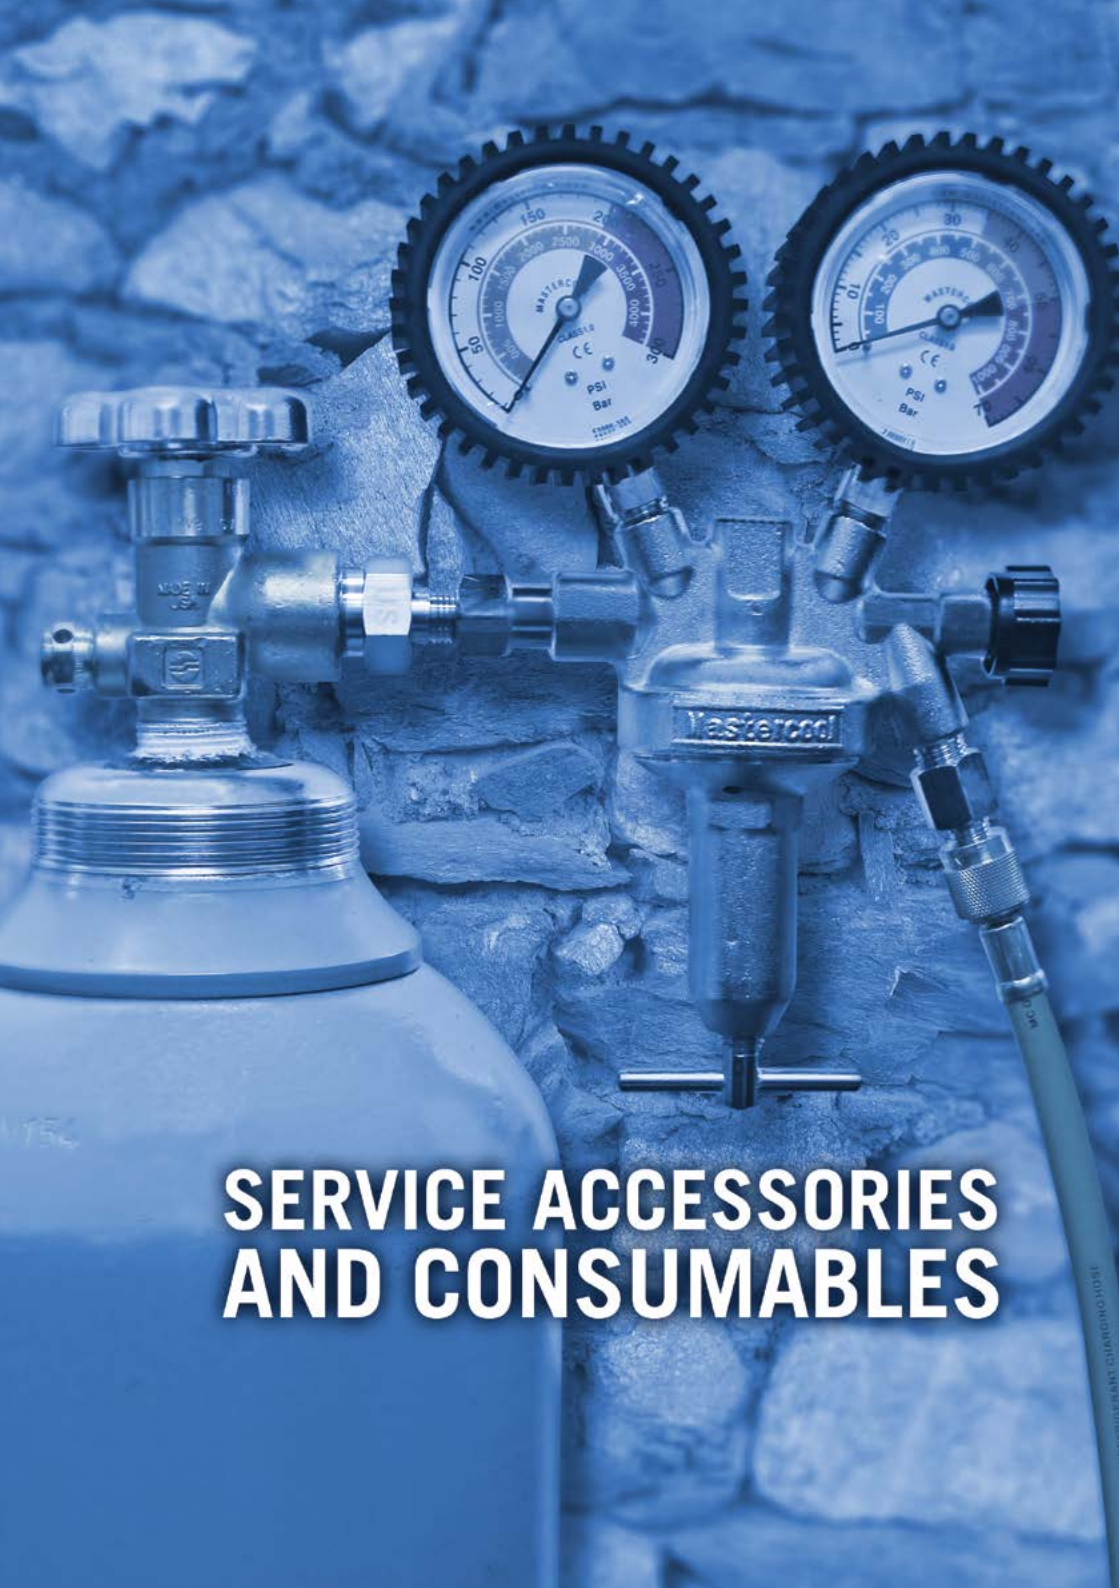

# SERVICE ACCESSORIES AND CONSUMABLES

REFRIGERANT CHARGING HOSE

**NITROGEN PRESSURE REGULATORS**

Mastercool's nitrogen regulator is specifically designed to meet the specifications of HVAC/R and automotive A/C systems. This single stage nitrogen regulator is used to test systems for leaks when they do not contain refrigerant.

- 1/4" SAE flare outlet port, with control valve, to keep pressure on the regulator at all times
- T-Handle for ease of pressure adjustment
- 63 mm (2 1/2") gauges with guards
- High pressure gauge 4400 psig (300 bar), Low pressure gauge 1000 psig (70 bar)
- Kits come with leak testing gauge and charging hose, packaged in a blow molded case



Model #	<b>53001</b>	<b>53002</b>	<b>53003</b>	<b>53004</b>	<b>53005</b>
Standard	CGA580 (US)	DIN477#6 and DIN477#10 (This unit includes an adapter to convert DIN477#6 to DIN477#10) (France/Germany)	BS3 (England)	AS2473.2 (Australia)	5-UNI11144 (Italy)

1/4 FL-M outlet connection

**PRESSURE TESTING REGULATOR KITS**



**53010 PRESSURE TESTING REGULATOR KIT (US)**

53001 Nitrogen Pressure Regulator, 48" Yellow Charging Hose (47482), Leak Testing Adapter (53042), Blow molded case (53000-PB)

**53020 PRESSURE TESTING REGULATOR KIT (France/Germany)**

53002 Nitrogen Pressure Regulator, 48" Yellow Charging Hose (47482), Leak Testing Adapter (53042), R410a Straight Adapter 1/4 FL-M x 5/16 Swivel-F (90413), Blow molded case (53000-PB)

**53030 PRESSURE TESTING REGULATOR KIT (England)**

53003 Nitrogen Pressure Regulator, 48" Yellow Charging Hose (47482), Leak Testing Adapter (53042), R410a Straight Adapter 1/4 FL-M x 5/16 Swivel-F (90413), Blow molded case (53000-PB)

**53040 PRESSURE TESTING REGULATOR KIT (Australia)**

53004 Nitrogen Pressure Regulator, 48" Yellow Charging Hose (47482), Leak Testing Adapter (53042), Blow molded case (53000-PB)

**53050 PRESSURE TESTING REGULATOR KIT (Italy)**

53005 Nitrogen Pressure Regulator, 48" Yellow Charging Hose (47482), Leak Testing Adapter (53042), Blow molded case (53000-PB)

**53042-YF LEAK TESTING ADAPTER FOR R1234YF**



- 80 mm gauge
- R1234yf low side coupler



**OPTIONAL ACCESSORIES**

<b>66434-R</b>	High Side Standard R134a 1/4" FL-M x 13 mm Economy Coupler	<b>53000-70</b>	Low Pressure Regulator Gauge
<b>82834</b>	High Side Manual R134a 14 mm-F x 16 mm Coupler	<b>53000-300</b>	High Pressure Regulator Gauge
<b>90413</b>	R410a Straight Adapter 1/4" FL-M x 5/16" Swivel-F	<b>47482</b>	48" Yellow Charging Hose
<b>53042</b>	Leak Testing Adapter	<b>93254-E</b>	Black Gauge Guard
<b>53000-42</b>	Leak Testing Gauge	<b>53000-W</b>	Teflon Washer



**Mastercool®**  
"World Class Quality"

**PRESSURE TESTING REGULATOR KITS\***

**ONLY FOR SALE IN EUROPE**



**53025 PRESSURE TESTING REGULATOR KIT** (France/Germany) 53002 Nitrogen Pressure Regulator, 48" Yellow Charging Hose (47482), Leak Testing Adapter (53042), R410a Straight Adapter 1/4 FL-M x 5/16 Swivel-F (90413), Regulator Adapter (53002-AD), 1 liter bottle of nitrogen (91150), Blow molded case (53015-PB)



**53035 PRESSURE TESTING REGULATOR KIT** (England) 53003 Nitrogen Pressure Regulator, 48" Yellow Charging Hose (47482), Leak Testing Adapter (53042), R410a Straight Adapter 1/4 FL-M x 5/16 Swivel-F (90413), 1 liter bottle of nitrogen (91150), Regulator Adapter (53003-AD), Blow molded case (53015-PB)

**53055 PRESSURE TESTING REGULATOR KIT** (Italy) 53005 Nitrogen Pressure Regulator, 48" Yellow Charging Hose (47482), Leak Testing Adapter (53042), 1 liter bottle of nitrogen (91150), Regulator Adapter (53004-AD), Blow molded case (53015-PB)

**53025-NH PRESSURE TESTING REGULATOR KIT** (France/Germany) 53002 Nitrogen Pressure Regulator, 48" Yellow Charging Hose (47482), Leak Testing Adapter (53042), R410a Straight Adapter 1/4 FL-M x 5/16 Swivel-F (90413), 1 liter bottle of NitroH (91151), Regulator Adapter (53002-AD), Blow molded case (53015-PB)

**53035-NH PRESSURE TESTING REGULATOR KIT** (England) 53003 Nitrogen Pressure Regulator, 48" Yellow Charging Hose (47482), Leak Testing Adapter (53042), R410a Straight Adapter 1/4 FL-M x 5/16 Swivel-F (90413), 1 liter bottle of NitroH (91151), Regulator Adapter (53003-AD), Blow molded case (53015-PB)

**53055-NH PRESSURE TESTING REGULATOR KIT** (Italy) 53005 Nitrogen Pressure Regulator, 48" Yellow Charging Hose (47482), Leak Testing Adapter (53042), 1 liter bottle of NitroH (91151), Regulator Adapter (53004-AD), Blow molded case (53015-PB)

\* add a **-A** to include a low side manual R134a 1/4" FL-M x 13mm quick coupler (82934-e)

\* add a **-AYF** to convert the leak testing adapter to a R1234yf leak testing adapter (53042-yf)



**REGULATOR ADAPTER**

**ONLY FOR SALE IN EUROPE**

53003-AD



These adapters are designed to work with Mastercool's line of Nitrogen Pressure Regulators and allow for the use of our new 1 Liter Nitrogen and NitroH bottles.



**53002-AD** France/Germany | **53003-AD** England | **53005-AD** Italy

**1 LITER NITROGEN BOTTLE** (max filling pressure 110 bar)

**ONLY FOR SALE IN EUROPE**



Mastercool introduces its new offering of 1 liter portable Nitrogen bottles.

The nitrogen bottles are commonly used for:

- Testing for leaks in pressure of HVAC & A/C
- Flushing of HVAC & A/C systems
- Fluxing during soldering in HVAC & A/C
- Calibration of pressure switches
- Gauge calibration and much more



**91150-6** (6 pcs.) 1 liter bottle of Nitrogen

**91150-48** (48 pcs.) 1 liter bottle of Nitrogen

**91150-96** (96 pcs.) 1 liter bottle of Nitrogen

**1 LITER NITRO H BOTTLE** (max filling pressure 110 bar)

**ONLY FOR SALE IN EUROPE**



Mastercool introduces its new offering of 1 liter portable NitroH bottles. NitroH is a mixture of 95% nitrogen and 5% hydrogen. This unique combination allows this gas to be used for leak detection in conjunction with Mastercool's 55800 IntellaSense Refrigerant Leak Detector.



**91151-6** (6 pcs.) 1 liter bottle of NitroH

**91151-48** (48 pcs.) 1 liter bottle of NitroH

**91151-96** (96 pcs.) 1 liter bottle of NitroH

SERVICE ACCESSORIES AND CONSUMABLES



**Mastercool®**  
"World Class Quality"

**TOTAL A/C QUICK FLUSH**



Specific fluid for the inner flushing of air conditioning and refrigeration systems.

- O-Ring safe
- Non-Flammable
- Non-Corrosive
- For Professional Use
- Pressurized container ready to use



- 91051** Total A/C Quick Flush Kit
- 91050** 17 oz. Total A/C Quick Flush Can
- 91050-6** 6 Pack - 17 oz. Total A/C Quick Flush Cans

**91046-A A/C SYSTEM FLUSH KIT**



Includes flush gun, hose, canister and canister adapter. Designed to work with any light weight flushing agent which can be mixed with pressurized air. Excellent for quickly and effectively removing refrigerant oil debris during retrofitting or compressor replacement.



**A/C FLUSH SOLVENT**



- Effectively removes debris and sludge from A/C components
- Solvent-based
- Evaporates quickly
- Leaves no residue
- O-Ring safe
- Non-Flammable
- Non-Corrosive
- Professional use only
- Flush any A/C system



- 91049-32** 32 oz. Flush Solvent
- 91049-32-6** 6 pack - 32 oz. Flush Solvent
- 91049-128** 1 Gallon Flush Solvent
- 91049-128-4** 4 pack - 1 Gallon Flush Solvent

**92707 HYBRID A/C COMPRESSOR OIL**



- Formulated for Vehicles with Electric A/C Compressors
- High Dielectric Formula Provides Advanced Compressor Protection
- Synthetic lubricant specifically created for electric hybrid air conditioning compressors
- For replenishing hybrid or electric compressor oil in accordance with the quantity evacuated or the quantity recommended by the compressor manufacturer
- Provides outstanding lubricity and compressor protection
- Compatible replacement lubricant for compressors using Honda 38899RCJA01, ND-10, ND-OIL 11 (ND-11), and SE-10Y
- High dielectric protection formula has excellent "resistivity" to potential electrical current leakage in high voltage hybrid A/C systems
- Contains conditioners, inhibitors and anti-wear agents
- Net contents 7 oz. (210 mL)

**COMPRESSOR OILS**



Maximum protection with excellent thermal & oxidative stability. Moisture tolerant. OEM approved.

**PAG 65**

**92709-65-8** PAG 65 Oil (8 oz (240 ml) bottle)

**92709-65-32** PAG 65 Oil (32 oz (1 L) bottle)

**PAG 100**

**53826** PAG 100 Oil (2 oz (60 ml) cartridge)

**92709-100-8** PAG 100 Oil (8 oz (240 ml) bottle)

**92709-100-32** PAG 100 Oil (32 oz (1 L) bottle)

**PAG 150**

**92709-150-8** PAG 150 Oil (8 oz (240 ml) bottle)

**92709-150-32** PAG 150 Oil (32 oz (1 L) bottle)

**Ester Oil**

**53827** Ester Oil (2 oz (60 ml) cartridge)

**92710** Ester Oil (8 oz (240 ml) bottle)

**92712** Ester Oil (32 oz (1 L) bottle)

**ACCESSORIES**



**53314** Dye Remover  
4 oz (120 ml)

**53315** Service Labels  
25 per pack, bright yellow label indicating that the system has been charged with UV Dye.

**92398** UV Enhancing Safety Glasses  
This is a must for protection against ultraviolet light during leak detection.

**91000-B DELUXE CLUTCH HUB PULLER/INSTALLER KIT**



Kit contains a complete offering of A/C compressor clutch hub pullers and installers for GM, Ford, Chrysler and Imports. Includes a universal clutch holding tool and comes in a custom molded case.

**92311 DELUXE ORIFICE TUBE SERVICE KIT**



This 5 piece universal kit will remove and install any style orifice tube. Comes in custom molded box.

**92329 TOYOTA A/C DISCONNECT TOOL**



The new Toyota spring lock A/C hose couplings require this special disconnect tool. Simply insert the end of the tool into the coupling to disengage the hose.

**ALUM BOND**



A two-component epoxy formula highly concentrated with carefully selected pure aluminum particles, modified curing agents and special high quality additives to provide maximum strength, durability and ease of application. Alumbond is aluminum filled epoxy specially formulated for repairing condenser coils, tanks, valves, pumps, castings, water jackets, radiators, etc., where non-rusting, non-magnetic aluminum finish is desired.



**PHYSICAL PROPERTIES:**

- Hardness (Shore, ASTM D 1706): 83D
- Coefficient of Thermal Expansion: 40 x 10-6 cm/cm/C
- Compression Strength (ASTM D 695): 8600 psi (59 M Pa)
- Tensile Strength (ASTM D 638): 3500 psi (24 M Pa)
- Maximum Line Pressure (after 5 hrs application time): 650 psi

**90935** Aluminum Repair Kit (6.5 oz package)

**90934** Aluminum Repair Kit (2 oz package)

**90935-12** Aluminum Repair Kit - box of 12 (each box contains Hardener & Resin (3.25 oz. (94g) each)





A man with a beard, wearing a blue zip-up jacket and work gloves, is operating a manual tube and hose forming tool. The tool is blue and silver, with a long metal rod extending from it. The background is a textured, light blue surface. The overall image has a blue color cast.

**Mastercraft**  
High Class Quality

**TUBE & HOSE  
FORMING**

**71500-A HYDRA-KRIMP**



**Fabricating A/C Hoses Just Got Easier...**  
Mastercool's Patented "Hydra - Krimp" makes crimping barbed and beaded fittings as easy as 1 - 2 - 3! The lightweight hand-held hydraulic press is very portable and ideal for shop and field applications. The kit comes with a complete set of dies covering hose sizes #6, #8, #10, #12 and reduced barrier #6, #8, #10 and #12. The dies snap quickly into the press fixture requiring no pins or screws.



**PATENT# 6,324,884**

Kit comes in a custom molded case and includes:

- 71500-001AB** Hydra - Krimp Pump
- 71500-001B** Hydra - Krimp Yoke
- 71500-001C** Complete Die Set Assembly (7 pc. set)
- 71500-6** Die Set - #6 (5/16")  
Die Set - #8 (13/32" Reduced Barrier)
- 71500-8** Die Set - #8 (13/32")
- 71500-10** Die Set - #10 (1/2")
- 71500-12** Die Set - #12 (5/8")
- 71500-6SRB** Die Set - #6 (5/16" Reduced Barrier)
- 71500-10SRB** Die Set - #10 (1/2" Reduced Barrier)
- 71500-12SRB** Die Set - #12 (5/8" Reduced Barrier)
- 71500-PB** Custom Molded Box



The die snaps quickly into the press fixture requiring no pins or screws.



**71550 A/C HOSE CRIMPER**



The 71550 is our "manual style" A/C hose crimper. The dies snap quickly into place requiring no pins or screws. The unit can be easily mounted to a bench using the holding fixture or held securely in a vice. This kit comes with a complete set of dies covering standard hose sizes #6, #8, #10 and #12.




**PATENT# 6,324,884**

**\*Optional reduced barrier sizes are available.**

Kit comes in a custom molded case and includes:

- 71500-001** Hydra - Krimp Pump
- 71550-002** Arbor Assembly
- 71550-003** Holding Fixture Assembly
- 71500-6** Die Set - #6 (5/16")
- 71500-8** Die Set - #8 (13/32")
- 71500-10** Die Set - #10 (1/2")
- 71500-12** Die Set - #12 (5/8")
- 71550-PB** Custom Molded Carrying Case



The die snaps quickly into the press fixture requiring no pins or screws.



**HYDRA-SWAGE**



71600-A



71650-A

Fabricates and Expands Copper, Aluminum and Soft Steel Tubing Using Hydraulic Power.  
**PATENT# 6,619,099**



- 71600-A (7 HEAD KIT)** Consists of Expander Heads 3/8, 1/2, 5/8, 3/4, 7/8, 1 and 1 1/8", Hydra-Swage 71601, Adapter and Inner-Outer Reamer
- 71600-A-M (7 HEAD KIT)** Same as 71600, but using Metric Expander Heads 10, 12, 15, 16, 18, 22 and 28 mm.
- 71650-A (10 HEAD KIT)** Consists of Expander Heads 3/8, 1/2, 5/8, 3/4, 7/8, 1, 1 1/8, 1 3/8, 1 5/8, and 2 1/8", Hydra-Swage 71601, Adapter and Inner-Outer Reamer.

PART#	DESCRIPTION	TUBE O.D.
71601-A	Hydra-Swage	
71601-D	Adapter for 71601	
71685	Inner - Outer Reamer	
71600-PB	Molded Box for 71600, 71600-M & 71650	
71600-03	Expander Head	3/8"
71600-04	Expander Head	1/2"
71600-05	Expander Head	5/8"
71600-06	Expander Head	3/4"
71600-07	Expander Head	7/8"
71600-08	Expander Head	1"
71600-09	Expander Head	1 1/8"
71600-11	Expander Head	1 3/8" (35 mm)
71600-13	Expander Head	1 5/8"
71600-17	Expander Head	2 1/8" (54 mm)
71600-10M	Expander Head	10 mm
71600-12M	Expander Head	12 mm
71600-15M	Expander Head	15 mm
71600-16M	Expander Head	16 mm
71600-18M	Expander Head	18 mm
71600-22M	Expander Head	22 mm
71600-28M	Expander Head	28 mm

TUBE AND HOSE FORMING

**HYDRAULIC FLARING AND EXPANDING**



71675



71676

Mastercool introduces the newest members of its handheld hydraulic line of tubing tools. These new kits are an upgrade to the existing hydra-swage expanding kits, allowing the user to easily make OEM flares with a pump of the handle. **PATENT# 6,619,099**



**71675 (7 HEAD KIT)**  
 Complete Hydraulic Flaring and Expanding Kit  
 Consists of Expander Heads 3/8, 1/2, 5/8, 3/4, 7/8, 1 and 1 1/8", Hydra-Swage 71601, Adapter, Inner-Outer Reamer and Hydraulic Flaring Accessory 71680 packaged in a blow molded case

**71676 (10 HEAD KIT)**  
 Complete Hydraulic Flaring and Expanding Kit  
 Consists of Expander Heads 3/8, 1/2, 5/8, 3/4, 7/8, 1, 1 1/8, 1 3/8, 1 5/8, and 2 1/8", Hydra-Swage 71601, Adapter, Inner-Outer Reamer and Hydraulic Flaring Accessory 71680 packaged in a blow molded case



**71680 HYDRAULIC FLARING ACCESSORY**



Add the 71680 to your existing Mastercool hydraulic expanding kits to allow for the ability to make OEM flares with a simple pump of the handle. Flares 7 sizes: 1/4, 5/16, 3/8, 1/2, 5/8, 3/4, 7/8."



**71700 HYDRAULIC FLARING & SWAGING TOOL**



This kit features a hand-held hydraulic press that accurately flares & swages copper tubing. Once the die and adapter are secured in the fixture, a few pumps of the handle and you're done! This tool really takes the work out of swaging and flaring, especially on larger tube sizes. The kit includes dies and adapters for flaring and swaging copper tubing sizes 1/4, 5/16, 3/8, 1/2, 5/8, 3/4 and 7/8." Comes in custom molded carrying case.

**PATENT# 5,782,128**

**71700-A** Flaring & Swaging Pump

**71700-B** Yoke Assembly

**71700-PB** Plastic Molded Box

**71700-01** 45° Flaring Cone

**71700-04** 1/4" Swaging Adapter

**71700-05** 5/16" Swaging Adapter

**71700-06** 3/8" Swaging Adapter

**71700-08** 1/2" Swaging Adapter

**71700-10** 5/8" Swaging Adapter

**71700-12** 3/4" Swaging Adapter

**71700-14** 7/8" Swaging Adapter

**71700-104** 1/4" Die Set

**71700-105** 5/16" Die Set

**71700-106** 3/8" Die Set

**71700-108** 1/2" Die Set


**71700-110** 5/8" Die Set

**71700-112** 3/4" Die Set

**71700-114** 7/8" Die Set

**71685** Inner-Outer Reamer

**70087** Steel Brush Thread Cleaner



The copper tube is secured in the holding fixture by the forming dies. The hydraulic pump pushes in the forming adapter to fabricate the flare or swage. This cut-away photo shows the forming process.



**71475 UNIVERSAL HYDRAULIC FLARING TOOL SET**



This kit fabricates:

- Push Connect 1/4, 5/16 and 3/8"
- GM Fuel Line Flare
- Brake Lines and Transmission 5/16 and 3/8"
- Flare/Double Flare 3/16, 1/4, 5/16, 3/8 and 1/2"
- Metric Bubble Flare 4.75, 6, 8, and 10 mm
- Comes in a custom molded box.

**PATENT# 5,782,128**



Push Connect

GM Fuel

45° Double Flare

ISO Bubble Flare



**71485-PB** Custom Molded Plastic Box for 71475




**Mastercool®**  
"World Class Quality" Inc.

**BALL BEARING CUTTERS**



Each cutter includes up to 8 ball bearings for easy operation and extra smooth cut.



Includes a detachable swivel deburring tool for smooth surface

Mastercool's EZ Tube Cutters offer the latest "Reduced Friction" technology! Our reduced friction design incorporates ball bearings into the cutter wheel, tube rollers and a control knob. Reducing the resistance in these high friction areas allows the cutter to roll fast and easy as it slices through the tube. The "Reduced Friction" design is sure to save time and reduce fatigue!



**COMPARE**



Standard steel cutting wheel used on competing cutters



Re-enforced steel cutting wheel with internal ball bearings for extra smooth cut

**72029** "Reduced Friction" Tube Cutter for 1/8 to 1 1/8" (3-28 mm)

**72035** "Reduced Friction" Tube Cutter for 1/4 to 1 1/2" (6-38 mm)

**72030** Replacement Cutting Wheel for 72029

**72034** Replacement Cutting Wheel for 72035

**TUBE CUTTERS**



70027



70029



70033



70037

MASTERCOOL tube cutters are lightweight yet durable. Carbide steel cutting wheels work with hard and soft copper, aluminum, brass, thin wall steel and stainless steel. All cutters feature rollers with flare cut-off grooves to salvage as much old tubing material as possible.

**70027** Mini Tube Cutter for 1/8 to 5/8" (3-16 mm) O.D. Tubing (1/8 to 1/2" Nominal)

**70029** Mini Tube Cutter for 3/8 to 1 1/8" (4-28 mm) O.D. Tubing (1/4 to 1" Nominal)

**70033** Heavy Duty Tube Cutter for 1/8 to 1 1/8" (4-28 mm) O.D. Tubing (1/4 to 1" Nominal)

**70035** Heavy Duty Tube Cutter for 1/4 to 1 5/8" (6-40 mm) (1/4 to 1 1/2" Nominal)

**70037** Sliding Ratchet Tube Cutter for 1/4 to 2 5/8" (6-67 mm) O.D. Tubing (1/4 to 2 3/4" Nominal), Triple Chrome Plated

**70038** Sliding Ratchet Tube Cutter for 1/4 to 3 1/2" (6-89 mm) O.D. Tubing (1/4 to 3" Nominal)



**Mastercool**<sup>®</sup>  
"World Class Quality"

**RATCHET STYLE TUBE CUTTER**



When you don't have swing room, ratchet action allows cutting all the way around the tubing easy.

**70030** (1/4 to 7/8" O.D. Tubing)

**70031** (5/16 to 1 1/8" O.D. Tubing)

**70025 CAPILLARY TUBE CUTTER**



Cuts all sizes of capillary tubes without collapsing the tube.

**80021 PLUMBERS TYPE MINI CUTTER**



Designed for applications with limited working space. Cuts soft copper, aluminum and thin wall steel tubing. Tube Cutter for 1/8 to 7/8" (4-22 mm) O.D. Tubing. (1/8 to 3/4" nom.)

**80121** Spare Cutting Wheel for 80021

**REPLACEMENT CUTTER WHEELS**



**70028**



**70034**

**70028** Replacement Cutting Wheels for 70027 (10 pcs).

**70034** Replacement Cutting Wheels for 70029, 70030, 70031, 70033, 70035, 70037 (10 pcs + 1 holding screw).

**70128** Carbide Cutting Wheel & Screw Set for 70027 includes: 2 Spare Cutting Wheels and 1 Holding Screw.

**70134** Carbide Cutting Wheel and Screw Set for 70029, 70035. Includes: 2 Spare Cutting Wheels and 1 Holding Screw.

**70138** Replacement Cutting Wheel for 70038 (1 per pkg.) Cut Hard and Soft Copper, Aluminum, Brass, Thin Wall Steel and Stainless Steel.

**70237** PVC Cutting Wheel for 70037. Cuts PVC and ABS.

**70238** Oversize PVC Cutting Wheel for 70038. Wheel is 1 5/8" Diameter. Cuts PVC and ABS.

**TUBE CONSTRICTOR WHEEL**

**70233** Used with 70033 or 70035.

**INNER-OUTER REAMERS**



**70085**



**71685**

**70085** Inner/Outer Reamer for 3/16 to 1 1/2" O.D. Tubing.

**71685** Designed to remove inner burrs easily. Full metal grip. Includes one spare tungsten blade for long use.

**71686-2** Two spare blades for 71685 (2 pcs).



TUBE AND HOSE FORMING



**Mastercool<sup>®</sup>**  
"World Class Quality" Inc.

**ONLY ECCENTRIC FLARING TOOL ON THE MARKET TO COVER UP TO 7/8"**



**70059**

*Make the perfect flare every time.*

Keeping with tradition, Mastercool introduces the newest addition to our flaring tool line. This eccentric flaring tool is the only tool on the market to cover up to 7/8" making the job of the HVAC/R technician easier everyday! Its automatic torque release prevents cracking of copper caused by over flaring.

Flares 6 sizes: 1/4, 3/8, 1/2, 5/8, 3/4, 7/8" O.D. Tubing



Railing allows yoke to smoothly travel while keeping the flaring tool and bar aligned



**70060**

**70059** Flares 6 sizes: 1/4, 3/8, 1/2, 5/8, 3/4, 7/8" O.D. Tubing.

**70060** Kit includes: **70059** Eccentric Flaring Tool, **71685** Inner-Outer Reamer, **70033** Heavy Duty Tube Cutter for (1/8" – 1 1/8") 4 to 28 mm.



3/8" access drive allows for use with impact wrench

**ECCENTRIC FLARING TOOLS**



**70057**

<< NEW AND IMPROVED >>

- Aluminum design
- Light weight and durable
- Automatic torque release



**70058**

**70057-A** Flares 6 Sizes: 1/4, 5/16, 3/8, 1/2, 5/8 and 3/4" O.D. Tubing.

**70057-AM** Flares 7 Metric Sizes: 6, 8, 10, 12, 14, 16 and 18 mm O.D. Tubing.

**70058-A** Kit includes: **70057-A** Eccentric Flaring Tool, **71685** Inner-Outer Reamer, **70033** Heavy Duty Tube Cutter for (1/8 – 1 1/8") 4 to 28 mm. O.D. Tubing (1/4 to 1" Nominal).

**70058-AM** Same as Kit 70058-A, but with Metric Eccentric Flaring Tool 70057-AM.



**STANDARD 45° FLARING TOOL**



- 70051** Standard 45° Flaring Tool  
Flares 7 Sizes: 3/16, 1/4, 5/16, 3/8, 7/16, 1/2 and 5/8" O.D. Tubing.
- 70051-M** Metric 45° Flaring Tool  
Flares 7 Metric Sizes: 4, 6, 8, 10, 12, 15 and 16 mm O.D. Tubing.

**70052 SLIDING DIE-BLOCK 45° FLARING TOOL**



Sliding Die-Block 45° Flaring Tool Flares and Burnishes 6 Sizes: 3/16, 1/4, 5/16, 3/8, 1/2 and 5/8" O.D. Tubing.

**70053 45° FLARING & SWAGING TOOL SET**



Durable forged steel slip-on yoke. Bars are chrome plated, hardened steel. Swages in close quarters where punch style cannot be used. Includes custom molded plastic box.

45° Flaring & Swaging Tool Set includes:

- Two Flaring Bars covering 9 sizes: 1/8, 3/16, 1/4, 5/16, 3/8, 7/16, 1/2, 5/8 and 3/4" O.D. Tubing.
- Five Swaging Adapters covering 7 sizes: 3/16, 1/4, 5/16, 3/8, 1/2, 5/8 and 3/4" O.D. Tubing.

**PUNCH-TYPE SWAGING TOOLS**



Enlarge one end of copper tubing to accept piece of original size tubing then solder together like a fitting. Tools are heat treated for durability.

**70040** All-In-One Swaging Punch  
Nickel-Chrome finish. Swages 1/4, 5/16, 3/8, 1/2 and 5/8".

**70048** Set of 5 Swaging Punches  
for 1/4, 5/16, 3/8, 1/2 and 5/8" O.D.

**70049** Flaring Bar and Set of 5 Punches  
for 1/4, 5/16, 3/8, 1/2 and 5/8" O.D. all in case.

MODEL#	SIZE	LENGTH
70041	1/4"	1/8"
70042	5/16"	-
70043	3/8"	1/4"
70044	1/2"	3/8"
70045	5/8"	1/2"
70046	3/4"	5/8"
70047	7/8"	3/4"

**70078 TORQUE WRENCH**



Ensures accurate tightness of fittings, especially R410A. Kit in a blow molded case includes sizes: 17, 22, 24, 26, 27 and 29 mm.

**Optional Wrench Sizes Available:**

**70078-19** 19 mm

**70078-25** 25 mm

**70078-28** 28 mm

**70078-32** 32 mm

**RATCHET WRENCHES**



**70081** Steel forged wrench with reversible ratchet. 9/16", 1/2" hex, 1/4" and 3/16" square.

**70082** Compact chrome plated wrench specially designed for use in hard to reach places. 1/4, 3/8, 3/16 and 5/16" square ratchet.

**70088 1/4" TUBE PIERCING PLIER**



**70088-TIP** Replacement Tip for 70088

**70083 PINCH-OFF PLIER**



Specially designed for the refrigeration industry. Pinches off and locks on copper tubing. Size: Throat 7", Depth 1", Jaw thickness 1/4"

**70069-A 4-IN-1 LEVER STYLE TUBE BENDER**



Complete 180° bend all metal multi-purpose tube bender for 3/16, 1/4, 5/16 and 3/8" O.D. Tubing.

**70069-AM** Complete 180° bend all metal multi-purpose tube bender for 6, 8, 10 mm O.D. Tubing.

**SPRING STYLE TUBE BENDERS**



Economical and effective tools for bending soft copper or aluminum tubing without kinks. Special nickel plated, spring steel is flared on one end for quick tube insertion. Each tool bends one size.

MODEL#	SIZE	LENGTH
70071	1/4"	10"
70072	5/16"	10"
70073	3/8"	10"
70074	1/2"	12"
70075	5/8"	14"
70077	3/4"	14"

**70076 SPRING STYLE TUBE BENDER SET**



Set of 5 spring benders for 1/4, 5/16, 3/8, 1/2 and 5/8" O.D. tubing.

**LEVER STYLE TUBE BENDERS**



70061

Open side design slips over tube at any point. Makes smooth short radius bends up to 180° with minimum effort. Calibrated to show angle of bend. Easy 90° start requires much less effort to make fast and accurate bends. Each tool bends one size.



70066

MODEL #	OUTSIDE DIAMETER OF TUBING	NOMINAL SIZE	RADIUS TO CENTER OF TUBE
70061	1/4"	1/8"	9/16"
70062	5/16"	-	11/16"
70063	3/8"	1/4"	15/16"
70064	1/2"	3/8"	1 1/2"
70065	5/8"	1/2"	2 1/4"
70066	3/4"	5/8"	3"
70067	7/8"	3/4"	3"



**70070 "Ratchet Style" TUBE BENDER KIT - 5 SIZES**



- Hand-operated ratchet design bends tubes easily. Bends 5 sizes: 3/8, 1/2, 5/8, 3/4 and 7/8" O.D. soft tubing
- Includes heavy duty tube cutter for 1/8 – 1 1/8" O.D. tubing
- Includes inner-outer reamer for 3/16 – 1 1/2" O.D. tubing
- Comes in custom molded case



**70070-M** "Ratchet Style" Metric Tube Bender Kit  
 Same as 70070 less 70033 Cutter & 70085 Reamer. Bends 8, 10, 12, 14, 16, 18 & 22 mm O.D. soft tubing.

**70080 "Ratchet Style" TUBE BENDER KIT - 6 SIZES**



<< BENDS 6 SIZES >>

Same as 70070 less 70033 Cutter & 70085 Reamer. Bends 6 sizes: 3/8, 1/2, 5/8, 3/4, 7/8 and 1 1/8" O.D. soft tubing.

**70070-RD REVERSE DIRECTION BENDING ADAPTER**



Bends: 1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 7/8" O.D. tubing



**70200-MSK-INT MINI-SPLIT TOOL KIT**



Consists of:

- MC HVAC-BAG** HVAC Utility Bag
- 57261-E-G** Ball Valve Manifold Gauge Set with Gauge Guards & Set of 3-60" ball valve hoses
- 70078** Torque Wrench
- 90413** Straight Adapter Fittings (2 pcs)
- 70058** Eccentric Flaring Tool Kit
- 91498** Universal Valve Core Remover/Installer

**70200-BSK-INT BASIC STARTER KIT**



Consists of:

- MC HVAC-BAG** HVAC Utility Bag
- 33661-E-G** Brass Manifold Gauge Set with gauge guard & Set of 3-60" hoses
- 70082** Ratchet Wrench
- 70040** All in One Swaging Punch
- 70076** Spring Style Tube Bender
- 70091** 45° Flaring & Cutting Tool
- 70085** Reamer
- 90376** Valve Core Remover w/Valve Cores
- 70088** 1/4" Tube Piercing Plier
- 52227** Pocket Infrared Thermometer

**70200-PK-INT PREMIUM KIT**



Consists of:

- MC HVAC-BAG** HVAC Utility Bag
- 33661-E-G** Brass Manifold Gauge Set with gauge guard & Set of 3-60" hoses
- 70082** Ratchet Wrench
- 70053** Flaring and Swaging Tool Kit
- 70069-A** 4-1 Lever Style Tool Bender
- 72029** Ball Bearing Tube Cutter
- 71685** Pen Type Inner/Outer Reamer
- 91498** Universal Valve Core Remover/Installer
- 252219** 8:1 Infrared Thermometer

**70200-PRK-INT PRO KIT**



Consists of:

- MC HVAC-BAG** HVAC Utility Bag
- 57261-E-G** Ball Valve Manifold Gauge Set with Gauge Guards & Set of 3-60" ball valve hoses
- 52246** Compact Subcool/Superheat Calculator
- 98061** Digital Vacuum Gauge

**70200-HK-INT HAND TOOL KIT**



Consists of:

- MC HVAC-BAG** HVAC Utility Bag
- 70082** Ratchet Wrench
- 70088** 1/4" Tube Piercing Plier
- 70083** Pinch Off Plier
- 71685** Pen Type Inner/Outer Reamer
- 52227** Pocket Infrared Thermometer
- 52336** Clamp-On Thermocoupler (extends 3 feet)



**MC-GLASS-DISP    LIGHTED GLASS DISPLAY**



Lighted Glass Display to promote Mastercool products.  
Dimensions: 2000 mm (h) x 750 mm (w) x 500 mm (d)

**MC-CRDBD-DISP    FULL COLOR DISPLAY**



3 Level, Full Color Cardboard Display to promote Mastercool products.  
Dimensions: 1828 mm (h) x 508 mm (w) x 724 mm (d)

**MC-LCD-DISP    LCD MONITOR**



17" LCD monitor that mounts to ceiling. This monitor displays video containing information and operation procedures of various Mastercool products.  
Dimensions: 370 mm (h) x 540 mm (w)

**APPAREL**



This T-shirt is made with 100% combed ringspun, preshrunk cotton material and features Mastercool's screenprinted logo on the front.

Adult-size solid-color cotton hat features Mastercool's embroidered logo on the front. Cloth strap with buckle closure in back.

<b>MC-SHIRT-SS</b>	Small Silver T-Shirt
<b>MC-SHIRT-MS</b>	Medium Silver T-Shirt
<b>MC-SHIRT-LS</b>	Large Silver T-Shirt
<b>MC-SHIRT-XLS</b>	Extra Large Silver T-Shirt
<b>MC-SHIRT-SB</b>	Small Black T-Shirt
<b>MC-SHIRT-MB</b>	Medium Black T-Shirt
<b>MC-SHIRT-LB</b>	Large Black T-Shirt
<b>MC-SHIRT-XLB</b>	Extra Large Black T-Shirt
<b>MC-HAT</b>	Hat

**MC-BANNER12-LG LARGE VINYL BANNER**



Heavy-Duty vinyl banner with grommets for easy hanging.  
Dimensions: 48" (w) x 24" (h)

**MC-SIGN12-SM CARDBOARD SIGN**



Cardboard sign for top of display  
Dimensions: 30" (w) x 6" (h)

**COUNTERPAD-15 COUNTERPAD**



Counterpad features a scratch resistant surface and non-slip base to provide durability.  
Dimensions: 20" (w) x 14" (h)

**POSTERS**



Gloss finish poster  
Dimensions: 24" (w) x 36" (h)

<b>MC-POSTER-HVAC</b>	HVAC Poster
<b>MC-POSTER-AUTO</b>	Auto Poster

# INDEX

ITEM #	PAGE #	ITEM #	PAGE #	ITEM #	PAGE #	ITEM #	PAGE #	ITEM #	PAGE #
0332-002	33	41963-120	26	47722	26	52260	38	53610	73
0377-001	33, 35	41963-200	26	47723	26	52270	38	53615	73
0378-001	35	42010	32, 34, 35	47724	26	52280	38	53615-A	74
0531-001	35	42010-10	28	47961	26	52300	44	53625	73
0768-001	35	42010-T-10	28	47961-120	26	52311	46	53660	73
0769-001	35	42014	32, 34, 35	47961-200	26	52332	46	53809	71, 72
1336-006	35	42014-10	28	47962	26	52333	46	53810	73
1336-008	35	42014-10	28	47962-120	26	52334	46	53825	73
1336-010	35	42016	34	47962-200	26	52335	46	53826	79
1336-012	35	42016-10	28	47963	26	52336	8, 10, 38, 39, 46, 93	53827	79
1336-016	35	45336	27	47963-120	26			53909	74
1336-018	35	45360	27	47963-200	26	52337	8, 10, 46	53910	74
1336-110	35	45361	27	47964	26	52350	44	55100	68
1336-112	35	45362	27	48010-10	28	52733	41	55100-SEN	68
32661-E	17	45363	27	48364	26	52775	41	55102	20
32661-EB	17	45372	27	48604	26	53000-300	76	55102-1400	20
32661-EB-JT	17	45396	27	48724	26	53000-42	76	55102-2400	20
32661-EBR	17	45601	27	48964	26	53000-70	76	55103	20
32661-M	17	45602	27	49261-36	27	53000-W	76	55200	68
32661-MB	17	45603	27	49262-36-JT	27	53001	76	55300	69
32661-MR	17	45721	27	49262-60	27	53002	76	55360	20
32661-MRN	17	45722	27	49262-60-JT	27	53002-AD	77	55400	69
33103-E	17	45723	27	49262-72	27	53003	76	55601	20
33103-EB	17	45961	27	49262-72-JT	27	53003-AD	77	55661	20
33103-EBR	17	45962	27	49263-36	27	53004	76	55744	69
33103-M	17	45963	27	49263-36-JT	27	53005	76	55800	67
33103-MB	17	46336	27	49263-60	27	53005-AD	77	55800-FILTER	67
33103-MR	17	46360	27	49263-60-JT	27	53010	76	55800-VL	67
33103-MRB	17	46361	27	49263-72	27	53012	70, 71	55850	67
33636-E	17	46362	27	49263-72-JT	27	53012-B	70	55975	67
33636-EB	17	46363	27	49264-36	27	53012-L	70	57236-E	15
33636-EBR	17	46364	27	49264-60	27	53020	76	57236-EB	15
33636-M	17	46372	27	49264-72	27	53025	77	57236-EBR	15
33636-MB	17	46396	27	49265-36	27	53025-NH	77	57236-M	15
33636-MR	17	46601	27	49265-36-JT	27	53030	76	57236-MB	15
33636-MRB	17	46602	27	49265-60	27	53035	77	57236-MR	15
33661-E	17	46603	27	49265-60-JT	27	53035-NH	77	57236-MRB	15
33661-E-G	93	46604	27	49265-72	27	53040	76	57261-E	15
33661-E-JT	17	46721	27	49265-72-JT	27	53042	76	57261-E-G	93
33661-EB	17	46722	27	49336-J	26	53042-YF	76	57261-E-G	93
33661-EBR	17	46723	27	49336-JT	26	53050	76	57261-E-JT	15
33661-M	17	46724	27	49360-J	26	53055	77	57261-EB	15
33661-MB	17	46961	27	49360-JT	26	53055-NH	77	57261-EB-JT	15
33661-MR	17	46962	27	49361-J	26	53100	71	57261-EBR	15
33661-MRB	17	46963	27	49362-J	26	53100-C	71	57261-M	15
33772-E	17	46964	27	49363-J	26	53123	71, 72	57261-MB	15
33772-EB	17	47124-ST	28	49601-J	26	53123-A	72	57261-MR	15
33772-EBR	17	47124-STR	28	49602-J	26	53123-YF	72	57261-MRB	15
33772-M	17	47184-ST	28	49603-J	26	53134	72	57272-E	15
33772-MB	17	47184-STR	28	52161	46	53223	71, 72	57272-EB	15
33772-MR	17	47244-ST	28	52220-C	46	53312	70, 71	57272-EBR	15
33772-MRB	17	47244-STR	28	52223-A	46	53312-B	70	57272-M	15
40336	26	47336	26	52224-A	42	53312-L	70	57272-MB	15
40360	26	47360	26	52224-C	42	53314	79	57272-MR	15
40372	26	47361	26	52224-D	42	53315	79	57272-MRB	15
40396	26	47362	26	52225-A	43	53322	72	58103-E	15
40396-120	26	47363	26	52225-B	43	53451-110	71	58103-EB	15
40396-200	26	47364	26	52226	45	53451-220	71	58103-EBR	15
41361	26	47364-ST	28	52227	45, 93	53451-C-110	71	58103-M	15
41362	26	47364-STR	28	52228	45	53451-C-220	71	58103-MB	15
41363	26	47372	26	52229	45	53500	71	58103-MR	15
41601	26	47396	26	52230	40	53500-C	71	58103-MRB	15
41602	26	47396-120	26	52231	41	53512-UV	70	58211	24
41603	26	47396-220	26	52233	41	53515	70, 71	58212	24
41721	26	47482	76	52236	40	53515-B	68, 70	58213	24
41722	26	47484-ST	28	52237	40	53517-UV	70, 71	58214	24
41723	26	47484-STR	28	52238	41	53518-UV	70, 71	58490	36
41961	26	47601	26	52240	41	53518-UV-220	70, 71	69HVAC	64
41961-120	26	47602	26	52246	40, 93	53580	71	69HVAC-P	64
41961-200	26	47603	26	52251	38	53585	71	69HVAC-PRO2	64
41962	26	47604	26	52252	38, 39	53587	71	60034-10	31
41962-120	26	47604-ST	28	52253	38, 39	53592	74	60134-10	31
41962-200	26	47604-STR	28	52254	38, 39	53597	74	61009-EUGRN	56
41963	26	47721	26	52255	38	53609	73	61009-EUGRN-1/4	56



ITEM #	PAGE #	ITEM #	PAGE #	ITEM #	PAGE #	ITEM #	PAGE #	ITEM #	PAGE #
61009-EUGRY	56	70045	90	71500-PB	82	82010-10	28	84721	26
61009-EUGRY-1/4	56	70046	90	71550	82	82214	30	84722	26
61010-EUGRN	56	70047	90	71550-002	82	82214-3/8	30	84723	26
61010-EUGRY	56	70048	90	71550-003	82	82214-E	30	84724	26
62009-EUGRN	56	70049	90	71550-PB	82	82214-J	30	84725	26
62009-EUGRN-1/4	56	70051	89	71600-03	83	82224	30	84961	26
62009-EUGRY	56	70051-M	89	71600-04	83	82224-3/8	30	84962	26
62009-EUGRY-1/4	56	70052	89	71600-05	83	82224-E	30	84963	26
62010	57	70053	89, 93	71600-06	83	82224-J	30	84964	26
62010-EUGRN	56	70057-A	88	71600-07	83	82272	32	84965	26
62010-EUGRY	56	70057-AM	88	71600-08	83	82274	33	85102-1/4	18
62011	57	70058	93	71600-09	83	82275	33	85103-M	18
62012	57	70058-A	88	71600-10M	83	82297	33	85103-MB	18
62020-W	57	70058-AM	88	71600-11	83	82332	33	85103-MRB	18
63009-EUGRN	56	70059	88	71600-12M	83	82333	33	85200	34
63009-EUGRN-1/4	56	70060	88	71600-13	83	82335	32	85211	24
63009-EUGRY	56	70061	91	71600-15M	83	82336	34	85211-R	24
63009-EUGRY-1/4	56	70062	91	71600-16M	83	82354	33	85212	24
63010	57	70063	91	71600-17	83	82357	33	85212-R	24
63010-AUS	57	70064	91	71600-18M	83	82358	33	85215	24
63010-EUGRN	56	70065	91	71600-22M	83	82375	72	85216	24
63010-EUGRY	56	70066	91	71600-28M	83	82379	33	85253-E	24
64010	57	70067	91	71600-A	83	82633	32	85510-E	29
65010	57	70069-A	91, 93	71600-A-M	83	82634	31, 32	85510-J	29
66010	57	70069-AM	91	71600-PB	83	82634-M	31, 32	85511	32
66011	57	70070	92	71601-A	83	82635	31	86102-1/4	14
66012	57	70070-M	92	71601-D	83	82733	31	86103-MB	14
66434-R	31, 76	70070-RD	92	71650-A	83	82734	31, 32	86103-MRB	14
66534-R	31	70071	91	71675	84	82735	31	86572-MB	14
67010	57	70072	91	71676	84	82736	31	86572-MRB	14
67011	57	70073	91	71680	84	82738	31	86596-MB	14
68010	57	70074	91	71685	83, 85, 87, 93	82834	30, 76	86596-MRB	14
69000	62	70075	91			82834-3/8	30	86972-MB	14
69000-220	62	70076	91, 93	71686-2	87	82834-E	30	86972-MRB	14
69000-220-TUV	62	70077	91	71700	85	82834-J	30	86996-MB	14
69000-J	62	70078	90, 93	71700-01	85	82834-SL	30	86996-MRB	14
691234YF	64	70078-19	90	71700-04	85	82834-SL-3/8	30	87350	18, 23
69134-A	64	70078-25	90	71700-05	85	82834-SL-E	30	87500	18, 23
69300	60	70078-28	90	71700-06	85	82834-SL-J	30	89772-M	18
69300-220	60	70078-32	90	71700-08	85	82836	31	89772-MB	18
69300-220-EU	60	70088-TIP	90	71700-10	85	82836-E	31	89772-MRB	18
69300-2V-110	60	70080	92	71700-104	85	82934	30	89996-M	18
69300-2V-220	60	70081	90	71700-105	85	82934-3/8	30	89996-MB	18
69300-2V-UK	60	70082	90, 93	71700-106	85	82934-E	30	89996-MRB	18
69350	61	70083	90, 93	71700-108	85	82934-J	30	90010-6	51
69350-220	61	70085	87, 93	71700-110	85	82934-SL	30	90016-6	51
69350-220-EU	61	70087	85	71700-112	85	82934-SL-3/8	30	90018-6	51
69350-2V-110	61	70088	90, 93	71700-114	85	82934-SL-E	30	90024-6	51
69350-2V-220	61	70091	93	71700-12	85	82934-SL-J	30	90059-B	51
69350-2V-UK	61	70128	87	71700-14	85	83102	18	90059-R-220	51
69390	61	70134	87	71700-A	85	83272	18	90061-8	51
69390-220	61	70138	87	71700-B	85	83341	31, 32, 34	90062-11-SEAL	51
69395-220	61	70200-BSK-INT	93	71700-PB	85	83341-10	28	90063-2V-110-B	49
69400	61	70200-HK-INT	93	72029	86, 93	83372	27	90063-2V-220-B	49
69400-220	61	70200-MSK-INT	93	72030	86	83634	18	90063-2V-220SVB	50
69500	62	70200-PK-INT	93	72034	86	83721	27	90065	48
69500-DR	61, 62	70200-PRK-INT	93	72035	86	83722	27	90065-220	48
70025	87	70233	87	80011	29	83723	27	90065-220-SV	50
70027	86	70237	87	80013	29	83834	31	90065-J	48
70028	87	70238	87	80021	87	83934	31	90066-2V-110-B	49
70029	86	71475	85	80034	30, 34	84336	26	90066-2V-220-A	51
70030	87	71485-PB	85	80034-1	34	84360	26	90066-2V-220-B	49
70031	87	71500-001	82	80034-2	34	84361	26	90066-2V-220SVB	50
70033	86	71500-001AB	82	80121	87	84362	26	90066-B	51
70034	87	71500-001B	82	80134	30, 34	84363	26	90066-SV-220	50
70035	86	71500-001C	82	80134-1	34	84364	26	90067	48
70037	86	71500-10	82	80134-2	34	84365	26	90067-220	48
70038	86	71500-10SRB	82	80234	31, 32	84372	26	90067-220-SV	50
70040	90	71500-12	82	80296	33	84396	26	90067-J	48
70040	93	71500-12SRB	82	81290	35, 36	84601	26	90068-2V-110-B	49
70041	90	71500-6	82	81297	33	84602	26	90068-2V-220-B	49
70042	90	71500-6SRB	82	81379	33	84603	26	90068-2V-220-SVB	50
70043	90	71500-8	82	81490	36	84604	26	90112-B	51
70044	90	71500-A	82	82010	34	84605	26	90165-R	51

ITEM #	PAGE #	ITEM #	PAGE #	ITEM #	PAGE #	ITEM #	PAGE #	ITEM #	PAGE #
90166-B	51	91049-128-4	78	92103-EBL-5/16	21	93661-E	16	99903-USB	8
90167-R	51	91049-32	78	92103-EBRL	21	93661-EB	16	99961	8
90168-B	51	91049-32-6	78	92103-EBRL-5/16	21	93661-EB1	19	99961-EU	8
90236-60	27	91050	78	92103-EL	21	93661-EBR	16	99963-EU	8
90262-36	27	91050-6	78	92103-EL-5/16	21	93661-M	16	99972	8
90262-60	27	91150-48	77	92103-MBL	21	93661-MB	16	252219	93
90262-72	27	91150-6	77	92103-MBL-5/16	21	93661-MR	16	COMMANDER1000	58
90263-36	27	91150-96	77	92103-ML	21	93661-MRB	16	COMMANDER1000-E	58
90263-72	27	91151-48	77	92103-ML-5/16	21	93661-MRB1	19	COMMANDER2000	58
90264-36	27	91151-6	77	92103-MRB1	21	93661-RB	19	COMMANDER2000-E	58
90264-60	27	91151-96	77	92103-MRB1-5/16	21	93772-E	16	COMMANDER3000	58
90264-72	27	91051	78	92103-MRBL	21	93772-EB	16	COMMANDER3000-E	58
90265-36	27	91084	32	92103-MRBL-5/16	21	93772-EB1	19	COMMANDER4000	58
90265-60	27	91120	46	92103-MRL	21	93772-EBR	16	COMMANDER4000-E	58
90265-70	27	91207	34	92103-MRL-5/16	21	93772-M	16	COUNTERPAD-15	95
90274	32	91253-EE	24	92103-RB	21	93772-MB	16	EBH	13, 15, 16, 17, 22
90296	33	91290	36	92103-RB-5/16	21	93772-MR	16	EBH1	19, 23
90314	32	91334	34	92107	34, 35	93772-MRB	16	EBHR	13
90328	28	91334-A	34	92311	80	93772-MRB1	19	EBL	13, 15, 16, 17, 21, 22
90328-5/16	28	91335	35	92329	80	93772-RB	19	EBL1	19, 21, 23
90331	32	91336	35	92398	79	94136	26	EBRH	15, 16, 17, 23
90332	32	91337	35	92661-E	16	94160	26	EBRL	13, 15, 16, 17, 21, 23
90333-R	28, 32	91339	35	92661-F-JT	16	94172	26	EH	15, 16, 17, 22
90333-UV	28	91339-01	35	92661-EB	16	94236	27	EL	15, 16, 17, 21, 22
90335	32	91339-02	35	92661-EB-JT	16	94260	27	EBH	15, 16, 17, 22
90335-R	28, 32	91339-03	35	92661-EB1	19	94272	27	EL	15, 16, 17, 21, 22
90336	32, 34	91339-04	35	92661-EB1-JT	19	95102	13	EBL	15, 16, 17, 21, 22
90336-10	28	91339-05	35	92661-EBR	16	95102-R-KIT	24	MBH	13, 14, 15, 16, 17, 18, 21, 22
90337	28, 32	91339-06	35	92661-M	16	96203-EB	13	MBL	13, 14, 15, 16, 17, 18, 21, 22
90338	32	91339-07	35	92661-MB	16	96203-EBR	13	MC HVAC-BAG	93
90340	32	91339-08	35	92661-MR	16	96203-MB	13	MC-BANNER12-LG	95
90341	32, 34, 35	91339-09	35	92661-MRB	16	96203-MTB	13	MC-CRDBD-DISP	94
90354	32	91339-10	35	92661-MRB1	19	96261-EB	13	MC-GLASS-DISP	94
90356	32	91339-11	35	92661-RB	19	96261-EBR	13	MC-HAT	95
90357	32	91339-12	35	92699	73	96261-MB	13	MC-LCD-DISP	94
90358	32	91339-13	35	92707	79	96261-MRB	13	MC-POSTER-AUTO	95
90363	31	91339-14	35	92708	73	96272-EBR	13	MC-POSTER-HWAC	95
90364	31	91339-15	35	92709-100-32	79	96272-EBR	13	MC-SHIRT-LB	95
90368	32, 34, 35	91339-16	35	92709-100-8	79	96272-MB	13	MC-SHIRT-LS	95
90369	32, 34, 35	91339-17	35	92709-150-32	79	96272-MRB	13	MC-SHIRT-MB	95
90373	32	91339-18	35	92709-150-8	79	96411	26	MC-SHIRT-MS	95
90375	72	91390	29	92709-65-32	79	96413	26	MC-SHIRT-SB	95
90376	36, 93	91490	36	92709-65-8	79	98061	52, 93	MC-SHIRT-SS	95
90378	35	91498	36, 93	92710	79	98061-SENSOR	52	MC-SHIRT-XLB	95
90410	13, 14, 15, 16, 17, 19, 33	91503-EE	24	92712	79	98062	8, 10	MC-SHIRT-XLS	95
90411	13, 14, 15, 16, 17, 19, 33	91553-EE	24	92732	73	98134	29	MC-SIGN12-SM	95
90413	8, 10, 13, 14, 15, 16, 17, 19, 32, 76, 93	91583-2V-220	63	93000	31	98209	55	MH	15, 16, 17, 18, 22
90430	8, 10, 28	91584-2V-220	63	93098	31	98210-A	54	ML	15, 16, 17, 18, 21, 22
90433	8, 10, 13, 14, 15, 16, 17, 19, 28	91585	63	93099	31	98211-A	55	MRBH	13, 14, 15, 16, 17, 18, 21, 22
90612-2V-110-B	49	91585-2V-220	63	93100	31	98234	29	MRBL1	19, 21, 23
90612-2V-220-B	49	91586	63	93103-EB	16	98250	55	MRH	15, 16, 17, 22
90612-2V-220-SVB	50	91586-220	63	93103-EB1	19	98250-220	55	MRKH	22
90633	32	91683-2V-220	63	93103-EBR	16	98251-E	24	MRKL	22
90637	56	91685	63	93103-MB	16	98310	54	MRL	15, 16, 17, 21, 22
90638	56	91685-220	63	93103-MRB	16	98315	54	RBH	19, 23
90639	56	91685-2V-220	63	93103-MRB1	19	99103-A	10	RBL	19, 21, 23
90640	56	91686	63	93103-RB	19	99103-A-2	10		
90924	32	91686-220	63	93211	24	99103-E	16		
90925	29	91686-2V-220	63	93211-R	24	99103-M	16		
90927	32	91687	63	93253-E	24	99103-MR	16		
90934	80	91687-220	63	93254-E	76	99134-1/4-A	12		
90935	80	91688	63	93503-E	24	99333	8, 10, 52		
90935-12	80	91688-220	63	93553-E	24	99334-110	8, 10, 52		
91000-B	80	92103-EB1	21	93636-E	16	99334-220	8, 10, 52		
91046-A	78	92103-EB1-5/16	21	93636-EB	16	99661-A	10		
91049-128	78	92103-EBL	21	93636-EB1	19	99661-A-EU	10		
				93636-EBR	16	99663-A-EU	10		
				93636-M	16	99772-A	10		
				93636-MB	16	99860-1/4-A	12		
				93636-MR	16	99872-1/4-A	12		
				93636-MRB	16	99903	8		
				93636-MRB1	19	99903-2	8		
				93636-RB	19	99903-PBA	8, 10		



**Director Of Sales:**  
*Idean Barjesteh*  
idean@mastercool.com

**European Sales:**  
*Luca Moretti*  
*Jan Vanderhenst*  
*Kristof Van de Sompel*  
*Dirk De Coninck*  
europe@mastercool.com

**Latin American Sales:**  
*Gabriel Aguilera*  
gabriel@mastercool.com

**Middle East Sales:**  
*Edmund Hopper*  
edmund@mastercool.com

**India Sales:**  
*Rajiv Gupta*  
rajiv@mastercool.com

**Brazil Sales:**  
*André Oliveira*  
andre@mastercool.com

**Asia Pacific Sales:**  
*Mark Byrnes*  
mark@mastercool.com

One Aspen Drive  
Randolph, NJ 07869 USA  
Phone: (973) 252-9119  
Fax: (973) 252-2455

Industriezone TTS  
Laagstraat 19  
9140 Temse, Belgium  
Telefon: +32 (0) 3 777 28 48  
Telefax: +32 (0) 3 777 40 62

R. Ver. Eurípedes Rama Pardal, 157  
07756-595 – Cajamar – SP  
Brazil  
Phone: (55 11) 4407 4017  
Fax: (55 11) 4407 4019

82a Chinchin St  
Islington NSW  
2296  
Phone: +61 417 401412

[www.mastercool.com](http://www.mastercool.com)

