

Job Name: _____
 Location: _____
 Engineer: _____
 Submitted to: _____
 Submitted by: _____
 Reference: _____

Date: _____
 Approval: _____
 Construction: _____
 Unit #: _____
 Drawing #: _____



ELECTRICAL

Power Supply DC (V)12
 Max Power Consumption (W)1.2
 Wire Type.....Polar 3 core sheathed PVC cable

TEMPERATURE

Operating Temperature Range °F (°C)32-114 (0~46)
 Storage Temperature Range °F (°C) 14-140 (-10~60)
 Humidity Range (%) 0-95 (no condensation)

WEIGHT AND DIMENSIONS

Weight oz. (g).....5.6(159)
 Dim.Net (HxWxD) in (mm)4-3/4 x 4-3/4 x 11/16
 (120 x 120 x 18)

GENERAL FEATURES

This basic wired remote features a weekly timer and built in temperature sensor.

FEATURES



- Operation modes: Auto/Cool/Dry/Fan/Heat
- Various timer setup (On / Off / Weekly) are possible.
- Weekly Timer
 - Start / Stop function is twice per day for a week.
 - Operating time can be set in 30-minute increments only.
 - The off time can be carried over to the next day.
- Temperature Set Back Timer
 - Used to change the set temperature in the operation times set for each day of the week. This can be used together with other timer settings. When setting up a timer, start/stop and a temperature setup can be changed.
- Error code is display.
- Thermo Sensor
 - Temperature detection of the room can be selected at the indoor unit or on the wired controller by initiating the Thermo Sensor feature.
- Auto restart.
 - Emergency function setting for power failure, etc.
- 33 feet of connectable thermostat wire.
- Filter Lamp Reset
 - Some indoor unit models are equipped with a filter lamp in the indoor unit's display to indicate when it is time to clean the air

Compatible with indoor models:

ASU7RLF
 ASU9RLF
 ASU12RLF
 ASU18RLF
 ASU24RLF
 ASU7RLF1
 ASU9RLF1
 ASU12RLF1
 ASU15RLF1
 ASU9RLS2
 ASU12RLS2
 ASU15RLS2

ASU9RLS3
 ASU12RLS3
 ASU15RLS3
 ASU9RLS3Y
 ASU12RLS3Y
 ASU15RLS3Y
 AUU7RLF
 AUU9RLF
 AUU12RLF
 AUU18RLF

ARU7RLF
 ARU9RLF
 ARU12RLF
 ARU18RLF
 ARU24RLF
 AGU9RLF
 AGU12RLF
 AGU18RLF

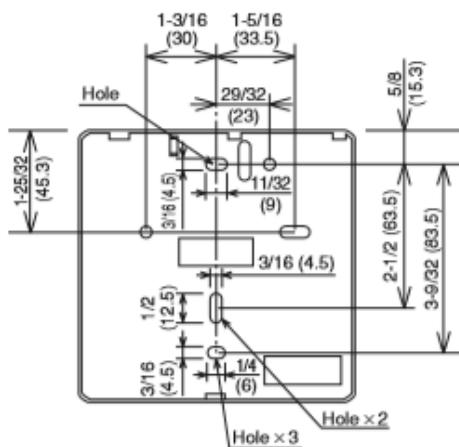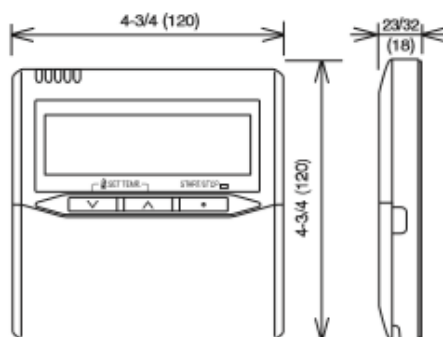

Unit: in. (mm)