

SUBMITTAL DATA: UTY-TTRX

Third Party Thermostat Convertor

Job Name: _____
 Location: _____
 Engineer: _____
 Submitted to: _____
 Submitted by: _____
 Reference: _____

Date: _____
 Approval: _____
 Construction: _____
 Unit #: _____
 Drawing #: _____



GENERAL FEATURES

The UTY-TTRX Thermostat Adapter allows a Fujitsu ductless system to be connected to a third-party thermostat such as Honeywell, Nest, etc.

FEATURES

- UP to 16 indoor units may be controlled with a single thermostat controller.
- Multiple indoor units connected to convertor operate by the same operating setting.
- Two or more types of VRF1 system, VRF2 system, single model or multi systems cannot be mixed together.

COMPATIBLE INDOOR UNITS

ASU7RLF	ARU7RLF	ASU9RLS3
ASU9RLF	ARU9RLF	ASU12RLS3
ASU12RLF	ARU12RLF	ASU15RLS3
ASU7RLF1	ARU18RLF	ASU9RLS2
ASU9RLF1	ARU24RLF	ASU12RLS2
ASU12RLF1	AGU9RLF	ASU15RLS2
ASU15RLF1	AGU12RLF	AUU7RLF
ASU18RLF	AGU15RLF	AUU9RLF
ASU24RLF		AUU12RLF
ASU30RLE		AUU18RLF

This device will work will all RLAV, TLAV, and TLAV1 VRF indoor units.

Please note field supplied 24V transformer required

ELECTRICAL

Power Supply DC (V) 12
 Max Power Consumption (W)..... 0.6
 Wire Type Polar 2 core sheathed PVC cable

TEMPERATURE

Operating Temperature Range °F (°C)32-114 (0~46)
 Storage Temperature Range °F (°C) 14-140 (-10~60)
 Humidity Range (%)0-95 (no condensation)


WEIGHT AND DIMENSIONS

Weight oz. (g).....4 (100)
 Dim.Net (HxWxD) in (mm).....1-1/16 x 3-7/16 x 3-7/16
 (27 x 86.7 x 86.7)

SUBMITTAL
DIMENSIONS

This product is comprised of a body and cover.

Unit : in (mm)

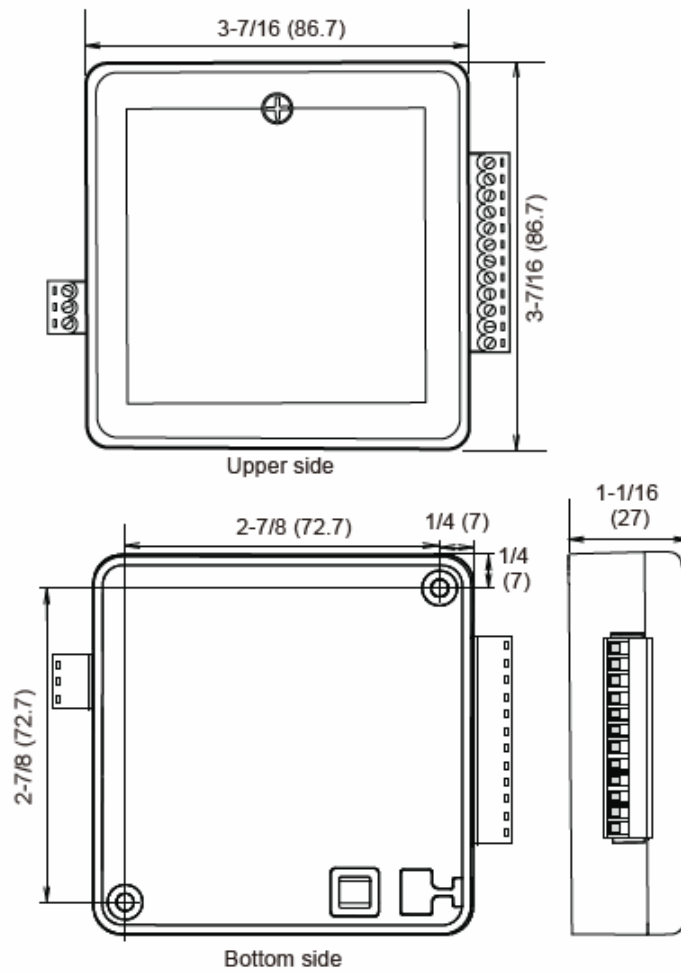

Set the bottom side to a flat place.