Table of Contents

77	

SharkBite® Plumbing Solutions	2
Quality In Every Component	3
SharkBite PEX System	4-5
SharkBite EvoPEX System	6-7
Made in the USA	8
PEX System Comparison	9
Benefits of SharkBite PEX	10-11
SharkBite EvoPEX Fittings Core Fittings	12–13
SharkBite PEX Pipe Potable Water PEX Pipe Special Application PEX Pipe PEX Accessories	14–15
SharkBite Valves Pressure Regulating Valves Thermostatic Mixing Valves Ball Valves & Check Valves General Service Valves	16–17
SharkBite Accessories Water Heater Connectors Hammer Arrestors & Gauges Stops & Fixture Supply Fittings Kits Accessories Radiant Fittings	18-20
SharkTech Academy	21
Contractor Rewards	22
Limited Warranty	23-24









THE SHARKBITE® EVOPEX™ SYSTEM

SharkBite Plumbing Solutions



Plumbing is a trade that requires skill and pride, and the plumbing system is one of the most critical components in residential homes, multi-family dwellings and commercial buildings. As plumbing systems have evolved, SharkBite® has been at the forefront of revolutionizing the industry. We strive to innovate efficient plumbing solutions that save installation time and improve system performance. We believe that it is our unwavering commitment to innovating new solutions for improving efficiency and reliability that make SharkBite the world leader and hallmark of push-to-connect plumbing solutions for plumbing professionals and mechanical contractors.

The new SharkBite® EvoPEX™ system is the next evolutionary step in providing an advanced potable water system for safe and efficient water delivery throughout the home. It is engineered to improve efficiency and enable plumbing contractors to optimize install time with clean, leak-free installations. Plumb an entire home without needing special tools. No soldering, unions, clamps or glue is required, which means cleaner installations, less potential leak points and less time lost on the job. Just connect and move on with the new evolutionary SharkBite EvoPEX system.

When installed as a comprehensive plumbing system using other trusted SharkBite brass fittings, PEX Pipe and water control valves, the SharkBite system is the only total rough-in plumbing solution from meter to fixture. One manufacturer with a complete set of solutions, designed for getting the job done.



Quality In Every Component

Designed for New Construction PEX Systems



STANDARD BODY

BODY (O



Acudel® modified PPSU provides toughness and chemical resistance along with excellent anti-decay stability and dimensional stability



BODY COMPONENTS



O-RING

EPDM provides great resistance to outstanding heat, steam, ozone, UV, alkali, and mild acidic and oxygenated solvents as well as high resistance to chloramine at high temperatures. The EvoPEX O-ring seals on the inside of the pipe for a water tight connection.



GRAB RING

Stainless Steel 316 with highest corrosion resistance and strength. The grab ring has teeth that "bite" on the pipe exterior and won't let go.



INDICATOR RING

Copolymer Duracon with superior chemical and thermal stability. Provides visual assurance of proper insertion depth and connection.



SPACER

Strong polymer with good dimensional stability and chemical resistance for additional support while guiding the pipe into the fitting.



COLLET

20% glass fiber reinforced Grilamid provides high impact strength, chemical resistance, very low moisture absorption, and high dimensional stability.



COLLET RETAINER

Stainless Steel 304 provides excellent corrosion resistance and holds the collet together on the body for a professional appearance.

CERTIFICATIONS

ASSE 1061

NSF/ANSI 61

CSA B125.3

NSF 372

ASTM F877

ASTM E84*







• The Evolutionary push-to-connect fitting designed specifically for PEX Pipe systems.

2 SharkBite PEX Pipe

- · Versatile, flexible, and durable PEX Pipe for residential hot and cold water applications.
- · Made in the USA.



SharkBite Washing Machine Outlet Box

- Outlet boxes with SharkBite push-to-connect fittings allow for quick and easy installation of appliances.
- Available with or without Water Hammer Arrestor.








- Outlet boxes with SharkBite push-to-connect fittings allow for quick and easy installation of appliances.
- Available with or without Water Hammer Arrestor.





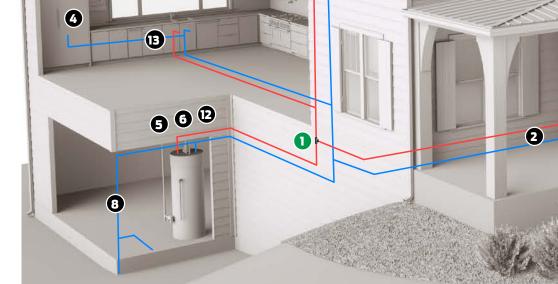

5 SharkBite Water Heater Connector Flex Hoses

- Eliminates the need for additional transition fittings with push-to-connect design for quick and easy installation.
- · Offered in braided or corrugated stainless steel.




6 Cash Acme Tank Booster PRO

- Easy to install water heater mixing valve that mixes hot water with cold to deliver tempered water at 120°F (49°C).
- Increases usable hot water capacity by up to 100%.



SharkBite PEX System

A Revolutionary Plumbing System from the Meter to the Fixture without Tools

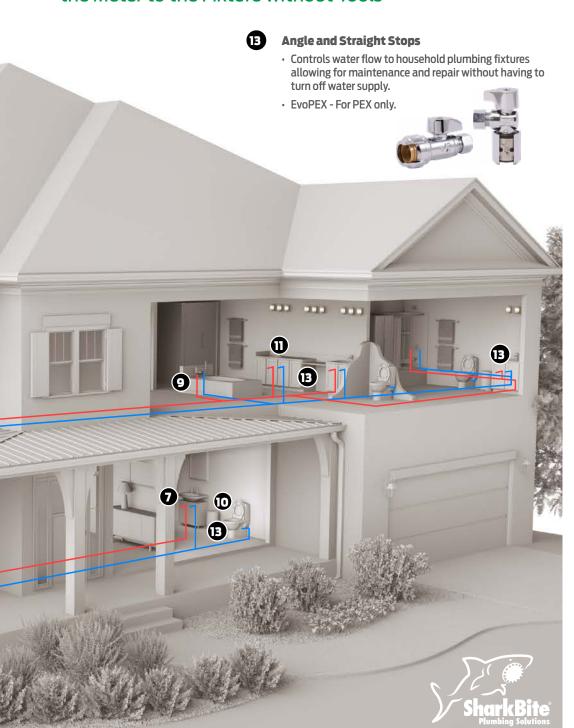

Ball Valves

- Convenient single lever control makes it easy to use and encourages shut-off of water supply.
- Can be rotated after assembly for easier installation in tight spaces.
- EvoPEX PEX only.
- SharkBite Universal For Copper, PEX and CPVC.





Pipe Supports & Brackets

- Versatile brackets ideal for sink, lavatory & toilet plumbing solutions.
- · Minimized concealed joints.
- · No flames required.

PEX Stub Outs

- Allows plumbing to be roughed in, dry wall hung, and painted
- Optional integrated bracket to attached stub out to stud or support bracket





Cash Acme HG110-D

- Point-of-use and point-of-source temperature actuated mixing valve that mixes hot water with cold to deliver tempered water at a controlled temperature.
- Adjustable and lockable mechanism minimizes potential for tampering.
- · Available with SharkBite ends.

Cash Acme HG145 & HG135

- Point-of-use thermostatic mixing valve designed to assist in the prevention of scalding.
- Compact design easily fits under or behind a single basin.



8 Cash Acme EB45

- Half-cartridge based pressure reducing and regulating valve.
- Retains a separate spring chamber and adjustable screw.
- Available with integral stainless steel SharkBite ends.



The SharkBite EvoPEX System

- Evolutionary push-to-connect technology
- · Permanent, non-removable fitting for PEX pipe only
- · No tools: increases efficiency and reduces risk of installation error
- Visual indicator provides verification of full pipe insertion
- · No minimum space requirement between fittings
- · SharkBite system warranty of 25 years

HOW TO MAKE A CONNECTION



STEP 1

When cutting SharkBite PEX Pipe, ensure that the ends are cut square and the surface is smooth. Ensure that both the EvoPEX fitting and pipe are clean and free of dirt and debris in preparation for making a connection.



STEP 2

Push the pipe into the fitting firmly (a twisting action reduces insertion force). Take care to avoid inserting the pipe at an angle.



STEP 3

Ensure that the pipe is pushed into the fitting fully and engaged properly by checking that the green indicator ring is fully visible in all four slots. This ensures a permanent connection.





PEACE OF MIND

The EvoPEX fitting has a green visual indicator for assurance of proper fitting connection.



FREEZE RESISTANT

SharkBite PEX systems are less susceptible to burst in freezing conditions due to the pipe's ability to expand. The outside temperature does not affect installation of SharkBite EvoPEX pipe and fittings and can be pressure tested immediately once all connections are made.



HFAITH

No torches, glues, or solvents required for installation, which keeps potentially dangerous chemicals out of your home and potable water supply.



PROVEN AND GUARANTEED

More than 1.5 million SharkBite connections are made every week. The leading push-to-connect fitting has now been engineered for new construction and re-pipe applications.



CONFIDENCE

No tools and glue significantly reduces the chance of installation error and leaks which reduces risk of water damage and mold. Minimal learning curve and liability with new laborers.



EFFICIENT WATER DELIVERY

The SharkBite EvoPEX system is immune to corrosion and mineral build-up for greater water pressure and improved delivery of hot water.



RELIABILITY

25 year system warranty with consequential damage coverage* to provide years of customer satisfaction.



QUALITY

Highest grade of materials from the most trusted manufacturer of push-to-connect fittings.



EASE OF INSTALLATION

No tools allows for ease of installation in tight spaces. Fitting rotation offers the ability to perfectly align the direction of the pipe and provides a professional installation appearance. No minimum spacing requirements between fittings.









MADE IN THE S A

Proudly made in the USA, the SharkBite EvoPEX system is the next evolutionary step in providing an advanced potable water system for safe and efficient water delivery throughout the home. We own our manufacturing process from start to finish, so every EvoPEX fitting and piece of PEX pipe is guaranteed from concept to delivery.

SharkBite EvoPEX Fittings

SharkBite EvoPEX is the newest innovative push-to-connect fitting from SharkBite Plumbing Solutions and is designed for new construction and re-pipe applications. Engineered as an easy alternative to tool-based pipe joining methods, SharkBite EvoPEX improves efficiency, minimizes lost time on the job and mitigates risk.

SharkBite PEX Pipe

SharkBite PEX pipe is a cost-effective piping solution approved for use in both hot and cold plumbing installations. We meet the highest chlorine resistance standards and utilize the most energy-efficient manufacturing processes. With over 12 billion feet of pipe installed worldwide, SharkBite PEX pipe is proven and guaranteed.

When installed as a comprehensive plumbing system with other trusted SharkBite brass fittings and water control valves, the SharkBite EvoPEX system is truly the one and only total rough-in plumbing solution.







PEX System Comparison — *Residential*

	EvoPEX	Crimp	Expansion
No tools required to make fitting connection that can cause install error	✓	X	X
No calibration/maintenance required for proper function of tool	✓	×	×
No grooves in the tubing caused by the expansion tool that can create potential leak paths	✓	✓	X
No heat gun needed for install in cold conditions	✓	✓	×
Visual indicator for assurance of proper fitting connection	✓	×	×
High performance polymer with great chemical and chloramine resistance	✓	√	✓
No potential for leaks caused by nicks on the fitting exterior	✓	X	X
Fitting manufactured in the USA	√	×	✓
Immediate pressure testing	✓	✓	X
25 Year System Warranty	✓	✓	✓
No rings required for proper fitting connection	✓	X	X
Easy install with minimal learning curve for new laborers	√	X	X





Health/Safety

No glue, solder, or solvents required for the connection process, which keeps potentially dangerous chemicals out of plumbing systems. Additionally, SharkBite PEX Pipe eliminates the need for open flames in the house that could be a potential fire hazard.



Versatile

SharkBite PEX Pipe can be installed in dry or wet conditions. SharkBite PEX Pipe can lend itself to many applications due to its physical properties of flexibility, reliability, and installation ease such as hydronic heating, fire protection, etc.



Chlorine Resistance

SharkBite PEX Pipe is tested to the highest level of chlorine resistance standards (100% chlorine at 140° F) and is certified to meet ASTM F876 oxidative-resistance requirements for continuous recirculation.



Proven and Guaranteed

SharkBite PEX Pipe has been around for more than 35 years with over 12 Billion feet of pipe installed worldwide.



Freeze Resistant

SharkBite PEX Pipe is freeze resistant as the pipe can expand and contract as water freezes and thaws within the pipe.



Able to bend pipe around corners which removes the need for 45° or 90° elbows in certain situations. SharkBite's new coiling process increases the flexibility of our coiled pipe even more.



Cost Effective

SharkBite PEX Pipe is substantially more cost effective than copper pipe—SharkBite PEX Pipe costs a third of the price of copper. SharkBite PEX Pipe is a fixed cost as prices don't fluctuate daily like copper pipe.

PROUDLY AMERICAN MADE







NSF/ANSI 14 NSF/ANSI 61



ASTM F 876



ASTM F 877



CSA B137.5



AWWA C904




UL 1821

Benefits of SharkBite PEX



	PEX	Copper	CPVC
No glues, solder, solvents necessary	✓	X	X
No health and safety concerns	√	X	X
Freeze Resistance	√	X	X
Flexibility for tight bend radius - less fittings	√	X	X
Efficient time-saving installation	√	X	X
Air testing is an acceptable alternative for pressure testing	✓	√	X
Highest Chlorine resistance	√	X	✓
No theft concerns	√	X	✓
Quiet, eliminates water hammer & noise from fluid transmission	√	X	√
Immune to corrosion, pitting, and mineral build up	✓	X	✓
Rain and humid condition will NOT affect fitting seal	✓	√	X
Cost effective, stable material costs	✓	X	✓
Retains more heat in hot water lines/resists condensation on cold water lines	√	X	√



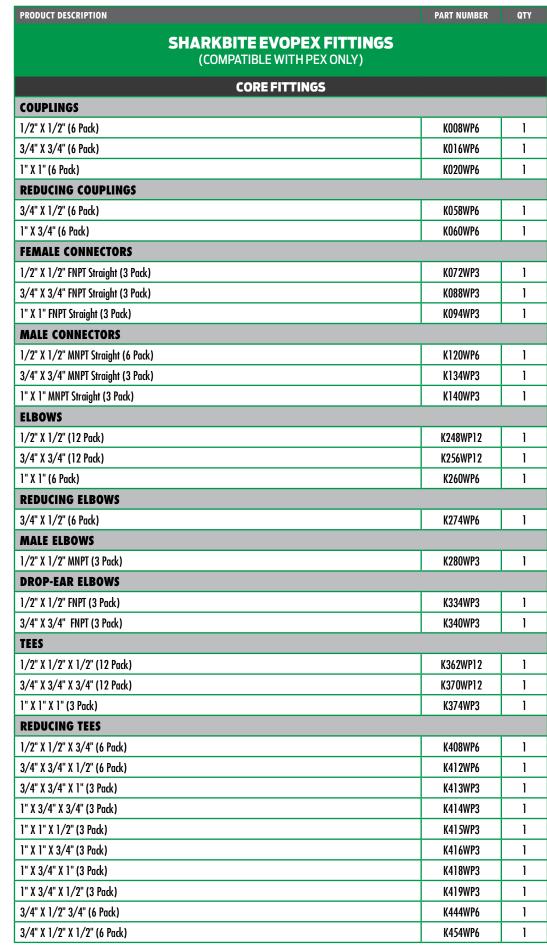




















PRODUCT DESCRIPTION	PART NUMBER	QTY
END CAPS		
1/2" (6 Pack)	K514WP6	1
3/4" (6 Pack)	K518WP6	1
1" (3 Pack)	K520WP3	1
STUB-OUTS		
1/2" x 6" PEX Stub Out with Bracket	K24649WP	25
1/2" x 6" PEX Stub Out	K24650WP	25
1/2" x 6" PEX Stub Out with Bracket and PEX 1/2" 90	K25578WP12	12
1/2" x 6" PEX Stub Out with PEX 1/2" 90	K25581WP12	12
BALL VALVES		
1/2" x 1/2"	K22222	12
3/4" x 3/4"	K22185	12
l" x l"	K22223	6
ANGLE STOPS	·	
1/2" X 3/8" Compression	K23036	12
STRAIGHT STOPS		
1/2" X 3/8" Compression	K23037	12



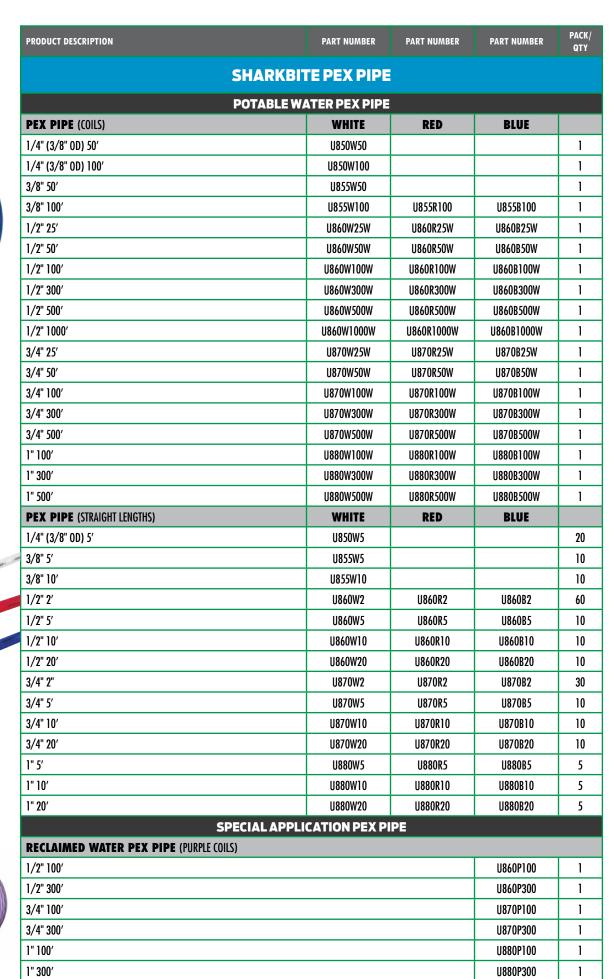






PRODUCT DESCRIPTION	PART NUMBER	PACK/ QTY
OXYGEN BARRIER PEX PIPE (ORANGE COILS)		
3/8" 100′	U8550100	1
3/8" 300′	U8550300	1
3/8" 500′	U8550500	1
1/2" 100′	U8600100	1
1/2" 300′	U8600300	1
1/2" 500′	U8600500	1
1/2" 1000′	U86001000	1
5/8" 300′	U8650300	1
3/4" 100′	U8700100	1
3/4" 300′	U8700300	1
3/4" 500′	U8700500	1
3/4" 1000′	U87001000	1
1" 100′	U8800100	1
1" 300′	U880O300	1
1" 500′	U8800500	1
OXYGEN BARRIER PEX PIPE (ORANGE STRAIGHT LENGTHS)		
1/2" 20′	U860020	10
3/4" 10'	U870010	10
3/4" 20'	U870020	10
1" 20'	U880020	5
PEX ACCESSORIES		
PEX ACCESSORIES		
PEX Decoiler	UFH034	1
PEX Pipe Cutter 1/4" - 1"	U701	1
PEX BEND SUPPORTS, SUSPENSION CLAMPS AND INSULATORS		
3/8" J Hook Pex Pipe Clamp	23065	12
1/2" J Hook Pex Pipe Clamp	23220	12
3/4" J Hook Pex Pipe Clamp	23221	12
1/2" Insulated Suspension Clamp (10 Pack)	23071A10	6
3/4" Insulated Suspension Clamp (10 Pack)	23072A10	6
1" Insulated Suspension Clamp (10 Pack)	23073A10	6
1/2" Pipe Insulator (10 Pack)	23074A10	6
3/4" Pipe Insulator (10 Pack)	23075A10	6
1" Pipe Insulator (10 Pack)	23076A10	6
1/2" Polymer Bend Support with Mounting Bracket	23050	12
3/4" Polymer Bend Support	23051	6
1/2" Metal Pipe Support	23053	12
3/4" Metal Pipe Support	23054	12



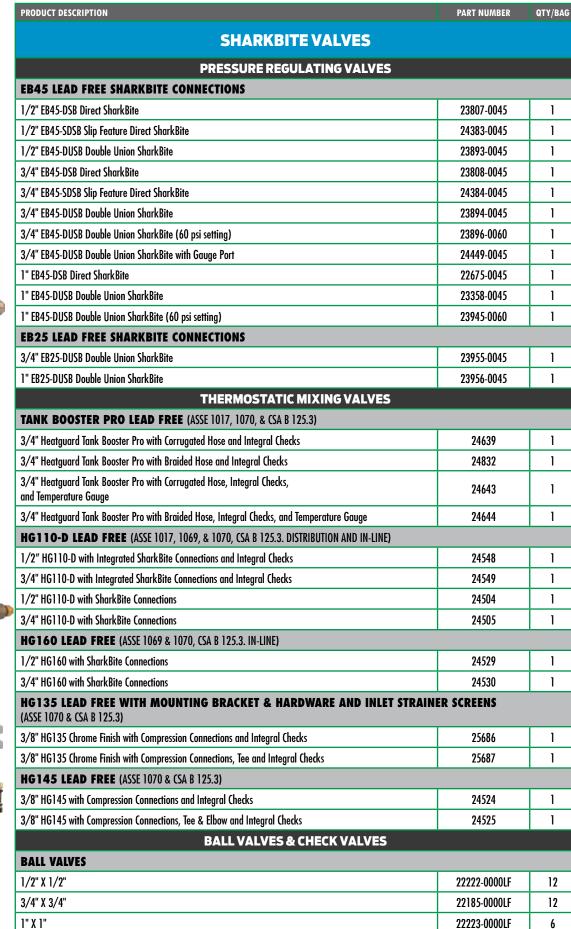













PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
BALL VALVES WITH DRAIN/VENT		
1/2" x 1/2" x 1/8" NPSM Drain Thread	22304-0000LF	12
3/4" x 3/4" 1/8" NPSM Drain Thread	22305-0000LF	12
1" x 1" 1/8" NPSM Drain Thread	22306-0000LF	6
BALL VALVES WITH DRAIN/VENT AND MOUNTING BRACKET		
1/2" x 1/2"	24615-0000LF	12
3/4" x 3/4"	24616-0000LF	6
l"x l"	24617-0000LF	6
SLIP BALL VALVES		
1/2" x 1/2"	24735LF	6
3/4" x 3/4"	24736LF	6
l" x l"	24737LF	3
CHECK VALVES		
1/2" X 1/2"	U2008-0000LF	6
3/4" X 3/4"	U2016-0000LF	6
1" X 1"	U2020-0000LF	3
GENERAL SERVICE VALV	/ES	
GATE VALVES WITH DRAIN		
1/2" x 1/2"	24634LF	12
3/4" x 3/4"	24635LF	12
HOSE BIBBS		
1/2" x 3/4" MHT 90 Deg Hose Bibb — Quarter Turn	24620LF	6
3/4" x 3/4" MHT 90 Deg Hose Bibb — Quarter-Turn	24621LF	6
1/2" x 3/4"MHT 90 Deg Hose Bibb — Multi-Turn	24626LF	6
3/4" x 3/4" MHT 90 Deg Hose Bibb - Multi-Turn	24627LF	6
1/2" x 3/4" MHT No-Kink 45 Deg Hose Bibb — Quarter Turn	24630LF	6
3/4" x 3/4" MHT No-Kink 45 Deg Hose Bibb — Quarter-Turn	24631LF	6
1/2" x 3/4" MHT No-Kink 45 Deg Hose Bibb — Multi-Turn	24632LF	6
3/4" x 3/4" MHT No-Kink 45 Deg Hose Bibb - Multi-Turn	24633LF	6
GARDEN VALVES		
1/2" x 3/4" MHT	24622LF	6
3/4" x 3/4" MHT	24623LF	6
ANTI-SIPHON FROST-FREE SILLCOCKS		
1/2" x 3/4" MHT 8"	24628LF	4
1/2" x 3/4" MHT 10"	24629LF	4
1/2" x 3/4" MHT 12"	24636LF	4
1/2" x 3/4" MHT 15"	24637LF	4
1/2" x 3/4" MHT 18"	24638LF	4













	PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
	SHARKBITE ACCESSORIES		
	WATER HEATER CONNECTORS		
	STAINLESS STEEL BRAIDED WATER HEATER CONNECTORS		
	1/2" X 3/4" FIP, 12"	U3068FLEX12LF	12
	1/2" X 3/4" FIP, 15"	U3068FLEX15LF	12
	1/2" X 3/4" FIP, 18"	U3068FLEX18LF	12
	1/2" X 3/4" FIP, 24"	U3068FLEX24LF	12
	3/4" X 3/4" FIP, 12"	U3088FLEX12LF	12
	3/4" X 3/4" FIP, 15"	U3088FLEX15LF	12
	3/4" X 3/4" FIP, 18"	U3088FLEX18LF	12
	3/4" X 3/4" FIP, 24"	U3088FLEX24LF	12
	STAINLESS STEEL CORRUGATED WATER HEATER CONNECTORS		
	3/4" X 3/4" FIP, 18"	SS3088FLEX18LF	12
	3/4" X 3/4" FIP, 24"	SS3088FLEX24LF	12
	3/4" x 1" FIP, 24"	SS3086FLEX24LF	6
	STAINLESS STEEL BRAIDED WATER HEATER CONNECTORS WITH BALL VALVES		
	1/2" X 3/4" FIP, 18"	U3068FLEX18BVLF	12
	3/4" X 3/4" FIP, 18"	U3088FLEX18BVLF	12
	STAINLESS STEEL CORRUGATED WATER HEATER CONNECTORS WITH BALL VALVES		
	1/2" X 3/4" FIP, 18"	SS3068FLEXBVLF	12
	3/4" X 3/4" FIP, 18"	SS3088FLEXBVLF	12
	STAINLESS STEEL BRAIDED WATER COUPLING HOSE		
	1/2" X 1/2", 18"	U3008FLEX18LF	12
	3/4" X 3/4", 18"	U3016FLEX18LF	12
671			
	STAINLESS STEEL BRAIDED WATER SOFTENER CONNECTOR		
	3/4" X 1" FIP, 24"	U3086FLEX24LF	6
	WATER SOFTENER FITTINGS		
	3/4" X 1" FIP	U086LF	12
	WATER HAMMER ARRESTORS & GAUGES	OUGULI	12
	WATER HAMMER ARRESTORS (PROVIDES MAINTENANCE-FREE, CONTINUOUS PROTECTION AGAINST W.	Ater hammer can be d	OSITIONED
	VERTICALLY OR HORIZONTALLY AND THE SHARKBITE CONNECTORS ALLOW THE ARRESTOR TO BE INSTALLED IN SEC		
	1/2" Residential	22630LF	1
	1/2" Commercial	22631LF	1
	3/4" Residential	22632LF	1
	1" Commercial	22633LF	1
	PRESSURE GAUGES		
	with 1/2" Tee	24436	1
	with 3/4" Tee	24438	1
	with 1" Tee	24440	1
	with 1/2" CTS Pressure Gauge (inserts into any 1/2" SB fitting)	24442	1
	with 3/4" CTS Pressure Gauge (inserts into any 3/4" SB fitting)	24444	1
	TEMPERATURE GAUGES		
	with 1/2" Tee	24437	1
	with 3/4" Tee	24439	1

PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
with 1" Tee	24441	1
with 1/2" CTS Pressure Gauge (inserts into any 1/2" SB fitting)	24443	1
with 3/4" CTS Pressure Gauge (inserts into any 3/4" SB fitting)	24445	1
STUB OUT ELBOWS		
1/2" SB X 1/2" Copper Tube 8" Length	U351LFA	6
STOPS & FIXTURE SUPPLY FITTIN	IGS	
PUSH-TO-CONNECT HOME RUN MANIFOLDS		
12 Port with Brass Valves	PM012SB	1
24 Port with Brass Valves	PM024SB	1
ANGLE STOPS		
1/2" X 3/8" Compression	23036-0000LF	12
1/2" X 1/4" (3/8" OD)	23048-0000LF	6
1/2" X 1/4" Compression	23336-0000LF	6
1/2" X 1/2" Compression	23489	6
1/2" X 1/2" MIP	24946	6
STRAIGHT STOPS		
1/2" X 3/8" Compression	23037-0000LF	12
1/2" X 1/4" (3/8" OD)	23049-0000LF	6
1/2" X 1/4" Compression	23337-0000LF	6
1/2" X 1/2" Compression	23490	6
1/2" X 1/2" MIP	24947	6
TEE STOPS		
1/2" X 1/2" X 1/4" Compression	24983	6
1/2" X 1/2" X 3/8" Compression	24984	6
3/4" X 3/4" X 1/4" Compression	24985	6
3/4" X 3/4" X 3/8" Compression	24986	6
1/2" X 1/2" X 1/4" (3/8" OD) SB	24987	6
STOP VALVE CONNECTORS		
1/4" (3/8" OD) X 3/8" Compression (Converts 3/8" comp stop to SharkBite)	U3523LF	6
1/4" (3/8" OD) X 1/4" Compression Nut	U3524LF	6
STOP VALVE TEE ADAPTERS		
1/4" (3/8" OD) X 1/4" (3/8" OD) X 3/8" Compression	U3358LF	6
1/4" (3/8" OD) X 1/4" (3/8" OD) X 1/4" (3/8" OD) Tube	U4358LF	6
DUAL TEE STOP VALVE ADAPTERS		
1/2" CTS X 1/2" CTS X 1/2"	U782LF	6
FAUCET CONNECTORS		
1/4" (3/8" OD) X 1/2" Threaded	U3525LF	6
TOILET CONNECTORS		
1/4" (3/8" OD) X 7/8" Ballcock Threads	U3531LF	6
1/4" (3/8" OD) X 7/8" Ballcock Threads Elbow	U3537LF	6
DISHWASHER ELBOWS		
1/4" (3/8" OD) X 3/8" MNPT Dishwasher	U276LF	6
1/4" (3/8" OD) X 3/4" Garden Hose Nut	U2276LF	6

























PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
KITS		
WATER HEATER INSTALLATION KITS (KITS INCLUDE 2 SHARKBITE CONNECTOR FITTINGS AND A DISC	ONNECT CLIP)	
1/2" X 3/4" FNPT	22604LF	12
3/4" X 3/4" FNPT	22441LF	12
ICE MAKER OUTLET BOX KITS		
1/2" SB X 1/4" Compression	25096	1
1/2" SB X 1/4" Compression with Water Hammer Arrestor	25097	1
WASHING MACHINE OUTLET BOX KITS		
1/2" SB X 3/4" MHT	25098	1
1/2" SB X 3/4" MHT with Water Hammer Arrestor	25099	1
ICE MAKER KIT IN BAGGED PACKAGING (ICE MAKER KITS COME WITH 1 SERVICE SLIP TEE, 1 ANG 1/4" WHITE PEX PIPE)	LE STOP, 1 VALVE CONNEC	CTOR, 10'
Ice Maker Connector with Angle Stop	25024	1
ACCESSORIES		
DEBURR & GAUGE TOOL		
Deburr & Gauge Tool (Use for 1/4", 3/8", 1/2", 5/8", 3/4" and 1" copper and CPVC pipe)	U702	1
DISCONNECT CLIPS		
1/4"	U706	12
3/8"	U708	24
1/2"	U710	24
5/8"	U3712	24
3/4"	U712	24
1"	U714	12
DISCONNECT TONGS		
1/2" Disconnect Tong	U711	1
3/4" Disconnect Tong	U713	1
1" Disconnect Tong	U715	1
WRAP FOR FITTING BURIAL		
10' x 2" X 0.02" Silicone Wrap	25406	1
RADIANT FITTINGS		
RADIANT FITTINGS (NON-POTABLE WATER APPLICATION)		
5/8" X 5/8" Coupling	U012	6
3/4" X 5/8" Reducing Coupling	U057	6
5/8" X 3/4" MNPT Reducing Adapter	U126	6
5/8" X 5/8" Elbow	U252	6
3/4" X 5/8" Elbow	U273	6
5/8" X 5/8" X 5/8" Tee	U366	6
5/8" End Stop	U516	6