


LOCK WING METER VALVES



BRASS VALVES

Part#	Size
GV217-1/2	1/2"
S80E41	3/4"



BLACK IRON VALVES

Part#	Size
AYM560B-04	1/2"
AYM560B-06	3/4"



8509910 BARRELL LOCK

Locks Meter Stop Valves.

8610005 KEY

Extra Key for 8509910 Lock.

POL SWIVEL CONNECTORS



MALE SWIVEL POL

Part#	Male Outlet	Extras
1685	1/4" NPT	NONE
MG1638	1/4" NPT	Soft-Nose & 60 drill orifice
ME-M345	1/4" NPT	90° Angle Outlet




MALE SWIVEL POL WITH EXCESS FLOW VALVE

Part#	Male Outlet	Extras
MG1690*	1/4" NPT	NONE
MG1641*	1/4" NPT	Soft "O" Ring Nose
MG1613**	1/4" NPT	NONE


*725,000 BTU/hr excess flow capacity at 100 psig

**1.8 GPM excess flow capacity



MALE POL W/ HANDWHEEL W/ SOFT "O" RING NOSE

Part #	Male Outlet	Extras
MG1654	1/4" NPT	Plastic Handwheel
MG1654A	1/4" NPT	Brass Handwheel




MALE POL W/ HANDWHEEL AND EXCESS FLOW VALVE

Part #	Male Outlet	Extras
MG1653	1/4" NPT	Plastic handwheel
MG1653A	1/4" NPT	Brass Handwheel
MG1645	9/16"-18LH	Plastic Handwheel
MG1645A	9/16"-18LH	Brass Handwheel

GAS GRILL QUICK CONNECT COUPLINGS

TYPE 1 COUPLINGS



MG1855-A03

TYPE 1 COUPLING

1/4" NPT X 1-5/16" ACME

Connects the grill regulator to the Sherwood 3349 (Type 1) valves shown on pg 7. Provides up to 200,000 btu/hr excess flow protection and thermal shutoff protection for grill cylinders.

MG1850

QCC ACME PURGING COUPLING



The POL nipple of this coupling has an unthreaded outlet and does not have an excess flow device. When it's attached to the 3349 valve, it holds the valve's internal check valve open for easy purging.

MG1899P

QCC ACME ADAPTOR FOR STANDARD POL VALVES



Install this UL listed adaptor into a standard POL valve on a 20-lb cylinder and that valve can then accept the Acme thread of the MG1851 QCC coupling. And because this adaptor has an internal check valve, it gives the standard POL valve the safety feature of the 3349 QCC valve.

TYPE 2 COUPLINGS

Male Quick-disconnect by 1/4" MNPT Plug

Connects the grill regulator to a quick-disconnect cylinder valve shown on page 8.



5LPA8C

5LPA11C

Same as 5LPA8C but it has a check valve.



5LP510BK

Quick-Disconnect Adaptor for Standard POL Valves.

POL PLUGS AND QCC DUST COVER



B87P
Plastic plug has a replaceable "o" ring and comes with a plastic strap. Packaged 100 per bag.



B88C
QCC dust cover w/ strap. Fits 1-5/16" Acme Threads on Type 1 QCC Cylinder Valves. Packaged 50 per bag.



ME-1014
Brass POL Plug



POL-CAP
Brass POL Cap

SAF-T-LOCKS



ME-530 SAF-T-LOCK
Consist of a threaded brass plug for the POL outlet and a removable lock. Comes in a box of 12 with 1 key

ME-530-03 KEY ONLY




ME-531 SERIES
FNPT pipe lock offs that prevent tampering, theft and/or accidental discharge. Packaged 6 locks and 1 key.

ME-521-50 1/2 FNPT
ME-531-75 3/4" FNPT



ME-533
1 3/4" FACME lock off. Packed 2 locks and 1 key.

POL ADAPTORS



FEMALE POL X FEMALE PIPE

Part#	Size
ME-M301	FPOL x 1/4" FNPT
ME-M303	FPOL x 1/2" FNPT



FEMALE POL X MALE PIPE

Part#	Size
ME-M284	FPOL x 1/4" MNPT
ME-M285	FPOL x 3/8" MNPT
ME-M286	FPOL x 1/2" MNPT
ME-M287	FPOL x 3/4" MNPT

POL ADAPTORS CONTINUED



MALE POL X FEMALE PIPE


Part#	Size
ME-M357	MPOL x 1/2" FNPT



MALE POL X MALE OD FLARE

Part#	Size
BG20E	MPOL x 3/8" OD FL
BG20F	MPOL x 1/2" OD FL
BG20I	MPOL x 5/8" OD FL

POL/LIFT TRUCK FILLER COUPLINGS



ME-M390

1/4" MNPT x MPOL. Has brass nipple w/ 1/4" bore and o-ring nose.



ME-790

1/4" MNPT x 1 1/4" FACME filler coupling with "E-Z Grip"



ME-795

Motor fuel Quick Connect Filler Valve. Kwik Stik motor fuel valve, 1 1/4" ACME x 1/4"

ME-795-03-02

Kwik Stik Replacement tip seal

QCC FILLER COUPLINGS



ME-516

1/4" MNPT QCC filler coupling



ME-M392


Converts POL filler coupling to QCC filler coupling.




ME-M393

Converts QCC filler coupling to POL filler coupling.

SPECIAL FILLER ADAPTORS



SHERWOOD PA901H
Female 1-3/4" Acme x FPOL for filling motor fuel tanks with a POL filler coupling



ME-M308
Female CGA555 x FPOL for using a POL filler coupling to fill through cylinder valves w/ CGA 555 liquid connections



S5LPAFP
FPOL x plug nipple filling adaptor for using a POL filler coupling to fill through a type 2 quick disconnect valve.

ACME ADAPTOR SCREENS



SCR-KIT
2 screens to fit a 2" & 1 1/4" acme adaptor

SCR-TOOL
Tool to press in screens. Can be used with hydraulic press or large vise. (We can install screens)

ACME ADAPTORS / COUPLINGS



MALE ACME X MALE NPT

PART#	DESCRIPTION	MATERIAL
ME-M498-4/2	1 1/4" Acme x 1/2" NPT x 1/4" FPT	Brass
ME-M498-6/3	1 1/4" Acme x 3/4" NPT	Brass
ME-M520-8	1 1/4" Acme x 1" NPT	Steel
M521-4	1 3/4" Acme x 1/2" NPT	Steel
MR215	1 3/4" Acme x 3/4" NPT	Brass
ME-M521-6	1 3/4" Acme x 3/4" NPT	Steel
MR216	1 3/4" Acme x 1" NPT	Brass
ME-M521-8	1 3/4" Acme x 1" NPT	Steel
MR217	1 3/4" Acme x 1 1/4" NPT	Brass
ME-M521-10	1 3/4" Acme x 1 1/4" NPT	Steel
ME-M233	2 1/4" Acme x 1 1/4" NPT	Brass
ME-M236	2 1/4" Acme x 1 1/4" NPT	Steel
ME-M502-12/8	2 1/4" Acme x 1 1/2" NPT	Brass
ME-M502-1610	2 1/4" Acme x 2" NPT	Brass
ME-M522-1610	2 1/4" Acme x 2" NPT	Steel
ME-M503-16*	3 1/4" Acme x 2" NPT	Brass
ME-M263	3 1/4" Acme x 2" NPT	Steel
ME-M262	3 1/4" Acme x 3" NPT	Brass
ME-M523-24	3 1/4" Acme x 3" NPT	Steel
M504-24	4 1/4" Acme x 3" NPT	Brass
M524-24	4 1/4" Acme x 3" NPT	Steel

* Add "A" to part# for inlet screen

ACME ADAPTORS / COUPLINGS (CONTINUED)



MALE ACME X FEMALE NPT

Part #	Description	Material
ME-M498-4/2	1 1/4" Acme x 1/4" FPT	Brass
ME-M498- 6/3	1 1/4" Acme x 3/8" FPT	Brass
ME-M192	1 1/4" Acme x 1/2" FPT	Brass
ME-M193	1 1/4" Acme x 3/4" FPT	Brass
MR210	1 3/4" Acme x 1/4" FPT	Brass
MR211	1 3/4" Acme x 3/8" FPT	Brass
MR212	1 3/4" Acme x 1/2" FPT	Brass
MR213	1 3/4" Acme x 3/4" FPT	Brass
MR214	1 3/4" Acme x 1" FPT	Brass
ME-M502-12/8	2 1/4" Acme x 1" FPT	Brass
ME-M502- 1610	2 1/4" Acme x 1 1/4" FPT	Brass
ME-M522 - 16/10	2 1/4" Acme x 1 1/4" FPT	Steel
ME-M502 - 16/12	2 1/4" Acme x 1 1/2" FPT	Brass
ME-M250	3 1/4" Acme x 1 1/4" FPT	Brass
ME-M252	3 1/4" Acme x 2" FPT	Brass
ME-M528-16	3 1/4" Acme x 2" FPT	Steel
ME-M508-24	3 1/4" Acme x 3" FPT	Brass
ME-M528-24	3 1/4" Acme x 3" FPT	Steel



FEMALE ACME X FEMALE NPT

Part #	Female ACME	FNPT	Material
ME-M442	3 1/4"	1 1/4"	Brass



MALE ACME X MALE ACME COUPLERS


Part #	Description	Material
ME-M270	1 1/4" ACME x 1 1/4" ACME	Brass
ME-M273	1 3/4" ACME x 1 3/4" ACME	Brass
ME-M536-18	2 1/4" ACME x 2 1/4" ACME	Steel
ME-M536-26	3 1/4" ACME x 3 1/4" ACME	Steel



MALE ACME X FEMALE ACME ADAPTORS

Part #	Male ACME	Female ACME	Material
ME-M611	1 3/4"	2 1/4"	Brass
ME-M612	1 3/4"	3 1/4"	Brass
ME-M622	1 3/4"	3 1/4"	Steel
M613	3 1/4"	4 1/4"	Brass
M623	3 1/4"	4 1/4"	Steel

ACME ADAPTORS / COUPLINGS (CONTINUED)




ACME FILLER COUPLINGS (SHORT)

Part #	Female ACME	MNPT	Material
ME-M100	1 1/4"	3/8"	Brass
ME-M101	1 1/4"	1/2"	Brass
MR110	1 3/4"	1/2"	Brass
MR111	1 3/4"	3/4"	Brass
ME-M631-6	1 3/4"	3/4"	Steel
MR112	1 3/4"	1"	Brass
ME-M631-8	1 3/4"	1"	Steel
ME-M120	2 1/4"	1 1/4"	Brass
ME-M121	2 1/4"	1 1/4"	Steel
ME-M130	3 1/4"	2"	Brass
ME-M133	3 1/4"	2"	Steel



ACME FILLER COUPLINGS (LONG)

Part #		Female	MNPT	Material
FISHER	MARSHALL	ACME		
M635-6	ME-M635-6	1 3/4"	3/4"	Steel
M635-8	ME-M635-8	1 3/4"	1"	Steel



ACME VAPOR COUPLINGS (SHORT)

Part #	Female ACME	MNPT	Material
ME-M140	1 1/4"	3/8"	Brass
ME-M141	1 1/4"	1/2"	Brass
ME-M150	1 3/4"	3/4"	Brass
ME-M151	1 3/4"	1"	Brass
ME-M160	2 1/4"	1 1/4"	Brass



ACME VAPOR COUPLINGS (LONG)

Part #	Female ACME	MNPT	Material
ME-M394	1 1/4"	3/8"	Brass
ME-M646-6	1 3/4"	3/4"	Steel
ME-M646-8	1 3/4"	1"	Steel




ACME PLUGS/DUST SEALS

Part #	Male ACME	Material	Ring & Chain Assy
ME-M178	1 1/4"	Plastic	P147
ME-M179	1 3/4"	Plastic	P148
ME-M180	2 1/4"	Plastic	P148
ME-M181	3 1/4"	Plastic	P183
M535-34	4 1/4"	Steel	P167

ACME ADAPTORS / COUPLINGS (CONTINUED)



ACME CAPS



Part #	Female ACME	Material	Ring & Chain Assy
ME-220FP	1 1/4"	Brass	--
1875-3A	1 1/4"	Plastic	P147
ME-M109	1 3/4"	Plastic	P147 or P148*
ME-M109-1	1 3/4"	Plastic w/chain	ME-P147
ME-M229-1	1 3/4"	Brass w/chain	Included
M219	1 3/4"	Steel	P147
ME-M219-1	1 3/4"	Steel w/chain	Included
ME-M431	2 1/4"	Brass	P167
M432	2 1/4"	Steel	P167
ME-M441	3 1/4"	Brass	P167
ME-M443	3 1/4"	Steel	P167
M625-34	4 1/4"	Steel	P167

*P147 fits 3/4" MPT & P148 fits 1 1/4" valves

ACME FILLER HOSE ADAPTORS



FISHER M570*



Hose adaptor with integral back check intended for attachment to the filler valve. It is designed specifically for use with the N480 valves. Should the filler valve on the tank fail to close, the M570 can be left on the filler valve so that the hose can be disconnected. The back check valve in the M570 prevents the loss of LP gas.

*Will not work with new Rego A7797A or Marshall ME-800 hose end valves.

INLET: 1 3/4" Male ACME
OUTLET: 1 3/4" Female ACME
REPLACEMENT BLACK RING: T13098
REPLACEMENT GASKET: T13103

SHERWOOD PA901B



Hose adaptor with integral back check intended for attachment to filler valve. Should filler valve on tank fail to close, the PA901B can be left on filler valve. This short coupled adaptor costs less than half the price of long adaptors. It has similar differential drop during filling and doesn't need a manual vent. The short size allows tank hood to be closed if adaptor remains on leaky filler valve.

INLET: 1 3/4" Male ACME
OUTLET: 1 3/4" Female ACME

MARSHALL ME-578



Hose adaptor for use with LP gas delivery truck hose outlets. The "Flo-Max" provides full-flow filling capacity while giving the user the ability to remove the hose and delivery valve in the event of a filler valve failure. "Flo-Max" is a manually operated safety fill device where the user controls whether the valve is open or closed, providing maximum protection against product discharge.

INLET: 1 3/4" Male ACME
OUTLET: 1 3/4" Female ACME

Replacement Key: ME-578-02

ACME FILLER HOSE ADAPTORS (CONTINUED)



ME-574

Intended for attachment to filler valves. The adaptor has an integral back check and bleed valve. Should the filler valve fail to close, it can be left on the filler valve with its back check preventing loss of LP gas.

INLET: 1 3/4" Male ACME



ME-572EXTHD

EXTENDED FILLER CHECK ADAPTORS

1 3/4" Female ACME x 1 3/4" Male ACME backcheck adapter. 7" longer than the ME-574. for use on underground tanks. Available with or without a bleed valve with standard or heavy duty handle.



ME-574EXT

Part #	Handle	Bleed Valve
ME-572EXT	Standard	No
ME-572EXTHD	Heavy Duty	No
ME-574EXT	Standard	Yes
ME-574EXTHD	Heavy Duty	Yes

DORMONT APPLIANCE CONNECTORS



DORMONT APPLIANCE CONNECTORS

- Flexible stainless steel
- AGA listed for indoor or outdoor use
- Now available with high temperature black epoxy coating for hearth applications

HEATER CONNECTORS

1/4" ID - 3/8" OD

Part #*	Length	NPT Connections
D10-2122-12	12"	3/8" MXF
D10-2122-18	18"	3/8" MXF
D10-2122-24	24"	3/8" MXF
D10-2122-36	36"	3/8" MXF
D10-2122-48	48"	3/8" MXF
D10-2122-60	60"	3/8" MXF

*Add an "A" after D10 for black epoxy, i.e., D10A-2122-XX

DRYER AND FURNACE CONNECTORS

3/8" ID - 1/2" OD

Part #*	Length	NPT Connections
D20-3132-12	12"	1/2" MXF
D20-3132-18	18"	1/2" MXF
D20-3132-24	24"	1/2" MXF
D20-3132-36	36"	1/2" MXF
D20-3132-48	48"	1/2" MXF
D20-3132-60	60"	1/2" MXF
D20-3132-72	72"	1/2" MXF

*Add an "A" after D20 for black epoxy, i.e., D20A-3122-XX

DORMONT APPLIANCE CONNECTORS (CONTINUED)

DOMESTIC RANGE CONNECTORS

1/2" ID - 7/8" O


Part #	Length	NPT Connections
D30-3132-12	12"	1/2" MXF
D30-3132-24	24"	1/2" MXF
D30-3132-36	36"	1/2" MXF
D30-3132-48	48"	1/2" MXF
D30-4141-24	24"	3/4" MXM
D30-4141-48	48"	3/4" MXM
D30-4142-12	12"	3/4" MXF
D30-4142-24	24"	3/4" MXF
D30-4142-36	36"	3/4" MXF
D30-4142-48	48"	3/4" MXF

O-RINGS



ME-W1 REPLACEMENT SEAL KIT


Provides a convenient storage system for all common LP Gas and anhydrous ammonia gaskets and O-rings. Perfect for dispenser cabinets or bobtail and transport drivers.



Seal Kit		
Description		
Complete Serviceman's Seal Kit and Carrying Case Includes:		
Part #	Qty	Description
MEW2	10	1 3/4" Acme Flat Gaskets
MEW3	10	1 1/4" Acme Flat Gaskets
MEW4	9	1 1/4" Acme Forklift Flat Gaskets
MEW5	10	2 1/4" Acme Flat Gaskets
MEW6	10	3 1/4" Acme Flat Gaskets
ME220M-02	12	Male Forklift Connector O-rings.
568-110-01	12	POL O-rings

O-RINGS (CONTINUED)


All are actual size

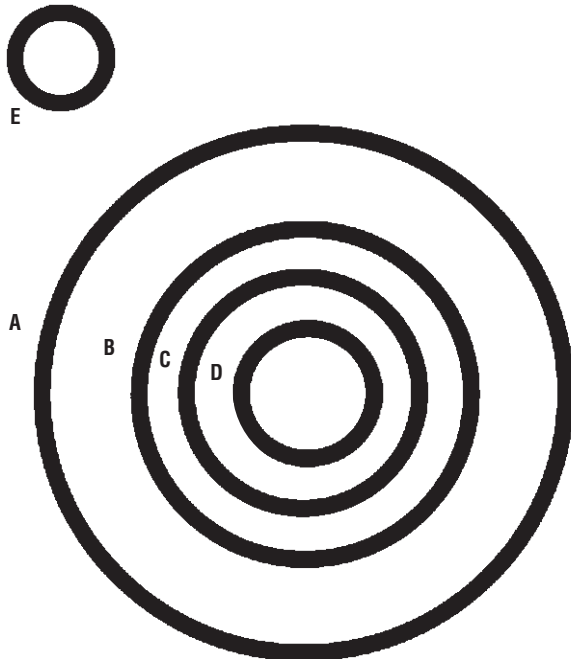

	Part #	Description
A	1H2917	3 1/4" ACME O-ring. Replaces flat washer used on 3 1/4" ACME filler valves.
B	T12655	2 1/4" ACME O-ring. Replaces flat washer used on 2 1/4" ACME vapor return and filler valves.
C	1E8124-O	1 3/4" ACME O-ring. Replaces flat washer used on 1 3/4" ACME filler valves.
D	T11673	Slippery O-ring. Internal O-ring for lift truck safety check connectors. Also used as emergency POL seal.
E	T12945	POL O-ring. Fits POL cylinder filling connector.

WASHERS

All are actual size.

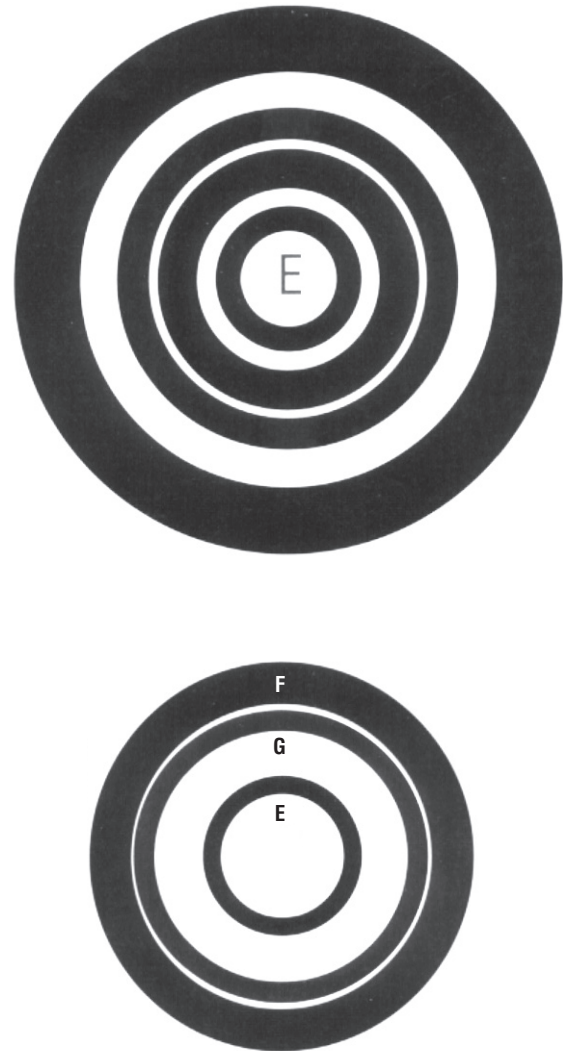

	Part #	Description
A	1E8128	3 1/4" ACME tank truck filler valve washer
B	1E8126	2 1/4" ACME tank truck vapor return washer
C	1E8124	1 3/4" ACME standard bulk tank filler valve washer
D	1E8122	1 1/4" ACME standard bulk tank vapor return valve washer
E	R7141M-3	1 1/4" ACME flat washer for use on lift truck cylinder safety check connectors
F	VISSGG	Senior gauge washer
G	VISJGG	Junior gauge washer

FLARED FITTINGS - SAE 45° FLARE

Most fittings are packaged 25 to a bag.




FLARE NUT

Item #	Flare
NS4C	1/4"
NS4E	3/8"
NS4F	1/2"
NS4I	5/8"
NS4K	3/4"



REDUCING FLARE NUT

Item #	Flare x Flare
NRS4EC	3/8" x 1/4"
NRS4FE	1/2" x 3/8"
NRS4IF	5/8" x 1/2"



COUPLINGS *

FLARE TO MALE PIPE THREAD

* Add "L" prefix to part number for a long coupling

Item #	Flare x MPT
48CA	1/4" x 1/8"
48CC	1/4" x 1/4"
48CE	1/4" x 3/8"
48EA	3/8" x 1/8"
48EC	3/8" x 1/4"
48EE	3/8" x 3/8"
48EF	3/8" x 1/2"
48EK	3/8" x 3/4"
48FC	1/2" x 1/4"
48FE	1/2" x 3/8"
48FF	1/2" x 1/2"
48FK	1/2" x 3/4"
48IF	5/8" x 1/2"
48IK	5/8" x 3/4"
48KF	3/4" x 1/2"
48KK	3/4" x 3/4"

FLARE TO FLARE



Item #	Flare x Flare
42C	1/4" x 1/4"
42E	3/8" x 3/8"
42F	1/2" x 1/2"
42I	5/8" x 5/8"
42K	3/4" x 3/4"

FLARED FITTINGS (CONTINUED)

Flare to Female Pipe Thread



Item #	Flare x FPT
46CC	1/4" x 1/4"
46EC	3/8" x 1/4"
46EE	3/8" x 3/8"
46EF	3/8" x 1/2"
46EK	3/8" x 3/4"
46FC	1/2" x 1/4"
46FE	1/2" x 3/8"
46FF	1/2" x 1/2"
46FK	1/2" x 3/4"
46IF	5/8" x 1/2"
46IK	5/8" x 3/4"
46KF	3/4" x 1/2"
46KK	3/4" x 3/4"

REDUCING COUPLINGS


Flare to Flare



Item #	Flare x Flare
42EC	3/8" x 1/4"
42FC	1/2" x 1/4"
42FE	1/2" x 3/8"
42IE	5/8" x 3/8"
42IF	5/8" x 1/2"
42KF	3/4" x 1/2"
42KI	3/4" x 5/8"

FORGED ELBOWS*

Flare to Male Pipe Thread



Item #	Flare x MPT
49CA	1/4" x 1/8"
49CC	1/4" x 1/4"
49CE	1/4" x 3/8"
49EC	3/8" x 1/4"
49EE	3/8" x 3/8"
49EF	3/8" x 1/2"
49EK	3/8" x 3/4"
49FC	1/2" x 1/4"
49FE	1/2" x 3/8"
49FF	1/2" x 1/2"
49FK	1/2" x 3/4"
49IE	5/8" x 3/8"
49IF	5/8" x 1/2"
49IK	5/8" x 3/4"
49KK	3/4" x 3/4"

* For 45° elbow, substitute 47 for 49 in the item number

FLARED FITTINGS (CONTINUED)

Flare to Flare



Item #	Flare x Flare
55C	1/4" x 1/4"
55E	3/8" x 3/8"
55F	1/2" x 1/2"
55I	5/8" x 5/8"
55K	3/4" x 3/4"
55FE	1/2" x 3/8"
55IE	5/8" x 3/8"
55IF	5/8" x 1/2"

Flare to Female Pipe Thread



Item #	Flare x FPT
54CC	1/4" x 1/4"
54EC	3/8" x 1/4"
54EE	3/8" x 3/8"
54EF	3/8" x 1/2"
54EK	3/8" x 3/4"
54FC	1/2" x 1/4"
54FE	1/2" x 3/8"
54FF	1/2" x 1/2"
54FK	1/2" x 3/4"
54IF	5/8" x 1/2"
54IK	5/8" x 3/4"

FORGED CONNECTORS

Swivel Connector



Item #	Flare
US4C	1/4"
US4E	3/8"
US4F	1/2"
US4I	5/8"
US4K	3/4"


PLUGS AND CAPS

Flare Fitting Plug



Item #	Flare
P2C	1/4"
P2E	3/8"
P2F	1/2"
P2I	5/8"
P2K	3/4"

Flare Fitting Cap




Item #	Flare
N5C	1/4"
N5E	3/8"
N5F	1/2"
N5I	5/8"
N5K	3/4"

FLARED FITTINGS (CONTINUED)

FORGED TEES

Flare to Flare to Male Pipe Thread



Item #	Flare X MPT
45EEC	3/8" x 1/4"
45EEE	3/8" x 3/8"
45EEF	3/8" x 1/2"
45FFE	1/2" x 3/8"
45FFF	1/2" x 1/2"
45IIF	5/8" x 1/2"

Flare to Flare to Flare



Item #	Flare
44C	1/4"
44E	3/8"
44F	1/2"
44I	5/8"
44K	3/4"



FORGED REDUCING TEES

Flare to Flare to Flare

Item #	A	B	C
44EEF	3/8"	3/8"	1/2"
44EEI	3/8"	3/8"	5/8"
44FEE	1/2"	3/8"	3/8"
44FEF	1/2"	3/8"	1/2"
44FFE	1/2"	1/2"	3/8"
44FFI	1/2"	1/2"	5/8"
44IFF	5/8"	1/2"	1/2"
44IFI	5/8"	1/2"	5/8"
44IIE	5/8"	5/8"	3/8"
44IIF	5/8"	5/8"	1/2"

FORGED CROSS



Item #	Flare
C1E	3/8"
C1F	1/2"
C1I	5/8"

SEAL BONNETS



Item #	Tubing O.D. Size
B1C	1/4"
B1D	3/8"
B1E	1/2"
B1F	5/8"
B1I	3/4"

TUBING/TOOLS



COPPER REFRIGERATION TUBING

Part #	Coil Length	O.D. Size
Y02X50	50'	1/4"
Y03X50	50'	3/8"
Y03X100	100'	3/8"
Y04X50	50'	1/2"
Y04X100	100'	1/2"
Y05X50	50'	5/8"
Y05X100	100'	5/8"

COPPER TYPE K TUBING

Part #	Coil Length	I.D. Size
YK02X60	60'	1/4"
YK02X100	100'	1/4"
YK03X60	60'	3/8"
YK03X100	100'	3/8"
YK04X60	60'	1/2"
YK04X100	100'	1/2"

YELLOW POLYETHYLENE COATED COPPER TUBING

Coating identifies the tubing as a gas line. Easy to install and cost efficient.



Part #	Coil Length	O.D. Size
13850	50'	3/8"
138100	100'	3/8"
11250	50'	1/2"
112100	100'	1/2"
15850	50'	5/8"
158100	100'	5/8"

J TUBING CLIPS



Part #	O.D. Size
419-3/8-1/2	3/8", 1/2"
419-5/8	5/8"


COPPER TUBE BENDERS



Part #	O.D. Size
LC630E	3/8"
LC630F	1/2"
LC630I	5/8"


TUBING/TOOLS (CONTINUED)

NP512 ROTHENBERGER (PAPCO) TUBE CUTTER




Replacement Part #	Description
NP512CW	Cutting Wheel
NP51250	Cutting Wheel Pin
NP51240	Retaining Ring
NP51211	Triangle Reamer

NP420 ROTHENBERGER (PAPCO) SWING RELEASE FLARING TOOL



Replacement Part #	Description
NP41900	Roller
NP42000	Roller Pin

ROL945TH ROLO-FLAIR FLARING TOOL



Replacement Part #	Description
ROL03002A	Cross Yoke Sub Assembly

BRASS PIPE FITTINGS



BRASS NIPPLE

Part #	MNPT	Length
B122AA	1/8"	Close w/ hex
B122CC	1/4"	Close w/ hex
B113C	1/4"	Close
B113C11/2	1/4"	1 1/2"
B113C2	1/4"	2"
B113C21/2	1/4"	2 1/2"
B113C3	1/4"	3"
B122EE	3/8"	Close w/ hex
B113E2	3/8"	2"
B113F11/2	1/2"	1 1/2"
B113F2	1/2"	2"
B113F3	1/2"	3"
B113F4	1/2"	4"
B113F5	1/2"	5"
B113F6	1/2"	6"
B113K11/2	3/4"	1 1/2"
B113K2	3/4"	2"
B113K5	3/4"	5"

BRASS PIPE FITTINGS (CONTINUED)



BUSHINGS

Part #	MNPT	FNPT
B110CA	1/4"	1/8"
B110EA	3/8"	1/8"
B110EC	3/8"	1/4"
B110FA	1/2"	1/8"
B110FC	1/2"	1/4"
B110FE	1/2"	3/8"
B110KC	3/4"	1/4"
B110KF	3/4"	1/2"
B110MK	1"	3/4"



COUPLERS

Part #	FNPT	FNPT
B103C	1/4"	1/4"
B103E	3/8"	3/8"



ADAPTORS Female to Male

Part #	FNPT	MNPT
B120CA	1/4"	1/8"
B120EC	3/8"	1/4"



PLUG

Part #	MNPT
B121C	1/4"
B121E	3/8"



CROSS

Part #	FNPT
B102C	1/4"
B102F	1/2"



ADAPTOR

Part #	FNPT
ME-24C	1/4" MPT x 9/16" LH

BRASS PIPE FITTINGS (CONTINUED)

TEES

Part #	FNPT
B101A	1/8"
B101C	1/4"
B101E	3/8"
B101F	1/2"
B101K	3/4"




ELBOWS

Part #	FNPT
B100C	1/4"
B100E	3/8" (3000psi)
B100F	1/2"
B100K	3/4"



STREET ELBOWS


Part #	NPT (Forged Brass)
B116A	1/8"
B116C	1/4"
B116E	3/8"



STREET TEE

Part #	Size
B105A	1/8"

DUCTILE IRON STRAINERS



Y-STRAINER FOR LIQUID PROPANE W/40 MESH SCREEN. PLUG INCLUDED.

Part #	Size
Z02B	1/4"
ME-650S	1/2"
ME-651S*	3/4"
ME-652S	1"
ME-653S	1 1/4"
ME-654S	1 1/2"
ME-655SP	2"
ME-656SP	3"

*3/4 Strainer has an 80 mesh screen.

THREADED FLANGE



FT24X16

3" Flange x 2" MPT
Gasket: T10561

FLEX GASKET KITS:

Includes bolt, nut and gasket
BNG-10, 1 1/4"
BNG-16, 2"
BNG-24, 3"
BNG-32, 4"

STANDARD AND EXTRA HEAVY PIPE NIPPLES

PIPE SIZING CODE

PIPE I.D.	CODE (**)
1/8"	01
1/4"	02
3/8"	03
1/2"	04
3/4"	06
1"	08
1 1/4"	10
1 1/2"	12
2"	16
3"	32

PIPE LENGTH	CODE (##)
CLOSE	0
1 1/2"	15
2"	20
2 1/2"	25
3"	30
3 1/2"	35
4"	40
4 1/2"	45
5"	50
Etc.	Etc.



SCHEDULE 80 EXTRA HEAVY PIPE NIPPLES

Item #	Pipe Sizes	Lengths
N**X##	1/4" - 3"	Close - 12"

SCHEDULE 40 BLACK MALLEABLE PIPE NIPPLES

Item #	Pipe Sizes	Lengths
40N**X##B	3/8" - 1 1/4"	Close - 12"

- Example - 1/2" x 3" nipple would be 40N04X30B

SCHEDULE 40 GALVANIZED PIPE NIPPLES

Item #	Pipe Sizes	Lengths
40N**X##G	3/8" - 1 1/4"	Close - 12"

- Example - 1/2" x 3" nipple would be 40N04X30G



CONCENTRIC SWAGE NIPPLES

Item #	Sizes
S**X**	1/2" - 3" X 1/4" - 2 1/2"

SCHEDULE 40 & SCHEDULE 80 BLACK PIPE


SCHEDULE 40		SCHEDULE 80	
Item #	SIZES	ITEM#	SIZES
Z**40	3/8" - 3"	Z**80	1/2" - 3"

- Schedule 40 pipe comes threaded and coupled
- Add CW to the part number for coated and wrapped pipe (Special Order)



PIPE FITTINGS

FORGED STEEL PIPE FITTINGS, 2000# AND 3000# THREADED

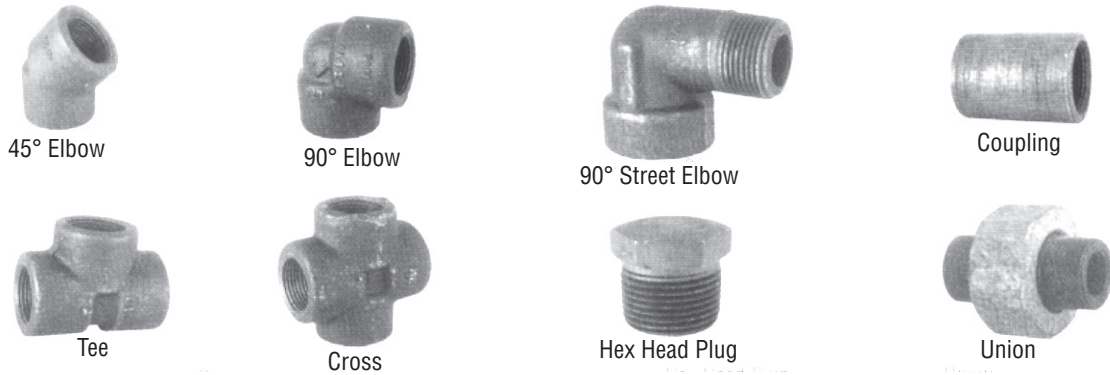

ITEM	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	3"
45° Elbow	E02452	E03452	E04452	E06452	E08452	E10452	E12452	E16452	E24452
90° Elbow	E02902	E03902	E04902	E06902	E08902	E10902	E12902	E16902	E24902
90° Street Elbow	ES02903	ES03903	ES04903	ES06903	ES08903	ES10903	ES12903	ES16903	ES24903
Coupling	C023	C033	C043	C063	C083	C103	C123	C163	C243
Tee	T022	T032	T042	T062	T082	T102	T122	T162	T242
Cross	X022	X032	X042	X062	X082	X102	X122	X162	X242
Hex Head Plug	HP02	HP03	HP04	HP06	HP08	HP10	HP12	HP16	HP24
Union	U023	U033	U043	U063	U083	U103	U123	U163	U243


FORGED STEEL BUSHINGS



MALE PIPE THREAD (A)

FEMALE PIPE THREAD (B)	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	3"
1/8"	B02X01	B03X01	B04X01	B06X01	B08X01	B10X01	B12X01	B16X01	B24X01
1/4"		B03X02	B04X02	B06X02	B08X02	B10X02	B12X02	B16X02	B24X02
3/8"			B04X03	B06X03	B08X03	B10X03	B12X03	B16X03	B24X03
1/2"				B06X04	B08X04	B10X04	B12X04	B16X04	B24X04
3/4"					B08X06	B10X06	B12X06	B16X06	B24X06
1"						B10X08	B12X08	B16X08	B24X08
1 1/4"							B12X10	B16X10	B24X10
1 1/2"								B16X12	B24X12
2"									B24X16

FORGED STEEL REDUCERS

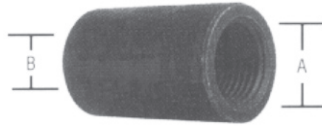

FEMALE PIPE THREAD (A)

FEMALE PIPE THREAD (B)	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	3"
1/8"	CR02X01	CR03X01	CR04X01	CR06X01	CR08X01	CR10X01	CR12X01	CR16X01	CR24X01
1/4"		CR03X02	CR04X02	CR06X02	CR08X02	CR10X02	CR12X02	CR16X02	CR24X02
3/8"			CR04X03	CR06X03	CR08X03	CR10X03	CR12X03	CR16X03	CR24X03
1/2"				CR06X04	CR08X04	CR10X04	CR12X04	CR16X04	CR24X04
3/4"					CR08X06	CR10X06	CR12X06	CR16X06	CR24X06
1"						CR10X08	CR12X08	CR16X08	CR24X08
1 1/4"							CR12X10	CR16X10	CR24X10
1 1/2"								CR16X12	CR24X12
2"									CR24X16

SCHEDULE 40 BUSHINGS (BLACK OR GALVANIZED)

For galvanized bushings, substitute suffix G for B in part number.



MALE PIPE THREAD (A)


FEMALE PIPE THREAD (B)	3/8"	1/2"	3/4"	1"	1 1/4"
1/4"	40B03X02B	40B04X02B	40B06X02B	40B08X02B	40B10X02B
3/8"		40B04X03B	40B06X03B	40B08X03B	40B10X03B
1/2"			40B06X04B	40B08X04B	40B10X04B
3/4"				40B08X06B	40B10X06B
1"					40B10X08B

DIELECTRIC (INSULATED) UNIONS



PART #	SIZE FPT
J701-403	1/2"
J701-404	3/4"
J701-405	1"
J701-406	1 1/4"
J701-407	1 1/2"
J701-408	2"
100-7575-00	Galvanized 3/4"

STANDARD SCHEDULE 40 PIPE FITTINGS (BLACK OR GALVANIZED)

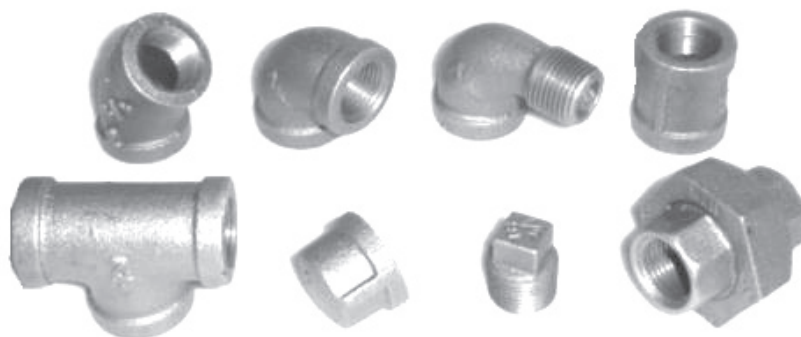

For galvanized fittings, substitute suffix G for B in part number.

ITEM	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
45° Elbow	40E0245B	40E0345B	40E0445B	40E0645B	40E0845B	40E1045B	40E1245B	40E1645B
90° Elbow	40E0290B	40E0390B	40E0490B	40E0690B	40E0890B	40E1090B	40E1290B	40E1690B
90° Street Elbow	40ES0290B	40ES0390B	40ES0490B	40ES0690B	40ES0890B	40ES1090B	40ES1290B	40ES1690B
Coupling	40CP02B	40CP03B	40CP04B	40CP06B	40CP08B	40CP10B	40CP12B	40CP16B
Tee	40T02B	40T03B	40T04B	40T06B	40T08B	40T10B	40T12B	40T16B
Cap	40C02B	40C03B	40C04B	40C06B	40C08B	40C10B	40C12B	40C16B
Plug	40SP02B	40SP03B	40SP04B	40SP06B	40SP08B	40SP10B	40SP12B	40SP16B

SCHEDULE 40 STANDARD REDUCING COUPLINGS (BLACK OR GALVANIZED)



For galvanized couplings, substitute suffix G for B in part number.

PART #	SIZE
40CR04X03B	1/2" X 3/8"
40CR06X04B	3/4" X 1/2"
40CR08X04B	1" X 1/2"
40CR08X06B	1" X 3/4"




SCHEDULE 40 STANDARD REDUCING 90° ELBOW (BLACK OR GALVANIZED)

For galvanized elbow, substitute suffix G for B in part number.

PART #	SIZE
40ER06X04B	3/4" X 1/2"
40ER08X04B	1" X 1/2"
40ER08X06B	1" X 3/4"
40ER10X08B	1 1/4" X 1"

SMART-HOSE ASSEMBLIES



Lifeline 3 incorporates an internal coated cable connected to normally unseated "Valve Flappers" located on each end of the cable. In the event of hose separation, coupling ejection or catastrophic hose failure the "Valve Flappers" are released and instantly seat, stopping the flow of product in both directions.



Part #	Size
R010639015	2" FNPT x 15' (Bulk Plant - Not DOT Approved)
R010639019	2" FNPT x 18.5' (DOT approved for transports)



Add "S" to part # for SMART-HOSE W/ SCUFF GUARD

The perfect outside protection for Transportation Hose to resist the effects of abrasion, (due to pump vibration) cutting and gouging.

HOSE/FLEXIBLE CONNECTORS



DAYCO BULK HOSE

- High Pressure Rubber LP-Gas Hose
- Minimum burst pressure - 1750 psig
 - Working pressure - 350 psig
 - UL listed
 - Two braid
 - Delivered in bulk hose reels or specified cut length

Item #	I.D. (in.)	O.D. (in.)	Crimp on Coupling #	App. Reel Length
F02	1/4"	21/32"	N/A	600'
F03	3/8"	3/4"	D06NP	600'
F04	1/2"	15/16"	D08NP	600'
F06	3/4"	1-1/4"	D12NP	500'
F08	1"	1-1/2"	D16NP	300'
F10	1-1/4"	1-13/16"	D20NP	300'
F12	1-1/2"	2-1/8"	D24NP	100'
F16	2"	2-3/4"	D32NP	100'



1" BOBTAIL HOSE ASSEMBLIES

Assemblies for bulk truck liquid service, complete with permanent swaged connections.

Item #				
Goodall	Dayco	Thermoid	Length	Connections
G08-100C	F08-100C	T08-100C	100'	1" MNPT
G08-125C	F08-125C	T08-125C	125'	1" MNPT
G08-150C	F08-150C	T08-150C	150'	1" MNPT

SCUFF GUARD

Heavy duty vinyl wrap protects your hose from abrasion. Increases hose life significantly. Sold per foot.



Item #	Fits Hose Size
SCUFF-06	3/4"
SCUFF-08	1"
SCUFF-10	1 1/4"
SCUFF-16	2"

LP-Gas Engine Fuel Hose

Item #	Hose I.D.	Hose O.D.	Min. Burst	Working Pressure
A4QW-A	3/16"	.52"	2000 psi	350 psi
A6QW-D*	5/16"	.67"	2000 psi	350 psi
A8QW-A	13/32"	.77"	2000 psi	350 psi
A10QW-A	1/2"	.92"	2000 psi	350 psi
A12QW-A	5/8"	1.08"	2000 psi	350 psi

* Add suffix R for rubber coated hose



GVH100
1" Carburetion Vapor Hose
GVH58
5/8" Carburetion Vapor Hose

HOSE/FLEXIBLE CONNECTORS (CONTINUED)

LOW PRESSURE BULK HOSE

Item #	Hose I.D.
DFVO3	3/8"
DFVO4	1/2"



1/4" AND 3/8" HOSE ASSEMBLIES (UP TO 350 PSI)
Both sizes have 3/8" Female Flare Ends.

Length	1/4" HOSE	3/8" HOSE
2'	MH24H	N/A
3'	MH36H	N/A
4'	MH48H	M0348H
5'	MH60H	N/A
6'	MH72H	M0372H
8'	MH96H	N/A
10'	MH120H	M03120H
12'	MH144H	N/A
15'	MH180H	M03180H
20'	N/A	M03240H
25'	N/A	M03300H

ASSORTED LOW PRESSURE HOSE ASSEMBLIES

Item #	DESCRIPTION
EF276124	5', 3/8" Appliance Extension Hose, 3/8" MPT ends
EF271470	15', 3/8" Appliance Extension Hose, 3/8" MPT ends
MG424#299	3', 1/4" Hose Assembly, 3/8" FL x 1/4" MPT
MG556#1793	12', 3/8" Nat. Gas Hose with Quick Disconnect

HIGH PRESSURE LIQUID HOSE ASSEMBLIES
350 psig Working Pressure

Pre-made 1/2" through 2" hose assemblies in various lengths.

Item #	Description	Stock Sizes
GC04-XX"	1/2" hose	13" - 25'
GC06-XX"	3/4" hose	9" - 30'
GC08-XX"	1" hose	18"
GC10-XX"	1 1/4" hose	10" - 15'
GC12-XX"	1 1/2" hose	10" - 18'
GC16-XX"	2" hose	12" - 18'

*Example: 3/4 x 18 ft. hose is GC06-216"

HOSE FLEXIBLE CONNECTORS

3/4" - 2" hose. Lengths made to order. The following part numbers are for lengths up to 18".

Item #	Hose Size
FC-06	3/4"
FC-08	1"
FC-10	1-1/4"
FC-12	1-1/2"
FC-16	2"



HOSE/FLEXIBLE CONNECTORS (CONTINUED)



STAINLESS STEEL FLEXIBLE CONNECTORS

Any length can be special ordered. Also available with union end.

SIZE	MALE BY MALE	MALE BY FEMALE
3/4" x 12"	LF06X120	---
3/4" x 18"	LF06X180	---
1" x 12"	LF08X120	LFU08X120
1" x 14"	LF08X140	LFU08X140
1" x 16"	LF08X160	---
1" x 18"	LF08X180	---
1 1/4" x 16"	LF10X160	LFU10X160
1 1/4" x 18"	LF10X180	---
1 1/2" x 18"	LF12X180	LFU12X180
2" x 18"	LF16X180	LFU16X180
3" x 18"	LF24X180	---
3" x 24"	LF24X240	LFU24X240




SWIVEL HOSE ADAPTER UNIONS

Tapered nose in swivel end makes up a tight metal to metal ground joint union with standard male pipe hose couplings.

Size	Female x Male Swivel	Female x Female Swivel
1/4"	A2045-4-4	A2046-4-4
1/2"	A2045-8-8	A2046-8-8
3/4"	A2045-12-12	A2046-12-12
1"	A2045-16-16	A2046-16-16
1-1/4"	A2045-20-20	A2046-20-20
1-1/2"	A2045-24-24	A2046-24-24
2"	A2045-32-32	A2046-32-32

HOSE COUPLINGS



CLAMP TYPE TWO BOLT COUPLINGS



Item #	Size	Hose I.D.
Clamp type, Standard Outlet		
CP08CL	1/2" MNPT	1/2"
CP12CL	3/4" MNPT	3/4"
CP16CL	1" MNPT	1"
CP20CL	1 1/4" MNPT	1-1/4"
CP24CL	1 1/2" MNPT	1-1/2"
CP32CL	2" MNPT	2"
CP48CL	3" MNPT	3"
Clamp type, Swivel Nut Outlet		
ME-M3162-12S	1 3/4" Female ACME	3/4"
ME-M3162-32S	3 1/4" Female ACME	2"
ME-M3162-32B**	3 1/4" Female ACME	2"
ME-M3162-48S	4 1/4" Female ACME	3"

** Brass nut, steel nipple - All others steel

HOSE COUPLINGS (CONTINUED)




QW HOSE COUPLING WITH HYDROSTATIC RELIEF CONNECTION

MHC8346

5/16" I.D. X 3/8" O.D.

Female Flare Swivel X 1/4" FNPT

Allows hydrostatic relief valve to be installed at safest, most protected position. The MHC8346 has a 3/4" female flare swivel on the tank valve end. The opposite end is a two piece reusable hose fitting for 5/16" I.D. stainless steel braid LP hose.



HOSE COUPLINGS FOR QW HOSE

Item #	Hose I.D.	Connection
A4QW-A-CPLG	3/16"	Female 1/4" O.D. Flare
A6QW-A-CPLG	5/16"	Female 3/8" O.D. Flare
A8QW-A-CPLG	13/32"	Female 1/2" O.D. Flare
A10QW-A-CPLG	1/2"	Female 5/8" O.D. Flare
A12QW-A-CPLG	5/8"	Female 3/4" O.D. Flare
A4412-4-6	5/16"	Male 1/4" NPT
ME-8346	5/16"	Female 1/4" FPT
A6QW-A-90CPL	5/16"	Female 3/8" O.D. Flare (90°)
A8QW-A-90CPL	13/32"	Female 1/2" O.D. Flare (90°)
A6QW-A-45CPL	5/16"	Female 3/8" O.D. Flare (45°)
A8QW-A-45CPL	13/32"	Female 1/2" O.D. Flare (45°)



BRASS HOSE FERRULES


Item #	Inside Diameter	Hose ID	Fits Dayco	Plain DIE	Ribbed DIE
S7325	.562"	1/4"		CD38	CDR37
S7326	.593"	1/4"	F02L	CD37	CDR36
S7327	.625"	1/4"	F02	CD36	CDR35
S7331	.750"	3/8"		CD31	CDR30
S7332	.781"	3/8"	F03	CD30	CDR29

FERRULE CRIMPING TOOLS

These tools are used to make low pressure hose assemblies only.



MLP3C CRIMPING TOOL
To be used with 3/16", 1/4", and 3/8" ID hose ferrules. Strike with hammer or press in vise, then turn 90° and strike or press again.

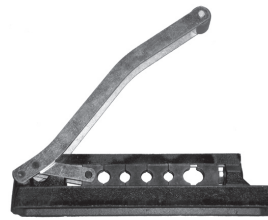

TL855 CRIMPING TOOL
5 Hole crimping tool. 1/4" -3/8" ID.



HOSE BARBS

4000 Series - 4 barb for low pressure use
5000 Series - 7 barb for high pressure use

	Item #	Description
	Female Flare Swivel X Hose Barb	
	MHC5335	1/4" hose barb x 3/8" female flare swivel
	MHC4355	3/8" hose barb x 3/8" female flare swivel
	MHC4357	3/8" hose barb x 1/2" female flare swivel
	Male Pipe X Hose Barb	
	MHC5231	1/4" hose barb x 1/8" male pipe thread
	MHC5232	1/4" hose barb x 1/4" male pipe thread
	MHC5233	1/4" hose barb x 3/8" male pipe thread
	MHC4252	3/8" hose barb x 1/4" male pipe thread
	Female Pipe X Hose Barb	
	MHC4631	1/4" hose barb x 1/8" female pipe thread
	MHC5632	1/4" hose barb x 1/4" female pipe thread
	Male Flare X Hose Barb	
	MHC5835	1/4" hose barb x 3/8" male flare
	MHC4855	3/8" hose barb x 3/8" male flare
	Hose Nut	
	MG201	9/16" 18 LH hose nut
		Hose Nipple
MG621		3/16" hose nipple
MG622		1/4" hose nipple
	Soft Nose POL with Handwheel X Hose Barb	
	MG1656*	Soft nose POL with handwheel x 1/4" hose barb
		POL X Hose Barb
MHC5930		POL x 1/4" barb, 7/8" hex
	Inverted Flare X Hose Barb	
	MHC5133	1/4" ID hose barb x 1/4" inverted flare

*Add "A" to part# for brass handwheel

QUICK DISCONNECT COUPLINGS



HIGH AND LOW PRESSURE COUPLINGS

Item #	Description
EF276190	1/4" FNPT X 1/4" MNPT
EF276187	3/8" FNPT X 3/8" MNPT
EF276166	1/4" Male Plug Only




LOW PRESSURE COUPLINGS

Item #		Size
Socket	Plug	
H100-006	H100-506	3/8"
H100-008	H100-508	1/2"
H100-010	H100-510	3/4"
H100-012	H100-512	1"



DISPOSABLE CYLINDER ADAPTORS

RESERVE GAS ADAPTORS



MG487

1"-20F X F POL

Allows you to connect a disposable cylinder to a regulator that has a POL inlet, providing a reserve gas supply to outdoor grills, etc.

ADAPTORS WITH CHECK VALVE SHUTOFF



ME-493

1"-20M X 9/16"-LH

1"-20 male thread is the same as a disposable cylinder's male thread. Connects to hose assembly with female 9/16"-LH hose end. Has check valve shutoff with "O" ring seal.

MG417

1"-20M X 1/4" MNPT

Same as above but with 1/4" MNPT inlet.

ADAPTORS WITHOUT CHECK VALVE

MG494

1"-20M X 9/16"-LH

Same as G493 without check valve.



MG491

1"-20M X 3/8" OD Flare

Same as above but with 3/8" OD flare.



DISPOSABLE CYLINDER ADAPTORS (CONTINUED)



MG492

1"-20M X 1/4" FNPT

Same as above but with 1/4" FNPT.



MG488

1"-20F X 1/4" MNPT

Same as above but with female 1"-20 connection.

SWIVEL ADAPTORS BY HOSE BARB



MG496

1"-20M swivel X 1/4" ID



MG484

1"-20F swivel X 1/4" ID

GAS OUTLET BOXES



ME-951 & ME-952 GAS BOXES



Utilizes a standard LP Gas outdoor appliance regulator and connector. Both models provide complete capacity operation at 10 psig or higher for all outdoor appliances without modification or the hassles of a 20# cylinder

Item #	Description	Color
ME-951IVY	Single 1 5/16" M.ACME/F.POL with 1/2" FNPT inlet	Ivy
ME-952IVY	Dual 1 5/16" M.ACME/EPOL with 1/2" FNPT inlet	Ivy

G0101-SS-50 STAINLESS STEEL GAS OUTLET BOX



Takes Low pressure gas connection. CGA/AGA approved for indoor/outdoor use. This unit can accommodate 118MBTU LP with a rear or bottom gas connection. 3/8" quick disconnect plug included. Available in 3/8" or 1/2" NPT connection. Surface mount box.

GR0101-SS-50 RECESSED STAINLESS STEEL GAS OUTLET BOX




Same unit as the G0101-SS but with slightly smaller body for use in recessed installation.

G0101-5 GAS OUTLET BOX



Economy version of the G0101 series boxes with the same great features and benefits. UV rated. PVC surface mount box.

HOSE ADAPTORS / KITS



**ME-R471
EXTEND-A-FLOW KIT**

The Extend-A-Flow kit allows you to connect small portable appliances, normally fueled by disposable cylinders, to the existing LP gas supply of a recreational vehicle, cottage, or propane gas grill, without interrupting the supply of regulated fuel to the system.

ME-R471 contains:

- MG415 Tee**
MPOL x FPOL x 1"-20MNPT
- MG42421-144 Hose**
12' long, 1"-20 male swivel x 1"-20 female swivel



**MER472 / ME-R473
EXTEND-A-STAY KITS**

The Extend-A-Stay kit is made for motorhome owners with a permanently mounted tank who want to stay at one location for some period of time. It connects the motor home to an auxiliary cylinder or tank, thus eliminating the need to periodically move the motorhome just to fill its permanently mounted tank.

ME-R472 contains:

- MG420 Tee**
MPOL x FPOL x 1"-20 MNPT
w/ cap x 1/4" female inverted flare

MG40401-60 Pigtail

5' long, MPOL and 1/4" male inverted flare

ME-R473 contains:

- MG420 Tee**
MPOL x FPOL x 1"-20 MNPT w/cap
x 1/4" female inverted flare

MG40401-60 Pigtail

5' long, MPOL and 1/4" male inverted flare

MG42421-144 Hose

12' long, 1"-20 male swivel x 1"-20 female swivel

**MG415
EXTEND-A-FLOW TEE**



MG415 has a male POL inlet by female POL outlet and 1"-20 male outlet with cap and retaining strap. The 1"-20 male outlet is equipped with a back check shutoff valve.

**MG420P
EXTEND-A-STAY TEE**



Same as MG415 except the MG420 has an additional 1/4" female inverted flare side outlet w/ cap for attaching a POL x 1/4" male inverted flare rubber hose pigtail.

HOSE ADAPTORS / KITS (CONTINUED)



MG480P


SECOND CHANCE GRILL ADAPTER
Hooks up grill to an RV propane system.

**MG414
ADD-A-TEE**




Equipped with two (2) 1"-20 male connections with shutoffs and safety caps and straps, and a female 1"-20 connection. The Add-A-Tee can be attached to the MG415 Extend-A-Flow tee so that two or more applications can be attached and operated.

**ME-413
TEE-FOR-TWO**



Equipped with a handwheel soft-nosed POL inlet connection and two (2) 1"-20 male outlet connections with shutoffs and safety caps and straps. Permits the operation of two portable appliances from the same fuel source.

**MG475
ADAPTOR**



Equipped with 60 drill orifice handwheel soft-nosed POL inlet by 1"-20 male outlet connection with shutoff. Can be used to connect MG42421-144 Extend-A-Flow hose to standard propane cylinders.

**MG42421-60
MG42421-144**



Hose assemblies are 5' and 12' long respectively with a 1"-20 male swivel connection on one end and a 1"-20 female swivel connection on the other. Uses 1/4" ID high pressure UL listed hose.

**MG40407-36 / MG40407-48
MG40407-60 / MG40407-72
MG40407-144**



ADAPTOR HOSE ASSEMBLY

Equipped with handwheel soft-nose POL inlet by 1"-20 male swivel outlet with shutoff. Used to connect appliances with 1"-20 connections to large cylinders or tanks.

**MG483
CAP AND STRAP**



Protective cap for 1"-20 male disposable cylinder connections. Protects threads and keeps out foreign material.