

Builder's Best, Inc. 201 Broiles Drive Jacksonville, TX 75766 888-368-7233 fax: 800-259-8368 www.BuildersBest.com

Black Metal Roof Cap (ASTM testing on reverse)

012636









Part Numbers


Diameter	Part #	Qty	Package	Opening	UPC
4"	012635	1	Ind. Box	with collar	•
	012645	1	Disp. Box	with collar	•
	012636	1	Ind. Box	flush	•
	012646	1	Disp. Box	flush	•
	012642	1	Ind. Box	flush	•
				no screen	
	012643	1	Ind. Box	with collar	•
				no screen	
6"	012633	1	Ind. Box	with collar	•
7"	012639	1	Ind. Box	with collar	•
	012634	1	Ind. Box	flush	•
4"	012640	1	Disp. Box	with collar	•

Product Specifications

- 26 gauge galvanized steel
- High performance polyester powder coated finish
- Removable 1/4" x 1/4" screen
- Back-draft flapper


Dimensions

Opening	Α	В	С	D	Ε	F	G	Н
4"	6	4.75	4	10	8.5	6	11	2.5
6"	8	6.5	6	14.25	13.25	9.75	15.25	2.5
7"	8.5	6.5	7	14.25	13.25	9.75	15.25	2.5
Universal:								
10.25" x 10.2"	11.75	7		15.5	15.5	11.5	16	

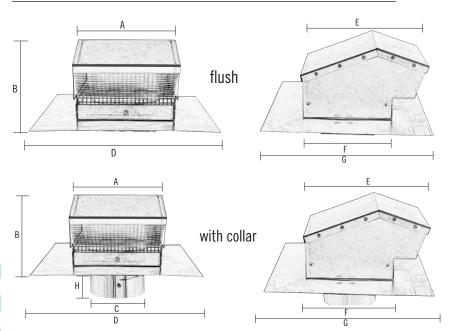

Kit #012640 includes:

One black roof cap with 4" diameter collar One 4" diameter x 8' UL® 181 Foil Duct One 3-4" Plastic Increaser/Reducer Two plastic Zip Torq[™] clamps



Label





Black Metal Roof Cap (PNs and Specs on reverse)

Results of ASTM B117:



Builder's Best coated galvanized steel



Leading Brand
painted cold rolled steel



Foreign brand painted galvanized steel

The three images above are the results of supplementary standardized testing on the Builder's Best Black Metal Roof Cap. Anti-corrosion properties have been tested by means of a salt test. The ASTM B117 is a standardized test method where metal pieces with different coatings are placed in a conditioned test chamber. Subsequently, they were sprayed for 480 hours (20 days) with a sodium chloride solution. This accelerates the corrosion process, which allows rapid insight into the performance of the coating. Tests were conducted by a third party lab.

Builder's Best black metal roof caps begin with galvanized steel which has some corrosion protection. Our high performance polyester powder coating showed very little corrosion. The leading brand uses cold rolled steel, which has no corrosion protection. Their paint coat showed some corrosion. Competitor X uses galvanized steel, which has some corrosion protection, however, the paint they used failed.



Warranty

Manufacturer assumes no responsibility for failure due to improper installation.

All specifications and designs are subject to change without notice and without incurring liability.

WARRANTY EXCLUSION AND DISCLAIMER Seller specifically excludes, and hereby disclaims any express representation or express warranty of any kind with respect to the goods ordered hereunder. All implied warranties, including without limitation merchantability or fitness for a particular purpose or arising from a course of dealing or usage or trade shall expire and cease 45 days after date of delivery. Seller shall not be liable to buyer or any third party for any special, secondary, incidental, or consequential damages however arising. Nothing in this provision shall invalidate or restrict any right or remedy otherwise available under state or federal law. Materials and specifications subject to change without notice.