




# VacuMaster™

## Economy Vacuum Pumps

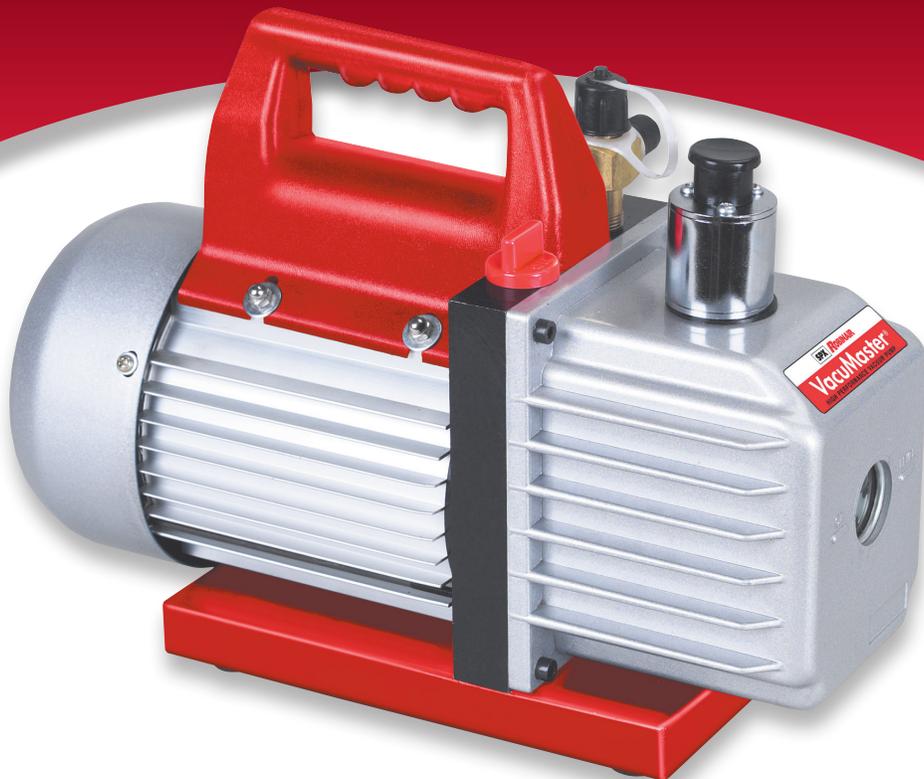

**Perfect Match**  
A choice of 1.5, 3, 5, or  
8 CFM (71, or 113 Lpm)  
vacuum pumps for all  
kinds of applications.  
See recommended  
chart.

- Performance tested to meet Robinair's high standards.
- Power and capacity for a wide range of service applications.
- High CFM rating for fast, thorough evacuation.
- Two-stage rotary vane design.


**Two-stage Design** – Cleans the system more thoroughly than a single-stage pump; the second stage starts pumping at a lower pressure so you can pull a deeper, ultimate vacuum.

**Oil Drain Valve** – Positioned at the bottom of the oil reservoir and angled for faster, more complete draining.

**Oil Fill Port** – Makes adding oil simple since the port is accessible from the front or either side. The sight glass on the front of the pump shows you when enough oil has been added.

**Heavy-Duty Motor** – High torque design for easy startup and efficient operation.

**Die-Cast Aluminum Housing** – Cast aluminum housings make the pumps lightweight but durable.

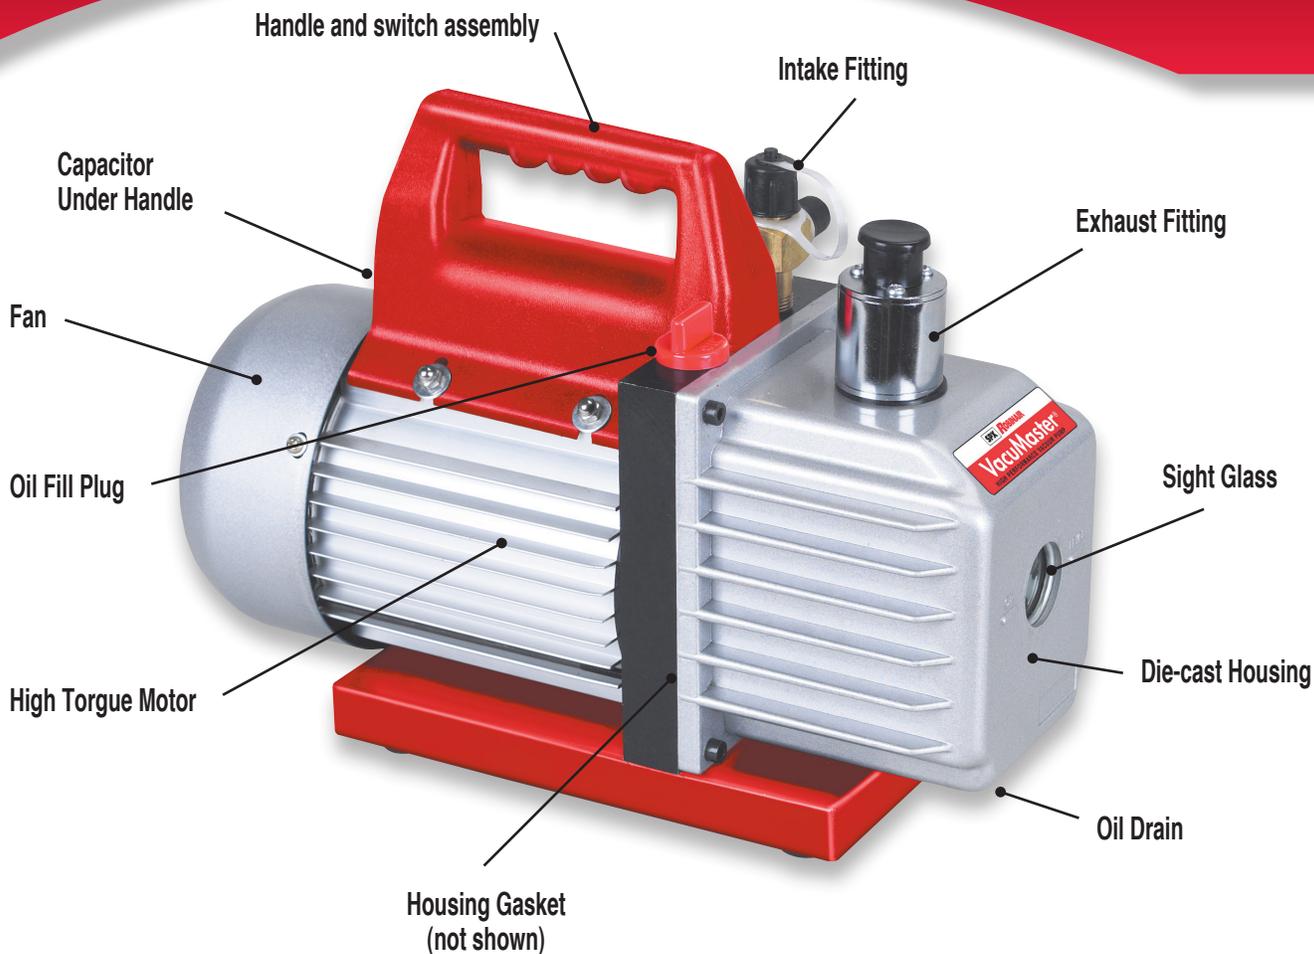

Model	Free Air Displacement	Factory Micron Rating	No. of Stages	Intake Fitting	Oil Capacity	Motor Size	Voltage	Weight	Dimensions
<b>Domestic Models</b>									
15150	1.5 CFM	50 microns	2	1/4" MFL and 3/8" Acme 3/8" FFL x 1/2" Acme adapter	7.4 oz. (219 ml)	1/4 hp	115V 60Hz	22 lbs. (10 kg)	9.5" H x 4.75" W x 12.5" L 240 mm x 120 mm x 315 mm
15300	3 CFM	40 microns	2	1/4" MFL and 3/8" MFL 3/8" FFL x 1/2" Acme adapter	7.5 oz. (220 ml)	1/3 hp	115V 60Hz	28 lbs. (12.5 kg)	10" H x 5" W x 13" L 255 mm x 123 mm x 336 mm
15500	5 CFM	40 microns	2	1/4" MFL and 3/8" Acme 3/8" FFL x 1/2" Acme adapter	7.5 oz. (220 ml)	1/3 hp	115V 60Hz	28 lbs. (12.2 kg)	10" H x 5" W x 13" L 255 mm x 123 mm x 336 mm
15800	8 CFM	40 microns	2	1/4" MFL and 3/8" MFL	18.6 oz. (550 ml)	1 hp	115V 60Hz	37 lbs. (16.8 kg)	16" H x 6" W x 10" L 406" mm x 152mm x 254mm
<b>International Models</b>									
15301 3 CFM	71 liters/minute	40 microns	2	1/4" MFL and 1/2" MFL 3/8" FFL x 1/2" Acme adapter	7.5 oz. (220 ml)	1/3 hp	220V 50Hz	28 lbs. (12.5 kg)	10" H x 5" W x 13" L 255 mm x 123 mm x 336 mm
15501 5 CFM	118 liters/minute	40 microns	2	1/4" MFL and 1/2" Acme 3/8" FFL x 1/2" Acme adapter	7.5 oz. (220 ml)	1/3 hp	220V 50Hz	28 lbs. (12.5 kg)	10" H x 5" W x 13" L 255 mm x 123 mm x 336 mm

09-32 ©2009 SPX. All rights reserved. Because of ongoing product improvements, we reserve the right to change design, materials, and specifications without notice. Certain kits may require additional cables or adapters. Product shipped may differ from photo(s) shown.