

SUBMITTAL - 48KUAS1R

Job Name: _____

Date: _____

Location: _____

R32

Indoor Unit: **ARUH48KUAS**

Outdoor Unit: **AOUH48KUAS1**



FEATURES

INDOOR UNIT:

- Mid Static Duct indoor unit delivering superior comfort and energy-efficient performance
- Indoor unit with ProCore™ (High Corrosion Resistant Copper) coils for long-lasting protection against corrosion
- Whisper-quiet operation with sound levels as low as 29dB
- Multiple fan speed options; Auto, High, Med, Low, and Quiet
- Special Operation modes available:
 - Economy Mode/ Energy Saving Mode / Powerful Mode / Minimum Heat Mode / Automatic defrosting operation / Auto-restart function
- Enhanced controls platform for seamless, intuitive operation:
 - Seamless control using the optional IR Receiver and Wireless Remote Controller kit (UTY-LBTUM)
 - Optional Wi-Fi connectivity enables remote monitoring through the Airstage Mobile App
 - Extended connectivity with support for third-party interface options
 - Compatible with BACnet and Modbus protocols for seamless integration with Building Management and Home Automation Systems
- Advanced scheduling and timer options offer greater control over unit operation:
 - Weekly Timer / 24-hr Timer / Sleep Function
- Built-in drain pump for efficient water removal making installation and maintenance easier
- Features automatic static pressure detection for optimal airflow and system efficiency
- Wide external static pressure range of up to 0.8 inWG for adaptable performance
- Offers group control, allowing seamless management of multiple units simultaneously
- Equipped with a built-in refrigerant leak detection sensor for enhanced safety and reliability.
- Additional premium features include, but are not limited to:
 - Built-in external input and output for interlocking systems with 3rd party devices (Ex: Fire Alarm, Door Switch, Humidifier, Aux. Heat & more)
 - Supports compatibility with the Airzone third-party communicating zoning system for optimized zoning control
 - Multiple Auxiliary Heat logic options for optimized heating performance
 - Service monitoring functionality via compatible accessories (UTY-RVRU & UTY-RNRUZ-series)
 - Flexible intake configuration with side or bottom options to meet installation requirements.

OUTDOOR UNIT:

- Low GWP R-32 systems for reduced environmental impact
- INVERTER-driven compressor that offers superior performance, comfort, and energy savings
- Compact outdoor unit with extended line set lengths up to 246ft (75m)
- Provides low ambient cooling and heating down to -5°F for dependable performance in extreme conditions.
- Blue Fin-coated heat exchanger for improved corrosion resistance and coil durability



7 Year Compressor, 5 Year Parts out-of-the-box Warranty.



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence.



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation in a residence and installed by a Fujitsu Elite contractor.



Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://connect.fujitsugeneral.com>

Version: 20250106A

SUBMITTAL - 48KUAS1R

SPECIFICATIONS:

Indoor Unit					ARUH48KUAS			
Outdoor Unit					AOUH48KUAS1			
System Name					48KUAS1R			
AHRI Number					215812203			
SEER2		Cooling			Btu/hW	16.4		
EER2						9.8		
HSPF2		Heating			kW/kW	10		
COP2						3.42		
Outdoor Operation Range		Cooling			°F (°C)	-5 to 122* ⁸ (-21 to 50* ⁸)		
		Heating				-5 to 75 (-21 to 24)		
Indoor Capacity		Cooling		Rated	Btu/h	46000		
				Min.—Max.		15,400—48,000		
		Heating	47°FDB (Outdoor temp.)	Rated		51000		
			17°FDB (Outdoor temp.) ^{*1}	Min.—Max.		16,000—56,000		
				Rated		36000		
				Max.		43200		
				5°FDB (Outdoor temp.) ^{*2}		Rated	38500	
			Max.					
Outdoor Connection pipe		Liquid		in (mm)	Ø3/8 (Ø9.52)			
		Gas			Ø5/8 (Ø15.88)			
		Method			FLARE			
		Pre-charge length			ft (m)	98 (30)		
		Min. length				16 (5)		
		Max. length				246 (75)		
		Max. height difference				98 (30)		
Indoor Dimensions (H × W × D)		Net			in (mm)	11-13/16 × 55-1/8 × 27-9/16 (300 × 1,400 × 700)		
		Gross				15-3/4 × 64-1/2 × 34-7/16 (400 × 1,638 × 875)		
Indoor Weight		Net			lb (kg)	121 (55)		
		Gross				141 (64)		
Outdoor Dimensions (H × W × D)		Net			in (mm)	39-5/16 × 37 × 12-5/8 (998 × 940 × 320)		
		Gross				46-5/16 × 40-7/16 × 17-1/2 (1,176 × 1,027 × 445)		
Outdoor Weight		Net			lb (kg)	157 (71)		
		Gross				176 (80)		
Indoor Fan		Cooling		High	CFM (m³/h)	1,501 (2,550)		
				Med		1,201 (2,040)		
				Low		971 (1,650)		
				Quiet		842 (1,430)		
		Heating		High		1,501 (2,550)		
				Med		1,201 (2,040)		
				Low		971 (1,650)		
				Quiet		842 (1,430)		
		Type × Qty						SIROCCO FAN × 3
		Motor output				W		375
Static pressure range				inWG (Pa)	0.12 to 0.72 (30 to 180)			
Outdoor Fan		Airflow rate		Cooling	CFM (m³/h)	2,619 (4,450)		
				Heating				
		Type × Qty					PROPELLER FAN × 1	
Motor output				W		120		
Indoor Sound Pressure Level ⁴		Cooling		High	dB (A)	40		
				Med		35		
				Low		33		
				Quiet		29		
		Heating		High		40		
				Med		35		
				Low		33		
				Quiet		29		
Outdoor Sound Pressure Level ⁴		Cooling			57			
		Heating			59			

SUBMITTAL - 48KUAS1R

SPECIFICATIONS:

Outdoor Refrigerant		Type		R32
		Charge	lb oz	5 lb 15 oz
			g	2700
Additional Charge Calculation			oz/ft	0.43
			g/m	40
Outdoor Refrigerant Oil		Type		RMM68AF
		Amount	in ³ (cm ³)	70.2 (1,150)
Indoor Moisture removal			pints/h (L/h)	8.2 (3.9)
Indoor Drain hose		Material		POLYVINYL CHLORIDE
		Tip Diameter		I.D.: Ø13/16 (Ø20.7), O.D.: Ø1-1/16 (Ø26.6)
Indoor Operation range		Cooling	°F (°C)	64 to 90 (18 to 32)
			%RH	80 or less
		Heating	°F (°C)	60 to 86 (16 to 30)
Power Supply				208/230 V~ 60 Hz
Available Voltage Range				187—253
System power supply		Voltage		208/230
		Frequency		60
		Available voltage range		187—253
Indoor Current	Cooling		A	20.6
	Heating			19.2
Maximum Operating Current ^{*3}		Cooling		25
		Heating		25
Outdoor Starting Current				20.6
MCA ^{*5}				25
Wiring spec. ^{*6}		MAX. CKT. BKR ^{*7}		30
Indoor Input Power	Cooling		kW	4.69
	Heating	47°FDB (Outdoor temp.)		4.37
		17°FDB (Outdoor temp.) ^{*1}		3.84
		5°FDB (Outdoor temp.) ^{*2}		5.1
Indoor Power Factor	Cooling		%	99
	Heating			
Energy Star ⁹				ESCC, ESME

NOTES:

- Cooling: Indoor temperature of 80°F (26.67°CDB)/67°FWB (19.44°CWB), and outdoor temperature of 95°FDB (35°CDB)/75°FWB (23.9°CWB).
- Heating: Indoor temperature of 70°FDB (21.11°CDB)/60°FWB (15.56°CWB), and outdoor temperature of 47°FDB (8.33°CDB)/43°FWB (6.11°CWB).
- *1: Heating (17°F): Indoor temperature of 70°FDB (21.11°CDB)/60°FWB (15.56°CWB), and outdoor temperature of 17°FDB (-8.33°CDB)/15°FWB (-9.44°CWB).
- *2: Heating (5°F): Indoor temperature of 70°FDB (21.11°CDB)/60°FWB (15.56°CWB), and outdoor temperature of 5°FDB (-15.0°CDB)/4°FWB (-15.56°CWB).
- Test conditions are based on AHRI 210/240 2023.
- *4:

- Indoor Sound Pressure Level, – Measured values in manufacturer's anechoic chamber.
- Outdoor Sound Pressure Level – Because of the surrounding sound environment, the sound levels measured in actual installation conditions might be higher than the specified values here.
- *3:

Maximum Operating Current – Maximum current is maximum value when operated within the operation range.

– The total current of indoor unit and outdoor unit.

MCA – *5: Minimum Circuit Ampacity (Calculation based on UL60335-2-40)

Wiring spec. – *6: Selected sample based on Japan Electrotechnical Standards and Codes Committee E0005.

As the regulations of wire size and circuit breaker differ in each country or region, select appropriate devices complied to the regional standard.

MAX. CKT. BKR – *7: Maximum Circuit Breaker

Operation Range – *8: Suction temperature of the outdoor unit.

Energy Star – *9 : ES = Energy Star, ESCC = Energy Star Cold Climate, ESME= Energy Star Most Efficient.

System continues to operate below rated outdoor operation temperature range, subject to varying conditions. System has no low temperature cut out. Capacity is not tested outside of the rated temperature range.

SUBMITTAL - 48KUAS1R

ACCESSORIES:

Model Number	Description
UTY-RVRU	KAGAMI - Touch Panel Wired Controller
UTY-RNRUZ5	Touch Panel Wired Remote Controller
UTY-RHRY	Simple Wired Remote (Without Mode Function) - Hospitality
UTY-RSRY	Simple Wired Remote (With Mode Function)
UTY-LBTUM	IR Receiver Kit w/ Wireless Remote Controller (Mid-Static Ducted)
UTY-TFSXJ4	Wi-Fi adapter (WiFi Interface Module UART Type)
FJ-AC-WIFI-1	Intesis Wi-Fi Device: Wired Module
FJ-IR-WIFI-1NA ^{*1}	Intesis IR Wireless AC Cloud Control Interface (Intesis Home app)
BM101WA ^{*1}	Cielo - Breez Max IR Controller w/ WiFi (Black)
BM102WA ^{*1}	Cielo - Breez Max IR Controller w/ WiFi (White)
UTY-VMSX	Modbus Converter
UTY-VTGX	Network Converter - Convert H-Series Comm. Protocol to V/J-Series Comm.
FJ-AC-485-1	Intesis - BACnet MSTP & Modbus RTU Gateway
UTY-TERX	External Switch Controller
UTY-TTRXZ1 ^{*2}	24V Thermostat Interface
TTRXZ1-KIT ^{*2}	24V Thermostat Interface Kit (UTY-TTRXZ1, UTY-WiFi Plug & 24V Transformer)
UTY-XSZXZ1	Remote Temperature Sensor
UTY-XCSX	External input and output PCB
UTY-XWZXZG	External Connect Kit
UTZ-GXNA	External input and output PCB Bracket
UTD-LFNA	Long Life Filter (36/42/48k units)
UTY-DSGYZ2 ^{*3}	Airstage Edge Controller

NOTES:

*1 -Requires IR receiver kit UTY-LBTUM to connect this device to IDU.


*2 -This device may not be used with any other type of controls (central controller, wire/wireless RC, WiFi adapter, BMS interface).

*3 -Connection to AIRSTAGE Cloud requires a compatible AIRSTAGE Mobile adapter connected to the IDU.

SUBMITTAL - 48KUAS1R

INDOOR UNIT DIMENSIONS:


Unit: in (mm)

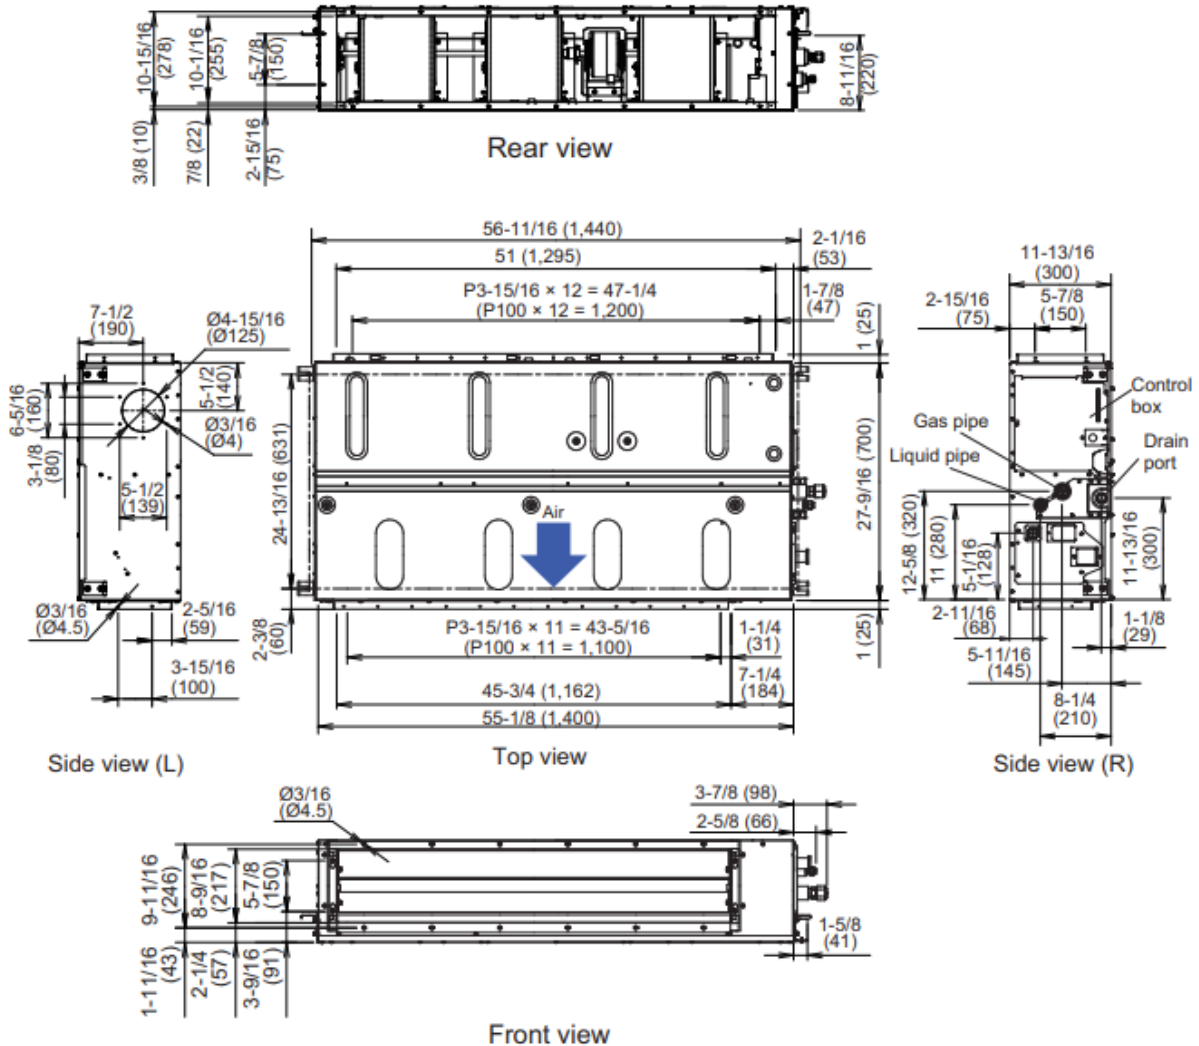

SUBMITTAL - 48KUAS1R

OUTDOOR UNIT DIMENSIONS:

Unit: in (mm)

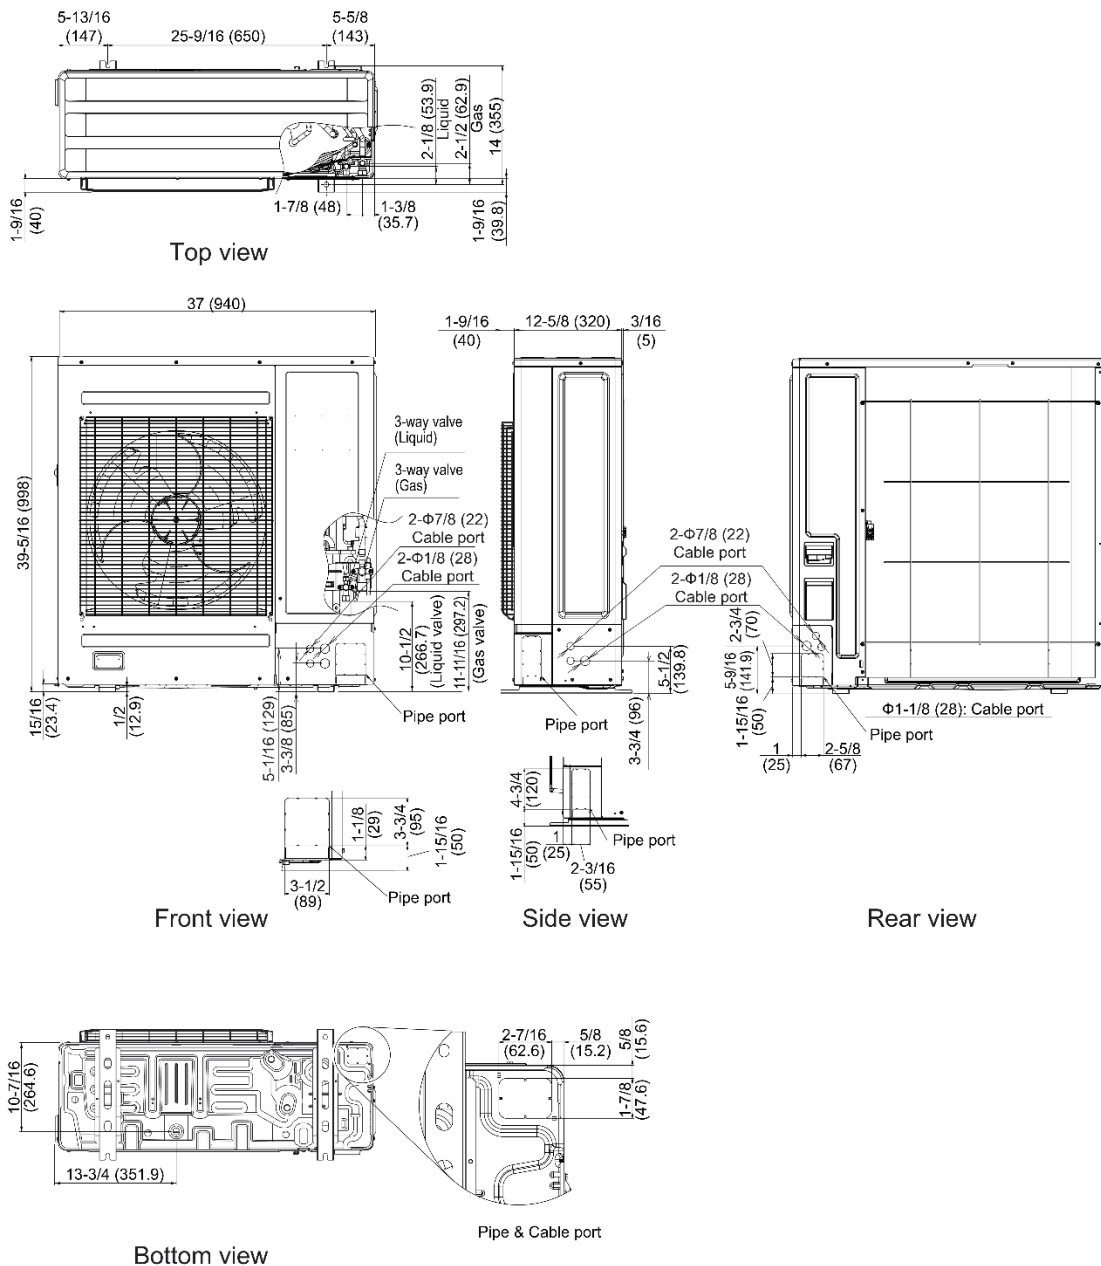

The Fujitsu logo is a worldwide trademark of Fujitsu General Limited. The Airstage logo and name is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan, the USA and other countries or areas. Copyright 2024 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.