



### Bosch BGH96 Furnace<sup>1</sup>

Introducing Bosch's first condensing furnace, the BGH96 Series. With 96% AFUE heating efficiency and a multipoise design, it is the perfect solution to efficiently heat your home. The multipoise design makes it even easier to replace your existing equipment or install them in your new home. You can also integrate the Bosch BGH96 Furnace with Bosch's IDS Outdoor Units and Cased Coils\* for a complete and highly efficient heating and cooling system. Between ease of installation, integration and troubleshooting, this Bosch Furnace offers convenience and peace of mind.

#### **Features**

- ▶ Up to 96% AFUE heating efficiency, ENERGY STAR rated
- ▶ 5-year parts limited warranty, 20 year heat exchanger limited warranty\*\*
- Reliable, proven two-stage design
- ▶ 3-way multipoise design allows for flexibility in multiple types of installations, available in upflow (right or left return) and horizontal orientations
- ► Field convertible gas type for hassle-free installation, all furnaces come standard with a natural gas to propane gas conversion kit
- ▶ 2 stage x13 ECM motors for all models for quiet and efficient operation
- ► Hot-surface ignition for dependable operation
- ▶ Durable aluminized steel tubular heat exchanger and stainless-steel secondary heat exchanger
- ▶ Pairs with Bosch IDS 1.0 or 2.0 heat pump, reaching up to 19 SEER
- ► Low profile cabinet construction allows for installation in tight spaces. Convenient left or right-hand connection for gas and electric service. The cabinet is painted galvanized steel with an anti-rust coating, that passes a 500 hours salt spray test
- ▶ LED fault diagnostics for quick and easy service calls



# Why Choose The Bosch BGH96 Furnace

#### **Savings**

Homeowners will see the savings on their energy bills by converting up to 96% of the fuel purchased to heat their home. The furnace's two-stage gas valve switches between high and low fire settings, allowing enhanced comfort and more efficient operation than single stage technology.

#### **System Efficiency**


Dual fuel systems are the ideal solution to maximize comfort and efficiency. Bosch offers a complete dual fuel system with the Bosch Inverter Ducted Split (IDS) heat pump, Bosch BMAC cased coil, Bosch 96% AFUE Gas Furnace and the Bosch Connected Control thermostat. In the summer, the Bosch IDS efficiently cools and dehumidifies your home. In the shoulder seasons, the IDS system will provide the exact amount of heating or cooling that your home requires, no more, no less. In the colder months, the system senses when it is more economical for the heat pump to shut off and the Bosch BGH96 gas furnace to take over. Installing a Bosch matched dual fuel system is the best choice to optimize both savings and comfort.

#### Residential Limited Warranty\*\*

With the residential limited warranty, you receive peace-of-mind knowing you will receive replacement parts protection for up to 5 years and up to 20 years on the heat exchanger. This offering covers all components incorporated into the BGH96 Furnace at the time of manufacture. All other components or parts that are purchased from Bosch and installed in the field have a 1 year parts warranty.





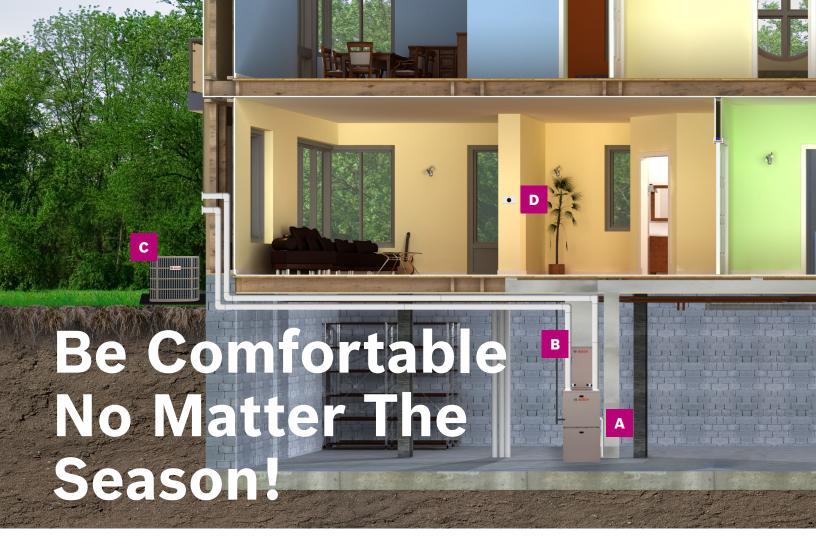

# The Complete & Highly Efficient Dual Fuel Heating and Cooling System For Your Home



#### **Bosch's BGH96 Furnace**

The BGH96 Gas Furnace is Bosch's first condensing furnace. Offering up to 96% efficiency, a two-stage gas valve, and a multi-speed blower, this ENERGY STAR rated furnace offers premium comfort and energy savings.



#### **Bosch's Cased Coil**

The Inverter Ducted Split Evaporator Coil, when paired with a Bosch Furnace and IDS outdoor condensing section, delivers some of the best comfort levels and efficiency on the market today. Bosch offers a complete range of evaporator coils to fit your needs.



#### **Bosch's IDS ODU**

The robust Bosch Inverter Ducted Split 1.0 or 2.0 Air Source Heat Pump system utilizes just the right amount of energy to achieve ultimate comfort and maximum efficiency while keeping sound levels to a minimum.





#### Bosch's BCC50\*

The BCC50 is a sleek, internetconnected thermostats with easy all-in-one control for your heating and cooling systems. It can be controlled using the Bosch Connected Control app and is compatible with most 24VAC HVAC equipment on the market.

INVERTER DUCTED SPLIT 1.0 + CASED COIL + 96% FURNACE AHRI 210/240 Performance Data										
SYSTEM	OUTDOOR UNIT	CASED COIL	FURNACE MODEL	HEAT PUMP COOLING CAPACITY (BTU/HR)			HEAT PUMP HEATING CAPACITY (BTU/HR)			OFM
SYSTEM				TOTAL	EER"	SEER****	HI	HSPF""	LOW	CFM
2 Ton	BOVA-36HDN1-M18M	BMAC2430ANTD	BGH96M060B3A	23600	12.5	18	24000	9.5	17200	820/630
	BOVA-36HDN1-M18M	BMAC2430ANTD	BGH96M080B3A	23600	12.5	18	24000	9.5	17200	800/580
	BOVA-36HDN1-M18M	BMAC2430BNTD	BGH96M060B3A	24000	12.5	18	24000	9.5	17200	860/680
	BOVA-36HDN1-M18M	BMAC2430BNTD	BGH96M080B3A	24000	12.5	18	24000	9.5	17200	840/630
	BOVA-36HDN1-M18M	BMAC3036ANTD	BGH96M060B3A	33000	10.5	16.5	34200	9	22600	1050/800
	BOVA-36HDN1-M18M	BMAC3036ANTD	BGH96M080B3A	33000	10.5	16.5	34200	9	22600	1020/800
3 Ton	BOVA-36HDN1-M18M	BMAC3036BNTD	BGH96M060B3A	33600	10.6	16.5	34200	9	23000	1100/850
3 1011	BOVA-36HDN1-M18M	BMAC3036BNTD	BGH96M080B3A	33600	10.6	16.5	34200	9	23000	1070/850
	BOVA-36HDN1-M18M	BMAC3036CNTD	BGH96M080C4A	34000	10.6	16.5	34200	9	23000	1050/820
	BOVA-36HDN1-M18M	BMAC3036CNTD	BGH96M100C5A	34000	10.6	16.5	34200	9	23000	1150/750
	BOVA-60HDN1-M18M	BMAC4248BNTF	BGH96M080B3A	43000	10.5	17.5	45500	9	31000	1250/1050
	BOVA-60HDN1-M18M	BMAC4248CNTF	BGH96M080C4A	43000	11	18	45500	9	31000	1250/1050
4 Ton	BOVA-60HDN1-M18M	BMAC4248CNTF	BGH96M100C5A	45000	11.2	18	47000	9	31400	1450/1150
	BOVA-60HDN1-M18M	BMAC4248DNTF	BGH96M100D5A	45500	11.2	18	47000	9	32000	1500/1200
	BOVA-60HDN1-M18M	BMAC4248DNTF	BGH96M120D5A	45500	11.2	18	47000	9	32000	1500/1200
	BOVA-60HDN1-M18M	BMAC4860CNTF	BGH96M100C5A	52500	10	17	53500	9.5	37000	1450/1150
5 Ton	BOVA-60HDN1-M18M	BMAC4860DNTF	BGH96M100D5A	53000	10.5	17.5	54000	9.5	38000	1500/1200
	BOVA-60HDN1-M18M	BMAC4860DNTF	BGH96M120D5A	53000	10.5	17.5	54000	9.5	38000	1500/1200

INVERTER DUCTED SPLIT 2.0 + CASED COIL + 96% FURNACE AHRI 210/240 PERFORMANCE DATA										
SYSTEM	OUTDOOR UNIT	CASED COIL	FURNACE MODEL	HEAT PUMP COOLING CAPACITY (BTU/HR)			HEAT PUMP HEATING CAPACITY (BTU/HR)			CFM
SISIEM				TOTAL	EER'''	SEER""	HI	HSPF""	LOW	Crivi
2 Ton	BOVA-36HDN1-M20G	BMAC2430ANTD	BGH96M060B3A	24000	13	18.5	24000	10	18000	820/630
	BOVA-36HDN1-M20G	BMAC2430ANTD	BGH96M080B3A	24000	13	18.5	24000	10	18000	800/580
2 1011	BOVA-36HDN1-M20G	BMAC2430BNTD	BGH96M060B3A	24000	13.5	19	24000	10	19000	860/680
	BOVA-36HDN1-M20G	BMAC2430BNTD	BGH96M080B3A	24000	13.5	19	24000	10	19000	840/630
	BOVA-36HDN1-M20G	BMAC3036ANTD	BGH96M060B3A	32200	11.2	17	34000	10	25000	1050/800
	BOVA-36HDN1-M20G	BMAC3036ANTD	BGH96M080B3A	32200	11.2	17	34000	10	25000	1020/800
	BOVA-36HDN1-M20G	BMAC3036BNTD	BGH96M060B3A	33000	11.6	17.5	34200	10	25000	1100/850
3 Ton	BOVA-36HDN1-M20G	BMAC3036BNTD	BGH96M080B3A	33000	11.6	17.5	34200	10	25000	1070/850
3 1011	BOVA-36HDN1-M20G	BMAC3036CNTD	BGH96M080C4A	33600	12	18	34200	10	25000	1050/820
	BOVA-36HDN1-M20G	BMAC3036CNTD	BGH96M100C5A	33600	12	18	34200	10	25000	1150/750
	BOVA-36HDN1-M20G	BMAC4248BNTF	BGH96M080B3A	33000	12.5	18.5	34200	10	26000	1000/850
	BOVA-36HDN1-M20G	BMAC4248CNTF	BGH96M100C5A	33000	12.5	18.5	34200	10	19000 25000 25000 25000 25000 25000 25000 26000 34000 35000 35000 35000	1100/800
	BOVA-60HDN1-M20G	BMAC4248BNTF	BGH96M080B3A	43000	11.2	18	45000	9.5	34000	1250/1050
	BOVA-60HDN1-M20G	BMAC4248CNTF	BGH96M080C4A	44000	12	18.5	46000	10	35000	1250/1050
4 Ton	BOVA-60HDN1-M20G	BMAC4248CNTF	BGH96M100C5A	45000	12.5	18.5	46500	10	35000	1450/1150
	BOVA-60HDN1-M20G	BMAC4248DNTF	BGH96M100D5A	45500	12.5	18.5	47000	10	35000	1500/1200
	BOVA-60HDN1-M20G	BMAC4248DNTF	BGH96M120D5A	45500	12.5	18.5	47000	10	35000	1500/1200
	BOVA-60HDN1-M20G	BMAC4860CNTF	BGH96M100C5A	52000	12	18	53500	10	37000	1450/1150
5 Ton	BOVA-60HDN1-M20G	BMAC4860DNTF	BGH96M100D5A	52000	12.5	18.5	54000	10	38000	1500/1200
	BOVA-60HDN1-M20G	BMAC4860DNTF	BGH96M120D5A	52000	12.5	18.5	54000	10	38000	1500/1200



# System & Technical Information

Technical Specifications	Unit		BGH96M060B3A	BGH96M080B3A	BGH96M080C4A	BGH96M100C5A	BGH96M100D5A	BGH96M120D5A		
Bosch Part Number	-		7738006496	7738006497	7738006498	7738006499	7738006500	7738006501		
Cabinet Size (W)			17		2		24.5			
Cabinet Size (DxH)	Cabinet Size (DxH) Inch		(28-1/2) x (33-3/4)							
Fuel Type					Natural Gas/I					
AFUE	%				96					
ENERGY STAR Rating										
_	NG/LP (High)	Btu/h	60000	80000	80000	100000	100000	120000		
Input	NG/LP (Low)	Btu/h	39000	52000	52000	65000	65000	78000		
	NG/LP (High)	Btu/h	57000	76000	76000	95000	95000	115000		
Output	NG/LP (Low)	Btu/h	37000	49000	49000	62000	62000	75000		
Air Temperature Rise	°F	,	30-60		35			40-70		
Design Max. Outlet Air Temperature	°F		160		16			170		
	Heating	in. WC	0.12	0.15	0.15	0.2	0.2	0.2		
Certified EXT Static Pressure	Cooling	in. WC	0.5	0.5	0.5	0.5	0.5	0.5		
Tons AC @ 0.5" ESP	Tons	110	1.5/2		2.5/3/3.5/4	0.0	3.5/4/4.5/5	0.0		
Power Supply	V/Hz/PH		,_,	, -	115V/60	H7/1PH	2.27 .,, 2			
Max Overcurrent Protection (MOP)	Amps			15		,	20			
Blower Motor Full Load	Amps		8	8	7.8	11.5	10.5	10.5		
	Туре		Ü	Ü	x13		10.0	20.0		
Circulating Blower Motor	Diameter Blower	Inch	12	3/8	XIO	12 3/4				
Oncollecting Blower motor	Height Blower	Inch			11 1/4					
	Number of Spe		8 11 1/4 5							
Motor Speeds		d Settings High/Mid-High/Mid-Low/Low								
Motor Speeds	RPM	gs	1050 (rated)							
		W	1050 (rated) 63±10%							
Power Input	(High)		37±10% 42±10							
	(Low)	W								
Circuating Fan Motor		HP		3/4		_	1			
Max.Inlet Gas Pressure	Natural Gas	in. WC	10.5							
	Propane Gas (LP)		13							
Min.Inlet Gas Pressure	Natural Gas	in. WC	4.5							
	Propane Gas (LP)	in. WC	11							
Natural Gas Working Pressure	in. WC				High Fire:3.5 Low Fire:1.6					
Propane Gas Working Pressure	in. WC				High Fire:10 Low Fire:4					
Natural Gas Orifice (0-2000 Feet)	#				45					
Propane Gas Orifice (0-2000 Feet)	#				55					
Number of Burners			3	4	4	5	5	6		
Primary Heat Exchanger Diameter	Inch				13	3/4				
Primary Heat Exchanger	# Tubes		3	4	4	5	5	6		
Secondary Heat Exchanger Diameter	Inch			3/8						
Secondary Heat Exchanger	# tubes		33	33	39	39	48	48		
Dunnanum Curitalı Fantanıı Cattina	(High)	in. WC			1	1.1				
Pressure Switch Factory Setting	(Low)	in. WC	0.55							
Rollout Switch - Resettable	Off/On	°F			30	300				
Inlet High Temp Limit Switch - Fixed	Off/On	°F	150/120	130/100		150	/120			
Gas Connection Size	in. NPT				1/2					
Ignitor Type					Hot su	Hot surface				
Net Weight	lb		135	141	152	162	170	174		

## About Bosch

#### **Bosch Group**

The Bosch Group is a leading global supplier of technology and services in the areas of Automotive, Industrial Technology, Consumer Goods and Building Technology. The company was founded in Stuttgart, Germany, in 1886 and presently has more than 440 subsidiaries and is represented in over 150 countries.

In the U.S., Canada and Mexico, the Bosch Group manufactures and markets automotive original equipment and aftermarket solutions, industrial drives and control technology, power tools, security and communication systems, packaging technology, thermotechnology, household appliances and software solutions. The Bosch Group's products and services are designed to improving quality of life by providing innovative and beneficial solutions. In this way, the company offers technology worldwide that is "Invented for life." Additional information is available online at boschheatingandcooling.com and bosch.ca.

#### **Bosch Thermotechnology in North America**

Bosch Thermotechnology is a leading source of high quality water heating and comfort systems. The company offers gas tankless, electric whole house and point-of-use water heaters, Bosch and Buderus floor-standing and wall mounted boilers, Bosch and FHP geothermal, water-source and air-source systems as well as controls and accessories for all product lines. Bosch Thermotechnology is committed to being Simply Smart by offering products that work together as integrated systems that enhance quality of life in an ultra-efficient and environmentally friendly manner. For more information, visit boschheatingandcooling.com.

#### **Bosch Water-Source Heat Pumps: Made in the U.S.A.**

Bosch and FHP water-source and geothermal heat pumps are made by highly trained and skilled workers in our factory based in Fort Lauderdale, Florida. They are manufactured with rigorous standards and factory testing ensuring high efficient operation over the life of the unit. Bosch's ISO 9001 and ISO 14001 certified facilities provide consistent quality in every unit built.









Bosch Thermotechnology Corp.

Watertown, MA • Londonderry, NH • Ft. Lauderdale, FL General Inquiries: 1-866-642-3198

Copyright © 2020 Bosch Thermotechnology Corp. All rights reserved. Subject to change without notice.