



**Compressor Lockout,
Integral Low Voltage
Brownout Protection**

ICM204/205/206

DELAY ON BREAK

BLPS

- 3 or 5 minute fixed or 10 minute adjustable delay
- Works with anticipator thermostats

MODE OF OPERATION

With application of power, the load is energized. When the thermostat opens or there is a loss of power, the load is de-energized and the delay period begins. The compressor will not start again during the delay period. ICM Models 204/205/206 provide true thermostat interruption protection, even in the presence of a trickle current.

SPECIFICATIONS

Input

- **Voltage:** 18-30 VAC
- **Frequency:** 50-60 Hz

Output

- **Output Ratings:**
 - **Maximum:** 1.5 amps
 - **Minimum:** 40 mA
 - **Inrush:** 15 amps


Time Delay

- 3 or 5 minute fixed, 10 minute adjustable

INSTALLATION

1. Disconnect power.
2. Connect terminals as shown in the wiring diagram below.
3. Select desired time delay (adjustable models only).
4. Reapply power, check operation.

TIMING DIAGRAM

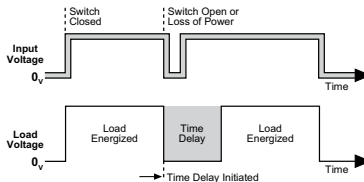

WIRING DIAGRAM

