




WARREN TECHNOLOGY STOCK-LINE ELECTRIC DUCT HEATERS

FITS MOST DUCT SIZES

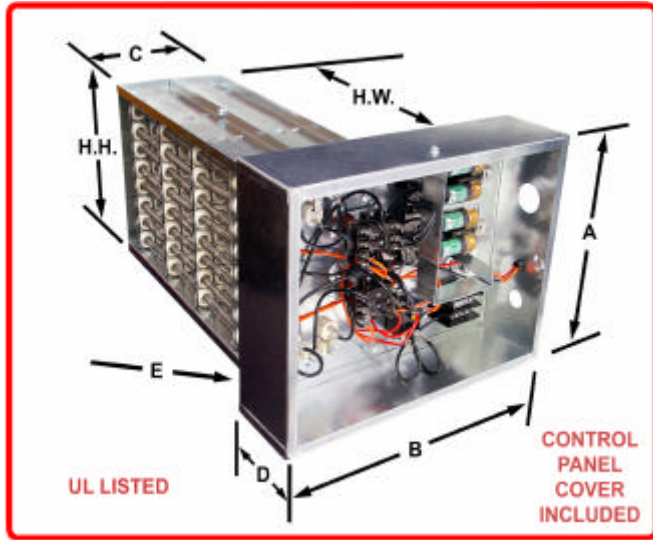

Stock-Line slip-in type duct heaters are designed to meet most residential and light commercial requirements for use in forced air duct systems. They may be used as the primary source of heat or as supplementary or stand-by heat to Heat Pump, Gas or Oil Fired Systems. Several units may be used in a large duct or systems with branch ducts for zoning or separate thermostat for zoning or separate thermostat control. The heaters are designed to operate in a variety of duct sizes.

Stock-Line units are UL listed and meet the requirements of the National Electric Code (NEC). The units have multi-voltage ratings, high grade nickel chrome elements, galvanized steel control panel and frame, and Warren's exclusive element support system. Built-in components include primary and secondary limit protection, magnetic disconnecting contactors (24 volt control), a fan relay, and circuit fusing where required by UL and NEC.

Custom built Model CBK electric duct heaters are available for units with accessories not furnished on Stock-Line electric duct heaters. (Consult representative for price and delivery information).

MODEL	KW	VOLTS	PHASE	STEPS	AMPS	DUCT SIZE LIMITS				DIMENSIONS					H-W	H-H	SHIP WEIGHT
						WIDTH		HEIGHT		A	B	C	D	E			
						MIN.	MAX.	MIN.	MAX.								
SL5A	4.8	240	1	1	20.0	8	16	8	12	9	11	3	4	1	7.5	7.25	10#
	4.4	230															
	4.0	220															
	3.6	208															
SL5T	5.0	240	3	1	12.1	8	16	8	12	9	13	3	4	1	7.5	7.25	11#
	4.6	230															
	4.1	220															
	3.7	208															
SL5TX	5.0	480	3	1	6.0	8	16	8	12	9	13	3	4	1	7.5	7.25	12#
SL10A	9.6	240	1	1	40.0	12	20	8	14	9	12	3	4	1	11.5	7.25	12#
	8.8	230															
	8.0	220															
	7.2	208															
SL10B	9.6	240	1	1	40.0	10	18	10	16	11	12	3	4	1	9.5	9.25	13#
	8.8	230															
	8.0	220															
	7.2	208															
SL15A*	14.4	240	1	2	60.0	18	24	8	12	9	19	3	4	1	17.5	7.25	20#
	13.2	230															
	12.0	220															
	10.0	208															
SL15B*	14.4	240	1	2	60.0	15	22	10	14	11	18	3	4	1	14.5	9.25	20#
	13.2	230															
	12.0	220															
	10.0	208															
SL20A*	19.2	240	1	2	80.0	16	22	10	14	11	20	6	4	1	15.5	9.25	25#
	17.6	230															
	16.1	220															
	14.4	208															
SL10T	9.9	240	3	1	23.9	12	20	8	14	9	12	3	4	1	11.5	7.25	12#
	9.0	230															
	8.3	220															
	7.4	208															
SL10TX	10.0	480	3	1	12.0	12	20	8	14	9	13	3	4	1	11.5	7.25	13#
SL15T	15.0	240	3	2	36.0	15	22	10	14	11	15	6	4	1	14.5	9.25	23#
	13.6	230															
	12.6	220															
	11.2	208															
SL15TX	15.0	480	3	2	18.1	15	22	10	14	11	14	6	4	1	14.5	9.25	22#
SL20T	19.8	240	3	2	47.7	16	22	11	14	12	14	6	4	1	15.5	9.25	22#
	18.0	230															
	16.6	220															
	14.8	208															
SL20TX	20.0	480	3	2	24.1	16	22	11	14	12	15	6	4	1	15.5	9.25	23#

*DENOTES UNITS WITH CIRCUIT FUSING.

STOCK-LINE ACCESSORY LIST

CAUTION: In some installations provisions must be made to allow for adequate mixing of by-pass air and heater air to prevent stratification.

PART NO. SLTR (TRANSFORMER KIT)

The STOCK-LINE Transformer Kit (P / N SLTR) comes complete with all the necessary parts (transformer, wire leads, screws, terminals, etc.) and instructions for external mounting.



PART NO. SLAS (AIR PRESSURE SWITCH KIT)

The STOCK-LINE Air Pressure Switch Kit (P / N SLAS) comes complete with all the necessary parts (air pressure switch, wire leads, screws, terminals, etc.) and instructions for external mounting.



2050 West 73 Street Hialeah, Florida 33016
 Telephone (305) 556-6933 Fax (305) 557-6157
 Website: www.warrenhvac.com
 E-Mail: warren@warrenhvac.com